



Copyright © 1997, 2014, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible or and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Copyright © 1997, 2014, Oracle et/ou ses affiliés. Tous droits réservés.

Ce logiciel et la documentation qui l'accompagne sont protégés par les lois sur la propriété intellectuelle. Ils sont concédés sous licence et soumis à des restrictions d'utilisation et de divulgation. Sauf disposition de votre contrat de licence ou de la loi, vous ne pouvez pas copier, reproduire, traduire, diffuser, modifier, breveter, transmettre, distribuer, exposer, exécuter, publier ou afficher le logiciel, même partiellement, sous quelque forme et par quelque procédé que ce soit. Par ailleurs, il est interdit de procéder à toute ingénierie inverse du logiciel, de le désassembler ou de le décompiler, excepté à des fins d'interopérabilité avec des logiciels tiers ou tel que prescrit par la loi.

Les informations fournies dans ce document sont susceptibles de modification sans préavis. Par ailleurs, Oracle Corporation ne garantit pas qu'elles soient exemptes d'erreurs et vous invite, le cas échéant, à lui en faire part par écrit.

Si ce logiciel, ou la documentation qui l'accompagne, est concédé sous licence au Gouvernement des Etats-Unis, ou à toute entité qui délivre la licence de ce logiciel ou l'utilise pour le compte du Gouvernement des Etats-Unis, la notice suivante s'applique:

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S.Government.

Ce logiciel ou matériel a été développé pour un usage général dans le cadre d'applications de gestion des informations. Ce logiciel ou matériel n'est pas conçu ni n'est destiné à être utilisé dans des applications à risque, notamment dans des applications pouvant causer des dommages corporels. Si vous utilisez ce logiciel ou matériel dans le cadre d'applications dangereuses, il est de votre responsabilité de prendre toutes les mesures de secours, de sauvegarde, de redondance et autres mesures nécessaires à son utilisation dans des conditions optimales de sécurité. Oracle Corporation et ses affiliés déclinent toute responsabilité quant aux dommages causés par l'utilisation de ce logiciel ou matériel pour ce type d'applications.

Oracle et Java sont des marques déposées d'Oracle Corporation et/ou de ses affiliés. Tout autre nom mentionné peut correspondre à des marques appartenant à d'autres propriétaires qu'Oracle.

Intel et Intel Xeon sont des marques ou des marques déposées d'Intel Corporation. Toutes les marques SPARC sont utilisées sous licence et sont des marques ou des marques déposées de SPARC International, Inc. AMD, Opteron, le logo AMD et le logo AMD Opteron sont des marques ou des marques déposées d'Advanced Micro Devices. UNIX est une marque déposée d'The Open Group.

Ce logiciel ou matériel et la documentation qui l'accompagne peuvent fournir des informations ou des liens donnant accès à des contenus, des produits et des services émanant de tiers. Oracle Corporation et ses affiliés déclinent toute responsabilité ou garantie expresse quant aux contenus, produits ou services émanant de tiers. En aucun cas, Oracle Corporation et ses affiliés ne sauraient être tenus pour responsables des pertes subies, des coûts occasionnés ou des dommages causés par l'accès à des contenus, produits ou services tiers, ou à leur utilisation.

# Contents

Using This Document	tation	11
		4.0
	usted Extensions	
•	y Policy	
• •	heir Components and Uses	
O .	Restrict Access	
	sed in Access Control Decisions	
=	onents	
Label Domin	ance	18
Accreditation	Ranges, Label Ranges, and Valid Labels	19
System Accre	editation Range	20
User Accredi	tation Range	21
Account Labe	el Range	22
Account Labe	el Range Examples	22
Session Rang	ge	24
Label Availab	oility in Trusted Extensions Sessions	26
Labeled Work	kspaces	27
Label Administration	on	27
Label Visibili	ity	27
Labels on Pri	inted Output	28
Authorization	s for Relabeling Information	28
Privileges for	Translating Labels	28
2 Planning Labels in	Trusted Extensions	29
Planning Labels in	Trusted Extensions	29
▼ How to P	Plan for Labels	29
▼ How to P	Plan the Encodings File	30
	ngs Files	
	les From Trusted Extensions	
Oracle Solaris	s Extensions to label encodings File	38

3	Creating a Label Encodings File	39
	Encodings File Syntax	39
	Word Order Requirements	40
	Classification Name Syntax	41
	Managing a Label Encodings File	46
	▼ How to Create a label_encodings File	47
	▼ How to Analyze and Verify the label_encodings File	47
	▼ How to Distribute the label encodings File	48
	▼ How to Add or Rename a Classification	
	▼ How to Specify Default and Inverse Words	50
	▼ How to Create a Single-Label Encodings File	
	▼ How to Debug a label_encodings File	54
4	Labeling Printer Output	55
	Labels on Body Pages	
	Security Text on Banner and Trailer Pages	
	Specifying the "Protect As" Classification	
	Specifying Printer Banners	
	Specifying Channels	61
	Configuring Security Text on Print Jobs	66
	▼ How to Specify the Text in PRINTER BANNERS	
	▼ How to Specify Handling Instructions in CHANNELS	
	▼ How to Set a Minimum "Protect As" Classification	
5	Customizing the LOCAL DEFINITIONS Section	69
	LOCAL DEFINITIONS Section	
	Contents of LOCAL DEFINITIONS Section	
	Specifying Colors for Labels	
	Modifying Oracle Solaris Extensions	
	▼ How to Add Oracle Solaris Extensions to an Encodings File	
	▼ How to Specify Default User Labels	
	▼ How to Assign a Color to a Label or Word	
6	Example of Planning an Organization's Encodings File	77
	Identifying the Site's Label Requirements	77
	Satisfying Information Protection Goals	78
	Trusted Extensions Features That Address Labeling and Access	
	Climbing the Security Learning Curve	81

	Analyzing the Requirements for Each Label	. 82
	Requirements for CONFIDENTIAL: INTERNAL_USE_ONLY	. 82
	Requirements for CONFIDENTIAL: NEED_TO_KNOW	82
	Requirements for CONFIDENTIAL: REGISTERED	83
	Names of Groups With NEED TO KNOW Label	83
	Understanding the Set of Labels	
	Defining the Set of Labels	
	Planning the Classifications	
	Planning the Compartments	. 87
	Planning the Use of Words in MAC	
	Planning the Use of Words in Labeling System Output	. 88
	Planning Unlabeled Printer Output	89
	Planning for Supporting Procedures	. 89
	Planning the Classification Values in a Worksheet	90
	Planning the Compartment Values and Combination Constraints in a	
	Worksheet	91
	Planning the Clearances in a Worksheet	. 92
	Planning the Printer Banners in a Worksheet	. 94
	Planning the Channels in a Worksheet	. 94
	Planning the Minimum Labels in an Accreditation Range	. 95
	Planning the Colors in a Worksheet	96
	Editing and Installing the label_encodings File	. 97
	Specifying the Version	. 97
	Specifying the Classifications	97
	Specifying the Sensitivity Labels	. 98
	Specifying the Information Labels	. 98
	Specifying the Clearances	99
	Specifying the Channels	. 99
	Specifying the Printer Banners	100
	Specifying the Accreditation Range	101
	Specifying the Local Definitions	102
	Configuring Users and Printers for Labels	103
۸ (	Customized Encodings File for SecCompany	105
	SecCompany's label_encodings File	105
	SecCompany's Verification of the label_encodings File	
nde	av	115

# Figures

FIGURE 1-1	Comparing the Label of a Text Editor With the Label Property in the File Browser	16
FIGURE 1-2	CIPSO Label Definition	
FIGURE 1-3	Representation of the TS, TS A, TS B, and TS AB Labels	18
FIGURE 1-4	How System Accreditation Range Is Constrained by Rules	20
FIGURE 1-5	ACCREDITATION RANGE Section of label_encodings File	21
FIGURE 1-6	Constraints on Account Label Ranges	23
FIGURE 1-7	Comparison of Session Ranges	25
FIGURE 1-8	Cumulative Effect of Constraints on a Session Range	26
FIGURE 2-1	Sample Planning Board for Label Relationships	33
FIGURE 2-2	Classifications in the Default label_encodings File	36
FIGURE 2-3	Compartments in the Default label_encodings File	36
FIGURE 4-1	Label Automatically Printed on Body Pages	56
FIGURE 4-2	Typical Banner Page of a Labeled Print Job	57
FIGURE 4-3	Differences on a Trailer Page	58
FIGURE 4-4	"Protect As" Statement	59
FIGURE 4-5	Commercial Use of PRINTER BANNERS Section on Banner Page	60
FIGURE 4-6	U.S. Government Use of PRINTER BANNERS Section on Banner Page	60
FIGURE 4-7	Commercial Use of CHANNELS Section on Banner Page	62
FIGURE 4-8	U.S. Government Use of CHANNELS Section on Banner Page	63
FIGURE 5-1	Window Labels With Colors From COLOR NAMES	71
FIGURE 6-1	Label Automatically Printed on Body Pages	79
FIGURE 6-2	How a Printer With a Restricted Label Range Handles Print Jobs	80
FIGURE 6-3	User Receiving Email Within the Account Label Range	81
FIGURE 6-4	Sample Planning Board for Label Relationships at SecCompany	86

# Tables

TABLE 1-1	Accreditation Range and Account Label Range Examples	24
TABLE 3-1	label_encodings Keywords	39
TABLE 4-1	Effect of Minimum "Protect As" Classification on Printer Output	59
TABLE 6-1	Label Ranges on SecCompany Printers at Various Locations	90
TABLE 6-2	Classifications Planner for SecCompany	91
TABLE 6-3	Compartments and User Accreditation Range Combinations Planner for	
	SecCompany	91
TABLE 6-4	Compartment Bits Planner for SecCompany	92
TABLE 6-5	Clearance Planner for SecCompany	93
TABLE 6-6	Printer Banners Planner for SecCompany	94
TABLE 6-7	Channels Planner for SecCompany	95
TABLE 6-8	Color Names Planner for SecCompany	96

## **Using This Documentation**

- Overview Describes how labels are used and are displayed in the Trusted Extensions
  feature of Oracle Solaris and how to plan labels in your organization. Also describes which
  parts of the "Compartmented Mode Workstation Labeling: Encodings Format" guide do
  not apply to the Trusted Extensions implementation.
- Audience System administrators, security administrators, and developers of labeled applications.
- **Required knowledge** Administratively assigned labels and site security requirements.

Describes how labels are used and are displayed in the Trusted Extensions feature of Oracle Solaris and how to plan labels in your organization. Also describes which parts of the "Compartmented Mode Workstation Labeling: Encodings Format" guide do not apply to the Trusted Extensions implementation.

## **Product Documentation Library**

Late-breaking information and known issues for this product are included in the documentation library at http://www.oracle.com/pls/topic/lookup?ctx=E36784.

## **Access to Oracle Support**

Oracle customers have access to electronic support through My Oracle Support. For information, visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info or visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs if you are hearing impaired.

#### **Feedback**

Provide feedback about this documentation at http://www.oracle.com/goto/docfeedback.

# · · · CHAPTER 1

#### **About Labels in Trusted Extensions**

This chapter prepares the security administrator to create the file that encodes labels for the Trusted Extensions feature of Oracle Solaris. This chapter assumes that you have read the following material:

- Chapter 9, "Common Tasks in Trusted Extensions," in "Trusted Extensions Configuration and Administration" guide, which prepares the security administrator to assume the Security Administrator role
- "Labels in Trusted Extensions Software" in "Trusted Extensions Configuration and Administration"

This chapter covers the following topics:

- "Labels and Security Policy" on page 13
- "Types of Labels, Their Components and Uses" on page 14

## **Labels and Security Policy**

Site security policy is the security policy that an organization establishes to protect its proprietary information. With Trusted Extensions software, labels and mandatory access control (MAC) can be part of this policy. Labels implement a set of rules that is a part of system security policy. System security policy is the set of rules that is enforced by system software to protect information that is being processed on the system. The term "security policy" can refer to the policy itself or to the implementation of the policy.

All systems that are configured with Trusted Extensions have labels. Labels are specified in a label\_encodings file. For a description of the file, see the label\_encodings(4) man page. For descriptions of the encodings files that Trusted Extensions provides, see "Sources for Encodings Files" on page 34.

Trusted Extensions installs a default version of the label\_encodings file. The default version supplies several commercial labels. This version can sometimes be used in non-production environments for learning purposes. A site might also customize one of the label\_encodings

files that Trusted Extensions provides. For an example of a site-specific file, see Appendix A, "Customized Encodings File for SecCompany".

Every system in a Trusted Extensions network needs its own copy of the site's label\_encodings file. For interoperability, the label\_encodings file on every system in the network must be compatible. At the very least, each system must recognize the labels on every other system.

Certain types of labels must be defined. The security administrator specifies the numeric values and the bits that define the internal representation of labels. Users and roles view the textual representation of labels. The labeling software translates between the internal form and the textual form. The label\_encodings file provides the rules for translating the internal representation of labels to their textual form. The textual form can be visible on the desktop. The internal representation is recorded in the audit trail and is interpreted by the praudit command.

The *security administrator* is the person who defines and plans the implementation of an organization's security policy. The security administrator establishes information protection procedures, makes sure that users and administrators are properly trained, and monitors compliance.

The Security Administrator role is created in the software. The role is assigned to one or more administrators who fully understand Trusted Extensions administration. These administrators are cleared to view and protect the highest level of information that is processed by Trusted Extensions. One responsibility of the security administrator is to create the site's label\_encodings file to replace the version that is installed by default. The administrator can also decide whether labels are visible on the desktop. Even when labels are not visible, objects and processes on the system are labeled, and MAC is enforced.

Trusted Extensions provides the Security Administrator role with the tools and capabilities to put the organization's security policy into effect. To assume the role, you first log in as a regular user, then you assume the role. At your site, the security administrator who defines the site's security policy might or might not be the same person who implements the policy.

## Types of Labels, Their Components and Uses

Trusted Extensions defines two types of labels:

- Sensitivity labels, often referred to as labels
- Clearance labels, referred to as *clearances*

Sensitivity labels, label ranges, and a label limit or *clearance* determine who can access which objects on the system. Clearance labels are assigned to users. Sensitivity labels are assigned to processes, including user processes, and to files and directories.

Some objects have a label range. These objects can be accessed at a particular label within the defined label range. A label range from ADMIN\_LOW to ADMIN\_HIGH allows access at all labels. The security administrator can narrow that label range. Objects with label ranges include the following:

- All hosts and networks with which communications are allowed
- Zones
- User accounts and role accounts
- Allocatable devices, such as tape drives, CD-ROM and DVD devices, and audio devices
- Other devices that are not allocatable, for example, printers, workstations (which are controlled through the label range of the frame buffer), and serial lines when they are used as a login device

The various procedures for setting labels on these objects is described in "Trusted Extensions Configuration and Administration". "Device Manager GUI" in "Trusted Extensions Configuration and Administration" describes how to set label ranges on devices.

### **Label Ranges Restrict Access**

Label ranges set limits on the following:

- The labels at which hosts can send and receive information.
- The labels at which processes acting on behalf of users and roles can access files and directories in zones.
- The labels at which users can allocate devices, thereby restricting the labels at which files can be written to storage media in these devices.
- The labels at which users can send jobs to printers.
- The labels at which users can log in to workstations. In addition to the user's label range, a label range on the frame buffer can be used to restrict access to a system.

Labels are automatically assigned to email messages. Emails are only visible in an email reader at the label of the message. The label of an email is printed when the email is printed.

#### **Labels Are Used in Access Control Decisions**

Labels are used to implement and control access on a system. Labels implement mandatory access control (MAC). With Trusted Extensions, both discretionary access control (DAC) checks and MAC checks must pass before access is allowed to an object. As in Oracle Solaris, DAC is based on permission bits and access control lists (ACLs). For more information, see Chapter 1, "Controlling Access to Files," in "Securing Files and Verifying File Integrity in Oracle Solaris 11.2".

MAC compares the label of a process that is running an application with the label or the label range of any object that the process tries to access. The labels implement the set of rules that enforce policy. One rule is *read down-read equal*. This rule applies when a process tries to access an object. The label of the process has to be greater than or equal to the label of the object, as in:


Label[Process] >= Label[Object]

On a system that is configured with Trusted Extensions, files and directories have slightly different access rules from each other and from process objects, network endpoint objects, device objects, and X window objects. In addition, an object can be accessed in three different ways. A slightly different set of rules applies for each way:

- The name of the file, directory, or device can be viewed.
- The contents or the attributes of the file, directory, or device can be viewed.
- The contents or the attributes of the file, directory, or device can be modified.

The following figure shows a system that uses labels to make an access control decision.

FIGURE 1-1 Comparing the Label of a Text Editor With the Label Property in the File Browser

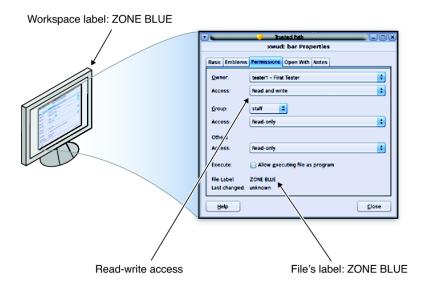

In the preceding figure, a user opens a text editor in a workspace with the label ZONE BLUE. The system sets the label of the process that is running the text editor to be equal to the label of the current workspace. Therefore, the text editor displays a label of ZONE BLUE. When the text editor attempts to open a file for editing, the label of the process that is running the text editor


is compared to the label of the file. When the two labels are equal, as the File Browser shows, access for writing is allowed.

#### **Label Components**

Labels and clearances consist of a single *classification* and zero or more *compartments*. The classification portion of a label indicates a *relative level of protection*. When a label is assigned to an object, the label's classification indicates the sensitivity of the information that is contained in the object. When a clearance is assigned to a user, the classification portion of the clearance label indicates the user's level of trust.

Trusted Extensions supports Common IP Security Option (CIPSO) labels. Each label has a classification field that allows 256 values, and a 256-bit compartments field. You cannot use 0 (zero) for a classification, so you can define a total of 255 classifications. For CIPSO labels, 240 compartment bits are available, for a total of 2<sup>240</sup> compartment combinations. The components are illustrated in the following figure. Note that "Class" means "Classification" and "Comp" means "Compartment".

FIGURE 1-2 CIPSO Label Definition

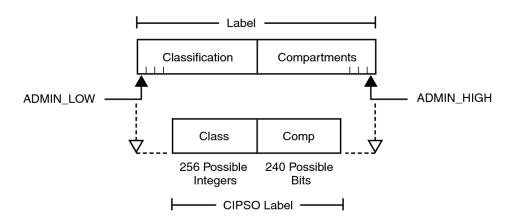

The ADMIN\_HIGH label and the ADMIN\_LOW label are administrative labels. These labels define the upper bound and lower bound of all labels on a system.

Each compartment has one or more compartment bits assigned. The same compartment bit can be assigned to more than one compartment.

The textual format of a classification appears similar to the following:

CLASSIFICATIONS:

```
name= TOP SECRET; sname= TS; value= 6;initial compartments= 4-5;
```

The compartment portion of a label is optional. Compartments in a label can be used to represent different kinds of groupings, such as workgroups, departments, divisions, or geographical areas. Compartments can also further identify how information will be handled.

When initial compartments are part of the classification definition, then compartments are part of that label. In the following excerpt, name indicates a compartment that can be used with the TS classification.

#### WORDS:

```
name= A; compartments= 0;
name= B; compartments= 1;
name= CNTRY1; sname= c1; compartments= ~4;
name= CNTRY2; sname= c2; compartments= ~5;
```


Possible labels from the preceding classifications and compartments include TS, TS A, TS B, and TS AB. A file with the TS A label would be available only to users who have the TS classification and the A compartment in their clearances. For an illustration, see Figure 1-3.

#### **Label Dominance**

When any type of label has a security level that is equal to or greater than the security level of a second label, the first label is said to *dominate* the second label. This comparison of security levels is based on classifications and compartments in the labels. The classification of the dominant label must be equal to or higher than the classification of the second label. Additionally, the dominant label must include all the compartments in the second label. Two equal labels are said to dominate each other.

By these criteria, TS A dominates TS, and TS dominates TS. The classification and compartment bits of the Top Secret (TS) label are shown in the following figure.

FIGURE 1-3 Representation of the TS, TS A, TS B, and TS AB Labels



Another kind of dominance, *strict dominance*, is sometimes required for access. One label *strictly dominates* another label when the first label has a security level that is greater than the security level of the other label. Strict dominance is dominance without equality. The classification of the first label is higher than the classification of the second label. The first label contains all the compartments in the second label. Or, if the classifications of both labels are the same, the first label contains all the compartments in the second label, in addition to one or more additional compartments.

Labels that are not in a dominance relationship are said to be *disjoint*. Disjoint labels are appropriate for separating departments at a company. For example, the label TS HR (Human Resources) would be disjoint from TS Sales.

# Accreditation Ranges, Label Ranges, and Valid Labels

Certain combinations of label components can be disqualified by rules in the label\_encodings file. Combination rules *implicitly* define the organization's usable labels. The security administrator is responsible for specifying combination rules.

A *valid* or *well-formed* label is a label that satisfies a combination rule. The security administrator defines combination rules by using any of the following means:

- A minimum clearance and a minimum sensitivity label must be specified.
  These system-wide minimum labels establish the lowest clearance and the lowest label that any regular user can have.
- Initial compartments (compartment bits) can be assigned to a classification.
   Initial compartment bits are always associated with the classification in a label. For more details, see "Classification Name Syntax" on page 41.
- A minimum classification, an output minimum classification, and a maximum classification can be associated with any word.
- Hierarchies among words can be defined by the bit patterns that are chosen for each word.
- *Required combinations* of words can be specified.
- *Combination constraints* can be specified for words.

Two accreditation ranges are implicitly specified in the label encodings file:

- "System Accreditation Range" on page 20
- "User Accreditation Range" on page 21

The term *accreditation range* is also used for the label ranges that are assigned to user and role accounts, printers, hosts, networks, and other objects. Because rules can constrain the set of valid labels, label ranges and accreditation ranges might not include all the potential combinations of label components in a range.

## **System Accreditation Range**

The system accreditation range includes the administrative labels ADMIN\_HIGH and ADMIN\_LOW. The system accreditation range also includes all the well-formed labels that are constructed from the label components in the label encodings file.

Administrative role accounts are usually the only accounts that can work at every label within the system accreditation range. An organization can also set up regular user accounts so that users can perform a task that requires an administrative label.

The following figure shows an example of how rules can constrain the labels that are permitted in a system accreditation range.

FIGURE 1-4 How System Accreditation Range Is Constrained by Rules

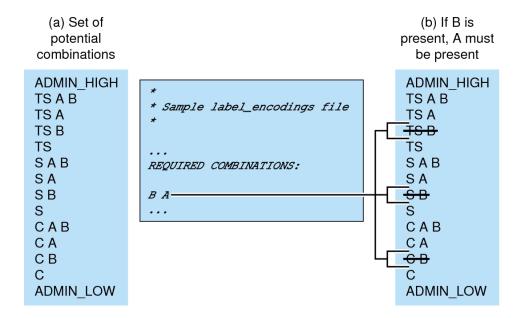


Figure 1-4 (a) shows all potential combinations given the classifications, TS (TOP SECRET), S (SECRET), and C (CONFIDENTIAL), and the compartments, A and B.


Figure 1-4 (b) shows a typical rule from the REQUIRED COMBINATIONS subsection of the SENSITIVITY LABELS section and its effects. The lines bracket the labels that are disqualified by the rule. Disqualified labels appear with lines through them. The REQUIRED COMBINATIONS syntax B A means that any label that has B as a compartment must also contain A. The converse

is not true. Compartment A is not required to be combined with any other compartments. Because compartment B is only permitted when A is also present, the labels TS B, S B, and C B are not well-formed. Labels that are not well-formed are not in the system accreditation range.

## **User Accreditation Range**

The user accreditation range is the largest set of labels that regular users can access when using Trusted Extensions. The user accreditation range always excludes ADMIN\_HIGH and ADMIN\_LOW. The user accreditation range is further constrained by any rules that constrain the "System Accreditation Range" on page 20. In addition, the user accreditation range can be constrained by a set of rules in the ACCREDITATION RANGE section of the label\_encodings file. Figure 1-5 continues the Figure 1-4 example. Figure 1-5 shows three different types of rules in the ACCREDITATION RANGE section and their effects on the user accreditation range. The lines bracket to the well-formed labels that the particular rule permits.

FIGURE 1-5 ACCREDITATION RANGE Section of label\_encodings File

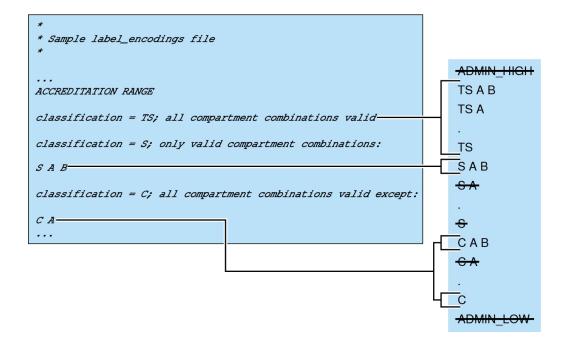

As shown in the box to the right, the user accreditation range excludes ADMIN\_HIGH and ADMIN\_LOW. The rule for the TS classification (shown in Figure 1-4) includes all TS combinations

except TS B. However, because TS B, and S B and C B, were previously overruled by the REQUIRED COMBINATIONS rule B A (as shown in Figure 1-4), TS A B, TS A, and TS are the only allowed TS combinations. As shown in Figure 1-5, because S A B is defined as the only valid combination for the S classification, S B is excluded again. All C combinations except C A are valid, according the rule for the C classification. However, because C B was overruled earlier, the only permitted combinations for the C classification are C A B and C.

## **Account Label Range**

The *account label range* is the range of labels that is available to a user account or role account. This range governs the labels at which the user can work when logging in to the system.

The labels that are available in the account label range have the following constraints:

- The user clearance defines the upper bound of the account label range.
  A clearance does not have to be a valid label. Because it must dominate all labels at which the user can work, the clearance must contain all the components of all the labels at which the user can work.
- The minimum label sets the lower bound of the account label range.
  The minimum sensitivity label in the label\_encodings file defines an absolute minimum on labels at which any user can work.

#### **EXAMPLE 1-1** Defining a Valid Clearance That Is Not a Valid Label


Consider a label\_encodings file that prohibits the combination of compartments A, B, and C in a label. The valid clearance in this label encodings file is not a valid label for a user.

- The minimum label would be TS with no compartments.
- TS A B C would be a valid clearance. TS A B C would not be a valid label.
- Valid labels for a user would be TS, TS A, TS B, and TS C.

## **Account Label Range Examples**

The possible clearances and minimum labels that can be assigned to a user are shown in the following example. These labels are based on the accreditation examples from the previous sections.

FIGURE 1-6 Constraints on Account Label Ranges

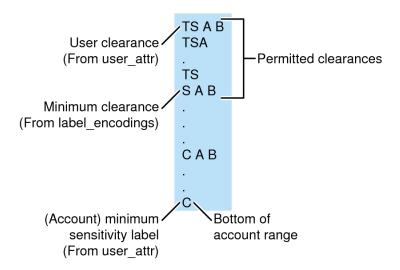

In this example, TS A B is the highest label in the system accreditation range. This label contains the only two compartments, A and B, that are permitted to appear together in a label with any classification. TS A B is the clearance assigned to the account.

C is the user's minimum label. The definitions in the account label range constrain the user to work at labels TS A B, TS A, TS, S A B, C A B, or C.

The permitted clearances are TS A B, TS A, TS and S A B. A minimum clearance of S A B is set in the label\_encodings file.

Even if TS A B were not a valid label, the security administrator could assign the label as a clearance. The assignment would allow the user to use any valid labels that are dominated by TS and that contain the words A and B. In contrast, if TS were assigned as the account clearance, the user could work at the labels TS and C only. TS without any compartments does not dominate S A B or C A B.

Table 1-1 provides a more complex example. The example illustrates the differences between the possible label combinations, the system accreditation range, the user accreditation range, and some example account label ranges.

**TABLE 1-1** Accreditation Range and Account Label Range Examples

Accreditation Range		Account Label Range			
Possible Labels	System	User	TS A B Clearance, S A B Min Label	тѕ Clearance, с Min Label	ADMIN_LOW Clearance and Min Label, solaris.label.delegate Authorization
ADMIN_HIGH	ADMIN_HIGH				
TS A B	TS A B		TS A B		
TS A	TS A	TS A	TS A		
TS	TS	TS	TS	TS	
S A B	S A B	S A B	S A B		
S A					
S				S	
САВ	САВ				
СА	СА				
С	С	С		С	
ADMIN_LOW	ADMIN_LOW				ADMIN_LOW

- Regular users without any authorizations can work only with the labels in the User Accreditation Range column.
- The fourth column shows the Account Label Range for a user with a clearance of TS A B and a minimum label of S A B. This range allows the user to work with the labels TS A B, TS A, TS, and S A B.
- The fifth column shows an account with a clearance of TS and a minimum label of C. This account would be allowed to work only with TS, S, and C labels because all the other valid labels that are dominated by TS include the compartments A and B. A and B are not in the clearance.
- The sixth column shows a user who is authorized to work outside the user accreditation range. This user is assigned a single label of ADMIN LOW.

## **Session Range**

The *session range* is the set of labels that is available to a user account during a Trusted Extensions session. The session range is a function of the following constraints:

- The label range of the user
- The label that the user chose at login
- The label range of the local system

The session range of a single-label account is the label of the account. Choosing from a range of labels is possible only when a user account is configured to use multiple labels. User with accounts that are configured to use multiple labels can choose different labels during the session. To specify a label, see "How to Change the Label of a Workspace" in "Trusted Extensions User's Guide".


The single label or session clearance that is chosen at login is in effect throughout the session until logout. During a multilabel session, the user can work at any valid label that is dominated by the session clearance and that dominates the user's minimum label.

Figure 1-7 continues the Figure 1-6 example. As shown in Figure 1-6, the user can specify a session clearance that uses any well-formed label between TS A B and S A B.

Figure 1-7 (a) shows the labels that are available if the user selects a multilabel session with a session clearance of S A B. Because the other intermediate labels between S A B and C are not well-formed, the user can only work at S A B, C A B, or C.

Figure 1-7 (b) shows the labels that are available if the user selects a single-label session with a session label of C A B. Note that C A B is below the minimum clearance. However, C A B is accessible because the user is selecting a session label, not a clearance. Because the session is single-label, the user can work at only one label. In this example, the user specified C A B, although S A B or C could have been chosen instead.

FIGURE 1-7 Comparison of Session Ranges

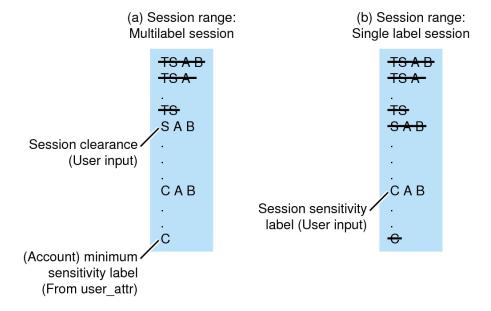

## **Label Availability in Trusted Extensions Sessions**

The following figure summarizes the progressive eliminations of available labels. The eliminated labels are shown with a line through them in the range where they are filtered out. The filtered out labels are not shown in subsequent ranges.

FIGURE 1-8 Cumulative Effect of Constraints on a Session Range

(a) Set of	(b) System	(c) User	(d) Account	(e) Multilabel
Potential	Accreditation	Accreditation	Label	Session Range
Combinations	Range	Range	Range	Using S A B
ADMIN_HIGH TS A B TS A TS B TS S A B S A S B S C A B C A C B C ADMIN_LOW	ADMIN_HIGH TS A B TS A TS B TS S A B S A S B S C A B C A G B C ADMIN_LOW	ADMIN_HIGH TS A B TS A TS B TS S A B S A S B C A B C B C ADMIN LOW	TS A B TS A TS S A B	TS A B TS A  TS S A B  C C A B C

The following set of examples show session label limitations and availability based on users' session choices. These examples continue the example from Figure 1-8.

#### **EXAMPLE 1-2** Effect of Using Default Label in Multilevel Session

At initial login, the user is assigned the lowest label in the user's account. If the lowest label is CONFIDENTIAL, the user user's first workspace is labeled CONFIDENTIAL. The user can then open workspaces at CONFIDENTIAL A B and SECRET A B, the session clearance.

#### **EXAMPLE 1-3** Effect on Multilevel Session of User Choosing Higher Label at Initial Login

If the user chooses a higher label at initial login, such as CONFIDENTIAL A B, the user's first workspace is labeled CONFIDENTIAL A B. The user can open a higher-labeled workspace SECRET A B, but cannot open a CONFIDENTIAL workspace during that session.

#### **EXAMPLE 1-4** Label Availability in Single-Level Session

At initial login, the user must choose a label. The available labels are within the user's label range up to the session clearance. If the clearance is SECRET A B, the labels that are available for the user to choose are CONFIDENTIAL, CONFIDENTIAL A B, SECRET A B. After choosing a label like SECRET A B, the user's first workspace is labeled SECRET A B. Because the session is single-level, the only available workspace label is SECRET A B.

## **Labeled Workspaces**

Labeled workspaces enable users to work at multiple labels during a single session.

If the user selects a range of labels for the session, the first workspace that appears is at the user's *minimum label*. By default, desktop panels exist for three other workspaces. By entering a workspace and selecting a label, all windows created in that workspace run processes at the selected label.

For details about working in a labeled system, see "Trusted Extensions User's Guide".

#### **Label Administration**

Several aspects about how labels appear to users can be configured. Label color and labels on printed output can be configured. Some actions on labels require authorization or privilege. For example, upgrading or downgrading an object's label requires an authorization. Manipulating a label between its internal and its textual representation can require a privilege.

## **Label Visibility**

Typically, the content of files at a lower label can be read by a user at a higher label. For example, system files and commonly available executables are assigned an ADMIN\_LOW label. According to the read down-read equal rule, users who work at any label can read ADMIN\_LOW files. As in Oracle Solaris, DAC permissions can prevent read access. Zones also protect files from being read. If a lower-level zone is not mounted, a user in a higher-level zone cannot access the files for reading.

Files that contain data that must not be viewed by regular users, such as system log files and the label\_encodings files, are maintained at ADMIN\_HIGH. To allow administrators access to protected system files, the ADMIN\_LOW and ADMIN\_HIGH administrative labels are assigned as the minimum label and clearance for roles.

## **Labels on Printed Output**

The labels that are printed on banner, trailer and body pages of print jobs can be customized. Also, accompanying text that appears on the banner and trailer pages can be customized. For more information, see Chapter 4, "Labeling Printer Output".

## **Authorizations for Relabeling Information**

The authorization to upgrade information to a label that dominates the label of the current information is called the Upgrade File Label authorization. The authorization that is used to downgrade information to a label that is lower than the label of the current information is called the Downgrade File Label authorization. For definitions of these authorizations, use the getent auth attr command.

## **Privileges for Translating Labels**

Label translation occurs whenever programs manipulate labels. Labels are translated to and from the textual strings to the internal representation. For example, when a program such as getlabel obtains the label of a file, before the label can be displayed to the user, the internal representation of the label is translated into readable output, that is, into a textual string. When the setlabel program sets a label specified on the command line, the textual string (that is, the label's name) is translated into the label's internal representation. Trusted Extensions permits label translations only if the calling process's label dominates the label that is to be translated. If a process attempts to translate a label that the process's label does not dominate, the translation is disallowed. The sys\_trans\_label privilege is required to override this restriction.



## Planning Labels in Trusted Extensions

This chapter covers the following topics:

- "Planning Labels in Trusted Extensions" on page 29
- "Sources for Encodings Files" on page 34

For a greater level of detail and for further reference, see the "Compartmented Mode Workstation Labeling: Encodings Format": Defense Intelligence Agency document [DDS-2600-6216-93]. This Defense Intelligence Agency (DIA) reference is included in the Trusted Extensions document set. When using the DIA reference, keep in mind that information labels and their components are not used in Trusted Extensions.

## **Planning Labels in Trusted Extensions**

Planning labels requires general knowledge of site security policy and specific knowledge of the syntax of the label\_encodings file. The security administrator is responsible for planning labels

The following task map describes the planning tasks and points to more information.

Task	Description	For Instructions
Study and outline your label_encodings file.	Make a label_encodings file that enforces your site security policy.	"How to Plan for Labels" on page 29
Build an extensible label_		"How to Plan the Encodings File" on page 30

#### **▼** How to Plan for Labels

1. Allow time to build a correct label encodings file.

Building the encodings for a site and making them correct can be a time-consuming process. A system cannot be configured until the correct label\_encodings file is installed.

#### 2. Know your site's security policy.

Many sites already have a security policy that was developed according to government methods. Commercial businesses, even businesses that do not have much experience in planning labeled security, can start by examining their goals for information protection. These goals can be used to make some common-sense decisions about how to use labels. If the company has developed legal requirements for labeling printed information and email, those guidelines are a good place to start.

- For more information about setting up site security policy, see Appendix A, "Site Security Policy," in "Trusted Extensions Configuration and Administration".
- For an example of planning a customized label\_encodings file that is based on company requirements, see Chapter 6, "Example of Planning an Organization's Encodings File".

#### 3. Study the U. S. government's label encodings file.

The government's description of the file is in the "Compartmented Mode Workstation Labeling: Encodings Format": Defense Intelligence Agency document [DDS-2600-6216-93].

4. Determine your site's entries in the LOCAL DEFINITIONS section of the file.

For suggestions and examples, see Chapter 5, "Customizing the LOCAL DEFINITIONS Section".

Finalize your encodings before installing Trusted Extensions.

Changing the label\_encodings file on a running system is risky. For more information, see the label\_encodings(4) man page.

## **▼** How to Plan the Encodings File

The following practices help you create a correct label\_encodings file that can be safely extended later.



**Caution -** For CLASSIFICATIONS and COMPARTMENTS, the security administrator can later change the textual representation. However, the integer and bit values cannot be changed without potentially serious complications.

1. Create a label encodings file.

For ideas, see "Sources for Encodings Files" on page 34. For the procedure, see "Managing a Label Encodings File" on page 46.

#### 2. Leave gaps in the label encodings file to add items.

#### a. Leave gaps when you number classifications.

For example, you could number classifications in increments of 10. The increments allow intermediate classifications to be added later.

#### b. Leave gaps in compartment bits.

Leave gaps in compartment bit numbers for possible later additions.

#### c. Reserve some initial compartment bits for later definition.

If your site uses inverse compartments, see "Default and Inverse Words" on page 43. To learn more about inverse compartments, see "Compartmented Mode Workstation Labeling: Encodings Format".

#### 3. Determine classifications for the site.

As described in Figure 1-2, the total number of classification values that you can use is 254. Do not use classification 0.

A Trusted Extensions system treats a classification value of 10 as more security-sensitive than a classification value of 2. The textual representations are not used to determine security levels.

The same classification value cannot be assigned to different names. Each classification must be higher or lower, or disjoint, from any other classification. Every classification must be distinct.

A table can be used to plan classifications. For a completed example, see Table 6-2.

#### 4. Determine the compartments for the site.

Decide how data and programs are grouped. Decide whether any data or programs can be intermixed. For example, perhaps purchase order data should not be viewable by programs that manage personnel files. Perhaps purchase order data should be accessible to programs that address shipment tracking problems.

At this point, do not think in terms of users. Think of *what*, not *who*.

#### 5. Name the classifications and compartments.


CLASSIFICATIONS and WORDS (for compartments) in the label\_encodings file have two forms: a mandatory long name and an optional short name. Short names can be used interchangeably with long names when labels are being specified.


# 6. Arrange the relationships among the classifications and among the compartments.

Compartments are not intrinsically hierarchical. However, compartments can be configured to have hierarchical relationships. Before setting up relationships, study the example section in "Compartmented Mode Workstation Labeling: Encodings Format".

To make this step easier, use a large board and pieces of paper that represent your classifications and compartments. For an example, see Figure 2-1. With this method, you can visualize the relationships and rearrange the pieces until they all fit together.

**Note -** Unless you are creating a set of encodings that must be compatible with another organization's labels, you can assign any valid number as a compartment bit. Keep track of the numbers that you use and their relationships to each other.



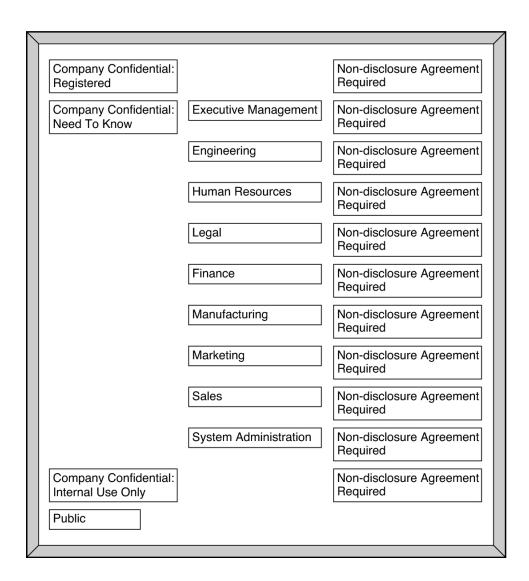

- 7. Arrange the labels in order of increasing sensitivity.
- 8. Decide which clearances to assign to which users.

You can use a table to plan clearances. For a completed example, see Table 6-5.

When you assign a clearance to a user, the classification component of the clearance must dominate all classifications at which the user can work. The clearance can be equal to the user's highest work classification. The compartment component of the clearance must include all compartments that the user might need.

#### Associate the definitions for each compartment with an internal format of integers, bit patterns, and logical relationship statements.

A table can be used to track compartment bit assignments. For a completed example, see Table 6-4.

# 10. Copy the WORDS section under SENSITIVITY LABELS to the INFORMATION LABELS section.

Although Trusted Extensions does not support information labels, the INFORMATION LABELS: WORDS: section must be identical to the SENSITIVITY LABELS: WORDS: section to be a valid encodings file.

#### 11. Decide which colors to associate with which labels.

For suggestions and examples, see "Specifying Colors for Labels" on page 70.

#### 12. Analyze the label relationships.

On a system that is configured with Trusted Extensions, use the chk\_encodings -a command to generate a detailed report on the label relationships in your label encodings file.

# chk\_encodings -a encodings-file

## **Sources for Encodings Files**

The label\_encodings file is a flat text file. On a system that is configured with Trusted Extensions, the label of the file is ADMIN\_HIGH to prevent regular users from reading it. The maximum line length in the label\_encodings file is 256 bytes. The file can be edited with any text editor. The security administrator is responsible for the creation and distribution of the label\_encodings file.

**Note -** The label\_encodings file can be created or edited on any system. However, the file must be checked and tested on a host that is configured with Trusted Extensions.

Some organizations have a government-furnished label\_encodings file that is based on Defense Intelligence Agency (DIA) specifications. Other organizations might want to derive their encodings file from one of the files that are provided by Trusted Extensions.

## **Encodings Files From Trusted Extensions**

Oracle Solaris provides the following sample label\_encodings files in the /etc/security/tsol directory. These samples can be modified to meet your site requirements.

label\_encodings

Is installed by Trusted Extensions software as the default. This file uses commercial labels, such as Confidential: Need to Know.

label\_encodings.examplesimilar to the example in Appendix A, "Customized Encodings File for SecCompany".

The introduction to the appendix describes the label components in the file. Chapter 6, "Example of Planning an Organization's Encodings File" describes each step for creating this file.

label encodings.gfi.slinghe U.S. government single-level file.

label\_encodings.singl& Oracle Solaris's version of the U.S. government single-level file. The color assignments are different.

label encodings.gfi.mLstlie U.S. government multilevel file.

label\_encodings.multiIs Oracle Solaris's version of the U.S. government multilevel file. The file combinations are less restricted, the minimum clearance is higher, the default user label is lower, and the colors are different.

Alternatively, you can build a label\_encodings file from scratch. The syntax and structure of the label\_encodings file is provided in "Encodings File Syntax" on page 39.

#### Default label\_encodings File

By default, the /etc/security/tsol/label\_encodings is installed with the following contents:

```
ACCREDITATION RANGE:
classification= PUB; all compartment combinations valid;
classification= SBX; all compartment combinations valid;
classification= CNF; all compartment combinations valid except:
CNF
minimum clearance= PUB;
minimum sensitivity label= PUB;
minimum protect as classification= PUB;
```

The ACCREDITATION RANGE definition restricts the user to the following label:

- PUBLIC is defined as the lowest classification.
- CONFIDENTIAL is defined as a higher classification.
- SANDBOX is defined as the highest classification.
- PUBLIC is defined as the minimum clearance.
- PUBLIC is defined as the minimum sensitivity label.
- PUBLIC is defined as the minimum "Protect As" classification.

The Classifications section of the default file is illustrated in the following figure.

FIGURE 2-2 Classifications in the Default label\_encodings File




#### CLASSIFICATIONS:

PUBLIC value = 2 CONFIDENTIAL value = 4 SANDBOX value = 5 MAX LABEL value = 10

The Compartments section of the file is illustrated in the following figure.

FIGURE 2-3 Compartments in the Default label\_encodings File



SENSITIVITY LABELS:

WORDS:

```
INTERNAL USE ONLY compartments = 1 \sim 2

NEED TO KNOW compartments = 1-2 \sim 3

RESTRICTED compartments = 1-3

PLAYGROUND compartments = 0 \sim 1 \sim 2 \sim 3
```

### **Differences Between Simplified GFI Label Encodings Files**

Oracle Solaris provides two government-furnished files, label\_encodings.gfi.single and label\_encodings.gfi.multi. The label\_encodings.gfi.single file is a single-level file, and the label\_encodings.gfi.multi file is a multilevel version of the single-level file. The files also differ in the settings in the ACCREDITATION RANGE section. The ACCREDITATION RANGE section describes which classifications and compartments are available to regular users.

Oracle Solaris also provides two simplified versions of these files, label\_encodings.single and label encodings.multi. The differences are described in the following sections.

### Simplified GFI Multilevel Label Encodings File

The ACCREDITATION RANGE settings in the label encodings.multi follow:

```
ACCREDITATION RANGE:
classification= u; all compartment combinations valid;
classification= c; all compartment combinations valid;
classification= s; all compartment combinations valid;
classification= ts; all compartment combinations valid;
minimum clearance= c;
minimum sensitivity label= u;
minimum protect as classification= u;
```

The ACCREDITATION RANGE definition enables the site to use all the classifications and compartments that are defined in the label\_encodings.multi file, as follows:

- UNCLASSIFIED, CLASSIFIED, SECRET, and TOP SECRET are defined with all compartment combinations valid.
- CLASSIFIED is defined as the minimum clearance.
- UNCLASSIFIED is defined as the minimum sensitivity label.
- UNCLASSIFIED is defined as the minimum protect as classification.

### Simplified GFI Single-Level Label Encodings File

The ACCREDITATION RANGE settings in the label encodings.single file follow:

```
ACCREDITATION RANGE: classification= s;
only valid compartment combinations: s a b rel cntry1
minimum clearance= s Able Baker NATIONALITY: CNTRY1;
minimum sensitivity label= s A B REL CNTRY1;
minimum protect as classification= s;
```

The ACCREDITATION RANGE definition restricts the user to the following label:

- SECRET is defined as the only classification
- SECRET A B REL CNTRY1 is defined as the only valid compartment combination
- SECRET ABLE BAKER NATIONALITY: CNTRY1 is defined as the minimum clearance
- SECRET A B REL CNTRY1 is defined as the minimum sensitivity label
- SECRET is defined as the minimum "Protect As" classification

### Oracle Solaris Extensions to label\_encodings File

Oracle Solaris's implementation of the label\_encodings file supports a LOCAL DEFINITIONS section. This section is optional and can be appended to an existing label\_encodings file. The word LOCAL in the keyword that starts the section means *local to Oracle Solaris's implementation*.

Options in the LOCAL DEFINITIONS section set label translation options and associate colors with labels. The title bars of application windows display each label against a background of the color that is specified for that label. If an invalid color or no color is specified in the COLOR NAMES option, a default color is supplied. Chapter 5, "Customizing the LOCAL DEFINITIONS Section" describes how to modify the Oracle Solaris extensions for your site.



## Creating a Label Encodings File

This chapter describes how to create, modify, analyze, and verify a label\_encodings file. This chapter covers the following topics:

- "Encodings File Syntax" on page 39
- "Managing a Label Encodings File" on page 46

## **Encodings File Syntax**

The label\_encodings file contains a VERSION specification and seven mandatory sections:

- CLASSIFICATIONS
- INFORMATION LABELS
- SENSITIVITY LABELS
- CLEARANCES
- CHANNELS
- PRINTER BANNERS
- ACCREDITATION RANGE

The sections must appear in that order. An optional LOCAL DEFINITIONS section can follow.

In the following table, *mandatory keyword* means only that the keyword must be present. Not all keywords must have definitions. The notes for each section indicate what must be defined and what is optional.

**TABLE 3-1** label\_encodings Keywords

Section	Notes
VERSION=	Mandatory keyword. The version specification is the single keyword VERSION=, followed by a character string that identifies this particular version of encodings.

Section	Notes	
CLASSIFICATIONS:	Mandatory keyword. At least one classification must be defined.	
INFORMATION LABELS:	Mandatory keywords. Even though information labels are not used in Trusted Extensions software, you must assign one bit to an information	
WORDS:	label word for each bit that you assign to a sensitivity label word. The sensitivity label words are defined in the following section.	
REQUIRED COMBINATIONS:	sensitivity laber words are defined in the following section.	
COMBINATION CONSTRAINTS:		
SENSITIVITY LABELS:	Mandatory keywords, although the WORDS definitions are optional. If you define sensitivity label words, the same bits must be assigned to	
WORDS:	WORDS in both the INFORMATION LABELS and CLEARANCES sections. The	
REQUIRED COMBINATIONS:	words that are assigned to the bits do not need to be the same.	
COMBINATION CONSTRAINTS		
CLEARANCES:	Mandatory keywords. One bit must be assigned to a clearance word for any sensitivity label word that you have defined. Clearance labels	
WORDS:	can allow combinations of words that have been disallowed in the definitions for sensitivity label words.	
REQUIRED COMBINATIONS:	definitions for sensitivity label words.	
COMBINATION CONSTRAINTS		
CHANNELS:	Mandatory keyword.	
PRINTER BANNERS:	Mandatory keyword.	
ACCREDITATION RANGE:	Mandatory keyword. A rule must be defined for each classification name. The minimum clearance, minimum sensitivity label, and minimum "Protect As" classification must be defined.	
LOCAL DEFINITIONS:	Optional keyword.	

For all the required sections, the keywords in the preceding table must be present, but not all of the sections must have definitions. For example, a label\_encodings file with only CLASSIFICATIONS and ACCREDITATION RANGE definitions is valid.

## **Word Order Requirements**

The order in which words are configured for sensitivity labels and clearances is not enforced. However, the order is important when you set up relationships between words. By convention, the WORDS in the SENSITIVITY LABELS section are arranged in increasing order of sensitivity.

For the effect of word order, see "Specifying Channels" on page 61. Detailed information is provided in "Compartmented Mode Workstation Labeling: Encodings Format": Defense Intelligence Agency document [DDS-2600-6216-93].

If a compartment word is defined for one type of label (by assigning the compartment word to one or more bits) in the label\_encodings file, then the same bits must be assigned to a word in the definition of the other types of labels. While all types of labels use the same classification names, the words that are used for each type of label can be different. The words can be different even when they are encoded with the same bits and literally refer to the same thing. Clearance labels can allow combinations of words that have been disallowed in the definitions for sensitivity label words.

## **Classification Name Syntax**

The classification is the hierarchical portion of a label. Each label has one and only one classification. A site can define up to 255 classifications. An integer value from 1 to 255 can be assigned to a classification in the label\_encodings file. The value 0 is reserved for the ADMIN\_LOW administrative label. The value 32,767 is reserved for the ADMIN\_HIGH administrative label. For an illustration of a CIPSO label, see Figure 1-2.

Classifications are defined once for clearances and once for sensitivity labels in the CLASSIFICATIONS section of the label encodings file.

A classification with a higher value dominates a classification with a lower value. The following table shows two sets of label names that are assigned the same values in different encodings files. The left column shows sample sensitivity labels from the label\_encodings.example file. The middle column shows labels from the label\_encodings.gfi.multi file. A label with the Registered or Top Secret classification, with a value of 6, dominates the labels that are listed in its column.

Commercial Example	U.S. Government Example	Value
Registered	Top Secret	6
Need to Know	Secret	5
Internal Use Only	Confidential	4
Public	Unclassified	1

### **Keywords for Classifications**

The following list describes the keywords that can be defined for classifications. For examples of initial compartment definitions, see "Default and Inverse Words" on page 43.

name=	Mandatory. Cannot contain (/), (,) or (;). All other alphanumeric characters and white space are allowed. Users can specify the name, the sname or the aname when specifying labels.
sname=	Mandatory in classifications only. The short name appears in sensitivity labels.
aname=	Optional. The alternative name that can be specified by users when a classification is needed.
value=	Mandatory. The values that you assign to represent the hierarchy among the classifications. Leave gaps for later expansion. 0 is reserved for ADMIN_LOW. Values can start at 1 and go to 255.
initial compartments=	Optional. Specify bit numbers for any default compartment words. Default compartment words initially appear in any label that has the associated classification.
	Advanced: Specify bit numbers for any inverse words. The minimum classification must not have initial compartments. For a description of inverse words, see "Default and Inverse Words" on page 43.
initial markings=	Obsolete. Do not define.

The following example shows the beginning of the label\_encodings.multi file.

**EXAMPLE 3-1** Classifications With Initial Compartments in label\_encodings.multi File

VERSION= Trusted Extensions Multi-Label GFI Distributed Demo Version

\*

\* WARNING: If CIPSO Tag Type 1 network labels are to be used:

\*

\* a) All CLASSIFICATIONS values must be less than or equal to 255.

\* b) All COMPARTMENTS bits must be less than or equal to 239.

\*

CLASSIFICATIONS:

\*

name= UNCLASSIFIED; sname= U; value= 1;
name= CONFIDENTIAL; sname= C; value= 4; initial compartments= 4-5 190-239;
name= SECRET; sname= S; value= 5; initial compartments= 4-5 190-239;
name= TOP SECRET; sname= TS; value= 6; initial compartments= 4-5 190-239;

Each classification has the mandatory name, sname, and value fields. The CONFIDENTIAL, SECRET, and TOP SECRET classifications have initial compartments. The lowest classification, UNCLASSIFIED, has no initial compartments.

The initial compartment bit assignments of 4-5 and 190-239 signify that bits 4, 5, and 190 through 239 are turned on. These bits are set to 1 in a label with this classification.

Some of the initial compartments are later used to define *default* and *inverse* words. Some initial compartments are reserved for possible later definitions of inverse words.

The following example shows a set of classifications that has no initial compartments.

### **EXAMPLE 3-2** Classifications With No Initial Compartments in label\_encodings.example File

```
CLASSIFICATIONS:
```

```
name= PUBLIC; sname= PUBLIC; value= 1;
name= INTERNAL_USE_ONLY; sname= INTERNAL; aname= INTERNAL; value= 4;
name= NEED_TO_KNOW; sname= NEED_TO_KNOW; aname= NEED_TO_KNOW; value= 5;
name= REGISTERED; sname= REGISTERED; aname= REGISTERED; value= 6;
```

### **Default and Inverse Words**

When a bit is defined as an initial compartment, the bit is set to 1 in every label that contains the classification. Any bit that is specified for an initial compartment can be defined later in the label\_encodings file as a *default compartment word* (*default word*) or an *inverse compartment word* (*inverse word*).

- A *default word* is a word that appears in any label that contains the classification.
- An *inverse word* is a word that appears in a label that has the associated classification when another word that you define with the inverse compartment's bit is not present.

### **EXAMPLE 3-3** Assigning Initial Compartments

name= WEBC AMERICA: sname= WEBCA:

In this example, the PUBLIC classification is assigned no initial compartments, while the WEB COMPANY classification is assigned initial compartments 4 and 5. A label that includes the PUBLIC classification has no default compartments. A label that includes the WEB COMPANY classification always has compartment bits 4 and 5 turned on.

```
name= PUBLIC; sname= P; value= 1;
name= WEB COMPANY; sname= WEBCO; value= 4; initial compartments= 4-5
```

The following shows how these initial compartment bits can be assigned to words by defining default and inverse words under SENSITIVITY LABELS.

minclass= WEB COMPANY; compartments= ~4;

```
SENSITIVITY LABELS:

WORDS:

name= DIVISION ONLY; sname= DO; minclass= WEB COMPANY; compartments= 4-5;
```

In the preceding WORDS example, compartment bits 4 and 5 are assigned to the word DIVISION ONLY. Each compartment bit is also associated with an inverse word. The sensitivity label name WEBC AMERICA is assigned to the inverse compartment bit ~4. The sensitivity label name WEBC WORLD is assigned to the inverse compartment bit ~5. These assignments have the following results:

- A sensitivity label with the WEB COMPANY classification initially includes the word
   DIVISION ONLY. The label's binary representation has the compartment bits 4 and 5 turned on.
- A sensitivity label with the PUBLIC classification always has compartment bits 4 and 5 turned off. The inverse words WEBC AMERICA and WEBC WORLD are included in the label.

Because a minclass of IUO is specified for the inverse words, WEBC AMERICA and WEBC WORLD are not displayed in the PUBLIC sensitivity label. The presence of these two inverse words is understood.

### **Compartment Words**

Compartments are optional words that can be defined to appear in labels. Compartments are called *categories* in some other trusted systems. Compartments are used to indicate the special handling procedures to be used for the information whose label contains the compartment and the general class of people who might have access to the information.

Compartment words are assigned to non-hierarchical bits. However, hierarchies can be established between compartment words. These hierarchies are based on rules for including bits from one compartment word in the bits that are defined for another compartment word.

Compartment words are optionally defined in the WORDS subsection for each label type. Each compartment word is assigned to one or more bits.

While all types of labels use the same classifications, the words that are used for each type of label can be different. The words can be different even when they are encoded with the same bits and literally refer to the same thing.

The following example shows the WEB COMPANY compartment word. The word is specified with a short name (sname) of WEBCO and compartment bits 40-50.

```
WORDS
```

```
name= WEB COMPANY; sname= WEBCO; compartments= 40-50;
```

Along with its classification field, each label has a 256–bit compartment field, of which 239 are available for CIPSO labels. Each bit is assignable in zero or more compartment words. Each word can have one or more compartment bits assigned. Out of the 239 available bits, many compartment words can be created. For an example, see the compartments planner in Table 6-3.

The classification, compartments, and combination requirements affect the accreditation range. The ACCREDITATION RANGE for each classification setting must be one of the following strings:

- only valid compartment combinations;
- all compartment combinations valid;
- all compartment combinations valid except;

### **Hierarchical Compartment Words**

Hierarchical compartments can be used to differentiate between documents that are available to everyone in a larger group, and documents that are available to subgroups only.

### **EXAMPLE 3-4** Using Bit Combinations to Establish Hierarchies

By defining a word that uses one bit and a second word that uses that same bit along with a second bit, you define a hierarchical relationship between the two words. The more general compartment word must be defined below the word that is more specific. For example, by defining a word that uses bit number 1 and another word that uses bits number 1 and 2, you give the two words a hierarchical relationship.

In this example, a Sales compartment is defined with two subcompartments, Direct\_Sales, and Indirect\_Sales. A single classification that is named WebCo is previously defined.

```
name= Direct_Sales; compartments= 1, 2
name= Indirect_Sales; compartments= 1, 3
name= Sales; compartments= 1
```

This definition allows the WebCo company to differentiate between documents that can be accessed by anyone in the entire sales department, documents that can be accessed only by members of the direct sales department, and documents that can be accessed only by members of the indirect sales department.

The assignments and effects are as follows:

- The security administrator assigns the WebCo Direct\_Sales clearance to employees in the direct sales department. The WebCo Indirect\_Sales clearance is assigned to employees in the indirect sales department.
- Documents that are created by an employee who is working at the WebCo Direct\_Sales label are labeled with the label that is only accessible to employees in the direct sales department.
- Anyone in the indirect or direct sales departments can work at the WebCo Sales label because the compartment word Sales is below both the Direct\_Sales and Indirect\_Sales words. Creating documents at the WebCo Sales label makes the documents available to everyone in the sales department.

### **EXAMPLE 3-5** Using REQUIRED COMBINATIONS to Establish Hierarchies

If two words are specified together in the REQUIRED COMBINATIONS section, the second label is added to the label whenever the first word is used.

In this example, the definitions of the Direct\_Sales, Indirect\_Sales, and Sales compartments serve essentially the same purpose as in Example 3-4. The difference is that the Direct Sales word will always have the Sales word with it.

## **Managing a Label Encodings File**



**Caution -** The safest time to modify a label\_encodings file is before a regular user logs in. Proceed with caution when modifying a file that is in use. For details, see the label encodings(4) man page.

The following task map describes the tasks for modifying and installing a label\_encodings file.

Task	For Instructions
Create or modify the label_encodings file.	"How to Create a label_encodings File" on page 47
Test the label_encodings file.	"How to Analyze and Verify the label_encodings File" on page 47
Distribute the label_encodings file.	"How to Distribute the label_encodings File" on page 48
Debug a label_encodings file.	"How to Debug a label_encodings File" on page 54
Change a classification definition.	"How to Add or Rename a Classification" on page 49
Create default or inverse words.	"How to Specify Default and Inverse Words" on page 50
Customize a single-label file.	"How to Create a Single-Label Encodings File" on page 52

Task	For Instructions
Specify a label name.	Example 3-7
Add a LOCAL DEFINITIONS section.	"Modifying Oracle Solaris Extensions" on page 73

## ▼ How to Create a label\_encodings File

For sample files, see the /etc/security/tsol directory on an installed system. The files are described in "Encodings Files From Trusted Extensions" on page 35.

You can create a label\_encodings file before you install Trusted Extensions on your first system. On that first system, you check the file. You can also create this file on the first system that you install with Trusted Extensions. The label\_encodings file must be accurate and tested before a second system is configured with Trusted Extensions.

### Before You Begin

On a system that is configured with Trusted Extensions, you must be in the Security Administrator role in the global zone. On other systems, you can create and edit the file in any text editor.

- 1. Create a backup copy of the original label encodings file.
  - # cp encodings-filename encodings-filename.orig
- 2. In an editor, open the label encodings file.
- 3. Modify the label encodings file.

For details, see "How to Plan the Encodings File" on page 30.

4. Save your changes.

Next Steps Continue with "How to Analyze and Verify the label encodings File" on page 47.

## ▼ How to Analyze and Verify the label\_encodings File

Before You Begin You must be in the Security Administrator role in the global zone.

1. Check the label definitions and the relationships of the labels.

In a terminal, use the chk encodings -a command to analyze and report on label relationships.

\$ /usr/sbin/chk encodings -a encodings-file

If the file does not pass, see "How to Debug a label\_encodings File" on page 54 for assistance. Do not continue to the next step until the file represents your label relationships correctly.

### 2. Verify the syntax of the file.

a. Run the chk\_encodings command.

# /usr/sbin/chk\_encodings encodings-file

#### b. Resolve errors.

If the command reports errors, the errors *must* be resolved before continuing.

3. Make the file the active label encodings file.

```
# cp /full-pathname-of-label-encodings-file \
/etc/security/tsol/label.encodings.site
# cd /etc/security/tsol
# cp label_encodings label_encodings.tx.orig
# cp label.encodings.site label_encodings
```

### 4. Test the encodings file.

Where possible, test the file on a few systems before approving the file for all systems at your site. For example, install one labeled system as a file server and another labeled system as a user's system. Communicate between the two at all labels. Transfer files at all labels, and so on.

Next Steps

When the file is ready to be installed on the network, see "How to Distribute the label encodings File" on page 48.

## ▼ How to Distribute the label\_encodings File

Create a master copy of the label\_encodings file.

For copying instructions, see "How to Copy Files to Portable Media in Trusted Extensions" in "Trusted Extensions Configuration and Administration".

**Note -** Store the master copy on labeled media in a protected location.

2. Immediately after installing a system with Trusted Extensions, copy the master file onto the system.

For copying instructions, see "How to Copy Files From Portable Media in Trusted Extensions" in "Trusted Extensions Configuration and Administration".

### **▼** How to Add or Rename a Classification

Before You Begin

You must be in the Security Administrator role in the global zone. To be able to add classifications, you left gaps in the classification numbers in the label encodings file.

Back up the label\_encodings file.

```
# cp label_encodings label_encodings.orig
```

Edit the label\_encodings file.

```
# pfedit encodings-file
```

3. Update the version number.

In the VERSION= section update the version number and the date.

```
VERSION= Trusted Extensions Example Version - 5.11 09/05/28
```

SCCS keywords are used for the version number and the date. For details, see the SCCS(1) man page.

```
VERSION= MyCo Example Version - %I% %E%
```

### 4. Add or rename the classification by performing one of the following:

In the CLASSIFICATIONS section, add the new classification.

```
Specify a long name, short name, and numeric value.
```

```
name= REGISTERED; sname= R; value= 15;
```

In the CLASSIFICATIONS section, rename an existing classification.

```
* name= INTERNAL_USE_ONLY; sname= IUO; value= 12; name= INTERNAL; sname= I; value= 12;
```

### 5. Add the new classification to the ACCREDITATION RANGE section.

The following example shows three new classifications that are added to the ACCREDITATION RANGE section. Each classification is specified with all compartment combinations valid.

**Note** - If you rename a classification, update the name in the ACCREDITATION RANGE section.

```
ACCREDITATION RANGE:
classification= UNCLASSIFIED;
                                    all compartment combinations valid;
* i is new in this file
classification= INTERNAL USE ONLY; all compartment combinations valid;
* n is new in this file
classification= NEED TO KNOW;
                                    all compartment combinations valid;
classification= CONFIDENTIAL;
                                    all compartment combinations valid except:
са
c b
classification= SECRET;
                                     only valid compartment combinations:
* r is new in this file
classification= REGISTERED;
                                      all compartment combinations valid;
```

### 6. Adjust the ACCREDITATION RANGE section, if necessary.

You might need to make the new classification a minimum classification.

```
minimum clearance= u;
minimum sensitivity label= u;
minimum protect as classification= u;
```

**Note -** Make sure that you set a minimum clearance that is dominated by all the clearances that you plan to assign to users. Similarly, make sure that the minimum sensitivity label is dominated by all the minimum labels that you plan to assign to users.

Next Steps

Verify the file by performing "How to Analyze and Verify the label\_encodings File" on page 47.

Distribute the file by following "How to Distribute the label\_encodings File" on page 48.

## **▼** How to Specify Default and Inverse Words

Before You Begin You must be in the Security Administrator role in the global zone.

Back up the label\_encodings file.

# cp label\_encodings label\_encodings.orig

### Edit the label encodings file.

```
# pfedit encodings-file
```

### 3. Specify initial compartments.

In the CLASSIFICATIONS section, specify the initial compartments as part of the classification definition. For example, in the following CLASSIFICATIONS section, WEB COMPANY has two initial compartments, 4 and 5:

```
CLASSIFICATIONS:
name= PUBLIC;    sname= P;    value= 1;
name= WEB COMPANY;    sname= WEBCO;    value= 2;    initial compartments= 4-5;
```

### 4. Specify a default word by assigning an initial compartment bit to the word.

In the following example, the initial compartment bits, 4 and 5, are assigned to three words:

```
name= DIVISION ONLY; sname= DO; minclass= IUO; compartments= 4-5;
name= WEBC AMERICA; sname= WEBCA; minclass= IUO; compartments= 4;
name= WEBC WORLD; sname= WEBCW; minclass= IUO; compartments= 5;
```

### 5. Specify an inverse word.

Inverse words are created by preceding an initial compartment with a tilde (~).

In the following example, the initial compartment bits, 4 and 5, are preceded by a tilde in the WEBC words:

```
name= DIVISION ONLY; sname= DO; minclass= IUO; compartments= 4-5;
name= WEBC AMERICA; sname= WEBCA; minclass= IUO; compartments= ~4;
name= WEBC WORLD; sname= WEBCW; minclass= IUO; compartments= ~5;
```

### 6. Save your changes.

Verify the file by performing "How to Analyze and Verify the label\_encodings File" on page 47.

### **Troubleshooting**

**Next Steps** 

For any compartment bits that are not reserved for later assignment, you need to assign a word to the bit in the following sections:

- SENSITIVITY LABELS: WORDS:
- INFORMATION LABELS: WORDS:
- COMPARTMENTS: WORDS:

## ▼ How to Create a Single-Label Encodings File

Certain labels must always be present in a label encodings file:

- One sensitivity label in the user accreditation range must be defined
- One clearance in the user accreditation range must be defined
- One information label in the user accreditation range must be defined

Before You Begin

You must be in the Security Administrator role in the global zone.

### 1. Open an existing encodings file or create a new one.

Provide a name that is different from the installed label encodings file.

```
# pfedit label_encodings.myco.single
```

### 2. Specify one classification and only the desired compartments.

For example, you could set up an encodings file with the INTERNAL\_USE\_ONLY classification, and specify no words.

```
VERSION= MyCompany Single-Label Encodings - 1.01 10/10/11
...
CLASSIFICATIONS:

name= INTERNAL_USE_ONLY; sname= INTERNAL; value= 5;
INFORMATION LABELS:
WORDS:
SENSITIVITY LABELS:
WORDS:
CLEARANCES:
WORDS:
CHANNELS:
WORDS:
PRINTER BANNERS:
WORDS:
```

## 3. In the ACCREDITATION RANGE section, include only one classification and one valid compartment combination.

In the following example, the INTERNAL classification is encoded.

ACCREDITATION RANGE:

```
classification= INTERNAL;
only valid compartment combinations:

INTERNAL
minimum clearance= INTERNAL;
minimum sensitivity label= INTERNAL;
minimum protect as classification= INTERNAL;
```

### 4. Add and modify the LOCAL DEFINITIONS section.

For details, see "Modifying Oracle Solaris Extensions" on page 73.

### **Example 3-6** Defining the Accreditation Range in a Single-Label Encodings File

The following example shows the settings in the ACCREDITATION RANGE section for a single-level label encodings file. A single ANY\_CLASS classification is defined. Compartment words A, B, and REL CNTRY 1 are specified for all types of labels.

```
ACCREDITATION RANGE:

classification= ANY_CLASS; only valid compartment combinations:

ANY_CLASS A B REL CNTRY1

minimum clearance= ANY_CLASS A B REL CNTRY1;
minimum sensitivity label= ANY_CLASS A B REL CNTRY1;
minimum protect as classification= ANY CLASS;
```

### Example 3-7 Changing the Single Label Name

In this example, the label\_encodings.example file is changed to handle a single-label company. The name= value is changed from SECRET to INTERNAL\_USE\_ONLY. The sname= value is changed from s to INTERNAL. Neither the value= nor the initial compartments= definition is changed.

```
CLASSIFICATIONS:
name= INTERNAL_USE_ONLY; sname= INTERNAL; value= 5; initial compartments= 4-5
190-239;
```

In the ACCREDITATION RANGE section, the short name of the classification is replaced. Also, the minimum values are replaced with the new sname.

```
ACCREDITATION RANGE:

classification= INTERNAL; only valid compartment combinations:

INTERNAL

minimum clearance= INTERNAL;
minimum sensitivity label= INTERNAL;
minimum protect as classification= INTERNAL;
```

**Next Steps** 

Verify the file by performing "How to Analyze and Verify the label\_encodings File" on page 47.

Distribute the file by following "How to Distribute the label encodings File" on page 48.

## ▼ How to Debug a label\_encodings File

Before You Begin You must be in the Security Administrator role in the global zone.

1. In an editor, check the entries in the INFORMATION LABELS: WORDS: section.

The entries must exactly match the entries in the SENSITIVITY LABELS: WORDS: section.

**Tip** - Encode the sensitivity label words, then copy the words to the INFORMATION LABELS section.

2. Check that no label in the user accreditation range has a value of 0 with no compartment bits.

This step ensures that no label is indistinguishable from the label ADMIN HIGH.

3. Check that no label in the user accreditation range has a value of 255 with all compartment bits from 0 to 239.

This step ensures that no label is indistinguishable from the label ADMIN HIGH.

4. Check that no compartment has a value higher than 239.

This step ensures that all labels can be mapped to CIPSO labels.

- 5. For labels that cannot be resolved, do the following:
  - Reset any objects with the new labels to a low system label, ADMIN LOW.
  - b. Restore a known, usable label\_encodings file from backup.
  - C. Use the chk\_encodings -a command to analyze the label problems in the faulty file.

# +++ CHAPTER 4

## **Labeling Printer Output**

This chapter describes how Trusted Extensions labels and handling instructions are printed on printer output. This chapter also describes how the Security Administrator role can make changes to the default printer output. This chapter covers the following topics:


- "Labels on Body Pages" on page 55
- "Security Text on Banner and Trailer Pages" on page 56
- "Specifying the "Protect As" Classification" on page 58
- "Specifying Printer Banners" on page 59
- "Specifying Channels" on page 61
- "Configuring Security Text on Print Jobs" on page 66

## **Labels on Body Pages**

When the printer is correctly configured with the job-sheets=labeled option, each print job's label is printed at the top and bottom of every body page. For the procedure, see "How to Configure a Multilevel Print Server and Its Printers" in "Trusted Extensions Configuration and Administration".

Figure 4-1 shows the label PUBLIC printed at the top and bottom of a print job's body page.

FIGURE 4-1 Label Automatically Printed on Body Pages




The Security Administrator role can change the defaults so that a higher label is printed instead of the label of the print job. To print a higher label, see "Specifying Channels" on page 61. To remove labels from printed output, see "Reducing Printing Restrictions in Trusted Extensions" in "Trusted Extensions Configuration and Administration".

## **Security Text on Banner and Trailer Pages**

When the printer is correctly configured with the job-sheets=labeled option, a *banner page* and a *trailer page* surround each print job. The banner and trailer pages contain label-related text and handling instructions for protecting printer output. For the printer configuration procedure, see "How to Configure a Multilevel Print Server and Its Printers" in "Trusted Extensions Configuration and Administration".

The fields and the text that are printed on the banner page are shown in Figure 4-2. The callouts show the names of the labels and the strings that appear by default.


The text, labels, and warnings that appear on print jobs are configurable. The text can also be replaced with text in another language for localization.

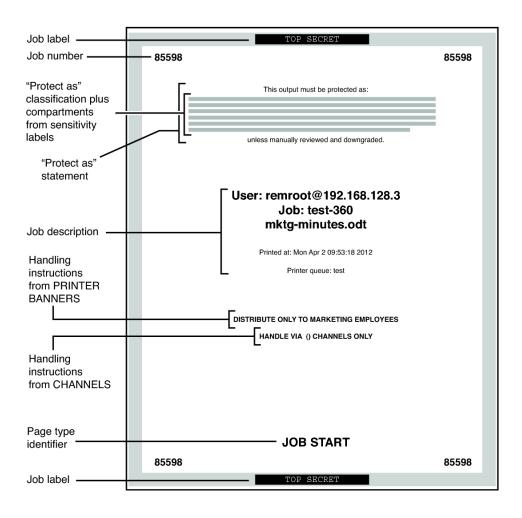

**FIGURE 4-2** Typical Banner Page of a Labeled Print Job

The differences on the trailer page are shown in the following figure. A thin black line is used as a frame on the trailer page, instead of the thick gray frame on the banner page. The page type identifier on a trailer page is JOB END.

FIGURE 4-3 Differences on a Trailer Page

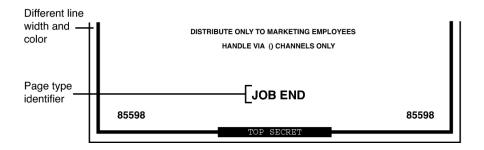

The parts of banner and trailer pages that the Security Administrator role can configure are described in the following sections:

- "Specifying the "Protect As" Classification" on page 58
- "Specifying Printer Banners" on page 59
- "Specifying Channels" on page 61

In addition, the Security Administrator role can make the following changes in a print configuration file that is called tsol separator.ps in the /usr/lib/cups/filter directory:

- Localize (translate) the text on the banner and trailer pages
- Specify alternates to default labels that are printed at the top and bottom of body pages
- Change or omit any of the text or labels

To customize the configuration file, see the comments in the tsol\_separator.ps file in the /usr/lib/cups/filter directory. For further details, see Chapter 19, "Managing Labeled Printing," in "Trusted Extensions Configuration and Administration".


## **Specifying the "Protect As" Classification**

The "Protect As" classification is printed in two places:

- On the top and bottom of banner and trailer pages
- In the middle of the *Protect As statement*, together with compartments from the job's label

The following figure shows the "Protect as" statement on labeled print output.

FIGURE 4-4 "Protect As" Statement

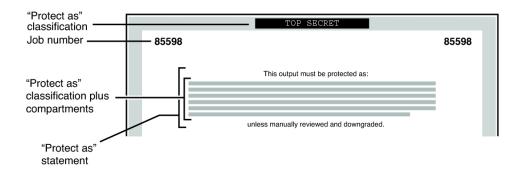

In another example, a site uses INTERNAL\_USE\_ONLY as the minimum "Protect As" classification. The site has three classifications with the values that are shown in the first two columns of the following table. The third column shows the "Protect As" classification. This classification is printed on the banner and trailer pages for the print job when the classification in the left column is in the job's label.

**TABLE 4-1** Effect of Minimum "Protect As" Classification on Printer Output

Classification of Print Job	Value	"Protect As" Classification Printed on Banner and Trailer Pages
NEED_TO_KNOW	3	NEED_TO_KNOW
INTERNAL_USE_ONLY	2	INTERNAL_USE_ONLY
PUBLIC	1	INTERNAL_USE_ONLY

As the preceding table illustrates, any print job whose label includes either the PUBLIC or the INTERNAL\_USE\_ONLY classification would print INTERNAL\_USE\_ONLY in the "Protect As" statement and at the top and bottom of banner and trailer pages. Any print jobs whose label includes the NEED TO KNOW classification would print NEED TO KNOW in the same locations.

## **Specifying Printer Banners**

The PRINTER BANNERS section in the label\_encodings file contains the first line or lines that can appear in the handling instructions in the lower third of the banner and trailer pages.

At commercial sites, the Security Administrator role can associate any text in the PRINTER BANNERS section with any compartment bit. The compartment bit must also be assigned to

a word in the SENSITIVITY LABELS section of the label\_encodings file. In the following example, the printer banner is the line that reads COMPANY CONFIDENTIAL: NEED\_TO\_KNOW HR.


Compartments from the print job's label are printed in the "Protect As" field along with the print job's "Protect As" classification. In the following example, the compartment HR from the label is printed as an access-related word along with the "Protect As" classification because all compartments are treated as access-related.

FIGURE 4-5 Commercial Use of PRINTER BANNERS Section on Banner Page



By convention in U.S. government installations, the printer banners line displays any warnings that are associated with the *subcompartments* of the job's sensitivity label. The following example shows a typical PRINTER BANNERS section at a U.S. government installation. Any string could be specified instead of the string that is shown here: (FULL SA NAME).

FIGURE 4-6 U.S. Government Use of PRINTER BANNERS Section on Banner Page

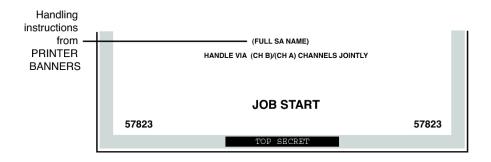

Following are the encodings for the printer banner line (FULL SA NAME) in Figure 4-6"

```
PRINTER BANNERS:

WORDS:
...
name= (FULL SA NAME); compartments= 2;
```

Next are the SENSITIVITY LABELS definitions for the same compartments that are used in the PRINTER BANNERS definitions in Figure 4-6. Note that compartment bit 2 is associated with the subcompartment word SA:

The printer banner displays as (FULL SA NAME) for the following reasons:

- The label contains the subcompartment word SA.
- Compartment bit 2 is associated with the subcompartment word SA.
- Compartment bit 2 is associated with the string (FULL SA NAME) in the PRINTER BANNERS encodings.


For a sample PRINTER BANNERS planner, see "Planning the Printer Banners in a Worksheet" on page 94.

## **Specifying Channels**

The CHANNELS section in the label\_encodings file defines the lines that can appear below the PRINTER BANNERS lines on the lower third of the banner and trailer pages. The CHANNELS section can be specified to print a string whenever the label of a print job contains a certain compartment.

Commercial sites can customize the text in the CHANNELS section with any compartment bit. The following figure shows a CHANNELS warning on a print job's banner page at a commercial site.

FIGURE 4-7 Commercial Use of CHANNELS Section on Banner Page



By convention in U.S. government installations, the channels lines of the banner page show the warnings that are associated with the *compartments* of the print job's label. Figure 4-8 shows a typical CHANNELS warning on a print job's banner page at a government installation: HANDLE VIA (CH B)/(CH A) CHANNELS JOINTLY.

The following discussion shows how the CHANNELS string HANDLE VIA (CH B)/(CH A) CHANNELS JOINTLY is specified for a print job whose label includes the compartment words A and B. For the purpose of the example, only (CH A) and (CH B) apply. However, because the compartment bit for a third channel (CH C) is included in the definitions, (CH C) is also mentioned in this discussion.

The example illustrates these features:

- Two compartment bits are associated individually with one set of words and together with another set of words.
- A third compartment bit is included with the encodings for the first two bits.
- One suffix is defined for when *any combination of one or more* channel words is in the label.
- Another suffix is defined for when a *single* channel word is in the label.
- A third suffix is defined for when *more than one* channel word is in the print job's label.

FIGURE 4-8 U.S. Government Use of CHANNELS Section on Banner Page



In the following example, two suffixes CHANNELS JOINTLY and CHANNELS ONLY and a prefix HANDLE VIA are defined.

**EXAMPLE 4-1** Suffixes and Prefixes in the CHANNELS Section in a U.S. Government label\_encodings File

#### CHANNELS:

### WORDS:

name= CHANNELS JOINTLY; suffix;
name= CHANNELS ONLY; suffix;
name= HANDLE VIA; prefix;

Next, the channel names (CH A), (CH B), and (CH C) are specified in two different ways to achieve the following results:

- When any one of the three compartment bits that is associated with channels is in the label, the HANDLE VIA: prefix is printed.
- When only one of the three compartment bits that is associated with channels is in the label, the CHANNELS ONLY suffix is printed after the channel name (CH A), (CH B), or (CH C).
- When more than one compartment bit that is associated with channels is in the label, the prefix is followed by each channel name separated by a slash (/). This channel name is then followed by the CHANNELS JOINTLY suffix.

In the following example, the first three lines that define CHANNELS words in the preceding example are repeated.

This example focuses on how (CH A), (CH B), and (CH C) are encoded to appear with the CHANNELS ONLY suffix.

(CH A) is encoded with bit 0 turned on and bits 1 and 6 explicitly turned off using the tilde
 (~): 0 ~1 ~6

- (CH B) is encoded with bit 1 turned on and bits 0 and 6 explicitly turned off using the tilde
   (~): ~0 1 ~6
- (CH C) is encoded with bit 6 turned on and bits 0 and 1 explicitly turned off using the tilde (~): ~0 ~1 6

#### CHANNELS:

#### WORDS:

```
name= CHANNELS JOINTLY; suffix;
name= CHANNELS ONLY; suffix;
name= HANDLE VIA; prefix;
name= (CH A); prefix= HANDLE VIA; suffix= CHANNELS ONLY; compartments= 0 ~1 ~6;
name= (CH B); prefix= HANDLE VIA; suffix= CHANNELS ONLY; compartments= ~0 1 ~6;
name= (CH C); prefix= HANDLE VIA; suffix= CHANNELS ONLY; compartments= ~0 ~1 6;
```

The first three lines of name definitions in the CHANNELS section have the following results:

- The HANDLE VIA prefix and the CHANNELS ONLY suffix are printed when *one* of the words that is associated with bits 0, 1, and 6 elsewhere in the label\_encodings file is in the print job's label
- The HANDLE VIA prefix and CHANNELS ONLY suffix are printed:
  - With (CH A) when compartment bit 0 is turned on in the label, and compartment bits
     1 and 6 are turned off
  - With (CH B) when compartment bit 1 is turned on in the label, and compartment bits0 and 6 are turned off
  - With (CH C) when compartment bit 6 is turned on in the label, and compartment bits0 and 1 are turned off

The last three lines in the preceding example are repeated in the following example. The repetition shows how (CH A), (CH B), and (CH C) are encoded to appear with the CHANNELS JOINTLY suffix when more than one of the words that is associated with bits 0, 1, and 6 is in the print job's label. A slash is inserted between the channels names when more than one of the bits that is defined in the CHANNELS section is in the print job's label.

**EXAMPLE 4-2** Encodings for More Than One Channel in CHANNELS Section in a U.S. Government Encodings File

```
name= (CH A); prefix= HANDLE VIA; suffix= CHANNELS ONLY; compartments= 0 \sim1 \sim6; name= (CH B); prefix= HANDLE VIA; suffix= CHANNELS ONLY; compartments= \sim0 1 \sim6; name= (CH C); prefix= HANDLE VIA; suffix= CHANNELS ONLY; compartments= \sim0 \sim1 6; name= (CH C); prefix= HANDLE VIA; suffix= CHANNELS JOINTLY; compartments= 6; name= (CH B); prefix= HANDLE VIA; suffix= CHANNELS JOINTLY; compartments= 1; name= (CH A); prefix= HANDLE VIA; suffix= CHANNELS JOINTLY; compartments= 0;
```

These CHANNELS definitions illustrate the importance of order when compartments are being encoded. The first three lines handle the cases when only one of the channels' compartment

bits is turned on, so the last three lines can handle cases when more than one bit is turned on. Therefore, none of the last three lines need to have any compartment bits explicitly set to 0. The result of these last three lines is that the suffix CHANNELS JOINTLY is always printed when any of two or more of the three compartment words that are associated with the channels is in the label.

- (CH C) is printed with CHANNELS JOINTLY when bit 6 is turned on, and either of bit 0 or 1, or both, are also turned on.
- (CH B) is printed with CHANNELS JOINTLY when bit 1 is turned on, and either of bit 0 or 6, or both, are also turned on.
- (CH A) is printed with CHANNELS JOINTLY when bit 0 is turned on, and either of bit 6 or 1, or both, are also turned on.

The following excerpt from the label\_encodings file shows that compartment bit 6 is associated with the label word CC.

SENSITIVITY LABELS:

```
WORDS:
.
.
.
name= CC; minclass= TS; compartments= 6;
```

The next excerpt shows that compartment bit 1 is associated with the sensitivity label word B.

SENSITIVITY LABELS:

```
WORDS:
. . .
name= B; minclass= C; compartments= 1;
```

The next excerpt shows that compartment bit 0 is associated with sensitivity label word A.

SENSITIVITY LABELS:

```
WORDS:
. . .
name= A; minclass= C; compartments= 0;
```

To summarize, the channels line prints as HANDLE VIA (CH B)/(CH A) CHANNELS JOINTLY because of the following specifications:

- HANDLE VIA is defined to always appear with any CHANNELS word.
- The sensitivity label has two access-related words, A and B, that are associated with two compartment bits, 0 and 1.
- Because two of the bits that are defined for CHANNELS words appear in the print job's label, the CHANNELS WORDS (CH A) and (CH B) are followed by CHANNELS JOINTLY.

Any string that must print before the channel name is specified as a *prefix*. Any string that must print after the channel name is specified as a *suffix*.

For a sample CHANNELS planner, see "Planning the Channels in a Worksheet" on page 94.

## **Configuring Security Text on Print Jobs**

The following task map describes how to format body pages and banner pages with labels.

Task	For Instructions
Print text on the banner page of a printout.	"How to Specify the Text in PRINTER BANNERS" on page 66
Print handling instructions.	"How to Specify Handling Instructions in CHANNELS" on page 67
Protect printouts at a higher label than the print job.	"How to Set a Minimum "Protect As" Classification" on page 68
Configure printers to label output.	"Configuring Labeled Printing" in "Trusted Extensions Configuration and Administration"

## **▼** How to Specify the Text in PRINTER BANNERS

In this procedure, you create the strings that appear at the top of the banner page and at the start of the handling instructions on the bottom of the page.

### Before You Begin

You must be in the Security Administrator role in the global zone. You have planned the banners.

- For background information, see "Specifying Printer Banners" on page 59.
- For assistance, use "Planning the Printer Banners in a Worksheet" on page 94.

### 1. Edit the label\_encodings file.

# pfedit encodings-file

### 2. Modify the PRINTER BANNERS section of the file.

### a. Create prefixes and suffixes.

These strings are associated with the text in the printer banner lines of banner and trailer pages.

PRINTER BANNERS:

```
WORDS:
name= ORCON; prefix;
```

## b. Specify the names of words to associate with any existing compartments in sensitivity labels.

You can associate compartments with particular prefixes and suffixes. Prefixes precede the compartment text and suffixes follow the compartment text on the printed output

**Next Steps** 

Continue with "How to Analyze and Verify the label encodings File" on page 47.

## **▼** How to Specify Handling Instructions in CHANNELS

In this procedure, you create the strings that state handling instructions on printer banner pages.

**Before You Begin** 

You must be in the Security Administrator role in the global zone. You have planned the prefixes and suffixes.

For assistance, use "Planning the Channels in a Worksheet" on page 94.

Edit the label\_encodings file.

```
# pfedit encodings-file
```

- 2. Modify the CHANNELS section of the file.
  - a. Specify the prefixes and suffixes.

The WORDS in the CHANNELS lines of banner and trailer pages become prefixes or suffixes. For example:

```
CHANNELS:

WORDS:
name= CHANNELS JOINTLY; suffix;
name= CHANNELS ONLY; suffix;
name= HANDLE VIA; prefix;
```

b. Specify the names of words to associate with existing compartments in sensitivity labels.

Use your defined prefixes and suffixes.

```
name= (CH C); prefix= HANDLE VIA; suffix= CHANNELS JOINTLY; compartments= 6;
```

```
name= (CH B); prefix= HANDLE VIA; suffix= CHANNELS JOINTLY; compartments= 1;
name= (CH A); prefix= HANDLE VIA; suffix= CHANNELS JOINTLY; compartments= 0;
```

Next Steps Continue with "How to Analyze and Verify the label encodings File" on page 47.

### **▼** How to Set a Minimum "Protect As" Classification

The minimum "Protect As" classification protects all printer output at the specified minimum classification or above. Site security policy might require this setting if lower-level information must be protected at a higher label.

Before You Begin You must be in the Security Administrator role in the global zone.

Edit the label\_encodings file.

# pfedit encodings-file

2. Specify a classification as the value for the minimum protect as classification entry.

This entry is defined in the ACCREDITATION RANGE section of the label\_encodings file.

**Example 4-3** Minimum "Protect As" Classification From a label\_encodings File

This example shows a minimum "Protect As" classification. This classification is defined in the ACCREDITATION RANGE section of the default label\_encodings file. With this setting, files that are labeled INTERNAL print with NEED TO KNOW on the banner and trailer pages.

```
minimum protect as classification= NEED_TO_KNOW;
```

Next Steps Continue with "How to Analyze and Verify the label encodings File" on page 47.



## Customizing the LOCAL DEFINITIONS Section

This chapter describes how to customize the LOCAL DEFINITIONS section of the label\_encodings file for Trusted Extensions. This chapter covers the following topics:

- "LOCAL DEFINITIONS Section" on page 69
- "Modifying Oracle Solaris Extensions" on page 73

### LOCAL DEFINITIONS Section

Oracle Solaris provides additional keywords that are not defined in the government-furnished "Compartmented Mode Workstation Labeling: Encodings Format" document. These Oracle Solaris keyword extensions are defined in the LOCAL DEFINITIONS section. The following is the LOCAL DEFINITIONS section from Trusted Extensions's default label encodings file:

```
*
* Local site definitions and locally configurable options.
*

LOCAL DEFINITIONS:

Classification Name= Classification;
Compartments Name= Sensitivity;

Default User Sensitivity Label= PUB;
Default User Clearance= CNF NEED TO KNOW;

COLOR NAMES:

label= Admin_Low; color= #bdbdbd;

label= PUB; color= blue violet;
label= SBX PLAYGROUND; color= yellow;
label= CNF; color= navy blue;
label= CNF: NEED TO KNOW; color= #00bfff;
label= CNF: RESTRICTED; color= #87ceff;

label= Admin_High; color= #636363;
```

\*
\* End of local site definitions
\*

### Contents of LOCAL DEFINITIONS Section

The security administrator can do the following in the LOCAL DEFINITIONS section of the label encodings file:

- Specify a user clearance and a user minimum label that is different from the definitions in the ACCREDITATION RANGE section.
  - For the procedure, see "How to Specify Default User Labels" on page 74.
  - Specify which colors are assigned to labels.

    Color definitions are optional. However, assigning colors to labels is highly recommended.

    For the procedure, see "How to Assign a Color to a Label or Word" on page 74.

For more information, see the label encodings(4) man page.

## **Specifying Colors for Labels**

In the LOCAL DEFINITIONS section of the label\_encodings file, the COLOR NAMES keyword is followed by zero or more color assignments. If no color is defined for a classification after the COLOR NAMES keyword, the color black is used. The default color values for the default label encodings file are shown in the following excerpt.

COLOR NAMES:

```
label= Admin_Low; color= #bdbdbd;
label= PUB; color= blue violet;
label= SBX PLAYGROUND; color= yellow;
label= CNF; color= navy blue;
label= CNF : INTERNAL USE ONLY; color= blue;
label= CNF : NEED TO KNOW; color= #80bfff;
label= CNF : RESTRICTED; color= #87ceff;
label= Admin_High; color= #636363;
```

Colors are assigned to labels and to words within labels with the following syntax:

```
label= label-name; color= color-name;
word= label-name: color= color-name;
```

The value of *color-name* can be either a text color name or a hexadecimal color value. The color is associated with a word or a label. The color that is assigned to a label's component

displays as a background color whenever a label includes the specified label components. The desktop software computes a complementary color for the lettering.

For an introduction to color values, see "Color Values" on page 72. A full discussion of how to specify color is outside the scope of this guide. For more information, see the X11(5) man page in the /usr/X11/share/man/man5 or /usr/share/man/man5 directory. Also, color specifications are covered in the *XWindows Systems User's Guide* (Vol. III), ISBN number 0-937175-29-3.

Color is assigned to a label's components according to the ordering rules that are described in the following section. For a desktop example of color use, see the following figure. The PUBLIC, INTERNAL, and NTK\_SALES workspace buttons are colored differently from each other and from standard workspace buttons.

FIGURE 5-1 Window Labels With Colors From COLOR NAMES



### Order of Color Specification

The color that is used for any label is determined according to the following rules:

- 1. If a label contains a compartment word that has one or more colors specified, then the color value associated with the first word= value is used.
- 2. If a label contains none of the compartment words that are associated with colors, and an exact match exists for the label name, then the specified label color is used.
- 3. If there is no exact match for the label name, then the color that is associated with the first specified label= value for the *classification* of the label is used.

4. If the classification has no assigned color, then the color that is assigned to the first label that contains the same classification is used.

### **EXAMPLE 5-1** Colors Assigned According to Ordering Rules

In this example, a system has the following color definitions:

```
label= u; color= green
label= c; color= blue
label= S; color= red;
word= B; color= orange;
label= TS; color= yellow;
label= TS SA; color= khaki;
```

The ordering rules result in the following color display:

- The label TS A displays with a yellow background because yellow is the color assigned to the TS classification. (Rule 3)
- Any label with the C classification displays with the color blue, unless the label also contains the word B. (Rule 2)
- A label with the C B classification displays with the color orange because word B is orange.
   (Rule 1)
- Any label with the U classification always displays with the color green. As defined in the label encodings file, word B cannot appear with the classification U. (Rule 2)

### **EXAMPLE 5-2** Color Assigned to a Label With No Assigned Color

This example illustrates Rule 4. The label TS displays the color khaki because TS SA is the only label that includes the TS classification. TS SA is defined to display the color khaki.

```
label= u; color= green
label= c; color= blue
label= S; color= red;
word= B; color= orange;
label= TS SA; color= khaki;
```

### **Color Values**

The /usr/share/X11/rgb.txt database translates color names into red, green, and blue values. You can refer to the rgb.txt file for color names to use for your site's labels. You can also use hexadecimal color values.

Briefly, here are a few high-level points about color values:

- Color values specify the amount of red, green, and blue (RGB) that compose the color.
- RGB values can be specified with three hexadecimal numbers from 0 to FF. Each hexadecimal number indicates the amount of red, green, or blue in the color. For example:

- Pure white is #FFFFFF
- Pure red is #FF0000
- Pure black is #000000

For more information, see the X11(5) man page.

- The number of colors that are available on the screen depends on several factors:
  - Amount of memory available for specifying colors
  - Number of color planes
  - How many other clients are using color cells
  - Whether private color maps are being used by other applications

For a sample color name planner, see Table 6-8. To assign colors, see "How to Assign a Color to a Label or Word" on page 74.

## **Modifying Oracle Solaris Extensions**

The following task map describes how to modify Oracle Solaris extensions in the label\_encodings file.

Purpose	Instructions
Add a LOCAL DEFINITIONS section to your encodings file.	"How to Add Oracle Solaris Extensions to an Encodings File" on page 73
Change label and clearance defaults for users.	"How to Specify Default User Labels" on page 74
Specify colors for labels.	"How to Assign a Color to a Label or Word" on page 74

# ▼ How to Add Oracle Solaris Extensions to an Encodings File

The LOCAL DEFINITIONS section of the label\_encodings file enables you to specify default user labels and colors for labels.

Before You Begin

You must be in the Security Administrator role in the global zone. You must have an encodings file that does not have a LOCAL DEFINITIONS section.

Add the LOCAL DEFINITIONS section to your label\_encodings file.

Append the section from an Oracle Solaris-supplied label\_encodings file. Oracle Solaris-supplied files are in the /etc/security/tsol directory.

## ▼ How to Specify Default User Labels

**Before You Begin** 

You must be in the Security Administrator role in the global zone. You must have an encodings file with a LOCAL DEFINITIONS section.

Back up the label\_encodings file.

```
# cp label_encodings label_encodings.orig
```

2. Edit the label\_encodings file.

```
# pfedit label_encodings
```

 Find the line in the LOCAL DEFINITIONS section that begins with Default User Sensitivity Label.

```
Default User Sensitivity Label= u;
Default User Clearance= c;
```

4. Replace the sensitivity label with your desired minimum user label.

The following example shows a new minimum label of c.

```
Default User Sensitivity Label= c;
```

5. Replace the clearance with your desired user clearance.

The following example shows a new clearance of s.

```
Default User Clearance= s;
```

6. Save your changes.

Next Steps Continue with "How to Analyze and Verify the label encodings File" on page 47.

## How to Assign a Color to a Label or Word

To minimize color-flashing, use color names or hexadecimal color values that you know have been specified for other applications. The default color values have been chosen with memory limitations for color in mind.

Before You Begin You must be in the Security Administrator role in the global zone.

## 1. Back up the label\_encodings file.

```
# cp label_encodings label_encodings.orig
```

## 2. Edit the label\_encodings file.

```
# pfedit label_encodings
```

#### 3. Find the COLOR NAMES section.

#### 4. Define a color for each classification.

In this example, the classification REGISTERED is assigned the color red. The NEED\_TO\_KNOW classification is assigned the color blue.

```
label= REGISTERED; color= red;
label= NEED TO KNOW; color= blue;
```

### 5. (Optional) Define colors for individual compartment words.

To distinguish certain compartment words irrespective of the classification with which they are associated, assign a separate color to those words.

### a. Determine the possible color names on your system.

The names are defined in a local color database. For more information, see the X11(5) man page.

### % grep Red /usr/share/X11/rgb.txt

```
255 69 0 OrangeRed
219 112 147 PaleVioletRed
...
```

### b. Assign the color names.

For example, assign the color OrangeRed to the EMGT compartment:

```
word= EMGT; color= OrangeRed;
```

#### 6. (Optional) Define colors for labels.

In this example, assign the color MediumPurple4 to the NEED TO KNOW label.

```
label= NEED TO KNOW; color= MediumPurple4;
```

## 7. Save your changes.

Next Steps Continue with "How to Analyze and Verify the label\_encodings File" on page 47.



# Example of Planning an Organization's Encodings File

This chapter discusses the creation of a set of Trusted Extensions labels that meet a company's goals for information protection. This chapter covers the following topics:

- "Identifying the Site's Label Requirements" on page 77
- "Climbing the Security Learning Curve" on page 81
- "Analyzing the Requirements for Each Label" on page 82
- "Defining the Set of Labels" on page 86
- "Editing and Installing the label encodings File" on page 97
- "Configuring Users and Printers for Labels" on page 103

The label\_encodings file that results from this planning is provided in Appendix A, "Customized Encodings File for SecCompany". A version of this file is installed as the label encodings.example file.

# **Identifying the Site's Label Requirements**

SecCompany, Inc. is the name of a fictional company whose label requirements are modeled in this example. To protect the corporation's intellectual property, the company's legal department mandates that employees use three labels on all sensitive email and printed materials. The three labels, from most sensitive to least sensitive, are the following:

Confidential: RegisteredConfidential: Need To KnowConfidential: Internal Use Only

The legal department also approves the use of an optional fourth label, Public. The Public label is for information that can be distributed to anyone without restrictions.

## **Satisfying Information Protection Goals**

At SecCompany, the manager in charge of information protection makes use of all possible channels to communicate labeling requirements. However, some employees do not understand the requirements. Other employees forget about the requirements or ignore them. Even when labels are properly applied, the information is not always properly handled, stored, and distributed. For example, reports indicate that registered information is sometimes found unattended. Copies of registered information have been left next to copy machines and printers, in break rooms, and in lobbies.

The legal department wants a better way to ensure that information is properly labeled without relying totally on employee compliance. The system administrators want a better way to control the following:

- Who can view sensitive information
- Who can modify sensitive information
- Which information is printed on which printers
- How printer output is handled
- How email at various levels of security is distributed internally and externally

# Trusted Extensions Features That Address Labeling and Access

Trusted Extensions software does not leave labeling decisions up to the discretion of computer users. All printer output from print servers that are configured with Trusted Extensions is automatically labeled according to the site's requirements.

Even though security was not yet fully understood at the company, the manager in charge of information protection knew that Trusted Extensions could implement the following features immediately:


- Automatic labeling of print jobs
- Printers with restricted access by label
- Email with restricted access by label

In Trusted Extensions, each print job is automatically assigned a *label*. The label corresponds either to the *level* at which the user is working or to the user's level of responsibility.

For example, when an employee works at the level of INTERNAL\_USE\_ONLY, the work should be accessible only by people who have signed nondisclosure agreements with SecCompany. When this employee sends email to the printer, the print job is automatically assigned the label INTERNAL USE ONLY.

The following figure shows the user's working label, INTERNAL\_USE\_ONLY, printed at the top and bottom of a body page of the email.

FIGURE 6-1 Label Automatically Printed on Body Pages

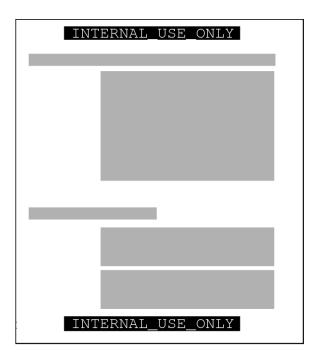

Banner and trailer pages can include *handling instructions*. Printed below the sensitivity label, handling instructions provides distribution instructions for the printed material. The following example shows the text on the banner page of a print job. The sensitivity level of the print job is NEED TO KNOW in the department of HUMAN RESOURCES.

NEED TO KNOW HR

DISTRIBUTE ONLY TO HUMAN RESOURCES (NON-DISCLOSURE AGREEMENT REQUIRED)

The instructions state that the information is only for human resources personnel who need to know the information. Also, the human resources personnel must have signed a nondisclosure agreement.


To retrieve a labeled printout, users must have access to a printer that prints at the label of the print job. A printer can be configured to print jobs at every label. For security, printers are configured to print only jobs within a restricted label range.

For example, Figure 6-2 illustrates that the legal department's printer has been set up to print only jobs that have been assigned one of three labels:

- NEED\_TO\_KNOW LEGAL Can be viewed only by permanent employees of SecCompany with a need to know within the legal department
- INTERNAL\_USE\_ONLY Can be viewed only by permanent employees of SecCompany and customers who have signed nondisclosure agreements
- PUBLIC Can be viewed by anyone

This printer setup excludes jobs that are sent at any other label. For example, this printer would reject jobs at the labels NEED TO KNOW MARKETING and REGISTERED.

**FIGURE 6-2** How a Printer With a Restricted Label Range Handles Print Jobs

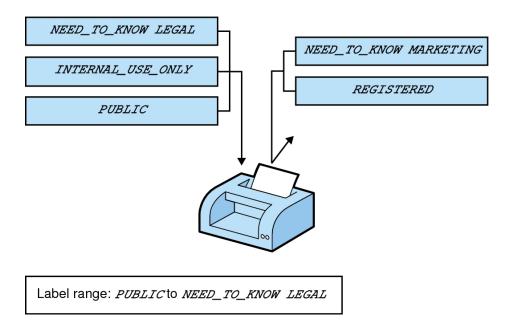

Printers in locations that are accessible to all employees can be similarly restricted. For example, printers can be configured to print jobs only at the two labels that all employees can view, INTERNAL\_USE\_ONLY and PUBLIC.

Similar to how the printer label range controls which jobs can be printed on a particular printer, a user's *account label range* limits which email the person can handle. The following figure shows email that is being labeled at the sensitivity label of the user's mail application. The email is sent to the mail application at that label.

NEED\_TO\_KNOW LEGAL

INTERNAL\_USE\_ONLY

PUBLIC

REGISTERED

FIGURE 6-3 User Receiving Email Within the Account Label Range

Account's label range: PUBLIC to NEED\_TO\_KNOW LEGAL

Sensitivity labels within range: PUBLIC,

INTERNAL\_USE\_ONLY, and NEED\_TO\_KNOW LEGAL

At SecCompany, gateways to the Internet are configured to screen email so that emails at inappropriate labels cannot be sent outside of the company. Inappropriate labels are any labels except PUBLIC.

## **Climbing the Security Learning Curve**

The manager in charge of information protection identifies an experienced administrator with the following qualifications:

- Is assessed to be trustworthy
- Knows how to administer Oracle Solaris systems
- Understands the organization's information-processing goals well enough to be responsible for overseeing and implementing the site's security

That person is assigned the job of security administrator.

Long before configuring Trusted Extensions, the security administrator starts to learn about security and to prepare a plan for the site's security policy. First, the security administrator reads the following documents:

- Chapter 1, "Security Planning for Trusted Extensions," in "Trusted Extensions
   Configuration and Administration" For guidance on creating a site's security policy
- "Trusted Extensions User's Guide" To become familiar with label types and label appearance
- "Trusted Extensions Configuration and Administration" To become familiar with security administrator responsibilities and tools
- Chapter 1, "About Labels in Trusted Extensions" To review label concepts

Then, the security administrator starts with a plan for the site's labels. The planning process is described in the following sections.

## **Analyzing the Requirements for Each Label**

The security administrator agrees that the set of labels that are mandated by the legal department is a useful starting point. However, further analysis is needed before the labels can be encoded.

# Requirements for CONFIDENTIAL: INTERNAL\_USE\_ONLY

The CONFIDENTIAL: INTERNAL\_USE\_ONLY label is for information that is proprietary to the company but can be distributed to all employees because of its low level of sensitivity. All employees have signed nondisclosure agreements before starting employment. Information with this label might also be distributed to other people. For example, the employees of vendors and contractors who have signed a nondisclosure agreement can receive the information. Because the Internet can be snooped, information with this label cannot be sent over the Internet. However, the information can be sent over email within the company.

Suitable use of the CONFIDENTIAL: INTERNAL USE ONLY label includes the following:

- Spending guidelines
- Internal job postings

## Requirements for CONFIDENTIAL: NEED\_TO\_KNOW

The CONFIDENTIAL: NEED\_TO\_KNOW label is for information that is proprietary to the company, has a higher level of sensitivity than INTERNAL\_USE\_ONLY, and has a more limited audience.

Distribution is limited to employees who need to know the information. Other people who need to know the information and who have signed nondisclosure agreements might also be in the audience.

For example, if only the group of people working on a particular project should view certain information, then NEED\_TO\_KNOW should be used on that information. Whenever information must be restricted to a particular group, the name of the group needs to be specified on the paper version of the information.

Including the name of a group in the CONFIDENTIAL: NEED\_TO\_KNOW label makes it clear that the information must not be given to anyone outside of the group. Information with this label cannot be sent over the Internet, but it can be sent over email within the company.

Suitable use of the NEED TO KNOW label includes the following:

- Product design documents
- Project details
- Employee Status Change form

## Requirements for CONFIDENTIAL: REGISTERED

The CONFIDENTIAL: REGISTERED label is for information that is proprietary to the company, has a very high level of sensitivity, and could significantly harm the company if released. Registered information must be numbered and tracked by the owner. Each copy must be assigned to a specific person. The copy must be returned to the owner for destruction after being read. Copies can be made only by the owner of the information. Use of brownish-red paper is recommended because this color cannot be copied.

This label is used when only one specific group of people is allowed to view the proprietary information. This information cannot be shown to anyone who is not authorized by the owner. The information cannot be shown to employees of other companies who have not signed a nondisclosure agreement, even if the owner authorizes the disclosure. Information with this label cannot be sent through email.

Suitable use of the CONFIDENTIAL: REGISTERED label includes the following:

- End of quarter financial information that has not yet been released
- Sales forecasts
- Marketing forecasts

## Names of Groups With NEED TO KNOW Label

The security administrator decides that the NEED\_TO\_KNOW label will contain the names of groups or departments. The security Administrator asks for suggestions about what words to

use to define groups or areas of interest within the organization. The following group names are in the initial list:

- Engineering
- Executive Management
- Finance
- Human Resources
- Legal
- Manufacturing
- Marketing
- Sales
- System Administration

Later, the security administrator adds the Project Team group, which enables all members of the Engineering and Marketing groups to share project data.

## **Understanding the Set of Labels**

The next step for the security administrator is to resolve how to use the classifications and compartments to encode the labels and clearances.

The next step for the security administrator is to resolve the following issues:

- How to use the classifications and compartments to encode the labels and clearances
- Which handling instructions will appear on printed output

The security administrator uses a large board. Pieces of paper are marked with the words that will be in the labels, as shown in Figure 6-4. This setup illustrates the relationships among labels. The pieces are rearranged until they all fit together.


The administrator drafts the following label relationships:

- The four labels are hierarchical with the REGISTERED label as the highest label. The PUBLIC label is the lowest.
- Only one label needs to be associated with group names

The list of people who are cleared to receive registered information is limited on a case-by-case basis. Therefore, REGISTERED does not need any associated group names. INTERNAL\_USE\_ONLY applies to all employees and people who have signed nondisclosure agreements. PUBLIC labels are for everybody. Therefore, INTERNAL\_USE\_ONLY and PUBLIC labels do not need further qualification. The NEED\_TO\_KNOW label does need to be associated with non-hierarchical words, such as NEED\_TO\_KNOW MARKETING or NEED\_TO\_KNOW ENGINEERING. The words that identify the group or department can also be included in a user's clearance, as part of establishing that user's need to know.

- Each label except the PUBLIC label requires the person who is accessing the information to have signed a nondisclosure agreement.
  - A phrase such as  $\mbox{NON-DISCLOSURE}\,$  AGREEMENT REQUIRED is a good reminder that this requirement exists.
- The handling instructions on banner and trailer pages must have clear wording on how to handle the information. These instructions are based on the classification and on any group name that can appear in the label.
  - Along with information about the sensitivity of the printer output, handling instructions must explain that a nondisclosure agreement is required when the label requires such an agreement.

FIGURE 6-4 Sample Planning Board for Label Relationships at SecCompany

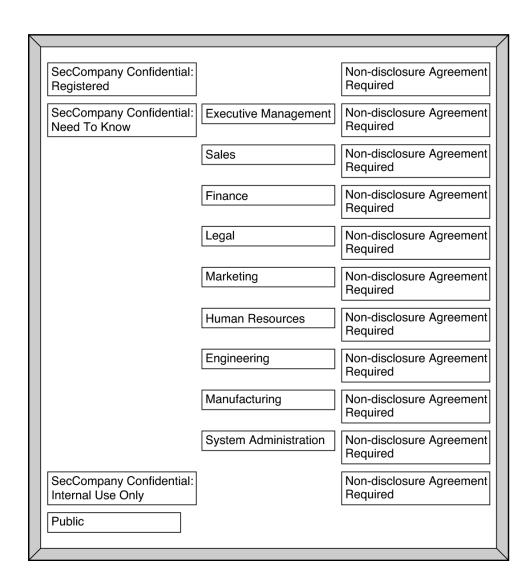

# **Defining the Set of Labels**

In this section, SecCompany's set of labels is defined in lists that include the following required aspects of labels:

- Classifications
- Other words
- Relationships between and among the words
- Classification restrictions that are associated with use of each word
- Intended use of the words in sensitivity labels and clearances
- Intended use of the words in labeling system output, such as printouts and email

## **Planning the Classifications**

Because the four labels are hierarchical, they are encoded as hierarchical classifications.

With the legal department's approval, the security administrator shortens the labels by omitting SecCompany Confidential: from the label names. Long classifications make labels hard to read in window title bars. The name of a label is truncated from right to left in title bars. Because the truncated names of all the label names above PUBLIC would begin with the words SECCOMPANY CONFIDENTIAL, the truncated names would be indistinguishable without manually extending the frame for each window.

The security administrator defines the following labels:

- REGISTERED
- NEED TO KNOW
- INTERNAL USE ONLY
- PUBLIC

## **Planning the Compartments**

The group names will be encoded as non-hierarchical *compartments*. Compartments will be restricted to appear only in labels that have the NEED\_TO\_KNOW classification. Compartment restrictions are encoded in the ACCREDITATION RANGE section under COMBINATION CONSTRAINTS in the label encodings file.

User *clearances* will control which users can create files and directories that have a group name in the label. User clearances will also control which users can create documents that have a label with more than one group name along with the NEED TO KNOW classification.

## **Planning the Use of Words in MAC**

The classifications and compartments in sensitivity labels and user clearances are used in mandatory access control (MAC). Therefore, the legal department's hierarchical labels and the group names need to be encoded as classifications and compartments so that they can be used in the labels that control which individual employees can access files and do other work.

SecCompany defines two sensitivity labels:

- PUBLIC, which is assigned the lowest value in the user accreditation range
- INTERNAL USE ONLY, which is assigned the next highest value above PUBLIC

An employee with no authorizations whose clearance is PUBLIC and whose minimum label is PUBLIC can use the system as follows:

- Works only in a PUBLIC workspace
- Creates files only at the PUBLIC label
- Reads email only at the PUBLIC label
- Uses printers that have PUBLIC in their label range

In contrast, an employee with no authorizations whose clearance is INTERNAL\_USE\_ONLY can use the system as follows:

- Works in either a PUBLIC or an INTERNAL\_USE\_ONLY workspace
- Creates files at either the PUBLIC label or the INTERNAL\_USE\_ONLY label, depending on the employee's current workspace
- Receives and sends email at either sensitivity label
- Can print a file that is labeled PUBLIC on any printer with PUBLIC in its label range
- Can send a file labeled INTERNAL\_USE\_ONLY to any printer with INTERNAL\_USE\_ONLY in its label range

# Planning the Use of Words in Labeling System Output

When the sensitivity label of a print job contains a group name compartment, the mandatory printer banner and trailer pages print the following text:

 ${\tt DISTRIBUTE\_ONLY\_TO} \ \ \textit{Group Name} \ \ ({\tt Non-Disclosure} \ \ {\tt Agreement} \ \ {\tt Required})$ 

## **Planning Unlabeled Printer Output**

Users who are directed to an unlabeled printer can print output with no labels. Users in a labeled zone with its own print server can print output with no labels if they are assigned the solaris.print.nolabel authorization. Roles can be configured to print output with no labels to a local printer that is controlled by a Trusted Extensions print server.

## **Planning for Supporting Procedures**

The security administrator creates security policies to enforce the labeling strategy.

## Rules for Protecting a REGISTERED File or Directory

The security administrator realizes that anyone with a clearance that includes the word REGISTERED can access any registered information anywhere in the company. Further precautions are needed. For example, users who have REGISTERED in their clearance must be instructed to use UNIX permissions to protect their files. Permissions must be set so that only the owner can view or modify the file. The following example shows a user who is applying discretionary access control to protect the contents of a REGISTERED directory.

As the following example shows, the user who creates a file or directory while working at an sensitivity label of REGISTERED needs to set the file's permissions to be read and write for the owner only. Directory permissions are set to be readable, writable, and searchable only by the owner. These permissions ensure that another user who can work at the REGISTERED label cannot read the file.

#### **EXAMPLE 6-1** Using DAC to Protect Registered Information

```
% plabel
REGISTERED
% mkdir registered.dir
% chmod 700 registered.dir
% cd registered.dir
% touch registered.file
% ls -l
-rwxrwxrwx registered.file
% chmod 600 registered.file
% ls -l
-rw----- registered.file
```

## **Rules for Configuring Printers**

The following table shows how printers that are available to various SecCompany departments need to be configured.

**TABLE 6-1** Label Ranges on SecCompany Printers at Various Locations

Printer Location	Type of Access	Label Range
Lobby or public meeting room	Anyone	PUBLIC only
Internal company printer room	Available to all people who have signed nondisclosure agreements	PUBLIC to INTERNAL_USE_ONLY
Restricted area for one group	Members of a group specified in the NEED_TO_KNOW <i>group-name</i> compartment	NEED_TO_KNOW <i>group-name</i> only
Strictly controlled area	Available only to people who have the REGISTERED classification in their clearance	REGISTERED only

For more information, see Chapter 19, "Managing Labeled Printing," in "Trusted Extensions Configuration and Administration".

## **Rules for Handling Printer Output**

People who have access to restricted printers are instructed to do the following:

- Protect information according to the instructions on the banner and trailer pages of printed output.
- Shred jobs that do not have both a banner and a trailer page. Also, shred jobs that do not have matching job numbers on the banner and trailer pages.

# **Planning the Classification Values in a Worksheet**

The worksheet in the following table shows names and hierarchical values that are defined for the four classifications for SecCompany. Because the value 0 is reserved for the administrative ADMIN\_LOW label, the value of the PUBLIC classification is set to 1. The values of the other classifications are set higher in ascending order of sensitivity.

**Note -** The names of groups in the labels are specified later, as WORDS in the SENSITIVITY LABELS and CLEARANCES sections.

**TABLE 6-2** Classifications Planner for SecCompany

name=	sname=/aname=	value=	initial compartments= bit numbers/ WORD
PUBLIC	PUB	1	None
INTERNAL_USE_ONLY	IUO	4	None
NEED_TO_KNOW	NTK	5	None
REGISTERED	REG	6	None

# Planning the Compartment Values and Combination Constraints in a Worksheet

The following table defines the relationships between words and classifications. The relationships were determined by using the planning board in Figure 6-4. PUBLIC and INTERNAL\_USE\_ONLY can never appear in a label with any compartment. NEED\_TO\_KNOW can appear in a label with any of the compartments or all of the compartments. The classification and compartment values are listed in ascending bit order.

**TABLE 6-3** Compartments and User Accreditation Range Combinations Planner for SecCompany

Classification	Compartment Name/ sname/ Bit	Combination Constraints
PUBLIC		PUBLIC
		Only valid combinations
INTERNAL_USE_ONLY		INTERNAL_USE_ONLY
		Only valid combinations
NEED_TO_KNOW	EXECUTIVE_MANAGEMENT_GROUP/ EMGT/ 11	NEED_TO_KNOW
	SALES/ SALES/ 12	All combinations valid
	FINANCE/ FIN/ 13	
	LEGAL/ LEGAL/ 14	
	MARKETING/ MKTG/ 15 20	
	HUMAN_RESOURCES/ HR/ 16	
	ENGINEERING/ ENG/ 17 20	
	MANUFACTURING/ MFG/ 18	
	SYSTEM_ADMINISTRATION/ SYSADM/ 19	

Classification	Compartment Name/ sname/ Bit	Combination Constraints
	PROJECT_TEAM/ SYSADM/ 20	
	ALL_DEPARTMENTS/ ALL/ 11-20	
REGISTERED		REGISTERED
		Only valid combinations

The security administrator uses the following table to track which bits have been used for compartments.

**TABLE 6-4** Compartment Bits Planner for SecCompany

11	12	13	14	15	16	17	18	19	20	

# **Planning the Clearances in a Worksheet**

The components of these labels are also assigned to users in clearances. The worksheet's Clearance Planner in Table 6-5 defines the label components to be used in clearances at SecCompany.

The following key to Table 6-5 lists the components in descending classification bit order and ascending compartment bit order:

Abbreviation	Name	Component
REG	REGISTERED	CLASS
NTK	NEED_TO_KNOW	CLASS
IUO	INTERNAL_USE_ONLY	CLASS
PUB	PUBLIC	CLASS
EMGT	EXECUTIVE_MANAGEMENT_GROUP	COMP
SALES	SALES	COMP
FIN	FINANCE	COMP
LEGAL	LEGAL	COMP
MKTG	MARKETING	COMP
HR	HUMAN_RESOURCES	СОМР

Abbreviation	Name	Component
ENG	ENGINEERING	COMP
MFG	MANUFACTURING	COMP
SYSADM	SYSTEM_ADMINISTRATION	COMP
P_TEAM	PROJECT_TEAM	COMP
ALL	ALL_DEPARTMENTS	COMP

**TABLE 6-5** Clearance Planner for SecCompany

CLAS	SCOMP	СОМР	СОМР	COMP	СОМР	СОМР	СОМР	СОМР	СОМР	СОМР	СОМР	Notes
REG	EMGT	ENG	FIN	HR	LEGAL	MFG	MKTG	SALES	SYSADM	P_ TEAM	ALL	Highest possible label, not used *
REG												Assigned to personnel as needed §
NTK	EMGT											Assigned to EMGT group
NTK		ENG										Assigned to ENG group
NTK			FIN									Assigned to FIN group
NTK		,		HR								Assigned to HR group
NTK					LEGAL							Assigned to LEGAL group
NTK				,		MFG						Assigned to MFG group
NTK							MKTG					Assigned to MKTG group
NTK						,		SALES				Assigned to SALES group
NTK									SYSADM			Assigned to SYSADM group
NTK	P_TEAM							Assigned to P_TEAM group				
NTK	ALL						Assigned to all groups					
IUO	IUO						,	Assigned to people with NDAs				
PUB												Assigned to anyone

<sup>\*</sup> The highest possible label in the system consists of the highest classification and all of the defined compartments. Because no one is permitted to access all information in all departments, this label is not in the user accreditation range. No one is assigned this clearance.

<sup>§</sup> When working at the REGISTERED sensitivity label, the user must set permissions to restrict access to everyone except the owner. UNIX file permissions of 600 and directory permissions of 700 restrict access.

# **Planning the Printer Banners in a Worksheet**

The SecCompany legal department wants the following to appear on banner and trailer pages of printed output:

SecCompany Confidential:

The PRINTER BANNERS section of the label\_encodings file can be used to associate a string with any compartment that appears in the sensitivity label of the print job. In this encodings file, only the NEED\_TO\_KNOW classification has compartments. The following table shows how the desired wording is specified as a prefix and assigned to each compartment. The abbreviation NTK is assigned to each channel so that the wording in the PRINTER BANNERS section includes the group name, as follows:

SecCompany Confidential: group-name

In the following planner, the words in the second column are listed in order of ascending bit order.

**TABLE 6-6** Printer Banners Planner for SecCompany

Prefix	Printer Banner (Word, No Suffix)
SECCOMPANY CONFIDENTIAL:	EXECUTIVE_MANAGEMENT_GROUP
SECCOMPANY CONFIDENTIAL:	SALES
SECCOMPANY CONFIDENTIAL:	FINANCE
SECCOMPANY CONFIDENTIAL:	LEGAL
SECCOMPANY CONFIDENTIAL:	MARKETING
SECCOMPANY CONFIDENTIAL:	HUMAN_RESOURCES
SECCOMPANY CONFIDENTIAL:	ENGINEERING
SECCOMPANY CONFIDENTIAL:	MANUFACTURING
SECCOMPANY CONFIDENTIAL:	SYSTEM_ADMINISTRATION
SECCOMPANY CONFIDENTIAL:	PROJECT_TEAM
SECCOMPANY CONFIDENTIAL:	ALL_DEPARTMENTS

## **Planning the Channels in a Worksheet**

The SecCompany legal department wants the following handling instructions to appear on banner and trailer pages on printed output:

DISTRIBUTE\_ONLY\_TO group-name EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)

This goal is met by assigning in the CHANNELS section the same compartment bits that were assigned to group names in Table 6-3. SecCompany plans to use the same group names in both the compartments and the channels.

The words that precede the channel name are specified as *prefixes*. The words that follow the channel name are specified as *suffixes*. The security administrator specifies prefixes and suffixes in the following planner. The planner lists the channels in ascending compartment bit order.

**TABLE 6-7** Channels Planner for SecCompany

Prefix	Channel	Suffix
DISTRIBUTE_ONLY_TO	EXECUTIVE_MANAGEMENT_GROUP	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	SALES	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	FINANCE	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	LEGAL	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	MARKETING	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	HUMAN_RESOURCES	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	ENGINEERING	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	MANUFACTURING	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	SYSTEM_ADMINISTRATION	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	PROJECT_TEAM	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)
DISTRIBUTE_ONLY_TO	ALL_DEPARTMENTS	EMPLOYEES (NON-DISCLOSURE_AGREEMENT_REQUIRED)

# Planning the Minimum Labels in an Accreditation Range

The following minimum values must be set:

- Minimum sensitivity label
- Minimum clearance
- Minimum "Protect As" classification

SecCompany wants employees to be able to use all the defined sensitivity labels. Also, the company wants to be able to assign the PUBLIC clearance to some employees. Therefore, the minimum sensitivity label and the minimum clearance need to be set to PUBLIC.

The minimum "Protect As" classification is printed on banner and trailer pages instead of the actual classification from the job's sensitivity label. The minimum "Protect As" classification can be set higher than the *actual* minimum classification. However, SecCompany requirements allow the minimum "Protect As" classification to always be equal to the real classification of the print job's sensitivity label. The security administrator specifies the value PUBLIC for the minimum sensitivity label, minimum clearance, and minimum "Protect As" classification.

## **Planning the Colors in a Worksheet**

The color that is assigned to a label displays as the background color whenever the name of the label appears at the top of a window. The lettering is displayed in a color that is computed by the windowing system to complement the background. At SecCompany, the security administrator chooses to keep the colors that are already assigned to the administrative labels in the default label\_encodings file. The administrator assigns green to PUBLIC, yellow to INTERNAL\_USE\_ONLY, blue to labels that contain NEED\_TO\_KNOW (with different shades of blue assigned to each compartment), and red to REGISTERED. The following table shows the color assignments, and the default color assignments for the ADMIN\_LOW and ADMIN\_HIGH labels.

**TABLE 6-8** Color Names Planner for SecCompany

Label or Name (label= or name=)	Color
ADMIN LOW	#BDBDBD
PUBLIC	green
INTERNAL_USE_ONLY	yellow
NEED_TO_KNOW	blue
NEED_TO_KNOW EMGT	#7FA9EB
NEED_TO_KNOW SALES	#87CEFF
NEED_TO_KNOW FIN	#00BFFF
NEED_TO_KNOW LEGAL	#7885D0
NEED_TO_KNOW MKTG	#7A67CD
NEED_TO_KNOW HR	#7F7FFF
NEED_TO_KNOW ENG	#007FFF
NEED_TO_KNOW MFG	#0000BF
NEED_TO_KNOW SYSADM	#5B85D0
NEED_TO_KNOW P_TEAM	#9E7FFF

Label or Name (label= or name=)	Color
NEED_TO_KNOW ALL	#4D658D
REGISTERED	red
ADMIN_HIGH	#636363

## Editing and Installing the label\_encodings File

The SecCompany setup team for Trusted Extensions makes a printed copy and an online copy of the installed label\_encodings file. The copy is used in case of problems with the new version of the file that the security administrator supplies.

The security administrator uses a text editor to create the label\_encodings file and then uses the chk\_encodings -a command to check the file. After the file passes all semantic and syntactic checks, the security administrator backs up the current version of the label encodings file, and installs the new label encodings file.

# **Specifying the Version**

The following example shows the SecCompany VERSION string in the label encodings file.

```
EXAMPLE 6-2 SecCompany VERSION String

VERSION= SecCompany, Inc. Example Version - 2.2 10/10/20
```

## **Specifying the Classifications**

The following example shows the SecCompany classifications and values from Table 6-2 in the CLASSIFICATIONS section.

## **EXAMPLE 6-3** SecCompany CLASSIFICATIONS Section

```
CLASSIFICATIONS:

name= PUBLIC; sname= PUB; value= 1;
name= INTERNAL_USE_ONLY; sname= IUO; aname= IUO; value= 4;
name= NEED_TO_KNOW; sname= NTK; aname= NTK; value= 5;
name= REGISTERED; sname= REG; aname= REG; value= 6;
```

**Note -** A classification cannot contain the slash (/) or comma (,) character. The classifications are specified from the lowest value to the highest.

## **Specifying the Sensitivity Labels**

The compartments from Table 6-3 are specified in the following example. The labels do not have any required combinations or combination constraints.

**EXAMPLE 6-4** SecCompany WORDS in the SENSITIVITY LABELS Section

```
SENSITIVITY LABELS:

WORDS:

name= ALL_DEPARTMENTS; sname= ALL; compartments= 11-20; minclass= NEED_TO_KNOW;
name= EXECUTIVE_MANAGEMENT_GROUP; sname= EMGT; compartments= 11; minclass= NEED_TO_KNOW;
name= SALES; sname= SALES; compartments= 12; minclass= NEED_TO_KNOW;
name= FINANCE; sname= FIN; compartments= 13; minclass= NEED_TO_KNOW;
name= LEGAL; sname= LEGAL; compartments= 14; minclass= NEED_TO_KNOW;
name= MARKETING; sname= MKTG; compartments= 15 20; minclass= NEED_TO_KNOW;
name= HUMAN_RESOURCES; sname= HR; compartments= 16; minclass= NEED_TO_KNOW;
name= ENGINEERING; sname= ENG; compartments= 17 20; minclass= NEED_TO_KNOW;
name= MANUFACTURING; sname= MFG; compartments= 18; minclass= NEED_TO_KNOW;
name= SYSTEM_ADMINISTRATION; sname= SYSADM; compartments= 19; minclass= NEED_TO_KNOW;
name= PROJECT_TEAM; sname= P_TEAM; compartments= 20; minclass= NEED_TO_KNOW;
REQUIRED COMBINATIONS:
```

## **Specifying the Information Labels**

Even though information labels are not used, values must be supplied under the INFORMATION LABELS: WORDS: section of the label\_encodings file for the file to pass the encodings check. The security administrator copies the words from the SENSITIVITY LABELS: WORDS: section. The result is shown in the following example.

**EXAMPLE 6-5** SecCompany WORDS in the INFORMATION LABELS Section

```
INFORMATION LABELS:
WORDS:
```

```
name= ALL_DEPARTMENTS; sname= ALL; compartments= 11-20; minclass= NEED_TO_KNOW;
name= EXECUTIVE_MANAGEMENT_GROUP; sname= EMGT; compartments= 11; minclass= NEED_TO_KNOW;
name= SALES; sname= SALES; compartments= 12; minclass= NEED_TO_KNOW;
name= FINANCE; sname= FIN; compartments= 13; minclass= NEED_TO_KNOW;
name= LEGAL; sname= LEGAL; compartments= 14; minclass= NEED_TO_KNOW;
name= MARKETING; sname= MKTG; compartments= 15 20; minclass= NEED_TO_KNOW;
name= HUMAN_RESOURCES; sname= HR; compartments= 16; minclass= NEED_TO_KNOW;
name= ENGINEERING; sname= BNG; compartments= 17 20; minclass= NEED_TO_KNOW;
name= MANUFACTURING; sname= MFG; compartments= 18; minclass= NEED_TO_KNOW;
name= SYSTEM_ADMINISTRATION; sname= SYSADM; compartments= 19; minclass= NEED_TO_KNOW;
name= PROJECT_TEAM; sname= P_TEAM; compartments= 20; minclass= NEED_TO_KNOW;

REQUIRED COMBINATIONS:
```

## **Specifying the Clearances**

Because the clearance words are the same as the sensitivity labels words, the words in the following example are the same as the words in "Specifying the Sensitivity Labels" on page 98.

```
EXAMPLE 6-6 SecCompany WORDS in the CLEARANCES Section
```

```
CLEARANCES:

WORDS:

name= ALL_DEPARTMENTS; sname= ALL; compartments= 11-20; minclass= NEED_TO_KNOW;
name= EXECUTIVE_MANAGEMENT_GROUP; sname= EMGT; compartments= 11; minclass= NEED_TO_KNOW;
name= SALES; sname= SALES; compartments= 12; minclass= NEED_TO_KNOW;
name= FINANCE; sname= FIN; compartments= 13; minclass= NEED_TO_KNOW;
name= LEGAL; sname= LEGAL; compartments= 14; minclass= NEED_TO_KNOW;
name= MARKETING; sname= MKTG; compartments= 15 20; minclass= NEED_TO_KNOW;
name= HUMAN_RESOURCES; sname= HR; compartments= 16; minclass= NEED_TO_KNOW;
name= ENGINEERING; sname= ENG; compartments= 17 20; minclass= NEED_TO_KNOW;
name= MANUFACTURING; sname= MFG; compartments= 18; minclass= NEED_TO_KNOW;
name= SYSTEM_ADMINISTRATION; sname= SYSADM; compartments= 19; minclass= NEED_TO_KNOW;
name= PROJECT_TEAM; sname= P_TEAM; compartments= 20; minclass= NEED_TO_KNOW;

REQUIRED COMBINATIONS:
```

## **Specifying the Channels**

The security administrator specifies one channel for each group name compartment. Each channel uses the same compartment bits that are assigned to the compartment words in the

SENSITIVITY LABELS: WORDS: section. The prefix is defined as DISTRIBUTE\_ONLY\_TO. The suffix is defined as (NON-DISCLOSURE AGREEMENT REQUIRED). The following is the proposed wording for handling instructions:

```
DISTRIBUTE_ONLY_TO group-name (NON-DISCLOSURE AGREEMENT REQUIRED)
```

The channel specifications in the following example create this wording.

**Note** - No compartments are assigned to the prefixes and suffixes. The prefixes and suffixes are used to define the channels.

#### **EXAMPLE 6-7** SecCompany WORDS in the CHANNELS Section

```
CHANNELS:
WORDS:
name= DISTRIBUTE ONLY TO;
                                prefix;
name= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= ALL_DEPARTMENTS; prefix= DISTRIBUTE_ONLY_TO; compartments= 11-20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= EXECUTIVE MANAGEMENT GROUP; prefix= DISTRIBUTE ONLY TO; compartments= 11;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= SALES; prefix= DISTRIBUTE_ONLY_TO; compartments= 12;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= FINANCE; prefix= DISTRIBUTE ONLY TO; compartments= 13;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED):
name= LEGAL; prefix= DISTRIBUTE_ONLY_TO; compartments= 14;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= MARKETING; prefix= DISTRIBUTE_ONLY TO; compartments= 15 20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= HUMAN_RESOURCES; prefix= DISTRIBUTE_ONLY_TO; compartments= 16;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= ENGINEERING; prefix= DISTRIBUTE ONLY TO; compartments= 17 20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= MANUFACTURING; prefix= DISTRIBUTE ONLY TO; compartments= 18;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= SYSTEM ADMINISTRATION; prefix= DISTRIBUTE ONLY TO; compartments= 19;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= PROJECT_TEAM; prefix= DISTRIBUTE_ONLY_TO; compartments= 20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
```

# **Specifying the Printer Banners**

The term *printer banner* has a specialized meaning in the label\_encodings file. A printer banner appears as a string on the banner page of printed output when the compartment that is associated with the printer banner string is part of a job's label.

The SecCompany PRINTER BANNERS section is shown in the following example. For a sample banner page, see Figure 4-2.

Note - No compartments are assigned to the prefixes and suffixes.

### **EXAMPLE 6-8** SecCompany WORDS in the PRINTER BANNERS Section

```
PRINTER BANNERS:
WORDS:
name= SECCOMPANY CONFIDENTIAL::
                                      prefix;
name= (NON-DISCLOSURE AGREEMENT REQUIRED); suffix;
name= ALL_DEPARTMENTS; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 11-20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= EXECUTIVE MANAGEMENT GROUP; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 11; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= SALES; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 12; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= FINANCE: prefix= SECCOMPANY CONFIDENTIAL::
compartments= 13; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= LEGAL; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 14 20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= MARKETING; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 15; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= HUMAN RESOURCES; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 16; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= ENGINEERING; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 17 20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= MANUFACTURING; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 18: suffix=(NON-DISCLOSURE AGREEMENT REQUIRED):
name= SYSTEM ADMINISTRATION; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 19; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= PROJECT TEAM; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
```

## **Specifying the Accreditation Range**

The ACCREDITATION RANGE: section in the following example shows the combination constraints from Table 6-3, and the minimum clearance, minimum sensitivity label, and minimum "Protect As" classification from "Planning the Minimum Labels in an Accreditation Range" on page 95. PUBLIC, INTERNAL\_USE\_ONLY, and REGISTERED are defined to never appear in a label with any compartment. NEED\_TO\_KNOW is defined to appear in a label with any combination of compartments.

## **EXAMPLE 6-9** SecCompany ACCREDITATION RANGE Section

```
ACCREDITATION RANGE:

classification= PUBLIC; only valid compartment combinations:

PUB

classification= INTERNAL_USE_ONLY; only valid compartment combinations:

IUO

classification= NEED_TO_KNOW; all compartment combinations valid;

classification= REGISTERED; only valid compartment combinations:

REG

minimum clearance= PUB;

minimum sensitivity label= PUB;

minimum protect as classification= PUB;
```

# **Specifying the Local Definitions**

SecCompany sets the default user labels, and customizes column headings and colors in the LOCAL DEFINITIONS section.

## **Specifying the Default User Labels**

SecCompany enables all users to access the PUBLIC label.

```
EXAMPLE 6-10 SecCompany Default User Labels
```

```
Default User Sensitivity Label= PUB;
Default User Clearance= PUB;
```

## **Specifying the Color Names**

The security administrator used the worksheet in Table 6-8 to complete the Color Names section.

```
EXAMPLE 6-11 SecCompany COLOR NAMES Section
```

```
COLOR NAMES:

label= Admin Low; color= #BDBDBD;
```

```
label= PUBLIC;
                    color= areen:
label= INTERNAL_USE_ONLY; color= yellow;
label= NEED TO_KNOW; color= blue;
label= NEED TO KNOW EMGT; color= #7FA9EB;
label= NEED TO KNOW SALES; color= #87CEFF;
label= NEED TO KNOW FIN; color= #00BFFF;
label= NEED_TO_KNOW LEGAL; color= #7885D0;
label= NEED_TO_KNOW MKTG; color= #7A67CD;
label= NEED TO KNOW HR; color= #7F7FFF;
label= NEED TO KNOW ENG; color= #007FFF;
label= NEED TO KNOW MFG; color= #0000BF;
label= NEED TO KNOW P TEAM; color= #9E7FFF;
label= NEED TO KNOW SYSADM; color= #5B85D0;
label= NEED_TO_KNOW ALL; color= #4D658D;
label= REGISTERED; color= red;
label= Admin High;
                       color= #636363:
* End of local site definitions
```

## **Configuring Users and Printers for Labels**

The security administrator has completed the label\_encodings file. However, apart from the label\_encodings file, labeling decisions at SecCompany need to be enforced on users and on printers.

For every user, the security administrator needs to specify the following:

The appropriate clearance

The default, PUBLIC, is too low for employees, but is required to prevent non-employees from accessing company files. For assistance, see "Planning the Clearances in a Worksheet" on page 92.

■ The appropriate minimum label

The default, PUBLIC, is not a company label. Company files start at the INTERNAL\_USE\_ONLY label. For assistance, see "Planning the Minimum Labels in an Accreditation Range" on page 95.

The security administrator can enable users to bypass certain Trusted Extensions print security features by assigning authorizations to the users.

For more information, see "Managing Users and Rights" in "Trusted Extensions Configuration and Administration".

For every printer, the security administrator can specify a label range. For printer configuration procedures, see "Configuring Labeled Printing" in "Trusted Extensions Configuration and Administration".

# Customized Encodings File for SecCompany

This appendix contains the label\_encodings file that was customized for SecCompany, Inc. in Chapter 6, "Example of Planning an Organization's Encodings File". This appendix also contains a sample of the debugging steps that the security administrator performed to create a syntactically correct file. Sample output from the chk\_encodings -a command is provided.

- "SecCompany's label encodings File" on page 105
- "SecCompany's Verification of the label encodings File" on page 109

## SecCompany's label\_encodings File

**Note -** This file is similar to the label\_encodings.example file that is delivered by Trusted Extensions.

At SecCompany, PUBLIC is the sensitivity label for communications across the Internet. INTERNAL USE ONLY is the sensitivity label for communications within the company.

The ALL\_DEPARTMENTS compartment word gets turned on when all defined compartment bits are on. This compartment word works as a toggle in a label builder.

```
* ident "@(#)label_encodings.seccompany %I% %E%"

* Copyright 2010 SecCompany, Inc. All rights reserved.

* Use is subject to license terms.

* 

* These confidential labels are required by SecCompany's

* legal and information protection departments.

* Department names can be used for controlling

* access to information across department boundaries.

* These labels are used for mandatory access control

* checks based on user clearance labels and labels and

* sensitivity labels on files and directories.
```

```
VERSION= SecCompany, Inc. Example Version - 2.2 10/10/20
CLASSIFICATIONS:
name= PUBLIC; sname= PUB; value= 1;
name= INTERNAL_USE_ONLY; sname= IUO; aname= IUO; value= 4;
name= NEED_TO_KNOW; sname= NTK; aname= NTK; value= 5;
name= REGISTERED; sname= REG; aname= REG; value= 6;
INFORMATION LABELS:
WORDS:
name= ALL_DEPARTMENTS; sname= ALL; compartments= 11-20; minclass= NEED_TO_KNOW;
name= EXECUTIVE MANAGEMENT_GROUP; sname= EMGT; compartments= 11;minclass= NEED_TO_KNOW;
name= SALES; sname= SALES; compartments= 12; minclass= NEED_TO_KNOW;
name= FINANCE; sname= FIN; compartments= 13; minclass= NEED_TO_KNOW;
name= LEGAL; sname= LEGAL; compartments= 14; minclass= NEED TO KNOW;
name= MARKETING; sname= MKTG; compartments= 15 20; minclass= NEED TO KNOW;
name= HUMAN_RESOURCES; sname= HR; compartments= 16; minclass= NEED_TO_KNOW;
name= ENGINEERING; sname= ENG; compartments= 17 20; minclass= NEED TO KNOW;
name= MANUFACTURING; sname= MFG; compartments= 18; minclass= NEED_TO_KNOW;
name= SYSTEM ADMINISTRATION; sname= SYSADM; compartments= 19; minclass= NEED TO KNOW;
name= PROJECT_TEAM; sname= P_TEAM; compartments= 20; minclass= NEED_TO_KNOW;
REQUIRED COMBINATIONS:
COMBINATION CONSTRAINTS:
SENSITIVITY LABELS:
WORDS:
name= ALL_DEPARTMENTS; sname= ALL; compartments= 11-20; minclass= NEED_TO_KNOW;
name= EXECUTIVE MANAGEMENT GROUP; sname= EMGT; compartments= 11;minclass= NEED TO KNOW;
name= SALES; sname= SALES; compartments= 12; minclass= NEED_TO_KNOW;
name= FINANCE; sname= FIN; compartments= 13; minclass= NEED TO KNOW;
name= LEGAL; sname= LEGAL; compartments= 14; minclass= NEED TO KNOW;
name= MARKETING; sname= MKTG; compartments= 15 20; minclass= NEED TO KNOW;
name= HUMAN RESOURCES; sname= HR; compartments= 16; minclass= NEED TO KNOW;
name= ENGINEERING; sname= ENG; compartments= 17 20; minclass= NEED_TO_KNOW;
name= MANUFACTURING; sname= MFG; compartments= 18; minclass= NEED_TO_KNOW;
name= SYSTEM ADMINISTRATION; sname= SYSADM; compartments= 19; minclass= NEED TO KNOW;
name= PROJECT_TEAM; sname= P_TEAM; compartments= 20; minclass= NEED_TO_KNOW;
REQUIRED COMBINATIONS:
COMBINATION CONSTRAINTS:
CLEARANCES:
WORDS:
name= ALL DEPARTMENTS; sname= ALL; compartments= 11-20; minclass= NEED TO KNOW;
name= EXECUTIVE_MANAGEMENT_GROUP; sname= EMGT; compartments= 11;minclass= NEED_TO_KNOW;
```

```
name= SALES; sname= SALES; compartments= 12; minclass= NEED_TO_KNOW;
name= FINANCE; sname= FIN; compartments= 13; minclass= NEED TO KNOW;
name= LEGAL; sname= LEGAL; compartments= 14; minclass= NEED_TO_KNOW;
name= MARKETING; sname= MKTG; compartments= 15 20; minclass= NEED_TO_KNOW;
name= HUMAN RESOURCES; sname= HR; compartments= 16; minclass= NEED TO KNOW;
name= ENGINEERING; sname= ENG; compartments= 17 20; minclass= NEED TO KNOW;
name= MANUFACTURING; sname= MFG; compartments= 18; minclass= NEED TO KNOW;
name= SYSTEM_ADMINISTRATION; sname= SYSADM; compartments= 19; minclass= NEED_TO_KNOW;
name= PROJECT_TEAM; sname= P_TEAM; compartments= 20; minclass= NEED_TO_KNOW;
REQUIRED COMBINATIONS:
COMBINATION CONSTRAINTS:
CHANNELS:
WORDS:
name= DISTRIBUTE_ONLY_TO; prefix;
name= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED); suffix;
name= ALL DEPARTMENTS; prefix= DISTRIBUTE ONLY TO; compartments= 11-20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= EXECUTIVE MANAGEMENT GROUP; prefix= DISTRIBUTE ONLY TO; compartments= 11;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= SALES; prefix= DISTRIBUTE ONLY TO; compartments= 12;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= FINANCE; prefix= DISTRIBUTE_ONLY_TO; compartments= 13;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= LEGAL; prefix= DISTRIBUTE ONLY TO; compartments= 14;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= MARKETING; prefix= DISTRIBUTE ONLY TO; compartments= 15 20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= HUMAN_RESOURCES; prefix= DISTRIBUTE_ONLY_TO; compartments= 16;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= ENGINEERING; prefix= DISTRIBUTE_ONLY_TO; compartments= 17 20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= MANUFACTURING; prefix= DISTRIBUTE ONLY TO; compartments= 18;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= SYSTEM_ADMINISTRATION; prefix= DISTRIBUTE_ONLY_TO; compartments= 19;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
name= PROJECT TEAM; prefix= DISTRIBUTE ONLY TO; compartments= 20;
suffix= EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED);
PRINTER BANNERS:
WORDS:
name= SECCOMPANY CONFIDENTIAL:;
                                      prefix:
name= (NON-DISCLOSURE AGREEMENT REQUIRED); suffix;
name= ALL DEPARTMENTS; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 11-20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= EXECUTIVE MANAGEMENT_GROUP; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 11; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= SALES; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 12; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= FINANCE; prefix= SECCOMPANY CONFIDENTIAL:;
```

```
compartments= 13; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= LEGAL; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 14 20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= MARKETING; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 15; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= HUMAN_RESOURCES; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 16; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= ENGINEERING; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 17 20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= MANUFACTURING; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 18; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= SYSTEM_ADMINISTRATION; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 19; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
name= PROJECT_TEAM; prefix= SECCOMPANY CONFIDENTIAL:;
compartments= 20; suffix=(NON-DISCLOSURE AGREEMENT REQUIRED);
ACCREDITATION RANGE:
classification= PUBLIC; only valid compartment combinations:
classification= INTERNAL USE ONLY; only valid compartment combinations:
IUO
classification= NEED_TO_KNOW; all compartment combinations valid;
classification= REGISTERED; only valid compartment combinations:
RFG
minimum clearance= PUB;
minimum sensitivity label= PUB;
minimum protect as classification= PUB;
* Local site definitions and locally configurable options.
LOCAL DEFINITIONS:
Classification Name= Classification:
Compartments Name= Departments;
Default User Sensitivity Label= PUB;
Default User Clearance= PUB;
COLOR NAMES:
label= Admin Low;
                       color= #bdbdbd:
label= PUBLIC;
                color= green;
label= INTERNAL_USE_ONLY; color= yellow;
label= NEED TO KNOW; color= blue;
label= NEED_TO_KNOW EMGT; color= #7FA9EB;
label= NEED_TO_KNOW SALES; color= #87CEFF;
label= NEED_TO_KNOW FIN; color= #00BFFF;
label= NEED_TO_KNOW LEGAL; color= #7885D0;
label= NEED_TO_KNOW MKTG; color= #7A67CD;
label= NEED_TO_KNOW HR; color= #7F7FFF;
```

```
label= NEED_TO_KNOW ENG; color= #007FFF;
label= NEED_TO_KNOW MFG; color= #0000BF;
label= NEED_TO_KNOW P_TEAM; color= #9E7FFF;
label= NEED_TO_KNOW SYSADM; color= #5B85D0;
label= NEED_TO_KNOW ALL; color= #4D658D;
label= REGISTERED; color= red;

label= Admin_High; color= #636363;

*
* End of local site definitions
*
```

## SecCompany's Verification of the label\_encodings File

After the chk\_encodings -a command several times, the security administrator corrected the syntax of the label\_encodings file. The following corrections provide a sample:

```
Label encodings conversion error:

In PRINTER BANNERS WORDS, word "ALL_DEPARTMENTS": SUFFIX "(NON-DISCLOSURE AGREEMENT REQUIRED)" not found.
```

**Description:** The final parenthesis after REQUIRED in the ALL\_DEPARTMENTS entry was missing. The security administrator typed the parenthesis.

```
Label encodings conversion error at line 168:
In ACCREDITATION RANGE, classification "INTERNAL_USE_ONLY": SENSITIVITY LABEL
"INTERNAL USE ONLY" not in canonical form. Is IUO what was intended?
```

**Description:** The security administrator replaced INTERNAL USE ONLY with IUO at line 168.

Label encodings conversion error at line 172:

In ACCREDITATION RANGE, classification "NEED\_TO\_KNOW": No sensitivity labels allowed after ALL COMPARTMENT COMBINATIONS VALID.

**Description:** The security administrator removed NEED\_TO\_KNOW at line 172.

"DEFAULT USER SENSITIVITY LABEL= PUBLIC" is not in canonical form. Is PUB what is intended?

Description: The security administrator replaced PUBLIC with PUB.

Label encodings conversion error at line 206: Invalid color label "NEED\_TO\_KNOW EMG".

**Description**: The security administrator replaced EMG with EMGT.

The following is an excerpt from the successful execution of the chk\_encodings -a command.

No errors found in label\_encodings.seccompany. ---> VERSION = SECCOMPANY, INC. EXAMPLE VERSION - 2.2 10/10/20 <------> CLASSIFICATIONS <---Classification 1: PUBLIC (PUB) Initial Compartment bits: NONE Initial Markings bits: NONE Classification 4: INTERNAL\_USE\_ONLY (IUO) / IUO Initial Compartment bits: NONE Initial Markings bits: NONE Classification 5: NEED\_TO\_KNOW (NTK) / NTK Initial Compartment bits: NONE Initial Markings bits: NONE Classification 6: REGISTERED (REG) / REG Initial Compartment bits: NONE Initial Markings bits: NONE ---> COMPARTMENTS AND MARKINGS USAGE ANALYSIS <---Normal compartment bits defined: 11-20 Regular inverse compartment bits defined: NONE Compartment bits reserved as 1 but not defined: NONE Normal marking bits defined: NONE Regular inverse marking bits defined: NONE Marking bits reserved as 1 but not defined: NONE ---> INFORMATION LABEL WORDS <------> SENSITIVITY LABEL WORDS <---Word: ALL\_DEPARTMENTS (ALL) Valid classification range: NTK -> REG Type: Normal Words hierarchically above: NONE Words hierarchically below: EXECUTIVE\_MANAGEMENT\_GROUP (EMGT) SALES (SALES) FINANCE (FIN) LEGAL (LEGAL) MARKETING (MKTG) HUMAN\_RESOURCES (HR) ENGINEERING (ENG) MANUFACTURING (MFG) SYSTEM\_ADMINISTRATION (SYSADM) PROJECT\_TEAM (P\_TEAM) Word: EXECUTIVE MANAGEMENT GROUP (EMGT) Valid classification range: NTK -> REG

Words hierarchically above: ALL DEPARTMENTS (ALL)

Type: Normal

```
Words hierarchically below: NONE
Word: SALES (SALES)
Valid classification range: NTK -> REG
Type: Normal
Words hierarchically above:
ALL DEPARTMENTS (ALL)
Words hierarchically below: NONE
Word: MARKETING (MKTG)
Valid classification range: NTK -> REG
Type: Normal
Words hierarchically above:
ALL_DEPARTMENTS (ALL)
Words hierarchically below:
PROJECT_TEAM (P_TEAM)
Word: PROJECT_TEAM (P_TEAM)
Valid classification range: NTK -> REG
Type: Normal
Words hierarchically above:
ALL DEPARTMENTS (ALL)
MARKETING (MKTG)
ENGINEERING (ENG)
Words hierarchically below: NONE
---> CLEARANCE WORDS <---
Word: ALL_DEPARTMENTS (ALL)
Valid classification range: NTK -> REG
Type: Normal
Words hierarchically above: NONE
Words hierarchically below:
EXECUTIVE_MANAGEMENT_GROUP (EMGT)
SALES (SALES)
FINANCE (FIN)
LEGAL (LEGAL)
MARKETING (MKTG)
HUMAN RESOURCES (HR)
ENGINEERING (ENG)
MANUFACTURING (MFG)
SYSTEM_ADMINISTRATION (SYSADM)
PROJECT_TEAM (P_TEAM)
Word: EXECUTIVE_MANAGEMENT_GROUP (EMGT)
Valid classification range: NTK -> REG
Type: Normal
Words hierarchically above:
ALL DEPARTMENTS (ALL)
Words hierarchically below: NONE
Word: MARKETING (MKTG)
Valid classification range: NTK -> REG
Type: Normal
```

Words hierarchically above:

```
ALL DEPARTMENTS (ALL)
Words hierarchically below:
PROJECT_TEAM (P_TEAM)
Word: PROJECT TEAM (P TEAM)
Valid classification range: NTK -> REG
Type: Normal
Words hierarchically above:
ALL DEPARTMENTS (ALL)
MARKETING (MKTG)
ENGINEERING (ENG)
Words hierarchically below: NONE
---> CHANNEL WORDS <---
Prefix Word: DISTRIBUTE ONLY TO
Suffix Word: EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
Word: DISTRIBUTE ONLY TO ALL DEPARTMENTS EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
Valid classification range: PUB -> REG
Type: Normal
Words hierarchically above: NONE
Words hierarchically below:
DISTRIBUTE_ONLY_TO EXECUTIVE_MANAGEMENT_GROUP EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE ONLY TO SALES EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE_ONLY_TO FINANCE EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE ONLY TO LEGAL EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE ONLY TO MARKETING EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE_ONLY_TO HUMAN_RESOURCES EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE ONLY TO ENGINEERING EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE_ONLY_TO MANUFACTURING EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE_ONLY_TO SYSTEM_ADMINISTRATION EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE_ONLY_TO PROJECT_TEAM EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
Word: DISTRIBUTE ONLY TO EXECUTIVE MANAGEMENT GROUP EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
Valid classification range: PUB -> REG
Type: Normal
Words hierarchically above:
DISTRIBUTE ONLY TO ALL DEPARTMENTS EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
Words hierarchically below: NONE
Word: DISTRIBUTE_ONLY_TO PROJECT_TEAM EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
Valid classification range: PUB -> REG
Type: Normal
Words hierarchically above:
DISTRIBUTE ONLY TO ALL DEPARTMENTS EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE ONLY TO MARKETING EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
DISTRIBUTE ONLY TO ENGINEERING EMPLOYEES (NON-DISCLOSURE AGREEMENT REQUIRED)
Words hierarchically below: NONE
---> PRINTER BANNER WORDS <---
Prefix Word: SECCOMPANY CONFIDENTIAL:
Suffix Word: (NON-DISCLOSURE AGREEMENT REQUIRED)
```

```
Word: SECCOMPANY CONFIDENTIAL: ALL DEPARTMENTS (NON-DISCLOSURE AGREEMENT REQUIRED)
Valid classification range: PUB -> REG
Type: Normal
Words hierarchically above: NONE
Words hierarchically below:
SECCOMPANY CONFIDENTIAL: EXECUTIVE MANAGEMENT GROUP (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: SALES (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: FINANCE (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: LEGAL (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: MARKETING (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: HUMAN_RESOURCES (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: ENGINEERING (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: MANUFACTURING (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: SYSTEM_ADMINISTRATION (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: PROJECT TEAM (NON-DISCLOSURE AGREEMENT REQUIRED)
Word: SECCOMPANY CONFIDENTIAL: EXECUTIVE MANAGEMENT GROUP (NON-DISCLOSURE AGREEMENT REQUIRED)
Valid classification range: PUB -> REG
Type: Normal
Words hierarchically above:
SECCOMPANY CONFIDENTIAL: ALL DEPARTMENTS (NON-DISCLOSURE AGREEMENT REQUIRED)
Words hierarchically below: NONE
Word: SECCOMPANY CONFIDENTIAL: PROJECT TEAM (NON-DISCLOSURE AGREEMENT REQUIRED)
Valid classification range: PUB -> REG
Type: Normal
Words hierarchically above:
SECCOMPANY CONFIDENTIAL: ALL DEPARTMENTS (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: LEGAL (NON-DISCLOSURE AGREEMENT REQUIRED)
SECCOMPANY CONFIDENTIAL: ENGINEERING (NON-DISCLOSURE AGREEMENT REQUIRED)
Words hierarchically below: NONE
---> LOCAL DEFINITIONS <---
Classification Field Name is "CLASSIFICATION"
Compartments Field Name is "DEPARTMENTS"
Default User Clearance = "PUB"
Default User Sensitivity Label = "PUB"
---> SENSITIVITY LABEL to COLOR MAPPING <---
ADMIN LOW = "#BDBDBD"
PUB = "GREEN"
IUO = "YELLOW"
NTK = "BLUE"
NTK EMGT = "#7FA9EB"
NTK SALES = "#87CEFF"
NTK FIN = "#00BFFF"
NTK LEGAL = "#7885D0"
NTK MKTG = "#7A67CD"
NTK HR = "#7F7FFF"
NTK ENG = "#007FFF"
NTK MFG = "#0000BF"
NTK P TEAM = "#9E7FFF"
NTK SYSADM = "#5B85D0"
```

NTK ALL = "#4D658D" REG = "RED" ADMIN\_HIGH = "#636363"

## Index

Numbers and Symbols /etc/security/tsol directory, 35 /usr/lib/cups/filter/tsol_separator.ps file, 58 /usr/share/X11/rgb.txt file, 72	aname= classification keyword, 42 authorizations Downgrade File Label, 28 Print Without Labels, 89 Upgrade File Label, 28
A	В
access control	banner pages
example, 16 label range, by, 15	appearance, 56
access decisions	computing the classification for, 59
using labels, 15	customizing, 58
access-related words	internationalizing, 58
definitions, 58	labeling, 56
accounts	body pages
label range, 22, 22	appearance, 55
session range, 24	labeling, 55
ACCREDITATION RANGE keyword, 40	
ACCREDITATION RANGE section	_
description, 40	С
example, 101	caveats See handling instructions
accreditation ranges	channels
example, 101	example, 99
overview, 19	prefixes and suffixes, 62
system, 20	specifying handling instructions, 67
user, 21	strings on banner and trailer pages, 61, 65 worksheet example, 94
ADMIN_HIGH label	CHANNELS keyword, 40
classification value, 41	CHANNELS section
illustrating numerical value, 17 ADMIN_LOW label	description, 40
classification value, 41	example, 99
illustrating numerical value, 17	chk encodings -a command, 47
administrative labels	CIPSO labels
configuring appearance, 27	illustration of, 17
specifying name visibility, 27	numerical values, 17
system accreditation range, in, 20	troubleshooting, 54

warning in label_encodings file, 42 classifications	Common IP Security Option (CIPSO) <i>See</i> CIPSO labels
adding to existing label encodings file, 49	comparing
analyzing, example of, 82	GFI files, 37
dominance, 41	label encodings files, 35
keywords, 41	labels, 16
maximum number, 17, 41	compartments
numerical values, 41	default and inverse words, 43
planning, example of, 87	hierarchical, 45
renaming, 49	numerical values, 44
rules for printing, 59	planning, example of, 87
specifying colors, 75	representing areas of interest, 44
syntax, 41	words, 44
CLASSIFICATIONS section	words, example of, 44
assigning initial compartments, 43	worksheet example, 91
description, 40	CONFIDENTIAL: INTERNAL USE ONLY label
example, 97	requirements, 82
keywords, 41	CONFIDENTIAL: NEED TO KNOW label
words, 43	groups that use, 83
clearances	requirements, 82
account label range, 22	CONFIDENTIAL: REGISTERED label
example, 99	adding DAC protections, 89
type of label, 14	requirements, 83
worksheet example, 92	Configuring Security Text on Print Jobs (Task
CLEARANCES keyword, 40	Map), 66
CLEARANCES section	creating
description, 40	label encodings file, 47
example, 99	customizing
COLOR NAMES section	banner pages, 58
color planner, 96	color assignments to labels, 74, 96
description, 38, 70	handling instructions by using channels, 67
example, 102	handling instructions in printed output, 66
colors	label appearance, 27
assigning, 74	security text on printer output, 56
finding color values, 75	
rules of use for labels, 71	
specifying for labels, 70	_
values, 72	D
worksheet example, 96	debugging
combination constraints	label_encodings file, 47,54
definition, 19	label_encodings file example, 109
example, 20, 21, 23, 101	default words
COMBINATION CONSTRAINTS keyword, 40	definition, 43
combination rules See combination constraints	specifying, 50
	defaults
	user labels. 102

Defense Intelligence Agency (DIA) label_encodings reference, 34	label_encodings verification log, 109 label_encodings versions, 35
demonstration files label_encodings file for SecCompany, 105 label_encodings samples, 35 label_encodings verification log, 109 label_encodings.example file, 43 label_encodings.multi file, 42 dominance, 18	G GFI files comparing, 37 in /etc/security/tsol directory, 35
Downgrade File Label authorization, 28	Н
	handling instructions printer banners, 28
E	specifying by using channels, 67
encodings file See label_encodings file examples	specifying in PRINTER BANNERS, 66
account label range, 22 ACCREDITATION RANGE section, 101	
CHANNELS section, 99	1
chk_encodings -a log, 109	INFORMATION LABELS keyword, 40
CLASSIFICATIONS section, 97	INFORMATION LABELS section
CLEARANCES section, 99	description, 40 example, 98
COLOR NAMES section, 102	initial compartments
commercial label_encodings file, 77	assigning bits to words, 43
debugging label_encodings file, 109	definition, 43
default user clearance, 102	initial compartments= classification keyword, 42
default user sensitivity label, 102	internationalizing
label_encodings file for SecCompany, 105	banner and trailer pages for printed output, 56, 58
label_encodings verification log, 109	inverse words
labels planning, 77	definition, 43 specifying, 50
LOCAL DEFINITIONS section, 102	specifying, 50
MAC decision, 16 PRINTER BANNERS section, 100	
SENSITIVITY LABELS section, 98	J
SENSITIVITI LABLES SECTION, 50	job-sheets=labeled option
	banner and trailer pages, 56 body pages, 55
F	
files	
/usr/lib/cups/filter/tsol_separator.ps, 58	K
/usr/share/man/man5/X11.5, 70	keywords for classifications, 41
/usr/share/X11/rgb.txt, 72	
/usr/X11/share/man/man5/X11.5, 70 label encodings, 35	L
label_encodings SecCompany example, 105	label encodings file
	· · · = -·· - · · · · · · · · · · · · ·

access-related words, 58	label encodings.single file, 35
ACCREDITATION RANGE section, 101	labels
changing classification names, 49	access decisions, 15
CHANNELS section, 61, 65, 99	account label range, 22
classification keywords, 41	accreditation ranges, 19
classifications	analyzing, example of, 82
example, 42	arranging relationships, 32
name syntax, 41	authorizations for changing, 28
CLASSIFICATIONS section, 41, 97	available during sessions, 26
CLEARANCES section, 99	banner and trailer pages, 56
color encoding example, 96	CIPSO, 17, 44
commercial example, 77	clearance, 14
compartment words, 44	color planning example, 96
creating	commercial example, 77
example of, 86	comparing, 16
initial, 47	components, 17
single-label, 52	configuring on printer output, 28
debugging, 54, 109	defaults
default versions, 35	user clearance, 102
description, 34	user sensitivity label, 102
INFORMATION LABELS section, 98	dominance, 18
installed with Trusted Extensions, 35	example, 98
list of, 35	files supplied by Oracle Solaris, 35
LOCAL DEFINITIONS section, 69, 102	installation example, 97
Oracle Solaris extensions to GFI encodings, 38	internal representation, 28
Oracle Solaris version of GFI multilabel file, 37	job-sheets=labeled option, 55, 56
Oracle Solaris version of GFI single-label file, 37	length of components, 44
planning, 29	limit, 19
PRINTER BANNERS section, 100	lower bound, 19
Protect As classification, 58	mandatory access and printing considerations, 78
REQUIRED COMBINATIONS section, 46	minimum "Protect As" classification, 68
SecCompany example, 105	planning, 29, 30
SENSITIVITY LABELS section, 98	printed body pages, 55
specifying default and inverse words, 50	ranges, 15, 19
specifying label colors, 70, 75	requirements for CONFIDENTIAL:
syntax, 39	INTERNAL_USE_ONLY, 82
U.S. government versions, 37	requirements for CONFIDENTIAL:
VERSION section, 97	NEED_TO_KNOW, 82
word order requirements, 40	requirements for CONFIDENTIAL: REGISTERED, 83
label encodings file, 35	restricting access by, 15, 15
label encodings.example file, 35	session range, 24
label encodings.gfi.multi file, 35	sources for label_encodings files, 34
label encodings.gfi.single file, 35	specifying colors, 75
label encodings file, 35	system accreditation range, 20
	textual strings, 28
label encodings.multifile, 35	

translating between representations, 28 translating into another language on banner and trailer pages, 58	O Oracle extensions <i>See</i> LOCAL DEFINITIONS section
types, 14	
upper bound, 19	
user accreditation range, 21	P
users	planners See worksheets
default clearance, 102	planning labels
default sensitivity label, 102	colors, 96
valid, 19	commercial example, 77
visible in workspaces, 27	initial, 29
well-formed, 19	label_encodings file, 30
worksheet example, 90	overview, 29
LOCAL DEFINITIONS keyword, 40	steps for, 30
LOCAL DEFINITIONS section	supporting procedures, 89
adding to GFI encodings file, 38	unlabeled printer output, 89
description, 40, 69	Planning Labels (Task Map), 29
example, 102	prefixes
localizing <i>See</i> internationalizing	in channels, 63
logs label encodings verification log, 109	Print Without Labels authorization, 89
tabet_encodings verification log, 109	printer banners
	appearance, 56 example, 100
	specifying handling instructions, 66
M	worksheet example, 94
Managing Label Encodings (Task Map), 46	PRINTER BANNERS keyword, 40
mandatory access control (MAC)	PRINTER BANNERS section
definition, 13	description, 40
used in access decisions, 16	example, 100
minimum "Protect As" classification	printer output
example, 58, 59	banner text, 59
printed output, 68	changing printed labels, 28
minimum clearance	channels, 63
example, 101	configuring labels and text, 56
minimum labels	further label configuration, 103
account label range, 22	planning, example of, 88
commercial example, 95	prefixes and suffixes, 63
minimum sensitivity label	rules for handling, 90
definition, 22	setting minimum "Protect As" classification, 68
example, 50, 53, 101	printing See printer output
Modifying Oracle Solaris Extensions (Task Map), 73	privileges
	changing labels, 28
	Protect As classification
N	example, 59, 101
N	overview, 58
name= classification keyword, 42	setting minimum for printed output, 68

R	computing the classification for, 59
required combinations See combination constraints	example, 57
REQUIRED COMBINATIONS keyword, 40, 46	internationalizing, 58
rgb.txt file, 72	labeling, 56, 58
	translating, 13
	See also internationalizing
	between label representations, 28
S	troubleshooting
security policy	label_encodings file, 54
definition, 13	tsol_separator.ps file, 58
identifying site requirements, 77	types of labels, 14
protecting information, 78	
setting minimum "Protect As", 68	
site-specific, 30	U
sensitivity	Upgrade File Label authorization, 28
type of label, 14	user accreditation range, 21
sensitivity labels <i>See</i> labels	users
SENSITIVITY LABELS keyword, 40	authorizations for changing labels, 28
SENSITIVITY LABELS section	further label configuration, 103
description, 40	printing authorizations, 89
example, 98	workspace access, 88
sessions	•
duration of label restrictions chosen at login, 25	
session range definition, 24	V
single-label	•
label_encodings file, 52	value= classification keyword, 42
sname= classification keyword, 42	values
strict dominance, 19	of administrative classifications, 41 of classifications, 41
suffixes	of compartments, 44
in channels, 63	verifying
syntax of label_encodings file, 39	, ,
sys_trans_label privilege, 28	label_encodings file, 47
system accreditation range, 20	label_encodings file example, 109
system security policy, 13	VERSION section
	description, 39
	example, 97
Т	VERSION= keyword, 39
task maps	
Configuring Security Text on Print Jobs (Task	
Map), 66	W
Managing Label Encodings (Task Map), 46	word order requirements
Modifying Oracle Solaris Extensions (Task	label encodings file, 40
Map), 73	words
Planning Labels (Task Map), 29	planning, example of, 88
trailer pages	WORDS keyword, 40

```
workgroups
represented by label compartments, 44
worksheets
channels planner, 94
classifications planner, 90
clearances planner, 92
color planner, 96
compartments planner, 91
printer banners planner, 94
workspaces
access by users, 26, 88
labeled, 27
```