

# Oracle® Communications Network Integrity

## Optical FTP Discovery and UIM Integration Cartridge Guide



Release 7.4

F91601-01

July 2024

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Copyright © 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## 1 Overview

---

About Optical FTP Discovery Cartridge	1-1
About Cartridge Dependencies	1-2
Run-Time Dependencies	1-2
Design-Time Dependencies	1-2
Opening the Cartridge Files in Design Studio	1-2
Building and Deploying the Cartridge	1-3

## 2 About the Cartridge Components

---

Discover optical Devices FTP	2-1
Optical File Transfer Collector	2-1
Scan Parameter Group	2-1
Optical File Transfer Parser	2-2
Scan Parameter Group	2-3
Optical File Transfer Device Modeler	2-4
Detect Optical Device UIM Discrepancies	2-4
Resolve Optical Device in UIM	2-4

## 3 Using the Cartridge

---

Creating a Discover Optical Devices FTP Scan	3-1
Populating UIM with Discovered Data for Optical Network Vendor	3-1

## 4 About Cartridge Modeling

---

Cartridge Representation	4-1
Hierarchy Mapping	4-2
Oracle Communications Information Model Information	4-2
Specifications	4-2
Physical Device	4-2
Equipment	4-3
Equipment Holder	4-3
Physical Port	4-4

Logical Device	4-5
Device Interface	4-5
Specification Cardinality	4-6
Equipment Visual Specifications	4-6
Field Mapping	4-6
Logical Mapping	4-6
Logical Device Mapping	4-7
Media Interface Mapping	4-7
Device Interface Configuration Item Mapping	4-8
Physical Mapping	4-9
Physical Device Mapping	4-9
Equipment Shelf Mapping	4-9
Equipment Holder Mapping	4-10
Equipment Card Mapping	4-10
Physical Port Mapping	4-11
About Design Studio Construction	4-11
Logical Specification Lineage	4-12
Physical Specification Lineage	4-12
Discovery Action	4-13
Discovery Processors	4-13
Discrepancy Detection Action	4-13
Discrepancy Resolution Action	4-14

## 5 About Optical FTP Discovery Input File Structure

---

NE Report File	5-1
Sub_Rack Report File	5-2
Board Report File	5-2
Physical_Location File	5-3
Interface_Resource_Report File	5-3

## 6 About Design Studio Extension

---

Adding a New Vendor	6-1
Adding a New Device Type under Existing Vendors	6-1

# Preface

This guide describes the functionality and design of the Oracle Communications Optical FTP Discovery and UIM Integration cartridge.

## Audience

This guide is intended for Network Integrity administrators who want to understand the design and evaluate the functionality of this cartridge, and for Network Integrity developers who want either to build or to extend similar cartridges.

Developers should have a good working knowledge of FTP protocol and their associated operations, specifications, Network Integrity, UIM, and the use of Oracle Communications Design Studio for Network Integrity.

You should be familiar with the following documents included with this release:

- Oracle Communications Network Integrity Concepts
- Oracle Communications Network Integrity Developer's Guide
- Oracle Communications Network Integrity File Transfer and Parsing Guide
- Oracle Communications Network Integrity UIM Integration Cartridge Guide

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

# 1

## Overview

This chapter provides an overview of the Oracle Communications Network Integrity Optical FTP Discovery Cartridge.

This chapter contains the following sections:

- About Optical FTP Discovery Cartridge
- About Cartridge Dependencies
- Opening the Cartridge Files in Design Studio
- Building and Deploying the Cartridge

## About Optical FTP Discovery Cartridge

Optical FTP Discovery Cartridge supports modeling of Optical Network devices in DWDM domain.

Optical FTP Discovery Cartridge uses FTP protocol to discover Optical Network Devices.

The Optical FTP Discovery Cartridge provides the following:

- Read and collect data from files provided using FTP/SFTP Protocol.
- Optical Network Device logical and physical structure modeling.
- Discrepancy detection and resolution on modeled data.

This cartridge produces both logical and physical device hierarchies that represent a discovered device. The logical hierarchy includes a logical device, child interfaces, subinterfaces (collectively called interfaces), and device interface configurations. The physical hierarchy includes physical device, equipment, equipment holders, and physical ports. This cartridge creates associations between the physical and logical hierarchies. The first association is at the device level, between the physical device and the logical device, and the second association is at the interface level between physical ports and Interfaces.

The cartridge discovers the following network entities:

- NetworkElement
- Sub\_Rack (Shelf/Rack)
- Board (Card)
- Port (Generic / SFP)
- Logical Device
- Interface / Sub-Interface

This cartridge is designed for a standalone display of the model hierarchy in Network Integrity. The cartridge provides no integration with other products but may be extended. This cartridge is specifically designed for discovering Optical Network devices within the DWDM domain, and any attempt to discover other devices will result in a scan failure.

For **Optical FTP Discovery**, modeling of a device fails if it does not follow the FTP file structure properly. For more information about Optical FTP Discovery Input file structure, see *About Optical FTP Discovery Input File Structure*.

In addition to a discovery action, this cartridge provides discrepancy detection and discrepancy resolution for integration with UIM.

Discrepancy detection provides the mechanism to allow a filtered comparison of logical and physical device trees between what is discovered and what is imported from UIM.

For more information about discrepancy detection actions and processors, see *Network Integrity Developer's Guide*.

The discrepancy resolution action enables the discovered logical and physical device trees to be created and updated in UIM.

## About Cartridge Dependencies

This section provides information on dependencies that the Optical FTP Discovery cartridge has on other entities.

### Run-Time Dependencies

This cartridge requires that the **Address\_Handlers** cartridge be deployed to Network Integrity.

### Design-Time Dependencies

The Optical FTP Discovery Cartridge has the following dependencies:

- Address\_Handlers
- NetworkIntegritySDK
- ora\_ni\_uim\_device
- ora\_uim\_model
- UIM\_Integration\_Cartridge

## Opening the Cartridge Files in Design Studio

To review and extend the Optical FTP Discovery Cartridge, you must download the Oracle Communications Optical FTP Discovery Cartridge software from the Oracle software delivery web site: <https://edelivery.oracle.com>

The software contains the Optical FTP Discovery Cartridge ZIP file, which has the following structure:

- \UIM\_Cartridge\_Projects\  
• \Network\_Integrity\_Cartridge\_Projects\  
• Optical-FTP-Discovery-Cartridge-R7.iar

See *Design Studio Online Help* and *Oracle Communications Network Integrity Developer's Guide* for information about opening files in Design Studio.

# Building and Deploying the Cartridge

See *Design Studio Help* for information about building and deploying cartridges.



# 2

## About the Cartridge Components

This chapter provides information about the components of the Oracle Communications Network Integrity Optical FTP Discovery Cartridge.

The Optical FTP Discovery Cartridge contains the following actions:

- Discover optical Devices FTP
- Detect Optical Device UIM Discrepancies
- Resolve Optical Device in UIM

### Discover optical Devices FTP

The Discover optical Devices FTP action retrieves Optical Network device data files using FTP protocol and provides a physical and logical device hierarchical model. This action models the associations between the physical and logical hierarchies.

The Discover optical Devices FTP action contains the following processors run in the following order:

- Optical File Transfer Collector
- Optical File Transfer Parser
- Optical File Transfer Device Modeler

### Optical File Transfer Collector

Optical File Transfer Collector is a file transfer processor. See *Oracle Communications Network Integrity File Transfer and Parsing* guide for information on file transfer processors.

The file transfer processor outputs a single parameter. This output parameter holds a collection of file objects, each of which points to the local version of the transferred file. The collection of files is used as input to the next processor Optical File Transfer Parser.

The name of the output parameter is system-generated and based on the name of the file transfer processor. For example, the Sample File Transfer processor outputs **sampleFileTransferFileCollection**.

The type of the output parameter is always **java.util.Collection<java.io.File>**.

### Scan Parameter Group

When a cartridge is deployed with scan parameter groups that are generated from a file transfer processor, they appear in the Network Integrity UI as scan parameters. File Transfer Processor Scan Parameter Group is added as a scan parameter to Optical File Transfer Collector.

Table 2-1 Characteristics in the File Transfer Processor Scan Parameter Group

Parameter	Default Value	Mandatory	Description
Transfer Type	FTP	Yes	Select how files should be transferred: <b>FTP</b> , <b>SFTP</b> , <b>Local</b> .
File Pattern	N/A	No	A pattern to match file names. The pattern supports wildcard characters. The supported wildcard characters are "*", "%", and "_". "*" and "%" represent a match of zero or more characters. "_" represents a match of any single character. Wildcard characters can be escaped with a backslash.
Port	N/A	No	The port used to connect to the remote server. The default is <b>21</b> for FTP and <b>22</b> for SFTP.
User Name	N/A	No	The user name to connect to the remote location.
Password	N/A	No	The password to connect to the remote location.
Session Timeout	60	No	The amount of time in seconds before an idle connection is timed out. The valid range is from <b>1</b> to <b>3600</b> .
Source File Management	Rename	No	Select the action to take on source files when the file transfer is complete. Options are: <b>Delete</b> , <b>Rename</b> , <b>Nothing</b> .
Rename Suffix	Processed	No	The suffix to add to the source file if the source file management characteristic has a value of <b>Rename</b> .

## Optical File Transfer Parser

Optical File Transfer Parser is a discovery processor. This processor accepts the list of files from Optical File Transfer Collector processor as an input and is used to parse files and collect required data.

The properties file available in the cartridge **Optical\_FTP\_Discovery\_Cartridge/src/opticalfiles.properties** contains key value pairs of file names that should be considered.

The sample **opticalfiles.properties** is as follows:

Key **Board\_REPORT\_File\_Name** contains value **Board\_Report\_**. This specifies that the files with names starting with "**Board\_Report\_**" will be considered for discovery and modeling Boards. The same rule applies to all other types of files.

Optical File Transfer Parser processor generates collection of neObjects that contains device details.

```
NE_REPORT_FILE_NAME=NE_Report
SUBRACK_REPORT_FILE_NAME=Subrack_Report_
BOARD_REPORT_FILE_NAME=Board_Report_
PORT_REPORT_FILE_NAME=Port_Report_
PHYSICAL_LOCATION_FILE_NAME=Physical_Location
```

## Scan Parameter Group

Additional filtering of devices based on **Network Element Name** and **Network Element Type Name** can be achieved using **Optical Device Scan Parameters**. This parameter group appears in Network Integrity as a scan parameter.

**Table 2-2 Characteristics in the Optical Device Scan Parameters Group**

Parameter	Default Value	Mandatory	Description
networkElementName	N/A	No	A pattern to match <b>networkElementName</b> . By default, it supports all deviceNames
networkElementQualifier	N/A	No	Select the matching Criteria for networkElementName : <ul style="list-style-type: none"> <li>• Equals</li> <li>• Equals_Ignore_Case</li> <li>• Begins_With</li> <li>• Begins_With_Ignore_Case</li> <li>• Ends_with</li> <li>• Ends_with_Ignore_Case</li> <li>• Contains</li> <li>• Contains_Ignore_Case</li> <li>• Comma_Delimited_Names</li> <li>• Comma_Delimited_Names_Ignore_Case</li> </ul>
networkElementType	N/A	No	A pattern to match networkElementType. By default, it supports all deviceTypes

Table 2-2 (Cont.) Characteristics in the Optical Device Scan Parameters Group

Parameter	Default Value	Mandatory	Description
networkElementTypeQualifier	N/A	No	Select the matching Criteria for networkElementType : <ul style="list-style-type: none"> <li>• Equals</li> <li>• Equals_Ignore_Case</li> <li>• Begins_With</li> <li>• Begins_With_Ignore_Case</li> <li>• Ends_with</li> <li>• Ends_with_Ignore_Case</li> <li>• Contains</li> <li>• Contains_Ignore_Case</li> <li>• Comma_Delimited_Names</li> <li>• Comma_Delimited_Names_Ignore_Case</li> </ul>

## Optical File Transfer Device Modeler

Optical File Transfer Device Modeler is a discovery processor. It accepts collection of **neObject** generated by Optical File Transfer Parser as input. This processor models the collected data into physical and logical devices.

## Detect Optical Device UIM Discrepancies

The Detect Optical Device UIM Discrepancies action detects discrepancies between discovery scan results of action Discover optical Devices FTP and data imported from UIM.

This discrepancy detection action extends the Abstract Detect UIM Discrepancies action (from the UIM Integration cartridge) and inherits all its processors. For information about the inherited processors, see *Network Integrity UIM Integration Cartridge Guide*.

The Detect Optical Device UIM Discrepancies action contains the following processors run in the following order:

1. UIM Discrepancies Filter Initializer (inherited)
2. Discrepancy Detector (inherited)

## Resolve Optical Device in UIM

The Resolve Optical Device in UIM action resolves discrepancies on logical and physical hierarchies and associations between the logical and physical entities in UIM.

The discrepancy resolution action extends the Abstract Resolve in UIM action (from the UIM Integration cartridge) and inherits all its processors. For information about the inherited processors, see *Network Integrity UIM Integration Cartridge Guide*.

The Resolve Optical Device in UIM action contains the following processors run in the following order:

1. UIM Resolution Framework Initializer (inherited)

2. UIM Resolution Initializer (inherited)
3. UIM Resolution Framework Dispatcher (inherited)

# 3

## Using the Cartridge

This chapter provides instructions for using the Oracle Communications Network Integrity Optical FTP Discovery Cartridge in Network Integrity

### Creating a Discover Optical Devices FTP Scan

The Discover Optical Devices FTP scan is used to discover and model data. It discovers network information using FTP protocol and creates network entities Physical device, shelf, card, port, and interface/sub-interface.

To create a Discover optical Devices FTP scan:

1. Create a new scan.  
See the *Network Integrity Online Help* for more information.
2. On the **General** tab, do the following:
  - a. From the **Scan Action** list, select **Discover optical Devices FTP**.  
The Scan Type field displays **Discovery**.
  - b. In the **Scan Action Parameters** section, configure the scan with appropriate parameters for both **File Transfer Processor Scan** parameter and **Optical Device Scan** parameter.
3. On the **Scope** tab, specify the path to the file directory.
4. Save and run the scan.

The scan discovers and models logical and physical devices.

The scan creates device model for each logical and physical device. The physical device structure uses **GenericPhysicalDeviceSpecification** and various references defined in the Discover optical Devices FTP action. For more information, see "Model Collections".

### Populating UIM with Discovered Data for Optical Network Vendor

You can populate UIM with network data discovered by the Discover optical Devices FTP discovery action.

To populate UIM with discovered network data:

1. Create a new scan.  
See *Network Integrity Online Help* for more information.
2. On the **General** tab of the Create Scan page, perform the following:
  - a. From the **Scan Action** list, select **Discover optical Devices FTP**.  
The Scan Type field displays **Discovery**.
  - b. Select **Detect Discrepancies**.
  - c. In the Scan Action Parameters area, enter the required configurations.

3. Save the scan.
4. Run the discovery scan.  
The scan generates **Entity+** discrepancies for each of the discovered device.
5. Right-click on the discrepancies you want to populate into UIM and select **Correct** in UIM.
6. Click **Submit**.
7. Verify if UIM is populated with the discovered data.

 **Note:**

The Import Action **Import from UIM** available in UIM\_Integration\_Cartridge can be used to import data from UIM.

# 4

## About Cartridge Modeling


The Oracle Communications Network Integrity Optical FTP Discovery Cartridge models the collected data according to Oracle Communications Information Model. The collected data is modeled into the following entities:

- Equipment
- EquipmentHolder
- EquipmentEquipmentRel
- EquipmentHolderEquipmentRel
- LogicalDevice
- PhysicalDevice
- PhysicalDeviceEquipmentRel
- PhysicalPort
- DeviceInterfaceConfiguration
- DeviceInterfaceConfigurationItem

See *Oracle Communications Information Model Reference* for more information about the Information Model.

## Cartridge Representation

The following figure shows the object relationship being rendered for Optical Network Vendor Devices.

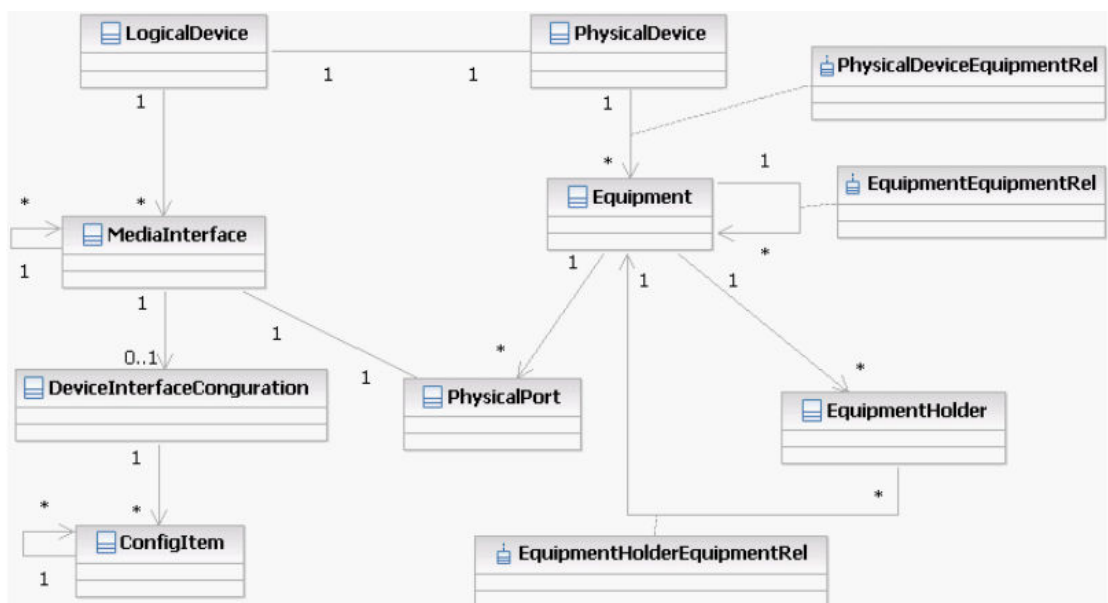



## Hierarchy Mapping

When a device is discovered, the media interface encapsulates common information about that interface. The device interface configuration captures the media type information that decorates the interface with media-specific parameters that define its behavior (that is; Generic, ATM, Frame Relay or VLAN). This cartridge supports only **Generic**.

## Oracle Communications Information Model Information

All entities (for example, physical device, logical device, media interface, and so on) are Oracle Communications Information Model 1.0-compliant for static fields. The dynamic fields (sometimes referred to as characteristics) are application specific. You can customize application-specific data with the device interface configuration mechanism.

The Optical FTP Discovery Cartridge supports the following configuration:

- Optical Generic Media

For the list of Information Model fields, see "Logical Mapping" and "Physical Mapping".

## Specifications

This section lists the specifications included in the **ora\_ni\_uim\_device** cartridge for Optical Network Vendor Devices.

You must first model inventory (UIM) specifications in an inventory cartridge using Design Studio, define the cartridge dependency such that the Network Integrity cartridge is dependent on the inventory cartridge, and then use the inventory cartridge specifications in the Network Integrity cartridge model.

Specifications shared with Oracle Communications Unified Inventory Management (UIM) are defined in the **ora\_ni\_uim\_device** cartridge. These cartridges are used to directly deploy specifications to UIM.

## Physical Device

The following table shows the list of physical device specifications.

**Table 4-1 Physical Device Specifications**

Specification	Cartridge	Intended Usage
GenericPhysicalDeviceSpecification	ora_ni_uim_device	Used to model all types of Optical Network Vendor devices.

**GenericPhysicalDeviceSpecification** is available in **ora\_ni\_uim\_device** and used to model all types of supported devices.

The following table shows the characteristics applied to the physical device specifications.

**Table 4-2 Physical Device Characteristics**

Characteristics	Field Type	Field Content
discoveredModelNumber	string	Text

**Table 4-2 (Cont.) Physical Device Characteristics**

Characteristics	Field Type	Field Content
discoveredPartNumber	string	Text
discoveredVendorName	string	Text
hardwareRev	string	Text
mgmtIpAddress	string	Text
nativeEmsName	string	Text
modelName	string	Text
owner	string	Text
softwareRev	string	Text
userLabel	string	Text

## Equipment

The following table shows the list of Equipment specifications.

**Table 4-3 Equipment Specifications**

Specification	Cartridge	Intended Usage
GenericEquipmentShelfSpecification	ora_ni_uim_device	Used to model all types of supported devices.
GenericEquipmentSpecification	ora_ni_uim_device	Used to model all types of supported devices.

**GenericEquipmentShelfSpecification** and **GenericEquipmentSpecification** are available in **ora\_ni\_uim\_device** and used to model all types of supported devices.

The following table shows the characteristics applied to the equipment specifications.

**Table 4-4 Equipment Characteristics**

Charecteristics	Field Type	Field Content
discoveredModelNumber	String	Text
discoveredPartNumber	String	Text
discoveredVendorName	String	Text
hardwareRev	String	Text
softwareRev	String	Text
modelName	String	Text
nativeEmsName	String	Text
owner	String	Text
userLabel	String	Text

## Equipment Holder

The following table shows the list of Equipment Holder specifications.

**Table 4-5 Equipment Holder Specifications**

Specification	Cartridge	Intended Usage
GenericEquipmentHolderSpecification	ora_ni_uim_device	Used to model all types of Optical Network Vendor devices.

**GenericEquipmentHolderSpecification** is available in **ora\_ni\_uim\_device** and used to model all type of supported devices.

The following table shows the characteristics applied to the equipment holder specifications.

**Table 4-6 Equipment Holder Characteristics**

Characteristics	Field Type	Field Content
modelName	String	Text
nativeEmsName	String	Text
discoveredVendorName	String	Text
owner	String	Text
userLabel	String	Text
direction	String	Text
edgePoint	String	Text
tpProtectionAssociation	String	Text

## Physical Port

The following table shows the list of Physical Port specifications.

**Table 4-7 Physical Port Specifications**

Specification	Cartridge	Intended Usage
GenericPhysicalPortSpecification	ora_ni_uim_device	Used to model all types of Optical Network Vendor devices.

**GenericPhysicalPortSpecification** is available in **ora\_ni\_uim\_device** and used to model all type of supported devices.

The following table shows the characteristics applied to the Physical Port specifications.

**Table 4-8 Physical Port Characteristics**

Characteristics	Field Type	Field Content
direction	String	Text
discoveredVendorName	String	Text
edgePoint	String	Text
nativeEmsName	String	Text
tpProtectionAssociation	String	Text
Port Type	String	Text
Port Level	String	Text

## Logical Device

The following table shows the list of Logical Device specifications.

**Table 4-9 Logical Device Specifications**

Specification	Cartridge	Intended Usage
GenericLogicalDeviceSpecification	ora_ni_uim_device	Used to model all types of Optical Network Vendor devices.

**GenericLogicalDeviceSpecification** is available in **ora\_ni\_uim\_device** and used to model all type of supported devices.

The following table shows the characteristics applied to the GenericLogicalDeviceSpecification.

**Table 4-10 Logical Device Characteristics for GenericLogicalDeviceSpecification**

Characteristics	Field Type	Field Content
mgmtIPAddress	String	Text
modelName	String	Text
nativeEmsName	String	Text
nativeEmsAdminServiceState	String	Text
nativeEmsServiceState	String	Text
owner	String	Text
sysObjectId	String	Text
userLabel	String	Text

## Device Interface

The following table shows the list of Device Interface specifications.

**Table 4-11 Device Interface Specifications**

Specification	Cartridge	Intended Usage
GenericInterfaceSpecification	ora_ni_uim_device	Used to model all types of Optical Network Vendor devices.

**GenericInterfaceSpecification** is available in **ora\_ni\_uim\_device** and used to model all type of supported devices.

The following table shows the characteristics applied to the GenericInterfaceSpecification specification.

**Table 4-12 Device Interface Characteristics for GenericInterfaceSpecification Specification**

Characteristics	Field Type	Filed Content
ifAlias	String	Text
ifName	String	Text
direction	String	N/A

**Table 4-12 (Cont.) Device Interface Characteristics for GenericInterfaceSpecification Specification**

Characteristics	Field Type	Filed Content
edgePoint	Boolean	N/A
ifPromiscuousMode	Boolean	N/A
mtuCurrent	Long	N/A
mtuSupported	Long	N/A
nativeEmsAdminServiceState	String	Text
nativeEmsConnectorPresent	Boolean	N/A
nativeEmsName	String	Text
owner	String	Text
physicalAddress	String	Text
userLabel	String	Text

## Specification Cardinality

The cardinality of all specification parent-child relationships is included in the software code so that **min= 0** and **max= n** conditions are met. This approach allows Network Integrity to programmatically instantiate all objects on demand as they are discovered using the web service.

## Equipment Visual Specifications

The visual facility on the Equipment specifications is not used. You can decide to upgrade the technology pack to provide visual effects to the UIM GUI for a given equipment entity.

## Field Mapping

The Optical FTP Discovery Cartridge supports the following field mappings:

- **Text:** Implies `Text [255]`.
- **static:** Information Model 1.0 defines this field to be static on the entity specification. The specification provides getters and setters for this field.
- **dynamic:** This is a dynamic field where the entity specification considers the field as a name and value pair. The specification does not provide getters and setters but has a get and set characteristics method holding a HashSet of entries.
- For Optical Network Device FTP, all characteristics are configured using the data retrieved from collected Files.

## Logical Mapping

The Optical FTP Discovery Cartridge supports the following logical mappings:

- Logical Device
- Media Interface
- Device Interface Configuration Item Mapping (Optical Generic Media)

## Logical Device Mapping

The following table shows Logical Device Mapping.

**Table 4-13 Logical Device Mapping**

Characteristic	Information Model Support	Value	Field Type
Description	static	NeSubrackType(NE_REPORT)	Text
id	static	Programmatically generated as Id::Name::"LogicalDevice"	Text
Name	static	Name(NE_REPORT)	Text
NativeEMSName	static	Name(NE_REPORT)	Text

## Media Interface Mapping

The following table shows Media Interface Mapping.

**Table 4-14 Media Interface Mapping**

Characteristic	Information Model Support	Value	Field Type
id	static	Programmatically generated as Id::Name::InterfaceName::ShelfNumber::SlotNumber::PortNumber	Text
Name	static	Interface Name (Interface_Resource_Report)	Text
description	static	Interface Description (Interface_Resource_Report)	Text
specification	static	Programmatically applies specification "GenericInterfaceSpecification".	N/A
interfaceNumber	static	N/A	Text
customerInterfaceNumber	static	N/A	Text
vendorInterfaceNumber	static	N/A	Text
nativeEmsName	static	Programmatically generated as Id::Name::InterfaceName::ShelfNumber::SlotNumber::PortNumber	Text
nativeEmsAdminServiceState	static	N/A	Enum with the following values: <ul style="list-style-type: none"> <li>UNKNOWN</li> <li>IN_SERVICE</li> <li>OUT_OF_SERVICE</li> <li>TESTING</li> <li>IN_MAINTENANCE</li> </ul>

**Table 4-14 (Cont.) Media Interface Mapping**

Characteristic	Information Model Support	Value	Field Type
nativeEmsServiceState	static	Status (Interface_Resource_Report)	Enum with the following values: <ul style="list-style-type: none"> <li>UNKNOWN</li> <li>IN_SERVICE</li> <li>OUT_OF_SERVICE</li> <li>TESTING</li> <li>IN_MAINTENANCE</li> </ul>
ifType	dynamic	Interface Type (Interface_Resource_Report)	Text
mtuSupported	static	N/A	Float
mtuCurrent	static	mtuCurrent (Interface_Resource_Report)	Float
physicalAddress	static	N/A	Text
physicalLocation	static	N/A	Text
minSpeed	static	N/A	Float
maxSpeed	static	N/A	Float
nominalSpeed	static	Speed (Interface_Resource_Report)	Float
ifAlias	dynamic	N/A	Text
ifName	dynamic	N/A	Text

## Device Interface Configuration Item Mapping

The following table shows Device Interface Configuration Item Mapping.

**Table 4-15 Device Configuration Item (IPv4) Mapping**

Characteristic (Generic Media)	Information Model Support	Value	Field Type
ipAddress	dynamic	IPv4Address (Interface_Resource_Report)	Text
prefix	dynamic	N/A	Text
ipVersion	dynamic	Programmatically Generated as IPv4	Enum <ul style="list-style-type: none"> <li>IPV4</li> </ul>
specification	static	Programmatically applies Optical GenericMedia specification	N/A

**Table 4-16 Device Configuration Item (IPv6) Mapping**

Characteristic (Generic Media)	Information Model Support	Value	Field Type
ipAddress	dynamic	IPv6Address (Interface_Resource_Report)	Text
prefix	dynamic	N/A	Text

**Table 4-16 (Cont.) Device Configuration Item (IPv6) Mapping**

Characteristic (Generic Media)	Information Model Support	Value	Field Type
ipVersion	dynamic	Programmatically Generated as IPV6	Enum <ul style="list-style-type: none"> <li>IPV6</li> </ul>
specification	static	Programmatically applies Optical GenericMedia specification	N/A

## Physical Mapping

The Optical FTP Discovery Cartridge supports the following physical mappings:

- Physical Device
- Equipment Shelf
- Equipment Holder
- Equipment Card
- Physical Port

## Physical Device Mapping

The following table shows Physical Device mapping.

**Table 4-17 Physical Device Mapping**

Characteristic (Generic Physical Device Specification)	Information Model Support	Value	Field Type
SoftwareRev	dynamic	SoftwareRev(NE_REPORT)	Text
PhysicalLocation	static	Location(PHYSICAL_LOCATION_FILE)	Text
NativeEMSName	static	Name(NE_REPORT)	Text
Name	static	Name(NE_REPORT)	Text
ModelName	dynamic	NeType(NE_REPORT)	Text
id	static	Programmatically generated as Id::Name::"PhysicalDevice"	Text
DiscoveredVendorName	dynamic	Set to "opticalVendor"	Text
Description	static	NeSubrackType(NE_REPORT)	Text

## Equipment Shelf Mapping

The following table shows Equipment Shelf mapping.



**Table 4-18 Equipment Shelf Mapping**

Characteristic (GenericEquipmentShelfSpecification)	Information Model Support	Value	Field Type
id	static	Programmatically generated as Type(SUBRACK_REPORT)	Text
Name	static	Programmatically generated as Type(SUBRACK_REPORT)	Text
Description	static	Description(SUBRACK_REPORT)   Subnet(SUBRACK_REPORT)	Text
NativeEmsName	static	Programmatically generated as Type(SUBRACK_REPORT)	Text
PhysicalLocation	static	PhysicalLocation(PHYSICAL_LOCATION_FILE)	Text
ModelName	dynamic	Set to "OPTICAL-SHELF"	Text
DiscoveredVendorName	dynamic	Set to "opticalVendor"	Text
DiscoveredPartNumber	dynamic	Programmatically generated as Type(SUBRACK_REPORT)	Text

## Equipment Holder Mapping

The following table shows Equipment Holder mapping.

**Table 4-19 Equipment Holder Mapping**

Characteristic (GenericEquipmentHolderSpecification)	Information Model Support	Value	Field Type
id	static	Programmatically generated	Text
Name	static	Programmatically generated as "slot=" SlotId(board)	Text
NativeEMSName	static	Programmatically generated	Text
Owner	dynamic	Set to "opticalVendor"	Text

## Equipment Card Mapping

The following table shows Equipment Card mapping.

**Table 4-20 Equipment Card Mapping**

Characteristic (GenericEquipmentCardSpecification)	Information Model Support	Value	Field Type
id	static	Programmatically generated	Text
Name	static	Name (BOARD_REPORT)	Text
Description	static	Description (BOARD_REPORT)	Text
NativeEMSName	static	Programmatically generated	Text
SerialNumber	static	Programmatically generated using <b>SerialNo (BOARD_REPORT)</b>	Text
PhysicalLocation	static	PhysicalLocation(PHYSICAL_LOCATION_FILE)	Text
ModelName	dynamic	Set to "OPTICAL-CARD"	Text
DiscoveredPartNumber	dynamic	Type (BOARD_REPORT)	Text
HardwareRev	dynamic	HardwareRev (BOARD_REPORT)	Text
DiscoveredVendorName	dynamic	Set to "opticalVendor"	Text
Owner	dynamic	Set to "opticalVendor"	Text

## Physical Port Mapping

The following table shows Physical Port mapping.

**Table 4-21 Physical Port Mapping**

Characteristic (GenericPhysicalPortSpecification)	Information Model Support	Value	Field Type
id	static	Programmatically generated	Text
Name	static	Name (PORT_REPORT)	Text
Description	static	PortNeType (PORT_REPORT)	Text
NativeEMSName	static	Programmatically generated	Text
VendorPortName	static	Name (PORT_REPORT)	Text
PortNumber	static	PortNum (PORT_REPORT)	Text
Direction	dynamic	Set to "Bidirectional"	Text
EdgePoint	dynamic	Set to "true"	Text
Port Type	dynamic	Port Type (PORT_REPORT)	Text
Port Level	dynamic	Port Level (PORT_REPORT)	Text

## About Design Studio Construction

This chapter provides information on the composition of the Oracle Communications Network Integrity Optical FTP Discovery Cartridge from the Oracle Communications Design Studio perspective.

The following table shows the **Optical\_FTP\_Discovery\_Cartridge** model collection used in the Optical FTP Discovery cartridge.

**Table 4-22 Optical\_FTP\_Discovery\_Cartridge Model Collection**

Specification	Information Model Entity Type	Intended Usage
GenericLogicalDeviceSpecification	LogicalDevice	Represents the root object discovered on the network for the devices. Logical Device Modeler models logical devices into <b>GenericLogicalDeviceSpecification</b> .
GenericPhysicalDeviceSpecification	PhysicalDevice	Represents any Optical Network Vendor Device discovered using FTP protocol.
GenericEquipmentHolderSpecification	EquipmentHolder	Represents any equipment container.
GenericEquipmentShelfSpecification	Equipment	Represents Chassis piece of equipment.
GenericEquipmentSpecification	Equipment	Represents Module piece of equipment.
GenericPhysicalPortSpecification	PhysicalPort	Represents any physical port.
GenericInterfaceSpecification	DeviceInterface	Represents interface discovered under <b>GenericLogicalDeviceSpecification</b> .

## Logical Specification Lineage

The following example shows a logical specification lineage for Devices. This lineage shows the intended relationship between specifications.

### Example 4-1 Logical Specification Lineage

```
GenericLogicalDeviceSpecification
  [0..*] GenericInterfaceSpecification
    [0..1] Optical Generic Media Configuration Item
      [0..1] Optical IP Addresses
        [0..*] Optical IP Address
```

## Physical Specification Lineage

The following example shows a physical specification lineage for Devices. This lineage shows the intended relationship between specifications.

### Example 4-2 Physical Specification Lineage

```
GenericPhysicalDeviceSpecification
  GenericEquipmentShelfSpecification
    [0..*] GenericEquipmentHolderSpecification
      [0..1] GenericEquipmentSpecification
        [0..*] GenericEquipmentHolderSpecification
          [0..1] GenericEquipmentSpecification
            [0..1]
GenericPhysicalPortSpecification
```

## Discovery Action

Optical FTP Discovery Cartridge supports discovery action Discover optical Devices FTP.

The following table shows the discovery actions in the Optical FTP Discovery Cartridge.

**Table 4-23 Discover optical Devices FTP**

Result Category	Address Handler	Scan Parameters	Model	Processors
Device	FileTransferAddressHandler	<ul style="list-style-type: none"> <li>Transfer Type</li> <li>File Pattern</li> <li>Port</li> <li>User Name</li> <li>Password</li> <li>Session Timeout</li> <li>Source File Management</li> <li>Rename Suffix</li> </ul> <p><b>Note:</b> These scan parameters must be added for the Create Scan web service request even when the values are left empty.</p>	Optical_FTP_Discovery_Cartridge	<ul style="list-style-type: none"> <li>Optical File Transfer Collector</li> <li>Optical File Transfer Parser</li> <li>Optical File Transfer Device Modeler</li> </ul>

## Discovery Processors

**Table 4-24 Discover Optical Devices FTP Scan Action Processors**

Processor Name	Variable
Optical File Transfer Collector	Input: N/A Output: <ul style="list-style-type: none"> <li>OpticalFileTransferCollectorFileCollection</li> </ul> Collection of files read from the scope provided.
Optical File Transfer Parser	Input: <ul style="list-style-type: none"> <li>OpticalFileTransferCollectorFileCollection</li> </ul> Output: <ul style="list-style-type: none"> <li>neObjects</li> </ul> Collection of device details
Optical File Transfer Device Modeler	Input: neObjects Output: N/A

## Discrepancy Detection Action

Detect Optical Device UIM Discrepancies is the action used to perform Discrepancy detection.

**Table 4-25 Detect Optical Device UIM Discrepancies**

Result Category	Results Score	Scan Parameters	Model	Processors
All	Discover optical Devices FTP	N/A	Optical_FTP_Discovery_Cartridge	This action extends the Abstract Detect UIM Discrepancies action included in the UIM Integration cartridge. See <i>Network Integrity UIM Integration Cartridge Guide</i> for more information.

## Discrepancy Resolution Action

Resolve Optical Device in UIM is the action used to perform Discrepancy Resolution.

**Table 4-26 Resolve Optical Device in UIM**

Result Category	Result Score	Processor
All	Discover optical Devices FTP	This action extends the Abstract Resolve in UIM action included in the Network Integrity UIM Integration cartridge. See <i>Network Integrity UIM Integration Cartridge Guide</i> for more information.

# 5

## About Optical FTP Discovery Input File Structure

For Optical Devices FTP scan to work, the files must be populated with the corresponding value.

**Table 5-1 List of Supported Files**

File Name	Mandatory	Description
NE_REPORT_FILE	YES	This file contains NetworkElement information
SUBRACK_REPORT_FILE_NAME	YES	This file contains Sub_Rack (Equipment Chassis) information
BOARD_REPORT_FILE	YES	This file contains Card related information present under Sub_Rack
PORT_REPORT_FILE	YES	This file contains port Information
PHYSICAL_LOCATION_FILE	YES	This file contains Physical Location details of NetworkElement
Interface_Resource_Report_File	YES	This file contains Device Interface details and Mapping between PhysicalPort Informations

 **Note:**

File naming convention can be changed by making the necessary changes inside **opticalfiles.properties** located at **Optical\_FTP\_Discovery\_Cartridge/src**. Each file is structured with a predetermined set of columns, each containing essential device information.

In each file, the initial seven lines are reserved for report-related information and are not utilized. The eighth line serves as the actual header, defining the columns. The subsequent lines contain the specific details pertaining to each device

## NE Report File

The following table shows the list of column headers required within the file.

**Table 5-2 NE Report File**

Header Name	Essential (Data)	Description
NE Name	YES	Network Element name

Table 5-2 (Cont.) NE Report File

Header Name	Essential (Data)	Description
NE Type	YES	Type of Device Model
NE ID	YES	Unique Id that represent Network Element
Subrack Type	YES	Subrack Type
Software Version	NO	Software Version been used by the device

## Sub\_Rack Report File

The following table shows the list of column headers required within the file

Table 5-3 Sub\_Rack Report File

Header Name	Essential (Data)	Description
NE	YES	Network Element under which this rack is present
Subrack Name	YES	Rack name
Subrack Type	YES	Type of Rack
Subrack ID	YES	Unique Id to represent Rack
Software Version	NO	Rack Software
SN(Bar Code)	NO	Bar Code Information
Description	NO	Rack Description
Subnet	NO	Subnet Related information
Subnet Path	NO	Subnet Path Information

## Board Report File

The following table shows the list of column headers required within the file.

Table 5-4 Board Report File

Header Name	Essential (Data)	Description
NE	YES	Network Element under which this board is present
NE Type	YES	Network Element Type
Board Name	YES	Board Name
Board Type	YES	Board Type
Subrack ID	YES	Rack (Id)under which this board is present
Slot ID	YES	Container (Id) that hold this board
Hardware Version	NO	Board Hardware Version
SN(Bar Code)	NO	Board SN(Bar Code)
Serial Number	NO	Board Serial Number
Software Version	NO	Board Software Version

**Table 5-4 (Cont.) Board Report File**

Header Name	Essential (Data)	Description
Description	NO	Board Description

## Physical\_Location File

The following table shows the list of column headers required within the file.

**Table 5-5 Physical\_Location File**

Header Name	Essential (Data)	Description
NE Name	YES	Network Element name
Location	YES	Physical Location

### Physical Location Report Sample File

8	NE Name	Location
9	SampleNE	SampleLocation

## Interface\_Resource\_Report File

The following table shows the list of column headers required within the file.

**Table 5-6 Interface\_Resource\_Report File**

Header Name	Essential (Data)	Description
Interface Name	YES	Interface Name
NE Name	YES	Network Element name
Interface Description	NO	Interface Description
Ipv4Address	NO	IPV4 Address
Ipv6Adress	NO	IPV6 Address
Interface Type	NO	Interface Type
Speed	NO	Interface Supported Speed
Status	NO	Interface Status Supported Value.(UP /DOWN)
MtuCurrent	NO	Interface MtuCurrent Details
Port Mapping	NO	Interface-PhysicalPort Mapping details Supported Value Format: <ul style="list-style-type: none"> <li>• ShelfNo:SlotNo:PortNo:PortName</li> <li>• SlotNo:PortNo:PortName</li> <li>• null</li> </ul>



# 6

## About Design Studio Extension

This chapter provides scenarios for the extensibility of Oracle Communications Network Integrity using Oracle Communications Design Studio.

### Adding a New Vendor

To discover and model data of a new vendor under Optical Network Vendor Devices, a new action can be created and a new collector processor (FTP) can be added. Subsequently, necessary Discover Model Code can be implemented to model the required Physical and Logical device hierarchy as per the requirement.

### Adding a New Device Type under Existing Vendors

For this example to discover and model a new optical Network vendor device, Optical File Transfer Device Modeler implementation can be updated with logic to support modeling of the new device type.

For more details regarding extensibility, see *Network Integrity Developer's Guide*.