


Setup for Oracle Database Appliance X8-2S / X8-2M

1 Connect Power and Network Cables

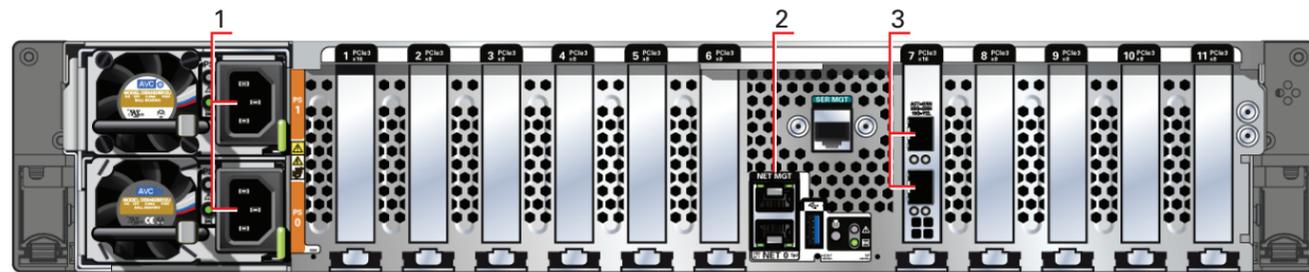


- A Plug in AC power to the two power supplies (1). For redundancy, each power supply should be connected to a separate AC power source.
- B Plug in a network cable to the Oracle Integrated Lights Out Manager (Oracle ILOM) network management port (2).
- C Plug in network cables for public network (3). (Port connections can vary depending on the option ordered).

Note: The cables are included as part of the Oracle Database Appliance shipment.

2 Start Up the System

Power on the host.

- A Confirm that the green SP OK LED (4) is steady ON and the green Power OK LED (5) flashes slowly. This indicates that the server is in Standby power mode.
- B Push the power button (6). This applies full power to the server.
- C Wait for the green Power OK LED (5) to turn steady ON. The Power OK LED may blink for several minutes. Do not repeatedly push the power buttons.

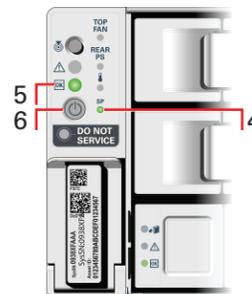

3 Deploy and Configure the Appliance

Refer to the *Oracle Database Appliance Deployment and User's Guide* for information about configuring and deploying the appliance. To get started with your appliance, refer to the *Oracle Database Appliance Welcome Kit* at:

<http://www.oracle.com/goto/oda/docs>




For more information about Oracle Database Appliance, go to Oracle Technology Network:
<http://www.oracle.com/technetwork/server-storage/engineered-systems/database-appliance/index.html>

For more information about deployment, go to:
<http://www.oracle.com/goto/oda/docs>

You can also scan the Quick Response Code with your mobile device to read the documentation.

Server Back Panel Components, Connectors, and Indicators

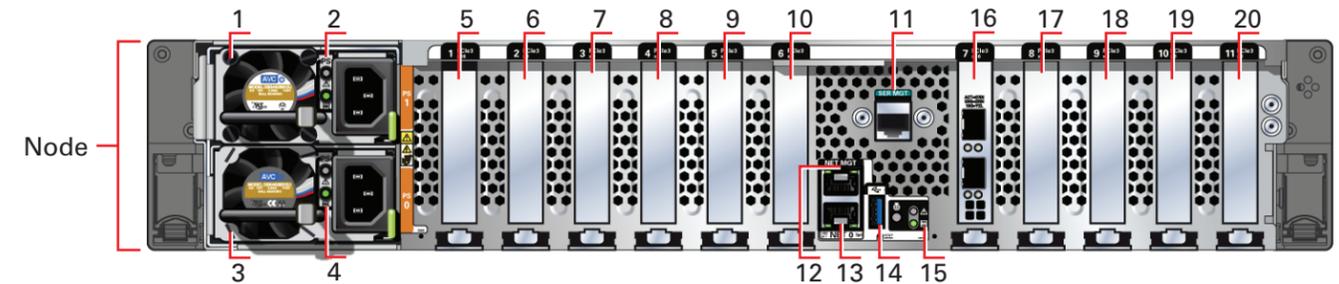

Callout	Description
1	Power Supply (PS) 1 with fan module
2	Power Supply (PS) 1 status indicators: Service Required LED: amber, AC OK LED: green
3	Power Supply (PS) 0 with fan module
4	Power Supply (PS) 0 status indicators: Service Required LED: amber, AC OK LED: green
5	PCIe card slot 1: filler panel
6	PCIe card slot 2: • Oracle Database Appliance X8-2S: filler panel • Oracle Database Appliance X8-2M: filler panel, or optional Oracle Dual Port 25Gb Ethernet Adapter, or optional Oracle Quad Port 10GBase-T Adapter
7-8	PCIe card slot 3 and PCIe card slot 4: • Oracle Database Appliance X8-2S: filler panel • Oracle Database Appliance X8-2M: Oracle NVMe Switch PCIe card
9-10	PCI card slots 5-6: filler panels
11	SER MGT port: RJ-45 serial port used to connect to the Oracle ILOM service processor
12	NET MGT port: 10/100/1000Base-T network interface port with RJ-45 connector used to connect to the Oracle ILOM service processor
13	100/1000Base-T network interface port with RJ-45 connector: NET 0
14	USB 3.0 connector
15	System status indicators: Locate LED: white, Service Required LED: amber, Power/OK LED: green
16	PCIe card slot 7: Oracle Dual Port 25Gb Ethernet Adapter or Oracle Quad Port 10GBase-T Adapter
17	PCIe card slot 8: • Oracle Database Appliance X8-2S: filler panel, or optional Oracle Dual Port 25Gb Ethernet Adapter, or optional Oracle Quad Port 10GBase-T Adapter • Oracle Database Appliance X8-2M: Oracle NVMe Switch PCIe card
18	PCIe card slot 9: Oracle NVMe Switch PCIe card
19	PCIe card slot 10: filler panel, or optional Oracle Dual Port 25Gb Ethernet Adapter, or optional Oracle Quad Port 10GBase-T Adapter
20	PCIe card slot 11: filler panel