Oracle® Banking Corporate Lending Configure Weblogic Server 12 c





Oracle Banking Corporate Lending Configure Weblogic Server 12 c, Release 14.7.6.0.0

G32298-01

Copyright © 2007, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

rΔ	fa	0

Purpose	\
Audience	\
Documentation Accessibility	V
Critical Patches	V
Diversity and Inclusion	V
Related Resources	V
Conventions	V
Screenshot Disclaimer	vi
Acronyms and Abbreviations	Vi
Introduction	
1.1 WebLogic Server Overview	1-1
	4
1.2 Pre-requisites	1-4
1.2 Pre-requisites Domain Configuration	1-4
·	2-1
Domain Configuration	
Domain Configuration 2.1 Create Domain	2-1
Domain Configuration 2.1 Create Domain 2.2 Pack and Unpack Domain	2-1 2-11
Domain Configuration 2.1 Create Domain 2.2 Pack and Unpack Domain 2.3 Start Admin server	2-1 2-11 2-11
Domain Configuration 2.1 Create Domain 2.2 Pack and Unpack Domain 2.3 Start Admin server 2.4 Start Node Manager	2-1 2-11 2-11
Domain Configuration 2.1 Create Domain 2.2 Pack and Unpack Domain 2.3 Start Admin server 2.4 Start Node Manager Cluster Configuration	2-1 2-11 2-12 2-12
Domain Configuration 2.1 Create Domain 2.2 Pack and Unpack Domain 2.3 Start Admin server 2.4 Start Node Manager Cluster Configuration 3.1 Configure Machines	2-1 2-11 2-12 3-1
Domain Configuration 2.1 Create Domain 2.2 Pack and Unpack Domain 2.3 Start Admin server 2.4 Start Node Manager Cluster Configuration 3.1 Configure Machines 3.2 Create Dynamic Cluster	2-1 2-11 2-12 3-1 3-4
Domain Configuration 2.1 Create Domain 2.2 Pack and Unpack Domain 2.3 Start Admin server 2.4 Start Node Manager Cluster Configuration 3.1 Configure Machines 3.2 Create Dynamic Cluster 3.3 Managed Server Template configuration	2-1 2-11 2-12 3-1 3-2 3-8



Tu	Tuning	
4.1	General Parameters	4-1
4.2	JVM Tuning	4-1
St	art Managed Servers	
Da	ata Source Creation and JDBC Configuration	
6.1	Create Data Source for Non XA	6-1
6.2	Create Data Source for XA	6-5
6.3	JDBC Parameters Tuning	6-9
JN	1S Resource Creation	
Or	acle WebLogic Load Balancing	
Fr	equently Asked Questions	
9.1	Machine status is Unreachable	9-1
9.2	Restart Node Manager	9-1
	· · · · · · · · · · · · · · · · · · ·	
9.3	Scale Up Dynamic Cluster	9-2



Preface

This topic contains the following sub-topics:

- Purpose
- Audience
- Documentation Accessibility
- Critical Patches
- Diversity and Inclusion
- Related Resources
- Conventions
- Screenshot Disclaimer
- Acronyms and Abbreviations

Purpose

This guide is designed to help acquaint you to configure Oracle Weblogic server. This guide explains the steps required for Configuration and applying best practices in cluster mode for:

- FCUBS 14.4
- Weblogic Version 12.2.1.4.0
- JDK 1.8.0_241

Audience

This manual is intended for the following User/User Roles:

Table 1 Audience

Role	Function
Administrator	Who controls the system and application parameters and ensures smooth functionality and flexibility of the banking application.
Implementation team	Implementation of Oracle Banking Corporate Lending Solution
Pre-sales team	Install Oracle Banking Corporate Lending for demo purpose
Bank personnel	Who installs Oracle Banking Corporate Lending

The user of this manual is expected to have basic understanding of Oracle Banking Application installation.



Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at https://www.oracle.com/corporate/accessibility/.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at Critical Patches, Security Alerts and Bulletins. All critical patches should be applied in a timely manner to ensure effective security, as strongly recommended by Oracle Software Security Assurance.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Related Resources

For more information on any related features, refer to the following documents:

- Oracle Banking Corporate Lending User Guides.
- Oracle Banking Corporate Lending Installation Guides.

Conventions

The following text conventions are used in this document:

Table 2 Conventions

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.



Screenshot Disclaimer

Personal information used in the interface or documents is dummy and does not exist in the real world. It is only for reference purposes.

Acronyms and Abbreviations

The list of the acronyms and abbreviations used in this guide are as follows:

Table 3 Acronyms and Abbreviations

Abbreviation	Description
BIP	Business Intelligence Publisher
EAR	Enterprise Archive file
EMS	Electronic Messaging Service
FCUBS	Oracle FLEXCUBE Universal Banking
FTP	File Transfer Protocol
GUI	Graphical User Interface
HTTP	Hypertext Transfer Protocol
IP	Internet Protocol
JDBC	Java Database Connectivity
JDK	Java Development Kit
JMS	Java Message Service
JNDI	Java Naming and Directory Interface
JTA	Java Transaction AP
JVM	Java Virtual Machine
MDB	Message-Driven Bean
NFS	Network File System
SSL	Secure Sockets Layer
WLS	WebLogic Server
XA	eXtended Architecture



1

Introduction

This topic contains the following sub-topics:

- WebLogic Server Overview
 This topic provides a brief explanation of the main components involved in the WebLogic server.
- Pre-requisites
 This topic provides pre-requisites for configuring the Weblogic server.

1.1 WebLogic Server Overview


This topic provides a brief explanation of the main components involved in the WebLogic server.

Domain

A domain is the basic administration unit for WebLogic Server instances. A domain consists of one or more WebLogic Server instances (and their associated resources) that are managed with a single Administration Server. Multiple domains can be defined based on different system administrators' responsibilities, application boundaries, or geographical locations of servers. Conversely, a single domain can be used to centralize all WebLogic Server administration activities.

Each WebLogic Server domain must have one server instance that acts as the Administration Server. Administration Server can be used via the Administration Console or using the command line for configuring all other server instances and resources in the domain.

Figure 1-1 WebLogic Domain Structure

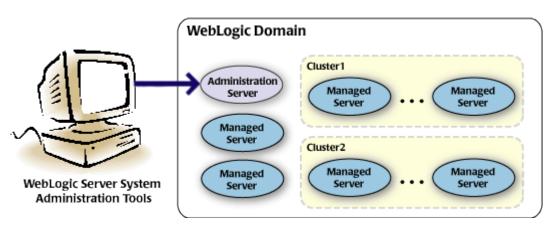

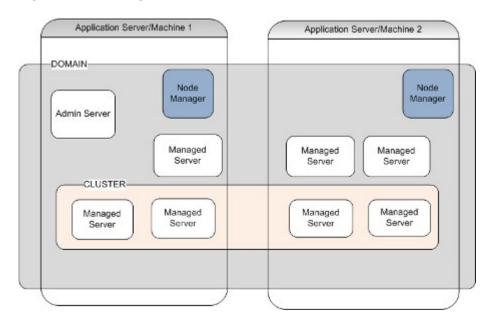


Figure 1-2 Weblogic 12c Domain Overview

Administration Server

A domain includes one WebLogic Server instance that is configured as an Administration Server. All changes to configuration and deployment of applications are done through the Administration Server. The Administration Server provides a central point for managing the domain and providing access to the WebLogic Server administration tools.

These tools include the following:

- WebLogic Server Administration Console: Graphical user interface to the Administration Server.
- WebLogic Server Node Manager: A Java program that lets the user start and stop server instances - both Administration Servers and Managed Servers - remotely, and to monitor and automatically restart them after an unexpected failure.

Admin server start mode needs to be configured as Production Mode.

Managed Server

In a domain, server instances other than the Administration Server are referred to as Managed Servers. Managed servers host the components and associated resources that constitute applications—for example, JSPs and EJBs.

When a Managed Server starts up, it connects to the domain's Administration Server to obtain configuration and deployment settings. In a domain with only a single WebLogic Server instance, that single server works as both the administration server and managed server.

Node Manager

The Managed Servers in a production WebLogic Server environment are often distributed across multiple machines and geographic locations.

Node Manager is a Java utility that runs as a separate process from the WebLogic Server and allows the user to perform common operations tasks for a Managed Server, regardless of its location with respect to its Administration Server. While the use of Node Manager is optional, it

provides valuable benefits if WebLogic Server environment hosts applications with high availability requirements.

If the user runs Node Manager on a machine that hosts Managed Servers, the user can start and stop the Managed Servers remotely using the Administration Console or from the command line. Node Manager can also automatically restart a Managed Server after an unexpected failure.

Machine

A machine in the Weblogic Serve context is the logical representation of the computer that hosts one or more Weblogic Server instances(servers). The Admin Server uses the machine definitions to start remote servers through the Node Managers that run on those servers. A machine could be a physical or virtual server that hosts an Admin or Managed Server that belongs to a domain.

Managed Server Cluster

Two or more Managed Servers can be configured as a WebLogic Server cluster to increase application scalability and availability. In a WebLogic Server cluster, most resources and services are deployed to each Managed Server (as opposed to a single Managed Server,) enabling failover and load balancing.

The servers within a cluster can either run on the same machine or reside in different machines. To the client, a cluster appears as a single WebLogic Server instance.

Dynamic Cluster

A dynamic cluster is any cluster that contains one or more dynamic servers. Each server in the cluster will be based upon a single shared server template. The server template allows to configure each server the same and ensures that servers do not need to be manually configured before being added to the cluster. This allows the user to easily scale up or down the number of servers in the cluster without the need for setting up each server manually. Changes made to the server template are rolled out to all servers that use that template.

The user cannot configure dynamic servers individually; there are no server instance definitions in the config.xml file when using a dynamic cluster. Therefore, the user cannot override the server template with server-specific attributes or target applications to an individual dynamic server instance.

When configuring a cluster, the user specifies the maximum number of servers expect to need at peak times. The specified number of server instances is then created, each based upon the server template. The user can then start-up however many the user needs and scales up or down over time according to needs. If the user needs additional server instances on top of the number the user originally specified, the user can increase the maximum number of servers instances (dynamic) in the dynamic cluster configuration.

Server Templates

A single server template provides the basis for the creation of dynamic servers. Using this single template provides the possibility of every member being created with the same attributes. Where some of the server-specific attributes like Servername, listen-ports, machines, etc. can be calculated based upon tokens.


The user can pre-create server templates and let Weblogic clone one when a Dynamic Cluster is created.




When none is available a server template is created with the Dynamic Cluster. The name and the listen ports are the only server template attributes that the user provides during Dynamic Cluster creation.

Figure 1-3 Simplified Configuration with Scalability and Elasticity

Simplified Configuration with Scalability and Elasticity





1.2 Pre-requisites

This topic provides pre-requisites for configuring the Weblogic server.

The user is going to create a domain with two managed servers. The managed servers are going to be created on two different physical servers (nodes). Note that, this document has been prepared based on a test conducted in Linux servers. This requires a Weblogic Server of the same version to be installed on both the machines and services.

Environment

2 servers where Linux is installed, 1 will be primary where the admin console will be running along with managed servers, and the other where only managed servers will be.

Softwares

- Oracle Weblogic Server 12.2.1.4 was installed on both machines under the same folder structure.
- 2. JDK 1.8 Latest available version installed on both machines. In this document, the JDK1.8.0 241 version is used.

Clock Synchronization

The clocks of both the servers participating in the cluster must be synchronized to within one-second difference to enable proper functioning of jobs otherwise it will lead to session timeouts.

Enable Graphical User Interface (GUI)

Establish a telnet or SSH connection to the primary server. Start X-manager (or any similar tool) on windows desktop. Export DISPLAY environment variable to the machine IP where x-manager is running. Syntax: **export DISPLAY=<ip-address>:<port>**

Test using xclock

2

Domain Configuration

This topic contains the following sub-topics:

Create Domain

This topic provides systematic instructions to create Domain.

Pack and Unpack Domain

This topic provides information on the Pack and Unpack utility.

Start Admin server

This topic provides systematic instructions to start the Admin server.

Start Node Manager

This topic provides systematic instructions to start the Node Manager.


2.1 Create Domain

This topic provides systematic instructions to create Domain.

Weblogic domain creation and configuration will be done from the primary server. From the primary server, launch the fusion Middleware configuration wizard using the command **config.sh** available under **\$WLS_HOME/common/bin** directory.

1. In the Welcome screen, select Create a new domain option. Specify the domain name.

Figure 2-1 Create Domain

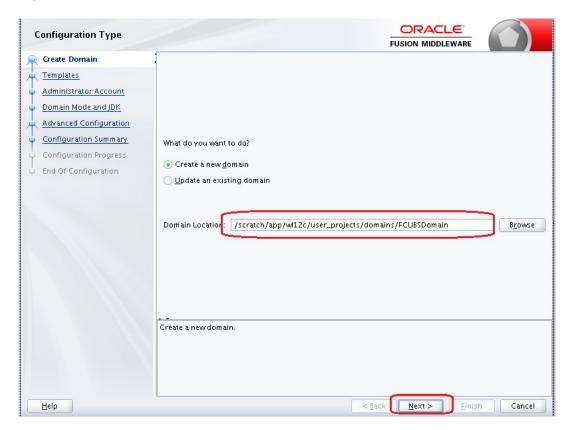


2. Click the **Next** button.

The **Templates** screen displays.



Figure 2-2 Templates

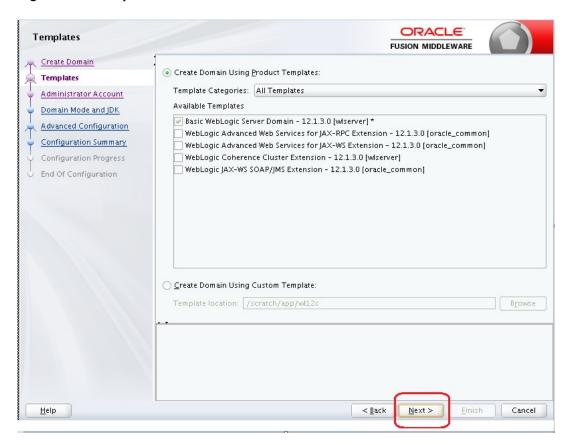

 $\textbf{3.} \quad \text{Select the required templates from } \textbf{Available Templates} \text{ and click the } \textbf{Next} \text{ button}.$

The Administrator Account screen displays.



Figure 2-3 Administrator Account



- 4. Specify the **Name**, **Password** and **Confirm Password** fields for administrator user and then click the **Next** button.
 - The specified credentials are used to access the Administration console.
 - The user can use this screen to define the default WebLogic Administrator account for the domain. This account is used to boot and connect to the domain's Administration Server.

The **Domain Mode and JDK** screen displays.



Figure 2-4 Domain Mode and JDK



Select server startup as Production mode and the available JDK and click the Next button.

The Advanced Configuration screen displays.

Figure 2-5 Advanced Configuration



6. Select the check box adjacent to **Administration Server** and **Node Manager** options and click the **Next** button.

The **Administration Server** screen displays.



Figure 2-6 Administration Server



7. Specify the **Listen Address** and **Listen Port** for administration server.




The default Listen port is 7001 and SSL port is 7101. This could be changed to any other available port. Ensure to make a note, of this port since the same is required for launching the Admin console, post domain creation.

Note:

Check for the port availability using the command - **netstat -anp |grep <Port no>**

The Node Manager screen displays.


Figure 2-7 Node Manager

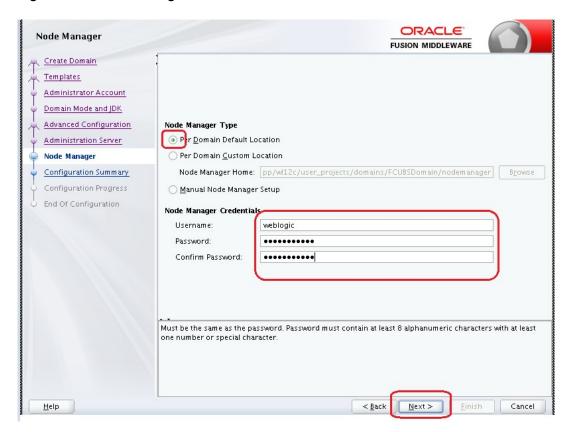

- 8. Under Node Manager Type, select Per Domain Default Location option.
- Under Node Manager Credentials, specify the Username, Password and Confirm Password and click the Next button.

The Configuration Summary screen displays.

Figure 2-8 Configuration Summary

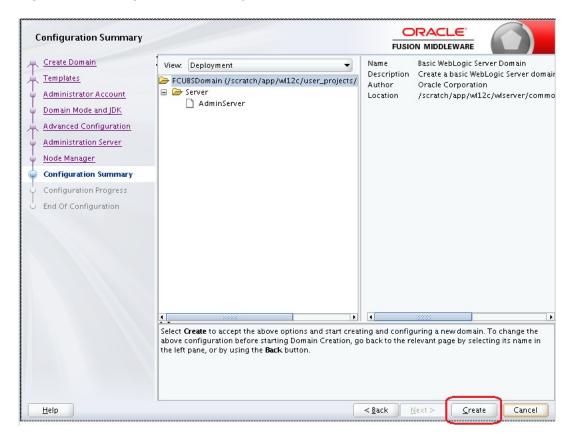

10. Verify the details and click the Create button.

The domain creation process is initiated and the progress of completion is indicated in the **Configuration Progress** screen.



ORACLE! **Configuration Progress** FUSION MIDDLEWARE Create Domain 100% Templates

Figure 2-9 Configuration Progress




11. Click the Next button.

The Admin Server console URL: http://<IP address>:<admin console port>/console

- <IP address >: Host on which domain was created.
- <admin console port> : Port specified in Administration Server configuration page. In this case the Admin Console URL is: https://server1hostname>:7101/console The Configuration success message displays in the Configuration Success screen.



Figure 2-10 Configuration Success

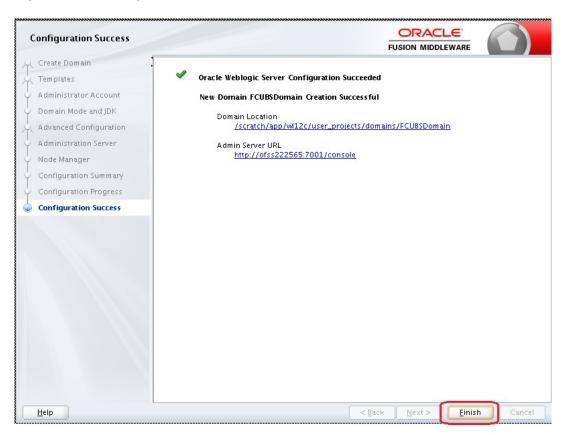

2.2 Pack and Unpack Domain

This topic provides information on the Pack and Unpack utility.

The domain structure is to be copied to the second server during domain creation. To copy the same, the user can use the Pack and Unpack utility provided under **\$WLSHOME/common/bin**.

Table 2-1 Pack and Unpack Domain

Domain	Description
Pack	Pack domain in primary server: ./pack.sh -managed=true -domain=/ scratch/app/wl12c/user_projects/domains/FCUBSDomain -template=/tmp/ FCUBSDomain.jar -template_name="FCUBSDomain"
Unpack	Unpack FTP FCBUSDomain.jar in binary mode to secondary server under /tmp area and unpack the domain using unpack utility provided under \$WLSHOME/common/bin/unpack.sh -domain=/scratch/app/wl12c/user_projects/domains/FCUBSDomain -template=/tmp/FCUBSDomain.jar

2.3 Start Admin server

This topic provides systematic instructions to start the Admin server.

Admin server is started on the primary server.

To start the admin server, log in to the primary server.

2. Navigate to the folder **\$DOMAIN_HOME/bin** and execute **startWeblogic.sh**.

2.4 Start Node Manager

This topic provides systematic instructions to start the Node Manager.

Node Manager needs to be started on both servers.

- Before starting the Node Manager, update Listen Address to the Hostname/IP Address of the machine in nodemanager.properties located in the folder \$DOMAIN_HOME/ nodemanager.
- 2. To start the Node Manager, log in to the servers.
- 3. Navigate to the folder **\$DOMAIN_HOME/bin** and execute **NodeManager.sh**.



Cluster Configuration

This topic provides information on the steps involved in the cluster configuration.

Dynamic Cluster configuration involves below steps:

- 1. Machine Configuration
- Dynamic Cluster Creation: In a normal WebLogic Cluster, the user defines Managed Server and adds them to the Cluster. In Dynamic Cluster, the user selects the number of servers required in the cluster and the Server Template that can be assigned to servers in this WebLogic Dynamic Cluster.
- 3. Server template modification: Servers (or Managed Server) that are part of WebLogic Dynamic Cluster will have properties taken from Server Template. Modify server template for best practices parameters for Dynamic Servers (part of Dynamic Cluster), the user can modify Server Template that applies to Dynamic Cluster. These settings apply to all the managed servers.
- Activate Changes that would automatically create the managed servers (as mentioned in the number of servers required parameter).

Calculate Number of Servers Required:

This topic contains the following sub-topics:

- Configure Machines
 - This topic provides systematic instructions to configure the machine.
- Create Dynamic Cluster
 - This topic provides systematic instructions to create Dynamic Cluster.
- Managed Server Template configuration
 This topic provides a list of parameters that modifies managed server template.

3.1 Configure Machines

This topic provides systematic instructions to configure the machine.

- Log in to Administration Console and navigate to FCUBSDomain left panel.
- 2. Click the **Environment** drop-down option and then click the **Machines**.

The **Summary of Machines** screen displays.


Figure 3-1 Summary of Machines



Click the New button.

The Create a New Machine - Machine Identity screen displays.


Figure 3-2 Create a New Machine - Machine Identity

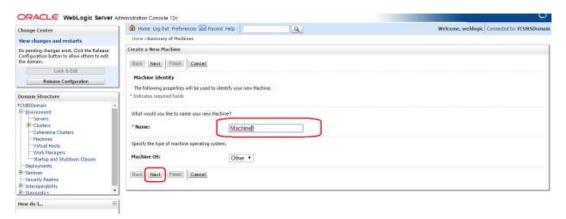

4. Specify the **Name** field for the machine and click the **Next** button.

The Create a New Machine - Node Manager Properties screen displays.

Figure 3-3 Create a New Machine - Node Manager Properties

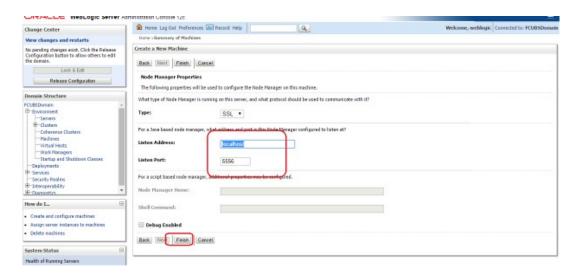



Specify the Listen Address and Listen Port and click the Finish button.

Listen Port is the port mentioned in **nodemanager.properties** file.

The Machine is created in the Summary of Machines screen.

Figure 3-4 Summary of Machines - Messages



- 6. Similarly, create a new machine entry for the other server.
- Before starting the managed servers, make sure that the Node manager Status of all the machines is Reachable.
 - In the Admin console, navigate through the **Domain Structure** left panel to Environment drop-down option and then click the **Machines**.

The **Summary of Machines** screen displays.

Figure 3-5 Summary of Machines




b. Click the newly created Machine1.

The **Settings for Machine1** screen displays.



Figure 3-6 Settings for Machine1

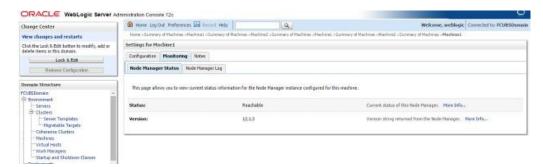

c. Click the **Monitoring** tab and then click the **Node Manager Status**.


The **Status** of **Machine1** displays and it should be **Reachable**.

3.2 Create Dynamic Cluster

This topic provides systematic instructions to create Dynamic Cluster.

- 1. Log in to Administration Console and navigate to FCUBSDomain left panel.
- Click the Environment drop-down option and then click the Clusters.The Summary of Clusters screen displays.


Figure 3-7 Summary of Clusters

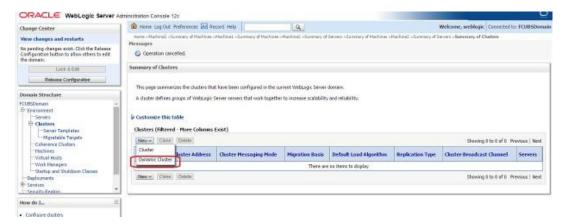

3. Click the **New** drop-down button and select the **Dynamic Cluster** option.

The Create a New Dynamic Cluster- Cluster Identity and Properties screen displays.


Figure 3-8 Create a New Dynamic Cluster- Cluster Identity and Properties

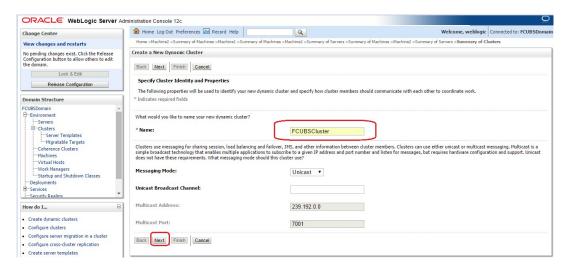

Specify the Name field for the cluster and click the Next button.

The Create a New Dynamic Cluster- Dynamic Server Properties screen displays.


Figure 3-9 Create a New Dynamic Cluster- Dynamic Server Properties

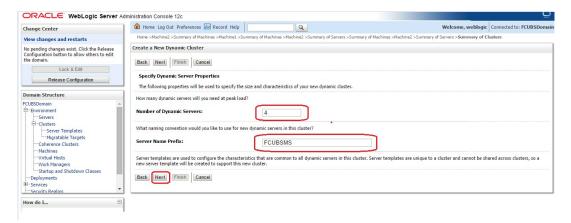

- Specify the Number of Dynamic Servers the user wants to configure.
- 6. Specify the **Server Name Prefix** and click the **Next** button.

The Create a New Dynamic Cluster- Machine Bindings screen displays.


Figure 3-10 Create a New Dynamic Cluster- Machine Bindings

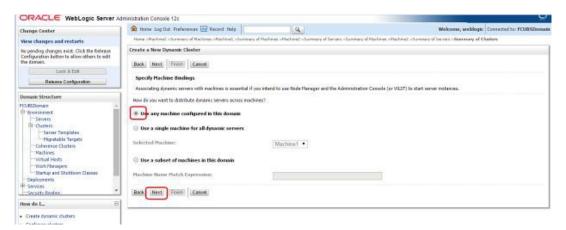

 Select machines that participate in the domain. In this case, all machines will be part of the domain, select Use any machine configured in this domain option and click the Next button.

Create a New Dynamic Cluster- Listen Port Bindings screen displays.

Figure 3-11 Create a New Dynamic Cluster- Listen Port Bindings

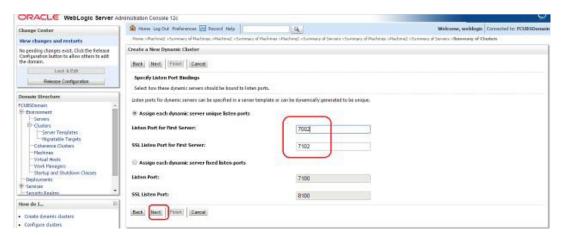


8. Select Assign each dynamic server unique listen ports option and specify the Listen Port for First Server and SSL Listen Port for First Server.

The subsequent servers will be assigned with an incremental port number.

Click the Next button.

A summary of the new Dynamic Cluster Configuration is displayed in the **Create a New Dynamic Cluster-Review Dynamic Cluster Configuration** screen.

Figure 3-12 Create a New Dynamic Cluster- Review Dynamic Cluster Configuration

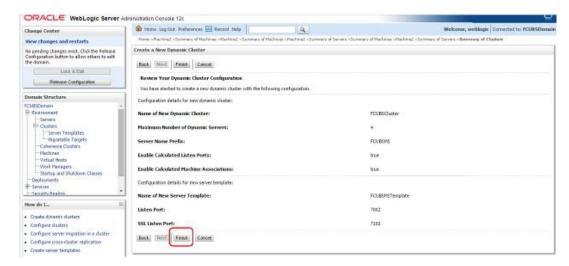

10. Click the Finish button to create Dynamic Cluster.

The **Summary of Clusters** screen displays and shows the recently created Dynamic Cluster.

Figure 3-13 Summary of Clusters - Messages



 Navigate to Change Center and click Activate Changes to automatically create 4 managed servers.

Summary of Clusters screen displays and shows the recently created 4 managed servers.

Figure 3-14 Summary of Clusters - Activate Changes





12. Navigate to FCUBSDomain left panel, click the Environment drop-down option and then click the Servers.

The **Summary of Servers** screen displays with list of 4 new servers.

Figure 3-15 Summary of Servers



3.3 Managed Server Template configuration

This topic provides a list of parameters that modifies managed server template.

The created server template is modified to apply the below parameters:

- Logging
 - This topic provides systematic instructions to update the parameters on the logging screen.
- HTTP Logging
 - This topic provides systematic instructions for HTTP Logging.
- Stuck Tread Max Time
 - This topic provides systematic instructions to update stuck thread max time.

3.3.1 Logging

This topic provides systematic instructions to update the parameters on the logging screen.

The process of log file writing in a Weblogic server can impact the performance. Hence, the user needs to keep the logging to a minimum in a production environment.

Update below parameters by in Logging Screen:

Table 3-1 Logging Parameters


Parameter	Description
Minimum Severity to log	Warning
Log file Severity level	Warning
Standard Out Severity level	Critical
Domain broadcaster Severity level	Critical



- 1. Navigate to the FCUBSDomain left panel and then click the Environment option.
- 2. Click the Clusters and then click Server Templates.

The Summary of Server Templates screen displays.

Figure 3-16 Summary of Server Templates

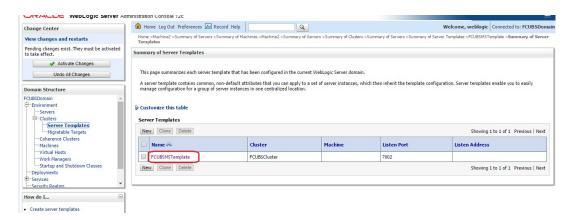

3. Select FCUBSMSTemplate and navigate to Logging tab and then to General.

The **Settings for FCUBSMSTemplate** screen displays.

Figure 3-17 Settings for FCUBSMSTemplate



4. Under **Advanced** tab, update the below parameters and click the **Save** button.

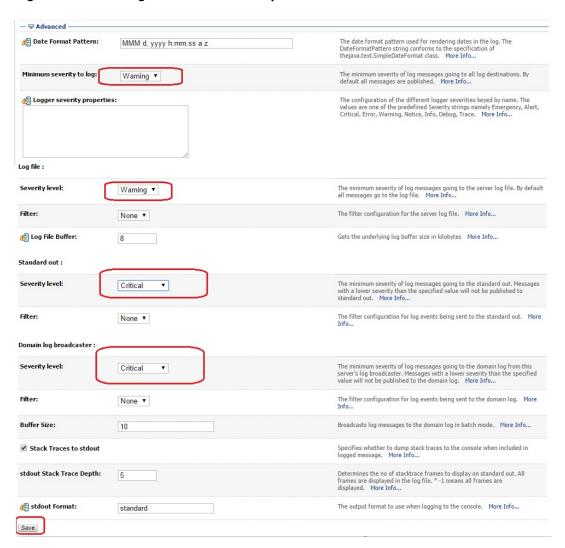


Figure 3-18 Settings for FCUBSMSTemplate - Advanced tab


3.3.2 HTTP Logging

This topic provides systematic instructions for HTTP Logging.

- Navigate to the FCUBSDomain left panel and click on the Environment drop-down option.
- 2. Click the **Clusters** and then click on the **FCUBSTemplate**.

The **Settings for FCUBSTemplate** screen displays.

Figure 3-19 Settings for FCUBSMSTemplate

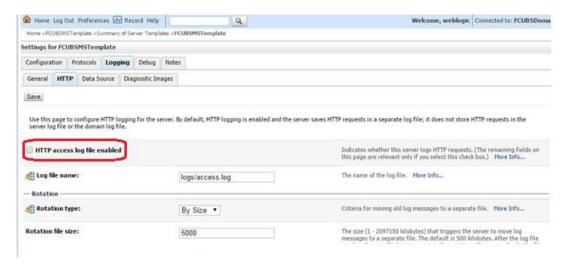

- 3. Click the **Logging** tab and then click the **HTTP** tab.
- 4. Uncheck the HTTP access log file enabled option.

3.3.3 Stuck Tread Max Time

This topic provides systematic instructions to update stuck thread max time.

- Navigate to the FCUBSDomain left panel and click on the Environment drop-down option.
- 2. Click the Clusters and then click the FCUBSTemplate.
- 3. Click the **Tuning** option.
- 4. Update the stuck thread max time to 18000, and click on the **Save** button.



4

Tuning

This topic contains the following sub-topics:

- General Parameters
 This topic provides information on the general parameters for tuning.
- JVM Tuning
 This topic provides information on JVM optimization for Oracle Universal Banking Solution.

4.1 General Parameters

This topic provides information on the general parameters for tuning.

Table 4-1 General Parameters

PARAMETER	VALUE	Navigate To
JTA Time out seconds	18000	 Log in to the Weblogic Server console. Click on the domain name (ex: FCUBSDomain) which is under Domain Structure. Go to Configuration and then JTA, parameter and values are found on the right-side panel of the console.
Session Timeout	900	 Log in to the Weblogic Server console. Click on the Deployments which is under Domain Structure. Click on the deployed FCJ application from the right side panel. Click on FCJNeoWeb from Modules and components. Go to Configuration tab and then click on the General, the parameter values can be found here.

4.2 JVM Tuning

This topic provides information on JVM optimization for Oracle Universal Banking Solution.

The JAVA minimum and maximum heap size need to be reset for 32 and 64-bit environments. Both the minimum and maximum heap sizes are set to 1.5GB and 4GB in the case of 32-bit and 64-bit environments respectively.

How to find whether the JVM is 32bit or 64bit?

Go to **\$JAVA_HOME/bin** directory. Check java version using command **./java –d64 –version** 64 bit JVM shows the version details whereas 32bit throws an error.

How to modify the JVM heap parameters?

To change the JVM heap parameters create a file **setUserOverrides.sh** under domain FCUBSCL in both servers. This file should be created in **\$WL_HOME/user_projects/domains/\$WLS_DOMAIN/bin** in both the servers. Paste below the contents of the **USER_MEM_ARGS** variable accordingly to override the standard memory arguments passed to java for SUN JDK.

32 bit JDK

```
USER_MEM_ARGS="-
Dorg.apache.xml.dtm.DTMManager=org.apache.xml.dtm.ref.DTMManagerDefault -
Dorg.apache.xerces.xni.parser.XMLParserConfiguration=org.apache.xerces.parsers
.XML11Configuration -Dweblogic.threadpool.MinPoolSize=100 -
Dweblogic.threadpool.MaxPoolSize=100 -Xms1536M -Xmx1536M -XX:MaxPermSize=256m
-server -XX:+UseParallelOldGC -XX:ParallelGCThreads=4"
export USER MEM ARGS
```

64 bit JDK

```
USER_MEM_ARGS="-
Dorg.apache.xml.dtm.DTMManager=org.apache.xml.dtm.ref.DTMManagerDefault -
Dorg.a
pache.xerces.xni.parser.XMLParserConfiguration=org.apache.xerces.parsers.XML11
Configuration -Dweblogic.threadpool.MinPoolSize=100 -
Dweblogic.threadpool.MaxPoolSize=100 -Xms8g -Xmx8g -Xmx4g -server -
XX:+UseParallelOldGC -XX:ParallelGCThreads=4"
export USER MEM ARGS
```



Take a backup of this files before modifying them same.



Start Managed Servers

This topic provides instructions to start Managed servers by using Script and Console.

 To start Managed Servers using scripts, execute startManagedWebLogic.sh script present in the folder \$DOMAIN_HOME/bin.


Usage: ./startManagedWebLogic.sh SERVER_NAME {ADMIN_URL}

For Example: ./startManagedWeblogic.sh FCUBSMS1 https://<hostname1>/console

- To start Managed Servers using console, log in to the admin console and navigate to the FCUBSDomain.
- 3. Click on the **Environment** drop-down option and then click on the **Servers**.

The **Summary of Servers** screen displays.

Figure 5-1 Summary of Servers

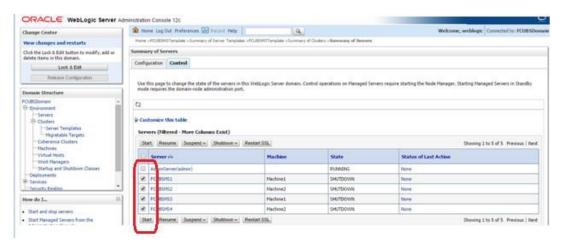

Click on the Control tab, select the managed servers to be started and then click on the Start button.

Upon successful startup, the status of Managed servers is changed to **RUNNING**.

Data Source Creation and JDBC Configuration

This topic provides information on data sources used by the FLEXCUBE application.

Following are the JNDI names of those data sources used by the FLEXCUBE application.

jdbc/fcjdevDS - This data source is used by FLEXCUBE online screen excluding branch screens.

- jdbc/fcjdevDSBranch This data source is used by Branch screens.
- jdbc/fcjSchedulerDS This data source is used by Quartz scheduler.



- jdbc/fcjdevDS should be NonXA.
- jdbc/fcjdevDSBranch and jdbc/fcjSchedulerDS should be XA

This topic contains the following sub-topics:

- Create Data Source for Non XA
 This topic provides systematic instructions for Data source creation for non XA.
- Create Data Source for XA
 This topic provides systematic instructions to create data source for XA.
- JDBC Parameters Tuning
 This topic provides information on JDBC Parameters that need to be updated for all the Data sources.


6.1 Create Data Source for Non XA

This topic provides systematic instructions for Data source creation for non XA.

- 1. Navigate to **FCUBSDomain** left panel.
- 2. Click on the Services drop-down option and then click on the Data Sources.

The **Summary of JDBC Data Sources** screen displays.


Figure 6-1 Summary of JDBC Data Sources

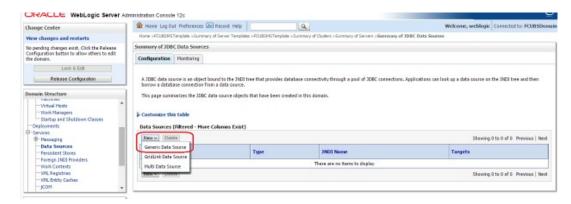

3. Click the **New** drop-down button and select **Generic Data Source** option.

The Create a New JDBC Data Source-JDBC Data Source Properties screen displays.


Figure 6-2 Create a New JDBC Data Source- JDBC Data Source Properties

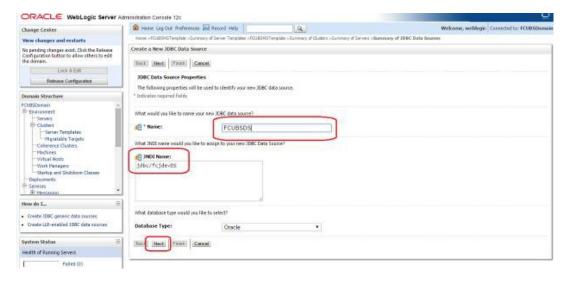

4. Specify the **Name** and **JNDI Name** fields and click the **Next** button.

The Create a New JDBC Data Source- JDBC Data Source Properties screen displays.

Figure 6-3 Create a New JDBC Data Source- JDBC Data Source Properties

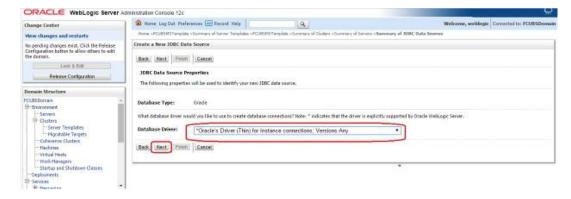




5. Select the **Database Driver** as **Oracle's Driver (Thin) for Instance connections: Versions: Any** and click the **Next** button.

The Create a New JDBC Data Source- Transaction Options screen displays.


Figure 6-4 Create a New JDBC Data Source- Transaction Options

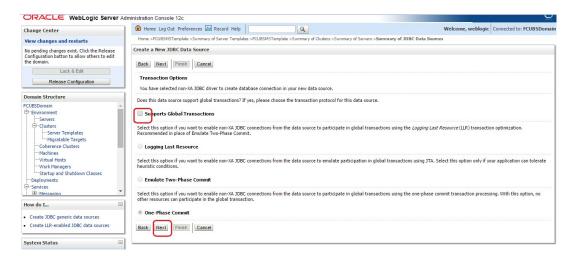

6. Uncheck the **Supports Global Transactions** option and click the **Next** button.

The Create a New JDBC Data Source- Connection Properties screen displays.

Figure 6-5 Create a New JDBC Data Source- Connection Properties

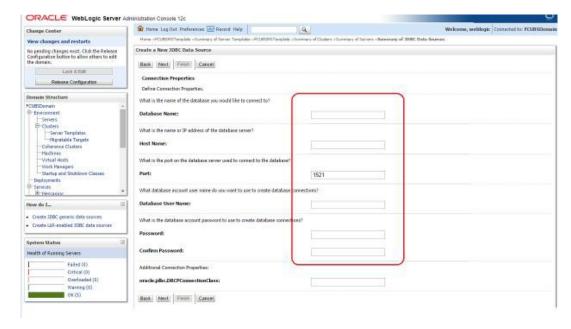

7. Specify the Database Name, Host Name, Port, Database User Name, Password, and Confirm Password fields and then click on the Next button.

The Create a New JDBC Data Source- Test Database Connection screen displays.



ORACLE WebLogic Server Administration Console 12c ⊕ Home Lag Out Preferences Recard Help Welcome, weblogic Connected to: FCUBS Q View changes and restarts Create a New JDBC Data Source No pending changes exist. Click the Release Configuration button to allow others to edit the domain. Test Configuration Back Nect Pinish Gencel Look & Edit Test Database Connection Release Coefiguration Test the database availability and the connection properties you provided. Domain Structure What is the full package name of XOBC driver class used to create database corrections in the correction pool? FCUBSDomain oracle.jdbc.OracleDriver URL: jdbc oracle oci @(DESCRIP) What database account user name do you want to use to ate database connections? Database User Name: FCUBS12108 B-Messanino How do L. What is the database account password to use to create de tabase connections? Create 3080 generic data seurces (Note: for secure password management, enter the pasd in the Password field instead of the Proper . Create LIR-enabled 30BC data sources System Status Health of Running Servers Confirm Password: Pailed (0) Critical (0) What are the properties to pass to the XOSC driver when creating database connections Warring (0) user=FCU8S121USER OK (5)

Figure 6-6 Create a New JDBC Data Source- Test Database Connection

8. Replace the JDBC **URL** field in the below format and click the **Next** button.

Default URL: jdbc:oracle:thin:@<IP_Adress>:<Port>:<INSTANCE_NAME>.

Change the default URL to:

jdbc:oracle:thin:@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP) (HOST=xxxxxx.com)(PORT=1521)))(CONNECT_DATA=(SERVICE_NAME=fcubs))

Where,

- Scan IP = xxxxxxx.com
- Service Name = fcubs
- Port = 1521

The user should make the necessary changes to the URL.

9. Click Test Configuration.

The connection test should be successful.

The Create a New JDBC Data Source- Targets screen displays.

Figure 6-7 Create a New JDBC Data Source- Targets



10. Select Target as FCUBSCluster and click the Finish button.

6.2 Create Data Source for XA

This topic provides systematic instructions to create data source for XA.

- 1. Navigate to FCUBSDomain left panel.
- 2. Click the Services drop-down option and then click the Data Sources.

The Summary of JDBC Data Sources screen displays.


Figure 6-8 Summary of JDBC Data Sources



3. Click the **New** drop down button and select **Generic Data Source** option.

The Create a New JDBC Data Source- JDBC Data Source Properties screen displays.

Figure 6-9 Create a New JDBC Data Source- JDBC Data Source Properties

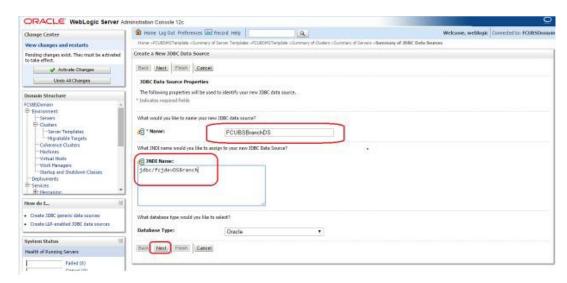


Specify the Name and JNDI Name fields and click the Next button.

The Create a New JDBC Data Source- JDBC Data Source Properties screen displays.



Figure 6-10 Create a New JDBC Data Source- JDBC Data Source Properties

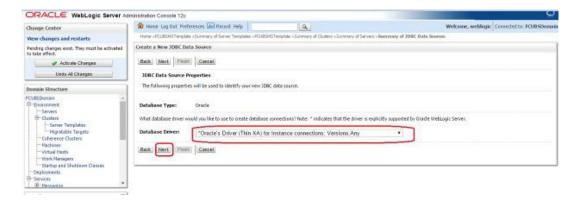

5. Select the **Database Driver** as **Oracle's Driver** (Thin XA) for Instance connections: Versions: Any and click the Next button.

The Create a New JDBC Data Source-Transaction Options screen displays.


Figure 6-11 Create a New JDBC Data Source- Transaction Options



Click the Next button.

The Create a New JDBC Data Source- Connection Properties screen displays.

Figure 6-12 Create a New JDBC Data Source- Connection Properties

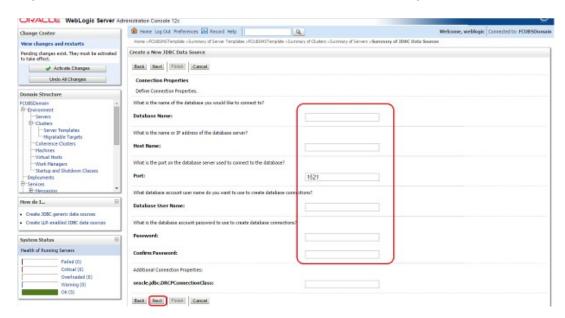




 Specify the Database Name, Host Name, Port, Database User Name, Password, and Confirm Password fields and then click the Next button.

The Create a New JDBC Data Source-Test Database Connection screen displays.

Figure 6-13 Create a New JDBC Data Source- Test Database Connection

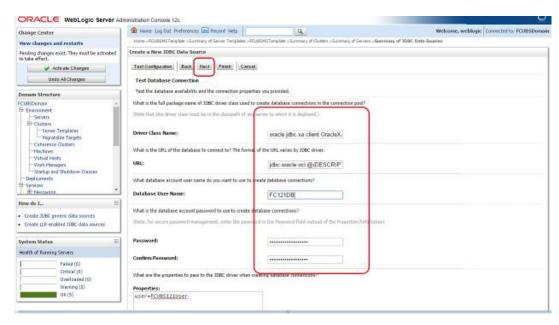

8. Replace the JDBC **URL** field in the below format and click the **Next** button.

Default URL: jdbc:oracle:thin:@<IP_Adress>:<Port>:<INSTANCE_NAME>.

Change the default URL to:

jdbc:oracle:thin:@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP) (HOST=xxxxxx.com)(PORT=1521)))(CONNECT_DATA=(SERVICE_NAME=fcubs))

Where,

- Scan IP = xxxxxxx.com
- Service Name = fcubs
- Port = 1521

The user should make the necessary changes to the URL.


9. Click the **Test Configuration**.

The connection test should be successful.

The Create a New JDBC Data Source-Targets screen displays.



Figure 6-14 Create a New JDBC Data Source- Targets

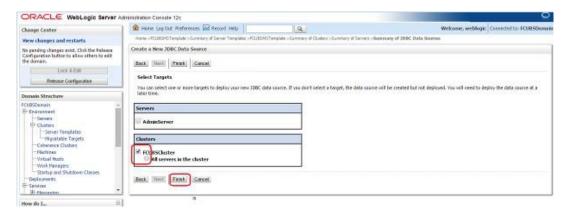

10. Select Target as FCUBSCluster and click the Finish button.

The newly created XA Data source is displayed in the **Summary of JDBC Data Sources** screen.

Figure 6-15 Summary of JDBC Data Sources



11. Navigate to the Change Center left panel and click the Activate Changes.

A message displays on Summary of JDBC Data Sources screen stating that All changes have been activated. No restarts are necessary.

ORACLE WebLogic Server Administration Console 12c **®** Home Lag Out Preferences **™** Record Help Welcome, weblogic Connected to: FCUBSE Home >PCUBSMSTemplate > Summary of Custom > Summary of Servers > Sources > PCUBSB ranchOS > Semenary of JDBC Data Searces Click the Lock & Edit buttoe to modify, add or delete items in this domain. All dranges have been activated. No restarts are necessary. Summary of JDBC Data Sources Configuration Honitoring A JOBC data source in an object bound to the JADI tree that provides database connectivity through a pool of JOBC connections. Applications can look up a data source on the JADI tree and then borrow a database connection from a data source. Startup and Shutdown Classes Stangu and Shatdown Cloeployments
Services
8- Messaging
18- Messaging
18 © Customize this table Data Sources (Filtered - Hore Columns Exist) Click the Lock & Edit button in the Change Center to activate all the buttons on this page New - Delete Showing 1 to 6 of 6 Previous | Next How do L. FCUBSBrandiO5 jdbc/fcjdevDS8randi . Create JDBC generic data sources jdbc/fcjdev0S FCUBSCluster Create 106C (Gidhink data sources) PCUBSDS_ASYNC jdbc/fcjdevDS_ASVIVO FCUBSClurter Create 308C multi-data sources PCUBSDS_XA jdbc/fcjdevDS_XA **FCURSCheiter** . Delete IDBC data sources PCUBSScheduler06 idbalfdSchedulerDS FCUBSCluster PLECTEST, WORLD FLEXTEST.WORLD FCUBSClucter New - Delete Showing 1 to 6 of 6 Previous | Next

Figure 6-16 Summary of JDBC Data Sources - Activate Changes

12. Similarly, create all the other Data Sources required for the FCUBS Application and Gateway Deployments.

6.3 JDBC Parameters Tuning

This topic provides information on JDBC Parameters that need to be updated for all the Data sources.

Table 6-1 JDBC Parameters

PARAMETER	VALUE	Navigate To	
Connection Reserve time out	30	Connection Pool and then click Advance	
Test Frequency	60	Connection Pool and then click Advance	
Inactive connection time out	30	Connection Pool and then click Advance	
Initial Capacity	1	Connection Pool	
Max capacity	Based on Site Requirement	Connection Pool	
Capacity Increment	5	Connection Pool	
Shrink Frequency	900	Connection Pool and then click Advance	
Test Connection on Reserve	Checked	Connection Pool and then click Advance	
Statement Cache Size	50	Connection Pool	



JMS Resource Creation

JMS Resource Creation involves various steps:

- Persistence Store Creation
- JMS Server Creation
- JMS Module Creation
- Resource Creation: Connection Factory and Queue's

Refer to the Configure JMS on Weblogic Server guide for further details on JMS setup.



Oracle WebLogic Load Balancing

For WebLogic load balancing, use

- Oracle HTTP Server: Refer to Configuration of Oracle HTTP Server guide for setup.
- Apache: Refer to Configuration for Apache guide for setup.



Frequently Asked Questions

This topic contains the following sub-topics:

- Machine status is Unreachable
 This topic provides systematic instructions to change the machine's status.
- Restart Node Manager
 This topic provides systematic instructions to restart the node manager.
- Scale Up Dynamic Cluster
 This topic provides systematic instructions to scale up dynamic cluster capacity.
- Session Timeout
 This topic describes steps to verify session timeout conditions.

9.1 Machine status is Unreachable

This topic provides systematic instructions to change the machine's status.

If the machine's status shows Unreachable, the machine is not reachable and the user cannot start/stop the managed servers from the console.

- In the console, navigate to **Domain structure** left panel.
- 2. Click on the **Machines** and then click on **Machine1**.

The **Settings for Machine1** screen displays.

3. Click on the Monitoring tab and then click on the Node Manager Status.

The **Status** displays **Unreachable** in the **Settings for Machine1** screen.

To change the status, start the Node Manager on that server.
 Refer to the Start Node Manager topic on steps to start the Node Manager.

9.2 Restart Node Manager

This topic provides systematic instructions to restart the node manager.

- 1. Locate node manager PID using ps -ef|grep weblogic.nodemanager.javaHome.
- Change directory to \$DOMAIN_HOME/bin.
- Kill the Unix process using kill -9 <pid>.
- 4. Verify that the node manager is killed by **tail –f nohup.out**.
- Start node manager using nohup ./startNodeManager.sh.
- 6. Verify that node manager is started using tail -f nohup.out.

9.3 Scale Up Dynamic Cluster

This topic provides systematic instructions to scale up dynamic cluster capacity.

To scale up the sufficient capacity of the dynamic cluster, the user can add dynamic servers on demand.


- Navigate to the FCUBSDomain left panel.
- 2. Click the Environment drop down option and then click Clusters.

The **Summary of Clusters** screen displays.

Click the FCUBSCluster.

The **Settings for FCUBSCluster** screen displays.

Figure 9-1 Settings for FCUBSCluster

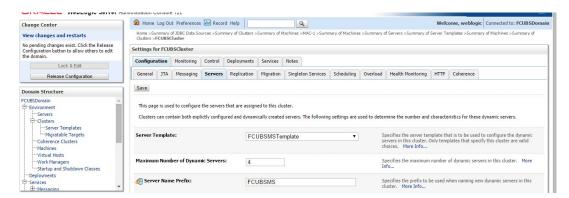

- 4. Click the **Configuration** tab and then click the **Servers** tab.
- Change the Maximum Number of Dynamic Servers to 8 and then click the Save button.
- Navigate to the Change Center left panel and click the Activate changes.

After activation, 4 new Dynamic Servers are added to the Dynamic Cluster.

Figure 9-2 Summary of Dynamic Clusters

Name 🙈	Туре	Machine	Listen Port
FCUBSMS1	Dynamic	MAC-1	7101
FCUBSMS2	Dynamic	MAC-2	7102
FCUBSMS3	Dynamic	MAC-1	7103
FCUBSMS4	Dynamic	MAC-2	7104
FCUBSMS5	Dynamic	MAC-1	7105
FCUBSMS6	Dynamic	MAC-2	7106
FCUBSMS7	Dynamic	MAC-1	7107
FCUBSMS8	Dynamic	MAC-2	7108

Start the 4 new Dynamic Servers and it doubles the capacity of the dynamic cluster.

9.4 Session Timeout

This topic describes steps to verify session timeout conditions.

Session timeouts occur intermittently during load condition.

Verify the following:

- 1. Clock Synchronization: Time across the nodes/machines is the same.
- 2. Session Stickiness in the load balancer: Persistence Type in load balancer should be set to SOURCE IP and should not be the cookie.

