



# BEA

BEA WebLogic ERP Adapter Installation  
and Configuration  
Version 5 Release 5

DN3501550.1204

January 3, 2005

EDA, EDA/SQL, FIDEL, FOCCALC, FOCUS, FOCUS Fusion, FOCUS Vision, Hospital-Trac, Information Builders, the Information Builders logo, Parlay, PC/FOCUS, SmartMart, SmartMode, SNAPPack, TableTalk, WALDO, Web390, WebFOCUS and WorldMART are registered trademarks, and iWay and iWay Software are trademarks of Information Builders, Inc.

Due to the nature of this material, this document refers to numerous hardware and software products by their trademarks. In most, if not all cases, these designations are claimed as trademarks or registered trademarks by their respective companies. It is not this publisher's intent to use any of these names generically. The reader is therefore cautioned to investigate all claimed trademark rights before using any of these names other than to refer to the product described.

Copyright © 2004 BEA Systems, Inc. All Rights Reserved.

Copyright © 2004, by Information Builders, Inc and iWay Software. All rights reserved. Patent Pending. This manual, or parts thereof, may not be reproduced in any form without the written permission of Information Builders, Inc.

---

---

## Preface

This documentation describes how to install and configure BEA ERP Adapters, Connector for JCA, Integration Business Services Engine (iBSE), and Application Explorer for use with BEA WebLogic Server. It is intended for those with an administrator's knowledge of the operating systems and target systems involved in their implementation.

## How This Manual Is Organized

---

The following table includes numbers, titles, and brief descriptions of chapters and appendixes in this manual.

Chapter/Appendix		Contents
1	<i>BEA WebLogic ERP Adapter Installation Overview</i>	Provides a brief overview of BEA ERP Adapter products and components, as well as their installation steps.
2	<i>Installing the ERP Adapters</i>	Provides installation requirements, instructions for running the installation program, post-installation tasks, and third party requirements for adapters.
3	<i>Configuring Connector for JCA</i>	Provides instructions for configuring Connector for JCA.
4	<i>Configuring the Integration Business Services Engine</i>	Provides instructions for configuring Web services components.
5	<i>Configuring Application Explorer</i>	Provides instructions for configuring the different versions of Application Explorer.

## Documentation Conventions

---

The following table lists the conventions that apply in this manual and a description of each.

Convention	Description
<code>THIS TYPEFACE</code> or <code>this typeface</code>	Denotes syntax that you must enter exactly as shown.

<b>Convention</b>	<b>Description</b>
<i>this typeface</i>	Represents a placeholder (or variable) in syntax for a value that you or the system must supply.
<u>underscore</u>	Indicates a default setting.
<i>this typeface</i>	Represents a placeholder (or variable), a cross-reference, or an important term.
<b>this typeface</b>	Highlights a file name or command.
Key + Key	Indicates keys that you must press simultaneously.
{ }	Indicates two or three choices; type one of them, not the braces.
	Separates mutually exclusive choices in syntax. Type one of them, not the symbol.
...	Indicates that you can enter a parameter multiple times. Type only the parameter, not the ellipsis points (...).
. . . . . .	Indicates that there are (or could be) intervening or additional commands.

## Help Us to Serve You Better

To help our consultants answer your questions effectively, please be prepared to provide specifications and sample files and to answer questions about errors and problems.

The following tables list the specifications our consultants require.

<b>Platform</b>	
<b>Operating System</b>	
<b>OS Version</b>	
<b>Product List</b>	
<b>Adapters</b>	
<b>Adapter Deployment</b>	For example, JCA, Integration Business Services Engine.
<b>Container Version</b>	

The following table lists components. Specify the version in the column provided.

<b>Component</b>	<b>Version</b>
Adapter	
EIS (DBMS/APP)	
HOTFIX / Service Pack	

The following table lists the types of Application Explorer. Specify the version (and platform, if different than listed previously) in the columns provided.

<b>Application Explorer Type</b>	<b>Version</b>	<b>Platform</b>
Swing		
Servlet		
ASP		

In the following table, specify the JVM version and vendor in the columns provided.

<b>Version</b>	<b>Vendor</b>

The following table lists additional questions to help us serve you better.

<b>Request/Question</b>	<b>Error/Problem Details or Information</b>
Provide usage scenarios or summarize the application that produces the problem.	
Did this happen previously?	
Can you reproduce this problem consistently?	

Request/Question	Error/Problem Details or Information
Any <b>change in the application environment:</b> software configuration, EIS/ database configuration, application, and so forth?	
Under what circumstance does the problem <i>not</i> occur?	
Describe the <b>steps</b> to reproduce the problem.	
Describe the <b>problem</b> .	
Specify the <b>error</b> message(s).	

The following table lists error/problem files that might be applicable.

XML schema
XML instances
Other input documents (transformation)
Error screen shots
Error output files
Trace and log files
Log transaction

---

---

# Contents

<b>1. BEA WebLogic ERP Adapter Installation Overview</b> .....	<b>1-1</b>
BEA ERP Adapter Components .....	1-2
ERP Adapters .....	1-3
Connector for JCA .....	1-3
Integration Business Services Engine .....	1-3
Application Explorer .....	1-4
Installation and Configuration Overview .....	1-4
<b>2. Installing the ERP Adapters</b> .....	<b>2-1</b>
Installation Requirements .....	2-2
BEA Requirements .....	2-2
Additional Adapter Requirements .....	2-2
Additional Integration Business Services Engine Requirements .....	2-3
Installing the ERP Adapters .....	2-4
Running the Installation .....	2-4
Post-Installation Topics and Tasks .....	2-6
Licensing the ERP Adapters .....	2-9
Uninstalling the ERP Adapters .....	2-10
Copying and Collecting Files for Adapters .....	2-10
Adding Drivers to CLASSPATH for SAP or MQ Series .....	2-15
Configuration Steps .....	2-16
<b>3. Configuring Connector for JCA</b> .....	<b>3-1</b>
Deploying and Configuring Connector for JCA .....	3-2
Connector Configurations Overview .....	3-3
Deploying Connector for JCA to BEA WebLogic .....	3-4
Changing Default Connector Settings .....	3-8
Deploying and Running the JCA Test Tool .....	3-10
Deploying the JCA Test Tool .....	3-10
Running the JCA Test Tool .....	3-15
Configuring the JCA Test Tool .....	3-16
<b>4. Configuring the Integration Business Services Engine</b> .....	<b>4-1</b>
Deploying, Configuring, and Verifying Servlet iBSE .....	4-2
Deploying Servlet iBSE .....	4-2
Configuring Servlet iBSE .....	4-7
Verifying Servlet iBSE .....	4-9
Enabling Tracing for Servlet iBSE .....	4-11
Creating and Configuring the iBSE Repository .....	4-12
Creating the iBSE Repository .....	4-12
Configuring iBSE to Use a Repository Database .....	4-17

<b>5. Configuring Application Explorer .....</b>	<b>5-1</b>
Configuring Swing Application Explorer .....	5-2
Accessing Swing Application Explorer .....	5-2
Configuring Servlet Application Explorer .....	5-4
Configuring Servlet Application Explorer Communications .....	5-4
Deploying Servlet Application Explorer .....	5-7
Accessing Servlet Application Explorer .....	5-11

---

---

## CHAPTER 1

# BEA WebLogic ERP Adapter Installation Overview

### Topics:

- BEA ERP Adapter Components
- Installation and Configuration Overview

This section provides an overview of the installation and configuration of BEA WebLogic ERP Adapters and components.

## **BEA ERP Adapter Components**

---

This manual explains how to install and configure the following products for use with BEA WebLogic Server:

- ERP Adapters
- Connector for JCA
- Integration Business Services Engine (iBSE)
- Application Explorer

The following topics briefly summarize the components. This manual explains how to install all components. Most users require only a subset of the available components.

## ERP Adapters

BEA ERP adapters provide the fastest and most efficient way to connect your applications to the following systems:

- PeopleSoft
- Oracle Applications
- Siebel
- SAP

**Note:** To connect BEA WebLogic to a different system, data source, or protocol, additional adapters are available through iWay Software. iWay Software provides over 200 types of adapters connecting everything from legacy systems and databases to the most recent advancements in information technology.

## Connector for JCA

Connector for JCA runs in J2EE Connector Architecture (JCA) compliant application servers and uses the Common Client Interface (CCI) to provide fast integration services using adapters. The connector provides an extremely quick way to deploy adapters to connect data, applications, systems, and protocols through an application server.

Connector for JCA provides XML transformation, adapter hosting, and integration capabilities. After you deploy Connector for JCA, you have access to adapters.

## Integration Business Services Engine

Integration Business Services Engine (iBSE) provides transformation and adapter hosting functionality as well as an environment for developing, running, and integrating Web services. It provides a transformation and integration engine for processing XML files and SOAP messages for exchanges with Web services applications. For use with application servers, iBSE is provided as a Web or Enterprise application and referred to as Servlet iBSE.

Servlet iBSE is deployed through a J2EE compliant application server. After you deploy Servlet iBSE, you have access to the adapters you installed. Although you can run both iBSE and Connector for JCA, only one is required to host adapters.

## Application Explorer

Application Explorer is a GUI tool that uses adapters to create schemas and Web services for use with Connector for JCA, iBSE, or other XML or Web services based programs. It enables you to quickly generate schemas and publish Web services from objects and procedures in production ERP systems, without requiring in-depth knowledge of the objects or systems.

For BEA WebLogic, two versions of Application Explorer are available:

- The Java **Swing** version is a window accessible within BEA WebLogic Workshop. The adapter installation automatically makes this available if Workshop is installed.
- The Java **Servlet** version is a Web application accessible through a Web browser. The adapter installation creates the Web application that you must deploy to WebLogic server through the console.

## Installation and Configuration Overview

---

Depending on the adapters and components you wish to use, installation and configuration steps include the following:

1. Review the requirements and install any required third party components. (Chapter 2, *Installing the ERP Adapters*)
2. Run the installation program to install adapters and components. (Chapter 2, *Installing the ERP Adapters*)
3. On UNIX, set environment variables. (Chapter 2, *Installing the ERP Adapters*)
4. Copy third party adapter-related files into the adapter directory structure. (Chapter 2, *Installing the ERP Adapters*)
5. To use Connector for JCA, deploy the Connector for JCA and the JCA Test Tool on your application server. (Chapter 3, *Configuring Connector for JCA*)
6. To use the Integration Business Services Engine (iBSE), deploy Servlet iBSE on your application server and optionally set up a database repository. (Chapter 4, *Configuring the Integration Business Services Engine*)
7. Configure Application Explorer. (Chapter 5, *Configuring Application Explorer*)
8. Perform any adapter-specific post-installation steps described in the documentation for your adapters.

---

---

## CHAPTER 2

# Installing the ERP Adapters

### Topics:

- Installation Requirements
- Installing the ERP Adapters
- Copying and Collecting Files for Adapters
- Configuration Steps

The following topics describe the requirements and initial installation procedures for BEA WebLogic ERP Adapters.

## Installation Requirements

---

Review the following installation requirements to ensure your system supports the ERP Adapters.

### BEA Requirements

The adapters run as part of your BEA WebLogic Server. Therefore, the adapters require the same hardware, operating system, and Java software requirements as BEA WebLogic Server. Ensure that BEA WebLogic Server 8.1(with service pack 3) is properly installed and functioning before configuring it for use with the ERP adapters. Be sure to install any needed service packs.

You can use an existing domain or create a new domain for adapter components using the Configuration Wizard.

- You can access the Configuration Wizard on Windows from the *Start* menu by selecting *Programs, BEA WebLogic Platform 8.1*, and then *Configuration Wizard*.
- You can access the Configuration Wizard on UNIX by executing the following:

```
/BEA\_HOME/weblogic81/common/bin/config.sh
```

**Note:** If multiple domains run on your machine, chose a custom configuration to change the default port so it does not conflict with other domains.

For more information, see the BEA WebLogic documentation.

### Additional Adapter Requirements

- Approximately 75 MB of disk space.
- For end users, Internet Explorer 6 or higher.
- For Swing Application Explorer, Java SDK 1.4.1 or higher.
- Third party libraries or JDBC drivers. Some adapters require third party libraries or JDBC drivers provided by the vendor of the target system. You must copy these files into the adapter directory structure after you install the adapters. For more information, see *Copying and Collecting Files for Adapters* on page 2-10.
- One of the following operating systems: MS Windows 2000 with SP2, MS Windows 2003, Linux, Sun Solaris 8, Sun Solaris 9, HP/UX 11, or IBM AIX 5. For additional operating system support information, contact Customer Support.

The procedures, names, and paths in this manual use Windows conventions and default locations unless otherwise indicated. For other operating systems and non-default locations, substitute accordingly. Names and case may vary between operating systems.

**Note:** Ensure that `/JAVA_HOME/bin` is in `PATH` on UNIX.

## **Additional Integration Business Services Engine Requirements**

The Integration Business Services Engine (iBSE) requires a repository in which to store transactions and metadata required for the delivery of Web services. A JDBC™ compliant database is recommended. However, a file system repository is available and configured by default, so no initial database configuration is required to get started.

If you wish to use a database repository, the SQL required to create the repository tables is installed with the adapters. The required steps are explained in Chapter 4, *Configuring the Integration Business Services Engine*. The following are certified as iBSE repository databases:

- Microsoft SQL Server 2000 with SP1
- Oracle 8 and 9
- Sybase 12
- DB2 8.1

## Installing the ERP Adapters

---

The BEA WebLogic ERP Adapter installation installs a set of ERP Adapters, Connector for JCA, iBSE, and Application Explorer. After installation, components and adapters are available for a 90 day trial. After the trial period, contact BEA Software to obtain a license for the components you wish to continue using.

On Windows, you must be an administrator for the local machine to run the installation.

On UNIX, since adapter components run as part of your application server, it is a good idea to install as the user ID under which your application server runs.

### Running the Installation

Use the steps below to install adapters and components.

#### **Procedure** How to Install the ERP Adapters

1. Execute the installation program for your platform. The name of this program may vary. For example:

- On Windows:

```
bw18sp3.win32.exe
```

- On UNIX platforms, there are two options:

If you have an X Windows environment, you can use a GUI-based installation by executing the installation program with no options. For example:

```
./bw18sp3.linux.bin
```

If you do not have an X Windows environment, use the text-based installation by executing the installation program with the `-console` option. For example:

```
./bw18sp3.linux.bin -console
```

**Note:** This procedure follows the GUI installation. The prompts for the text-based installation are almost identical.

The installation begins and the Welcome window opens.

2. Click *Next*.

The License Agreement appears.

3. Review the information, indicate that you accept the terms, and click *Next* to continue.

The Choose Destination Location window opens.

**Note:** If you previously installed the ERP Adapters or an iWay 5.5 product, you may not be prompted to choose the destination if the previous installation was not uninstalled.

4. Accept the default or click *Browse* to specify a new location and then click *Next*.  
The BEA parameters window appears.
5. Complete the *Base Url* and *BEA Home* fields as follows and then click *Next*.

<i>Base Url</i>	Specify the URL (http vs. https, hostname, and port) for accessing your application server. For example:  <a href="http://hostname:7001">http://hostname:7001</a>
<i>BEA Home</i>	Specify the BEA directory into which WebLogic and other BEA software are installed. If BEA WebLogic Workshop is installed, Swing Application Explorer and the Connector for JCA (CCI) Control are added to it.

The Start Copying Files window appears.

6. Click *Next* to start the installation.

Files are copied to your system in the directory you specified.

## Post-Installation Topics and Tasks

Review the remainder of this chapter to determine if any tasks are required for your platform and adapters.

### **Reference** Adapter Directory Structure

After installation, an iWay55 directory is created and contains the following subdirectories:

#### bea

Contains components to be deployed into your application server.

#### bin

Contains XML files required for adapters.

#### config

Contains configuration directories for Connector for JCA. By default, the connector is set to access the base configuration, and connector information is written to the base subdirectory. When additional connector configurations are created, their directories are placed here.

On UNIX, ensure that the user ID your application server runs under has full permissions to the iWay55/config directory and subdirectories. If you installed under a different user ID than the user ID that runs the application server processes, you may need to use `chmod`, `chown`, and/or group ownership.

#### etc

Contains miscellaneous tools and files to configure additional components.

#### lib

Contains adapters, drivers, and other files used by adapter components. All components must access this directory. In most cases, after components recognize this location, the adapters and other files are accessible.

**Warning:** A `license.xml` file appears in the iWay55 directory. Do not delete this file.

## **Procedure** How to Set Environment Variables

After installation, environment variables are required to use adapters and components. The variables can be set in your profile or in the WebLogic environment settings (commEnv.cmd or commEnv.sh).

- On Windows, environment variables are automatically set by the installation program. No steps are necessary, but it is a good idea to be aware of them in case you need to troubleshoot.
- On UNIX, the installation program appends the PATH, IWAY55OEM, and IWAY55 environment variables to the end of the .profile (or .bash\_profile) in your home directory. However, you may need to add the shared library path variable listed below. In addition, if you run components under different user IDs, be sure to add these variables to those profiles as well. This includes user IDs that run any third party components such as your application server. You must also add files to WebLogic's CLASSPATH variable (WEBLOGIC\_CLASSPATH) in commEnv.sh.

Ensure profiles are executed before attempting to run adapters and components.

**Note:** If you plan to run multiple installations of adapters and components, environment variables must have different values when running and installing each installation.

The following environment variable settings are required to use adapters and components:

1. The following variable must be defined and set to the location of the iWay55 directory:

```
IWAY55
```

For example:

```
IWAY55=/opt/iWay55/  
export IWAY55
```

**Note:** Be sure to include the trailing slash.

2. The PATH variable must contain the iWay55/lib directory. For example:

```
PATH=$PATH:/opt/iWay55/lib  
export PATH
```

3. An IWAY55OEM variable must be defined and set as follows:

```
IWAY55OEM=BEA
```

For example:

```
export IWAY55OEM=BEA
```

4. On UNIX, the shared library variable must contain the iWay55/lib directory. This variable varies depending on your platform.

AIX	LIBPATH
HP-UX	SHLIB_PATH
Other UNIX Platforms	LD_LIBRARY_PATH

For example:

```
LD_LIBRARY_PATH=/opt/iWay55/lib:$LD_LIBRARY_PATH
export LD_LIBRARY_PATH
```

5. The WEBLOGIC\_CLASSPATH (or CLASSPATH) variable must contain several files installed with the adapters.

- On Windows, this is done for you in:

```
BEA_HOME\weblogic81\common\bin\commEnv.cmd
```

- On UNIX, you must set this in:

```
BEA_HOME/weblogic81/common/bin/commEnv.sh
```

Eight files must be added to the WEBLOGIC\_CLASSPATH. Their locations depend on where you installed the adapters:

```
/opt/iWay55/lib/iwaf.jar
/opt/iWay55/lib/iwafcont.jar
/opt/iWay55/lib/iwrepository.jar
/opt/iWay55/lib/iwutil.jar
/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/iwafjca.jar
/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/xalan.jar
/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/xercesImpl.jar
/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/xmlParserAPIs.jar
```

For example, you can add the following line to the end of the commEnv.sh file:

```
WEBLOGIC_CLASSPATH=$WEBLOGIC_CLASSPATH:/opt/iWay55/lib/iwaf.jar:/opt/iWay55/lib/iwafcont.jar:/opt/iWay55/lib/iwrepository.jar:/opt/iWay55/lib/iwutil.jar:/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/iwafjca.jar:/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/xalan.jar:/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/xercesImpl.jar:/opt/iWay55/bea/iwjcaivp/WEB-INF/lib/xmlParserAPIs.jar
```

```
export WEBLOGIC_CLASSPATH
```

Do not forget to export the variable on UNIX.

**Note:** When you run the startup script for a domain (e.g., startWebLogic.sh), the startup script imports variables from the commEnv.sh or commEnv.cmd file. It then sets the CLASSPATH variable to include the WEBLOGIC\_CLASSPATH variable. If you are not using clusters, you can set WEBLOGIC\_CLASSPATH in the startWebLogic.sh file. Also, if you plan to run multiple instances of the adapters on different servers, set this in startWebLogic.sh so that each server uses different files. If you do set the WEBLOGIC\_CLASSPATH in the startup script (startWebLogic.sh), be sure to set it before the line that adds WEBLOGIC\_CLASSPATH to CLASSPATH.

## Licensing the ERP Adapters

When you license adapters, you receive xml files that you must rename and copy into the iWay55 directory.

### **Procedure** How to Update the License

After receiving a license, do the following:

1. Rename the license file to the following:

`license_adaptername.xml`

where:

`adaptername`

Is the name of the adapter.

For example:

`license_sap.xml`

2. Copy the license file to the iWay55 directory. The default location on Windows is:

`C:\Program Files\iWay55`

On other platforms, use the corresponding location.

3. Restart your domain.

**Note:** Do not delete the license.xml file that was installed with the adapters.

## Uninstalling the ERP Adapters

An uninstall utility is provided to properly remove adapter components from your system. You should use the uninstall utility rather than manually deleting directories. Manually removing directories on Windows or UNIX may cause problems if you wish to reinstall at a later time.

### **Procedure** How to Uninstall the ERP Adapters

To uninstall, do the following:

1. If you have deployed components to your application servers, undeploy them.
2. Ensure your domain is stopped.
3. Copy any files you wish to save out of the iWay55 directories.
4. Execute the uninstall utility. The utility's location varies depending on your platform. For example:

`C:\Program Files\iWay55\etc\uninstall\bwl8sp3\uninstaller.exe`

On UNIX, the file is named `uninstaller.bin`.

## Copying and Collecting Files for Adapters

---

Some adapters require third party libraries or JDBC drivers. To enable these adapters, you must:

1. Use the table that follows to determine third party files required for your adapter. Adapters may vary depending on the software you install.
2. Copy any required files into the `iWay55\lib` directory. The default location for this directory on Windows is:

`C:\Program Files\iWay55\lib`

On other platforms, use the corresponding location.

If the required third party files are not copied into this directory, then your adapter will not be available and may not appear in the JCA Test Tool or Application Explorer.

**Note:** On UNIX, be sure to copy files and not use links.

3. For the adapters for SAP and when using an MQ Series transport, some files must be added to your domain's CLASSPATH.

**Note:** The table sometimes lists the actual names of required files rather than the generic name of the driver or library. However, your vendor may change file names, update files, or have different versions of the drivers for different releases. Therefore, confirm which files are required by reviewing information provided by your vendor. Ensure you use the latest version of the driver for the correct release of your target system, data source, or protocol.

Adapter for	Required Libraries or Drivers
<p>Oracle Applications (E-Business Suite)</p>	<p>Oracle JDBC drivers (thin type4 or OCI type2) and/or Oracle Client NET8 or NET9.</p> <p>All calls to Oracle E-Business Suite occur through these drivers. If you do not have the appropriate JDBC driver, Oracle Technology Network (OTN) provides a download site:</p> <p><a href="http://otn.oracle.com/software/tech/java/sqlj_jdbc/content.html">http://otn.oracle.com/software/tech/java/sqlj_jdbc/content.html</a></p> <p><b>Note:</b> You require a logon ID to download the drivers.</p> <p>If you are using OCI drivers, you must install and configure Oracle Client on the machine with the Adapter for Oracle.</p> <p>To use Concurrent Program request functionality, you must install and configure Oracle Client on the Oracle database that supports Oracle E-Business Suite.</p>
<p>PeopleSoft</p>	<ul style="list-style-type: none"> <li>• PeopleSoft Java Object Adapter (psjoa.jar) <p>This file provides a low level interface between client applications and PeopleSoft. This file is provided with PeopleSoft in the following directory:</p> <p><a href="#">PS_HOME\web\PSJOA</a></p> <p>where:</p> <p><a href="#">PS_HOME</a></p> <p>Is the PeopleSoft home directory.</p> <p><b>Note:</b> The psjoa.jar file is different for every version of PeopleSoft. When you upgrade your PeopleTools release, ensure you copy the psjoa.jar file for the new release into the iWay55\lib directory and restart all components.</p> </li> <li>• pstools.properties (for PeopleSoft 8.1x) <p>PeopleSoft release 8.1x requires an additional file called pstools.properties in the following directory:</p> <p><a href="#">PS_HOME\web\jmac</a></p> </li> </ul> <p>For more information, see the <i>Adapter for Peoplesoft user's guide</i> documentation.</p>

Adapter for	Required Libraries or Drivers
SAP R/3	<p>SAP Java connector (normally sapjco.jar).</p> <p>Information on the current set of SAP connectors is available at:  <a href="http://service.sap.com/connectors">http://service.sap.com/connectors</a></p> <p>A valid SAP service ID is required to access this site. To download the current version, follow the information provided on the SAP Java Connector (SAP JCo) overview page. For more information, contact your SAP BASIS Administrator.</p> <p>Using the appropriate archive tool, open the archive containing the SAP Java Connector (SAP JCo) and extract the run-time files. The file names may vary by platform but usually are contained in the root of the archive.</p> <p>When using an application server, if you run into problems with the adapter for SAP, add sapjco.jar to your application server's CLASSPATH. For BEA WebLogic, the sapjco.jar file must be added to your WebLogic domain's CLASSPATH.</p>

Adapter for	Required Libraries or Drivers
Siebel	<p>For Siebel 6.3.x and higher, Siebel Java Data Bean API.</p> <p>This is distributed as .jar files with the Siebel Thin Client. These libraries vary by Siebel release in both content and name. Therefore, the Siebel Thin Client provided with the target Siebel system must always be used with the adapter. For example:</p> <ul style="list-style-type: none"> <li>• Siebel 6.3.x           <ul style="list-style-type: none"> <li><a href="#">SiebelTcOM.jar</a></li> <li><a href="#">SiebelTcCommon.jar</a></li> <li><a href="#">SiebelTC_enu.jar</a></li> <li><a href="#">SiebelDataBean.jar</a></li> </ul> </li> <li>• Siebel 7.0.3           <ul style="list-style-type: none"> <li><a href="#">SiebelJI_Common.jar</a></li> <li><a href="#">SiebelJI_enu.jar</a></li> </ul> </li> <li>• Siebel 7.5.2           <ul style="list-style-type: none"> <li><a href="#">SiebelJI_Common.jar</a></li> <li><a href="#">SiebelJI_enu.jar</a></li> <li><a href="#">SiebelJI.jar</a></li> </ul> </li> </ul> <p>The Siebel COM-based API (Windows only) requires the Siebel Thin Client to be installed and accessible to the adapter.</p> <p><b>Note:</b> The following files are for English language implementations:</p> <p><a href="#">SiebelTC_enu.jar</a>  <a href="#">SiebelJI_enu.jar</a></p> <p>For non-English installations, the last three letters (<i>_enu</i>) vary.</p> <p>If you are using MQ Series as a transport, you also need the following file:</p> <p><a href="#">com.ibm.mq.jar</a></p> <p>For BEA WebLogic, this MQ Series file must also be added to your domain's CLASSPATH.</p> <p>The following binary files are also required for MQ Series</p> <p><a href="#">MQXAi02.dll</a>  <a href="#">mqjbnd05.dll</a>  <a href="#">mqjbd02.dll</a></p> <p>For non-Windows platforms, use the corresponding files.</p>

## Adding Drivers to CLASSPATH for SAP or MQ Series

In addition to copying files into the lib directory, the following must be added to your domain's CLASSPATH. If you use the Adapter for SAP:

`sapjco.jar`

If your adapter uses MQ Series as a transport, the following file must be added to your domain's CLASSPATH:

`com.ibm.mq.jar`

You can set CLASSPATH by setting the WEBLOGIC\_CLASSPATH variable in the file that sets variables for all servers:

- Windows:

`BEA_HOME\weblogic81\common\bin\commEnv.cmd`

- UNIX:

`BEA_HOME/weblogic81/common/bin/commEnv.sh`

**Note:** When you start a domain, variables are imported from the commEnv.sh or commEnv.cmd file. The CLASSPATH variable is set to include the WEBLOGIC\_CLASSPATH variable. If you are not using clusters or manager servers, you can set CLASSPATH in the startWebLogic.sh or startWebLogic.cmd file for your domain. If you are not sure where to set CLASSPATH, consult BEA WebLogic documentation.

### **Procedure** How to Add Files to CLASSPATH

1. If it is started, stop the domain you are using.
2. Open the commEnv.cmd or commEnv.sh file in a text editor.
3. Add the full path to any files required for your adapter to the WEBLOGIC\_CLASSPATH variable. You can add lines at the end of the file. For example

On Windows:

```
set WEBLOGIC_CLASSPATH=%WEBLOGIC_CLASSPATH%; "C:\Program
Files\iWay55\lib\sapjco.jar"
```

On UNIX:

```
WEBLOGIC_CLASSPATH="${WEBLOGIC_CLASSPATH} " :/opt/iWay55/lib/sapjco.jar
export WEBLOGIC_CLASSPATH
```

**Note:** Adding directories is not sufficient. You must add the full paths including each file. On UNIX, make sure to export the variable.

4. Save and exit the file.

## Configuration Steps

---

After installation, the configuration steps depend on the components you wish to use.

1. For Connector for JCA, deploy the connector and JCA Test Tool. (Chapter 3, *Configuring Connector for JCA*)
2. For iBSE, configure Servlet iBSE and optionally set up a database repository. (Chapter 4, *Configuring the Integration Business Services Engine*)
3. Configure a version of Application Explorer. (Chapter 5, *Configuring Application Explorer*)
4. Perform any adapter-specific post-installation steps described in the documentation for your adapters.

---

---

## CHAPTER 3

# Configuring Connector for JCA

### Topics:

- Deploying and Configuring Connector for JCA
- Deploying and Running the JCA Test Tool

This section explains how to configure Connector for JCA. If you are using Servlet iBSE, but do not plan to use Connector for JCA, you can skip to Chapter 4, *Configuring the Integration Business Services Engine*.

## Deploying and Configuring Connector for JCA

---

Connector for JCA runs in J2EE™ Connector Architecture (JCA) compliant application servers and uses the Common Client Interface (CCI) to provide fast integration services using adapters. The connector provides a quick way to deploy adapters and connect data, applications, systems, and protocols. After you deploy the connector, you have access to the adapters.

Connector for JCA is installed with the adapters as the iwafjca.rar file. The default location on Windows is:

`C:\Program Files\iWay55\bea\iwafjca.rar`

For other platforms, see the corresponding location.

**Caution:** The iwafjca.rar file in the iWay55\etc\setup directory is not configured by default. This should only be used if the bea\iwafjca.rar file does not exist or causes problems. If you use the file in the iWay55\etc\setup directory you must manually edit the ra.xml file located inside the archive.

Before deploying the connector, review the information below regarding configurations and settings.

## Connector Configurations Overview

Connector for JCA has configuration directories where repository, schemas, and other information are stored. By default, a configuration called base is used and files and information are written under the iWay55 directories to the following default location on Windows:

```
C:\Program Files\iway55\config\base
```

For other platforms, see the corresponding location.

The default file system repository for the base configuration on Windows is:

```
C:\Program Files\iway55\config\base\repository.xml
```

The repository.xml file is not created until you access the configuration using Application Explorer or the JCA Test Tool.

A second repository stores the states of channels:

```
C:\Program Files\iway55\config\base\st_repository.xml
```

Connector for JCA configurations can be created by manually creating directories under iway55\config with the name of the configuration.

On UNIX, ensure the user ID under which your application server runs has full permissions to the iWay55/config directory and subdirectories. If you installed under a user ID other than the user ID that runs the application server processes, you may be required to use chmod, chown, and/or group ownership.

For more information on Connector for JCA, see the *Connector for JCA for BEA WebLogic Server User's Guide*.

## Deploying Connector for JCA to BEA WebLogic

The following procedure refers to the directory where BEA WebLogic is installed as *BEA\_HOME*. The procedure refers to the root of a domain as *DOMAIN\_NAME*. Substitute the absolute paths on your system for *BEA\_HOME* and *DOMAIN\_NAME*. The procedure contains paths for a Windows system. If you are on a UNIX system, substitute accordingly.

### **Procedure** How to Deploy Connector for JCA

1. Start the domain you are using for the adapters. For example:

`BEA_HOME\user_projects\domains\DOMAIN_NAME\startWebLogic.cmd`

2. Open the BEA WebLogic console to deploy Connector for JCA.

The BEA WebLogic console is accessible through a browser at:

`http://hostname:port/console`

where:

`hostname`

Is the hostname of the machine where your domain is running.

`port`

Is the port for the domain you are using. The port for the default domain is 7001.


For example:

`http://localhost:7001/console`


A logon page appears. If the logon page does not open, ensure your WebLogic domain is started and that you used the correct port.




3. Log on to WebLogic.
4. Expand the *Deployments* folder in the left pane and then, click *Connector Modules*.  
A page appears for deploying .rar files.

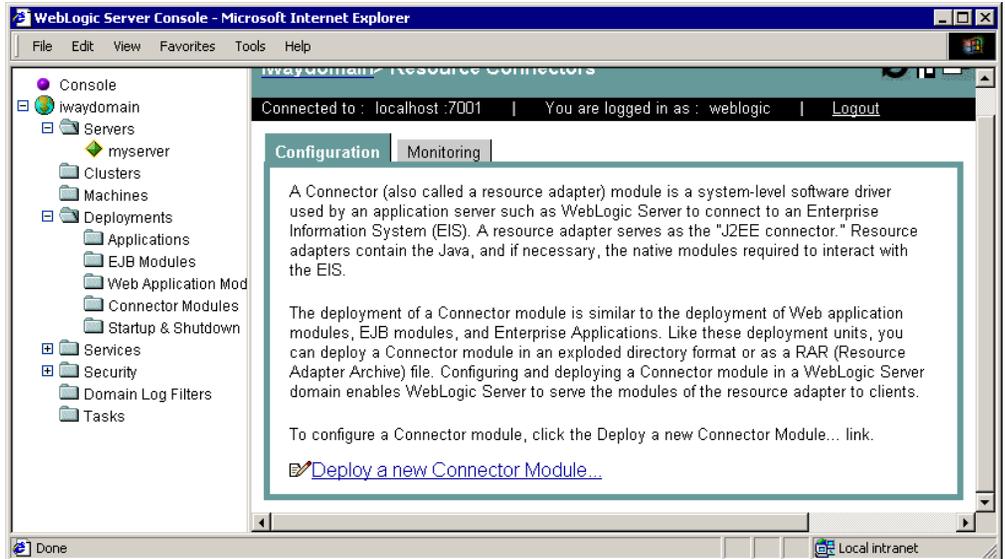

5. Click *Deploy a new Connector Module*.  
A page appears for you to specify where the connector is installed.

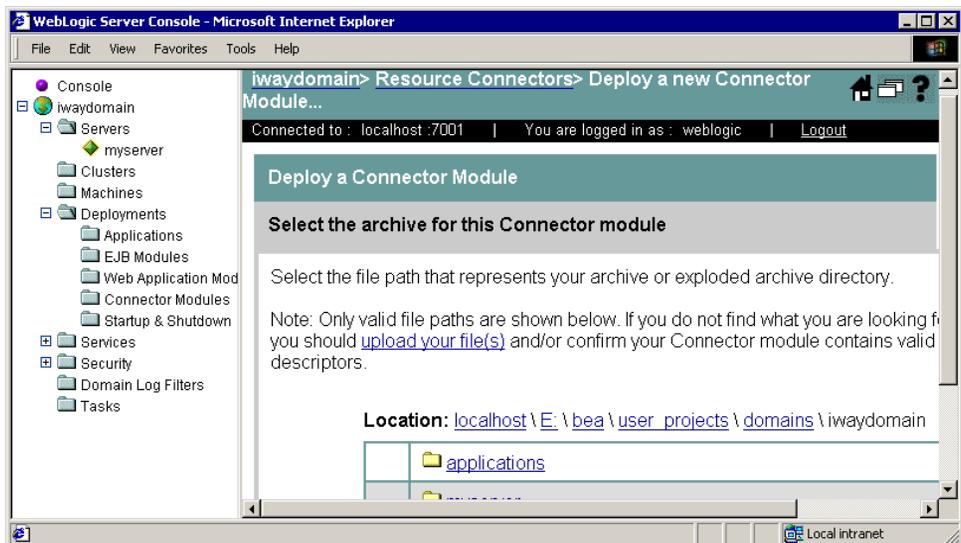

6. Click the links next to *Location* to view and specify the directory containing the Connector for JCA file (iwafjca.rar).

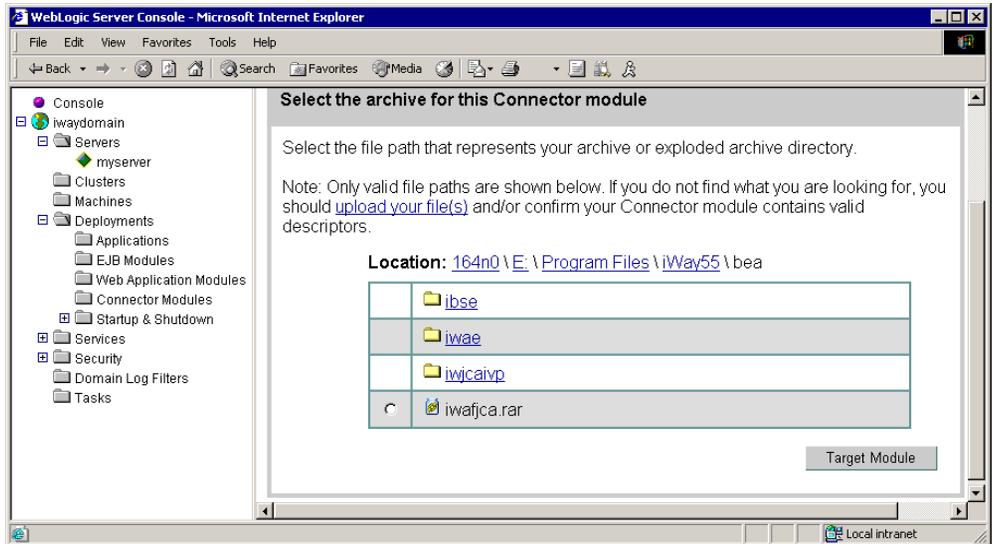


7. Select the option button next to *iwafjca.rar* and then, click *Target Module*.

If there are multiple servers in your domain, you are prompted to specify into which server or servers to deploy.

8. If prompted, check which servers to deploy to.


If you are deploying into a single server, information about the server displays.

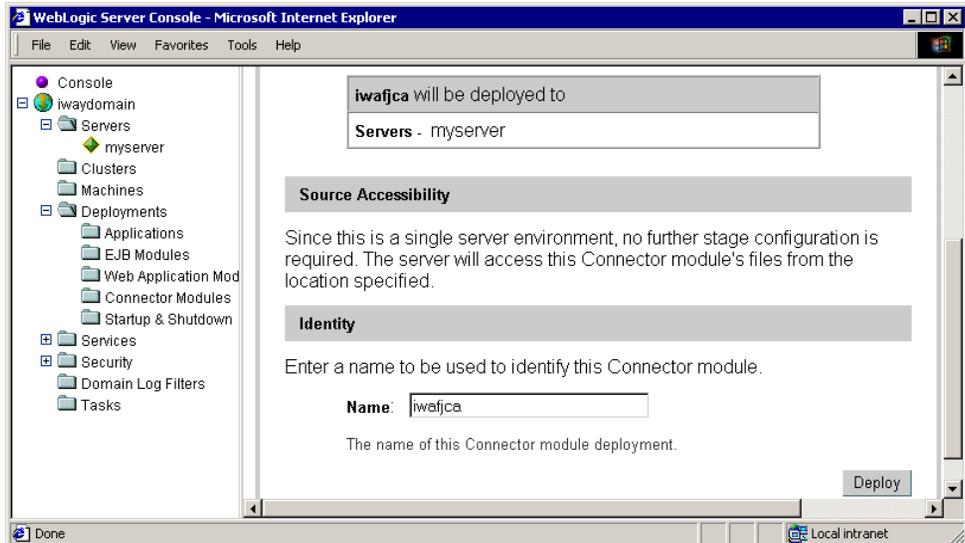

If you are deploying into multiple servers, you are prompted to copy the module to each server.

9. Click *Deploy* to complete the deployment process.

After the deployment completes, *iwafjca* appears on the left below *Connector Modules*.

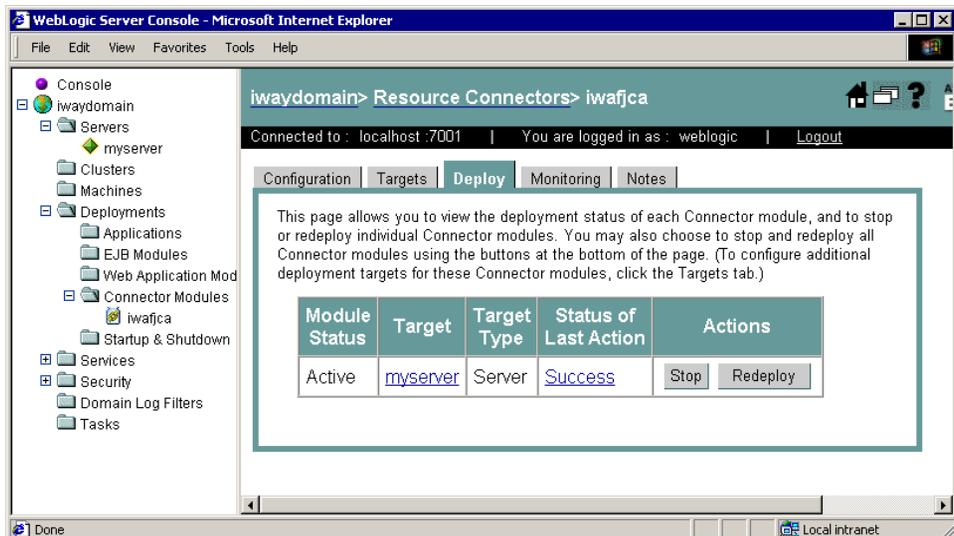

**Note:** You may need to expand the *Connector Modules* folder to see *iwafjca*.

## Changing Default Connector Settings

The behavior of Connector for JCA is controlled by the following file inside the iwafjca.rar archive:

[META-INF/ra.xml](#)

The following topic explains how to change the default settings for Connector for JCA.

### **Reference** How to Configure Connector for JCA Settings

This is not a required configuration. It is provided for reference. If you wish, you can proceed to *Deploying and Running the JCA Test Tool* on page 3-10.

To change defaults, you must:

1. Extract the META-INF\ra.xml file from the iwafjca.rar archive. To do this:
  - a. Open a command prompt and navigate to the directory containing the connector. For example:

```
C:\Program Files\iWay55\bea
```

- b. Issue the following command:

```
jar xvf iwafjca.rar META-INF/ra.xml
```

The jar command is located in the Java SDK's bin directory which might not be in your search path. If you receive an error, execute the jar command using its full path. This path varies depending on which version of Java is installed. For example:

```
C:\j2sdk1.4.1_03\bin\jar xvf iwafjca.rar META-INF/ra.xml
```

**Note:** Be sure to use the jar command and not Winzip. Winzip does not properly extract Java related archives.

2. Open the extracted ra.xml file in a text editor.
3. Modify the contents of the <param-value> tags to change defaults. If you did not install in C:\Program Files\iWay55, be sure to change the IWayHome variable.

The following settings can be changed:

- **IWayHome.** The installation directory where iWay 5.5. is installed.

```
<config-property-name>IWayHome</config-property-name>  
<config-property-type>java.lang.String</config-property-type>  
<config-property-value>c:\program files\iway55</config-property-value>  
</config-property>
```

**Note:** In some environments, the IWayHome parameter is ignored. This parameter is required when your application accesses the JCA Connector via JNDI.

- **IWayConfig.** Configuration instance for the connector to use at run time. By default, a base configuration is available and defined in this file. A program can access this information via JNDI, or it can override these values.

```
<config-property>
  <config-property-name>IWayConfig</config-property-name>
  <config-property-type>java.lang.String</config-property-type>
  <config-property-value>base</config-property-value>
</config-property>
```

- **LogLevel.** Trace setting. This can be set to DEBUG, INFO, or ERROR.

```
<context-param>
<config-property>
  <config-property-name>LogLevel</config-property-name>
  <config-property-type>java.lang.String</config-property-type>
  <config-property-value></config-property-value>
</config-property>
```

For example:

```
<config-property-value>DEBUG</config-property-value>
```

A directory in the configuration directory contains the logs. Also, be sure to review logs generated by your application server.

Leave the remainder of this file unchanged.

4. Save the file and exit the editor.
5. Use the jar command to return the ra.xml file to the META-INF directory within the archive. To do this, you can:

- a. Ensure that you are in the directory that contains the connector. For example:

```
C:\Program Files\iWay55\bea
```

- b. Issue the following command:

```
jar uvf iwafjca.rar META-INF/ra.xml
```

6. Redeploy the connector.

## Deploying and Running the JCA Test Tool

---

A sample Web application called the JCA Test Tool is installed with the adapters. The JCA Test Tool lets you test Service and Event adapters with Connector for JCA. On Windows, the default location for the Test Tool Web application is:

`C:\Program Files\iWay55\bea\iwjcaivp`

On other platforms, use the corresponding location.

### Deploying the JCA Test Tool

Deploy the JCA Test Tool to BEA WebLogic as explained below.

#### **Procedure** How to Deploy the JCA Test Tool to BEA WebLogic

To deploy the JCA Test Tool:

1. In a browser, open the BEA WebLogic console at:

`http://hostname:port/console`

where:

`hostname`

Is the hostname of the machine where BEA WebLogic is running.


`port`

Is the port for the domain you are using. The port for the default domain is 7001.

For example:


`http://localhost:7001/console`

A logon page appears.

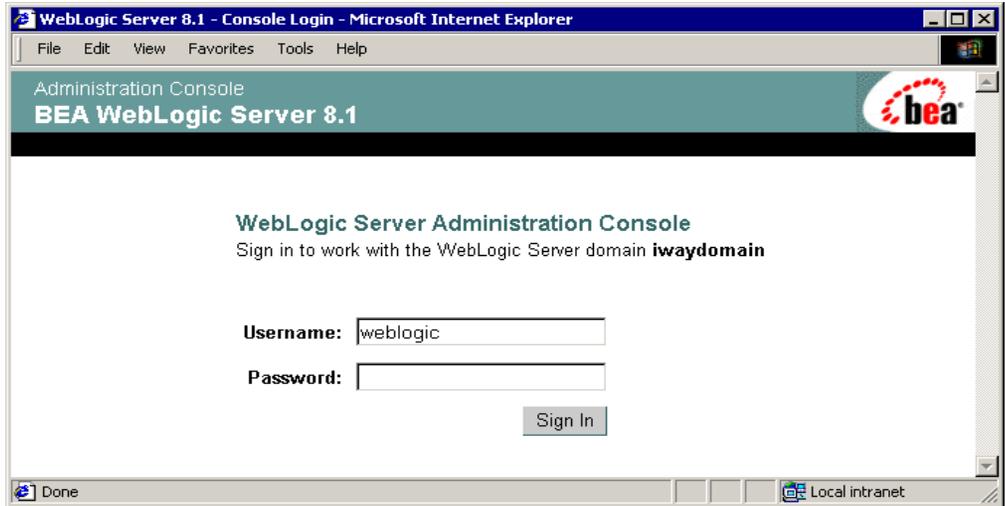


2. Log on to WebLogic.
3. Expand the *Deployments* folder on the left and then, click *Web Application Modules*.

A page appears for deploying and controlling Web applications. If other applications are already deployed, they appear.

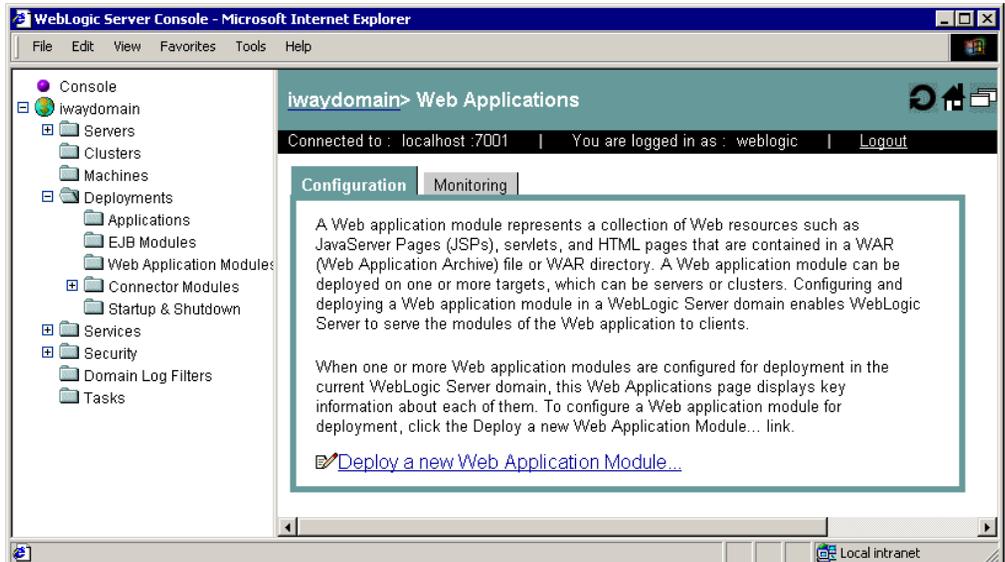


4. Select *Deploy a new Web Application Module*.

A page appears for you to specify where the Web application is located.

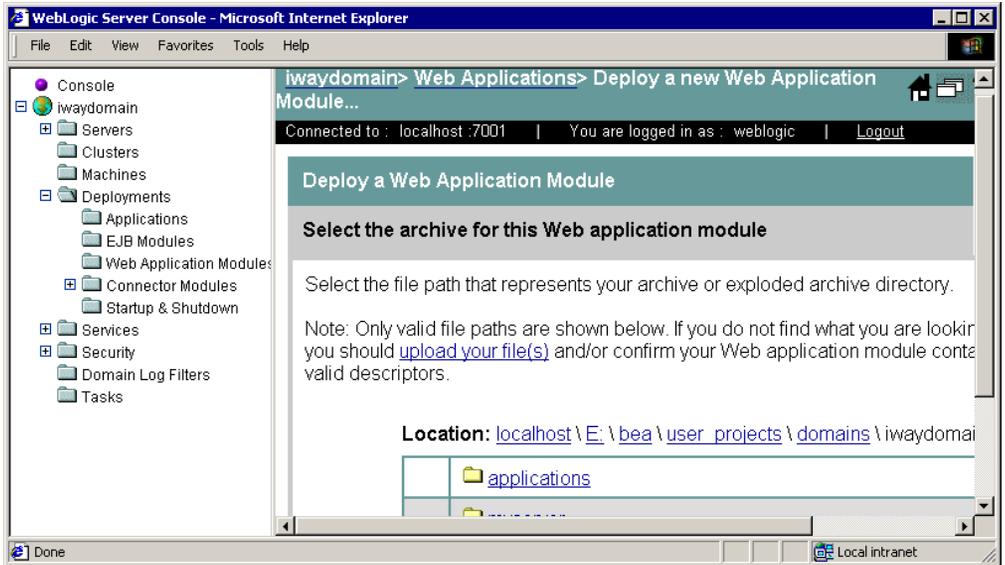

5. Click the links next to *Location* to view and specify the location of the directory with the Test Tool files.

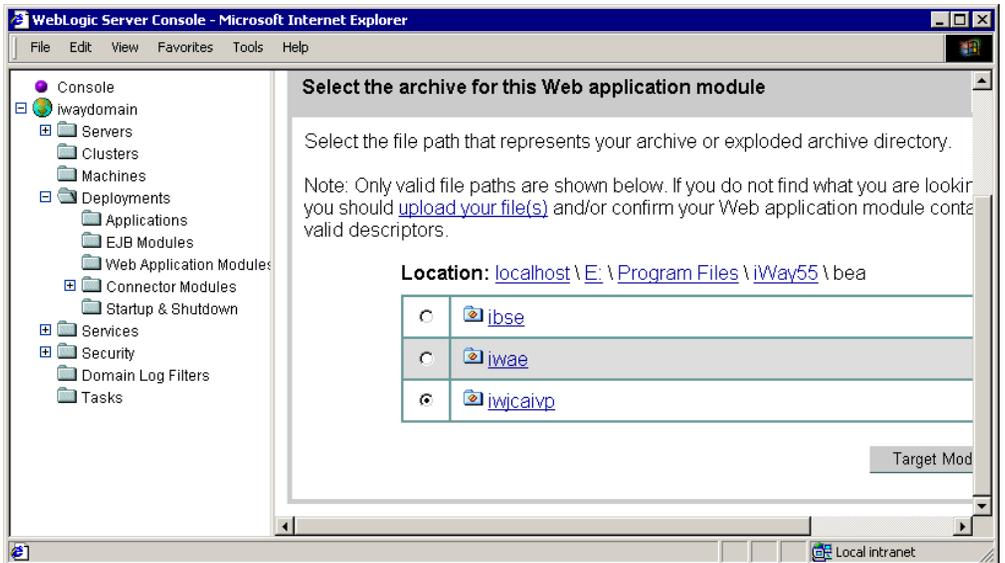


6. Select the option button next to the *iwjcaivp* directory and then, click *Target Module*.

If there are multiple servers in your domain, you are prompted to specify into which server or servers to deploy.

7. If prompted, check which servers to deploy to and click *Continue*.


If you are deploying into a single server, information about the server displays.

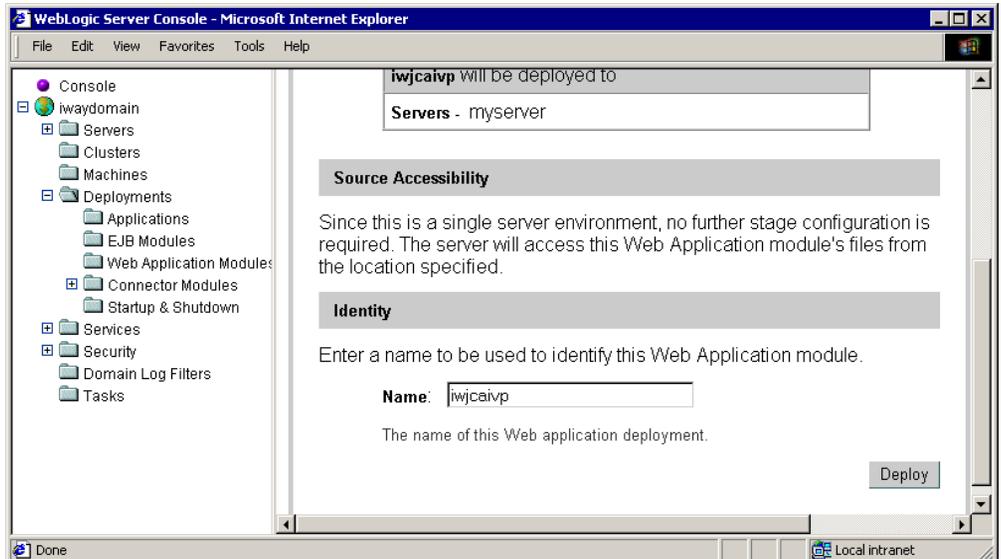

If you are deploying into multiple servers, you are prompted to copy the module to each server.

8. Click *Deploy*.

After a few seconds, the application is deployed, and appears on the left under *Web Application Modules*.

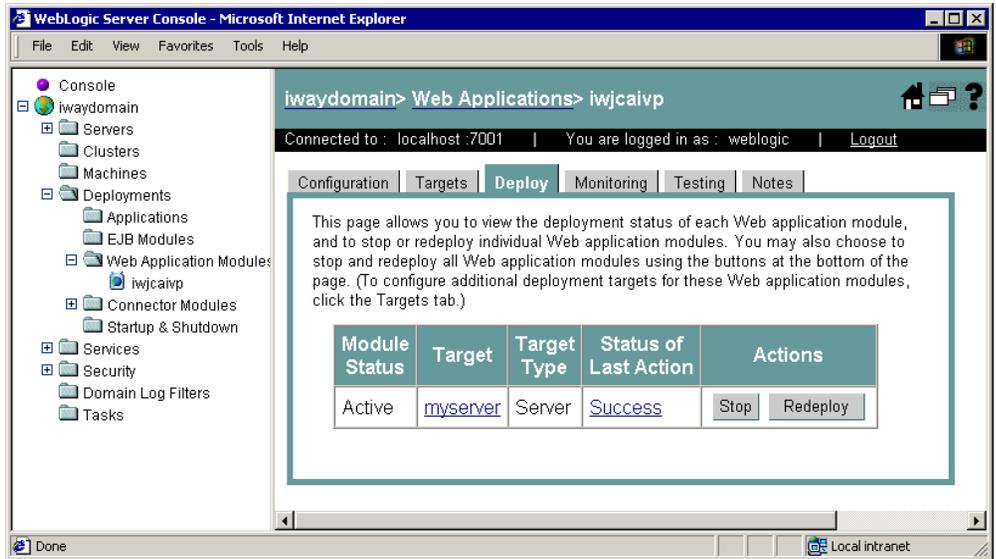

**Note:** You may need to expand the *Web Application Modules* folder to see the application.

## Running the JCA Test Tool

After deploying the JCA Test Tool, access it to test the deployment.

### **Procedure** How to Run the JCA Test Tool

To run the JCA Test Tool:

1. Open a browser to:

<http://hostname:port/iwjcaivp>

where:

[hostname](#)

Is the name of the machine where your application server is running.


[port](#)

Is the port for the domain you are using. The port for the default domain is 7001.

For example:

<http://localhost:7001/iwjcaivp>

The JCA Test Tool window opens and provides links for viewing Service or Event adapters.

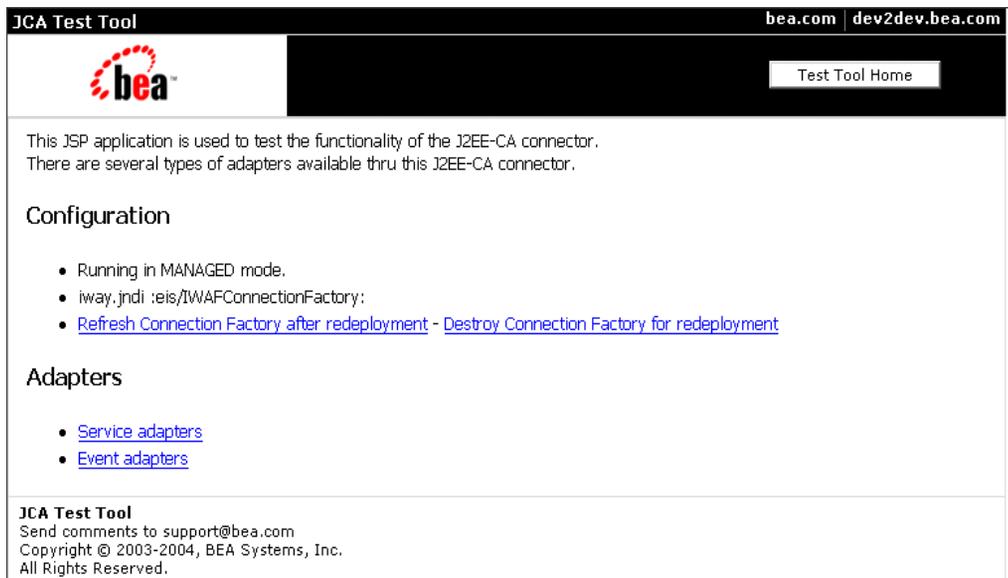

2. To display the available adapters, click the *Service adapters* or *Event adapters* links.

A page appears displaying links for available adapters.

The adapters that appear vary depending on which files are in the iWay55\lib directory. If your adapter requires third party drivers or libraries, they must be in the lib directory or your adapter may not appear.

Initially, no targets are configured for the Connector for JCA. However, after targets are configured using Application Explorer, you can test them using this tool.

**Note:** After configuring targets using Application Explorer, you may need to redeploy the JCA Test Tool before the targets appear.

## Configuring the JCA Test Tool

Although there is normally no need to do this, you can change JCA Test Tool default settings by modifying its web.xml file. The default location on Windows is:

`C:\Program Files\iWay55\bea\iwfjcaivp\WEB-INF\web.xml`

On other platforms, use the corresponding location.

This file defines aspects of the JCA Test Tool running environment. Modifying this file is optional in most environments. You change parameters in this file by modifying the contents of the <param-value> tags.

The following parameters can be changed:

- **iway.jndi.** (optional) Connection factory name for Connector for JCA. The connection factory name under BEA WebLogic is eis/IWAFConnectionFactory. The JCA Test Tool attempts to connect to the adapter via JNDI if JNDI is defined. If JNDI is undefined, iway.home and iway.config are used instead.

```
<context-param>
  <param-name>iway.jndi</param-name>
  <param-value></param-value>
  <description>
    JNDI name for the IWAF JCA Resource Adapter. If not
    provided, the application will create a new one based
    on iway.home, iway.config and iway.loglevel.
  </description>
</context-param>
```

- **iway.home.** The installation directory where the adapters are installed (iWay55).

```
<context-param>
  <param-name>iway.home</param-name>
  <param-value>c:\Program Files\iway55</param-value>
  <description>
    ONLY USED IF IWAY.JNDI NOT SET.
    Absolute path of iway installation directory.
  </description>
</context-param>
```

- **iway.config.** Configuration used at run time. A configuration named base is installed and available by default.

```
<context-param>
  <param-name>iway.config</param-name>
  <param-value>base</param-value>
  <description>
    ONLY USED IF IWAY.JNDI NOT SET.
    configuration name
  </description>
</context-param>
```

- **iway.loglevel.** Tracing level. The level can be DEBUG, INFO, and ERROR.

```
<context-param>
  <param-name>iway.loglevel</param-name>
  <param-value>DEBUG</param-value>
  <description>
    ONLY USED IF IWAY.JNDI NOT SET.
    Log level: DEBUG FATAL ERROR INFO WARN
  </description>
</context-param>
```

For more information on Connector for JCA, see the *Connector for JCA for BEA WebLogic Server User's Guide*.



---

---

## CHAPTER 4

# Configuring the Integration Business Services Engine

### Topics:

- Deploying, Configuring, and Verifying Servlet iBSE
- Creating and Configuring the iBSE Repository

This section explains how to configure and install Integration Business Services Engine (iBSE) components. If you are not using Web services components, proceed to Chapter 5, *Configuring Application Explorer*.

## Deploying, Configuring, and Verifying Servlet iBSE

---

The Integration Business Services Engine (iBSE) is a transformation and integration engine for processing XML files and SOAP messages for exchange with Web services applications and other systems. For use with BEA WebLogic, iBSE is available as a Web application and referred to as Servlet iBSE.

To use Servlet iBSE:

1. Deploy the `ibse` Web application. (*Deploying Servlet iBSE* on page 4-2)
2. Configure Servlet iBSE. (*Configuring Servlet iBSE* on page 4-7)
3. Verify Servlet iBSE. (*Verifying Servlet iBSE* on page 4-9).

### Deploying Servlet iBSE

Servlet iBSE is a Web application installed as an expanded directory with the adapters. The default location on Windows is:

`C:\Program Files\iWay55\bea\ibse`

For other platforms, see the corresponding location.

When using a file-based repository, information is written within the Web application's directory structure. Therefore, the user ID under which your domain runs must have full access to this directory.

### **Procedure** How to Configure BEA WebLogic 8.1 for Servlet iBSE Deployment

1. Start the domain you are using for the adapters. For example:

`BEA_HOME\user_projects\domains\DOMAIN_NAME\startWebLogic.cmd`

2. Open the WebLogic Console in a browser at:

`http://hostname:port/console`

where:

`hostname`

Is the hostname of the machine where WebLogic is running.


`port`

Is the port for the domain you are using. The port for the default domain is 7001.

For example:


`http://localhost:7001/console`

A logon page opens. If the page does not open, ensure your domain is started, and you used the correct port.

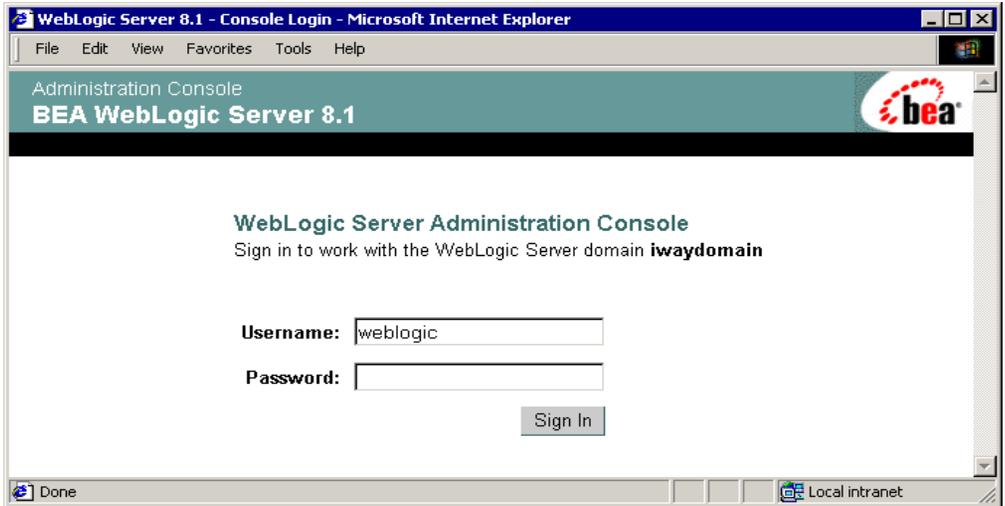


3. Log on to WebLogic.
4. In the left pane, expand the *Deployments* folder and then, click *Web Application Modules*.

A page appears for deploying and controlling Web applications. If other applications are already deployed, they appear.

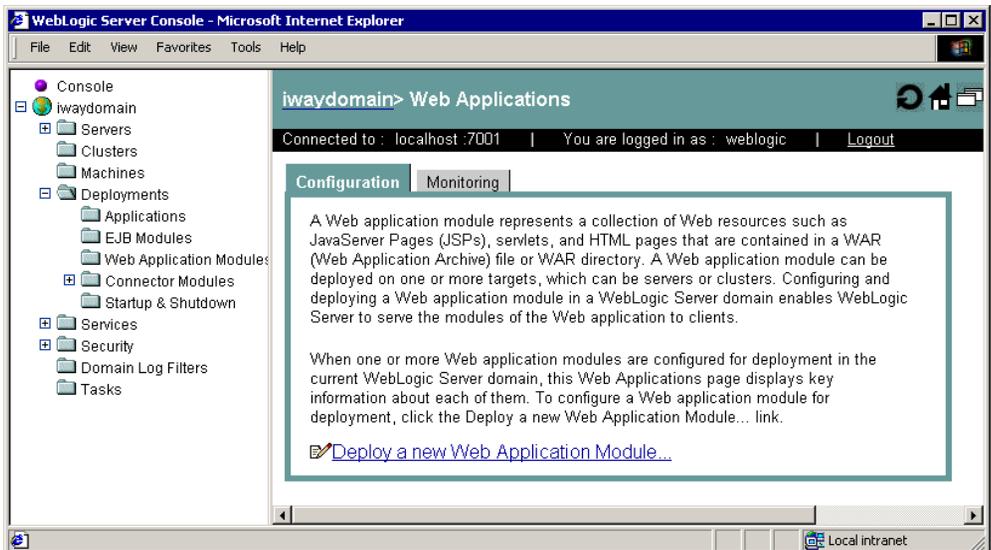


5. Select *Deploy a new Web Application Module*.

A page appears for you to specify where the Web application is located.

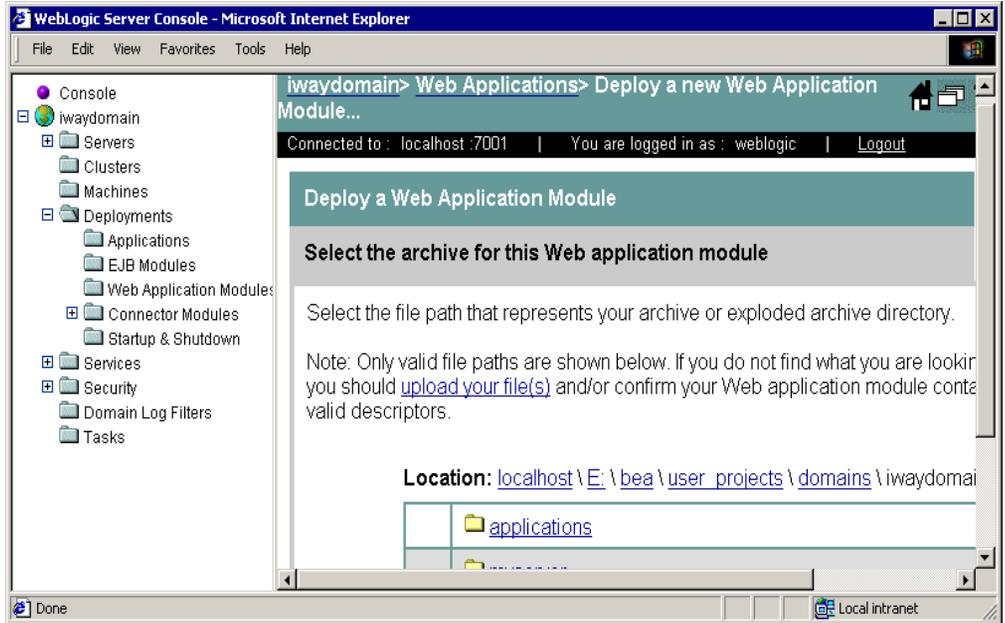

6. Click the links next to *Location* to view and specify the location of the directory above the directory with Servlet iBSE files.

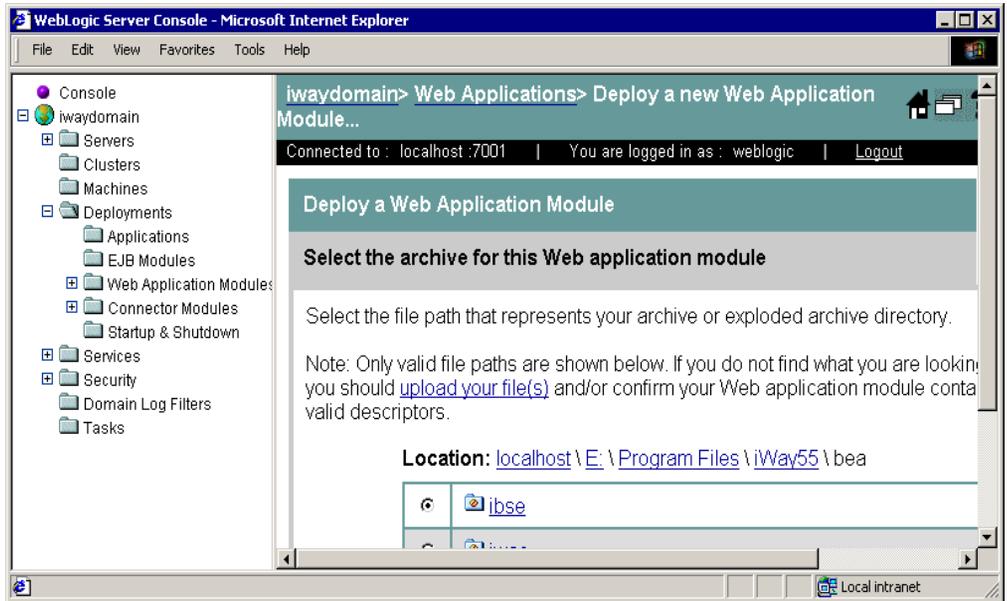


7. Select the option button next to the *ibse* directory and then click *Target Module*.

If there are multiple servers in your domain, you are prompted to specify into which server or servers to deploy.

8. If prompted, check which servers to deploy to and click *Continue*.


If you are deploying into a single server, information about the server displays.

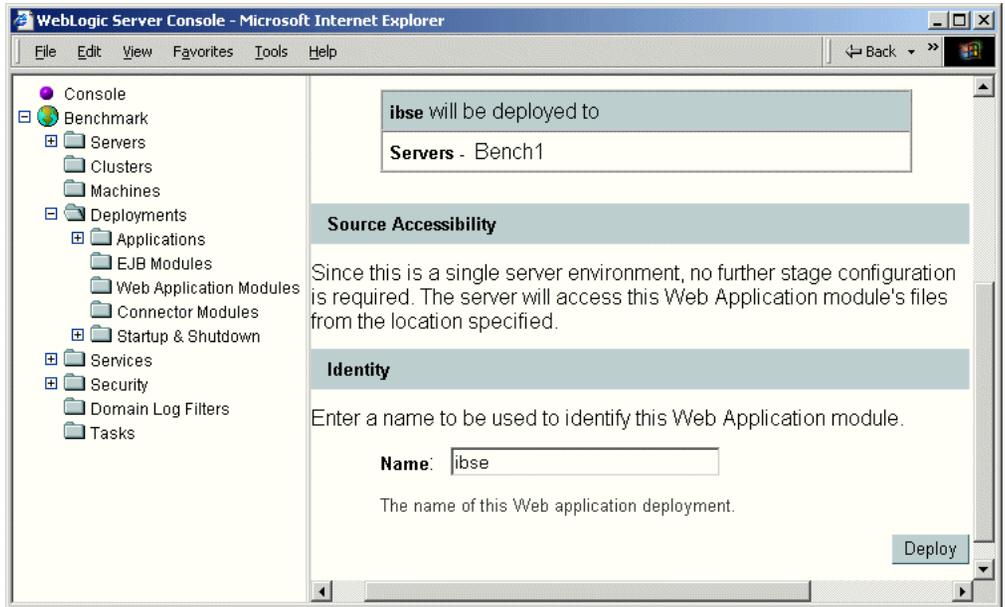

If you are deploying into multiple servers, you are prompted to copy the module to each server.

9. Click *Deploy*.

When deployment completes, *ibse* appears on the left under *Web Application Modules*.

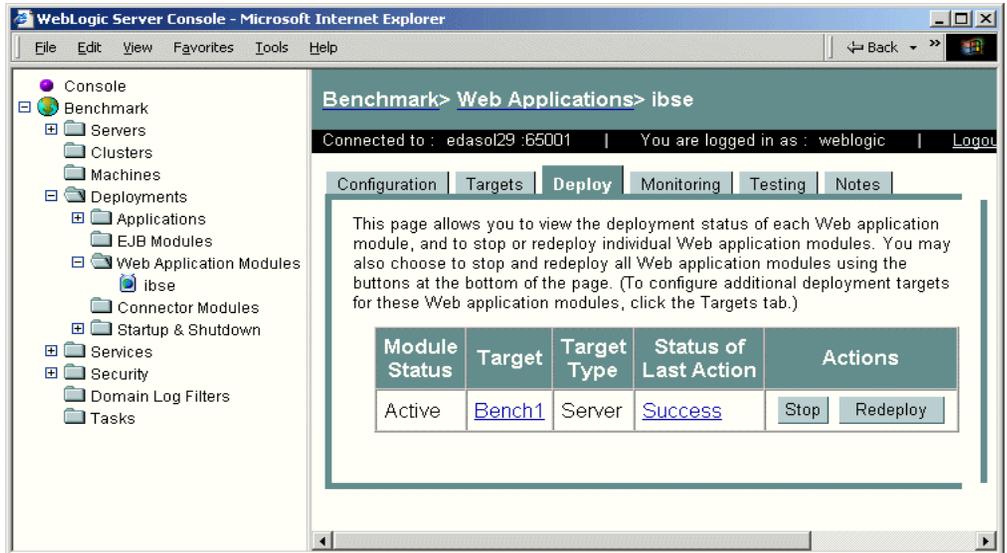

**Note:** You may need to expand the *Web Application Modules* folder to see *ibse*.

## Configuring Servlet iBSE

After Servlet iBSE is deployed through your application server, you can configure it using its configuration Web page.

### **Procedure** How to Configure Servlet iBSE

1. Open the following page in your browser:

<http://hostname:port/ibse>

where:

*hostname*

Is the hostname of the application server machine.

*port*

Is the port for the domain you are using. The port for the default domain is 7001.

For example:

<http://localhost:7001/ibse>

**Note:** The first time you access this page, it may take some time to load.

2. Log on when prompted. When first installed, the user ID and the password are:

- User Name: admin
- Password: admin

The Servlet iBSE configuration page opens and provides fields for editing iBSE parameters.

**iBSE Settings:** Save

Property Name	Property Value
<b>System</b>	
Language	English
Adapter Lib Directory	C:\Program Files\Way55\lib
Encoding	UTF-8
Debug Level	INFO
Number of Async. Processors	0
<b>Security</b>	
Admin User	admin
Admin Password	*****
Policy	<input type="checkbox"/>
<b>Repository</b>	
Repository Type	File System
Repository Url	file://C:\Program Files\Way55\bea\lib
Repository Driver	
Repository User	
Repository Password	
Repository Pooling	<input type="checkbox"/>
<a href="#">More configuration...</a>	

Save

3. Ensure the *Adapter Lib Directory* field specifies the path to the iWay55/lib directory. For example:

`C:\Program Files\iWay55\lib`

For some environments, this defaults, but for others, it does not.

After the path is specified, adapters in the lib directory are available to Servlet iBSE.

4. For security purposes, provide a new password in the *Admin Password* field.

**Note:** The *Repository Url* field specifies where the file system repository will be created. To use a database repository, you must enter the repository connection information. For now, use a file system repository for the initial verification. You can switch to a database repository as explained later in this section.

5. Click *Save*.

The file-based repository is created, and Servlet iBSE is ready for use. If you wish, you can change to a database repository after verifying Servlet iBSE.

## Verifying Servlet iBSE

When applications, such as Application Explorer, access Servlet iBSE, they can use one of the following URLs:

`http://hostname:port/ibse/IBSEServlet/`

`http://hostname:port/ibse/IBSEServlet/XDSOAPAdapterFactory`

## **Procedure** How to Verify Servlet iBSE

You verify iBSE from the iBSE home page. This page should automatically open when you click *Save* on the configuration page.

1. If it is not open, open the following page in your browser:

<http://hostname:port/ibse/IBSEServlet/>

where:

*hostname*

Is the hostname of the application server machine.

*port*

Is the port for the domain you are using. The port for the default domain is 7001.

For example:

<http://localhost:7001/ibse/IBSEServlet/>

The iBSE home page opens.



**Integration Business Service Engine**  
Listening on *IBSEServlet*

The following licenses are available on IBSEServlet

- **IVP**  
The IVP License is installed by default. It is used to install predefined Integration Business Services Engine Services.
- **test**  
The test License is installed by default. It is used to test Integration Business Services Engine Services.
- **production**  
The production License is installed by default. It is used for production purpose.

This page enables you to test the sample Web service provided with iBSE.

When you create Web services using Application Explorer, you can also test them from this page.

2. Click *IVP*.
3. Click *iwayivp*.
4. Click *ivp*.
5. Click *Invoke*.

An XML response like the following appears in your browser:

```
<?xml version="1.0" encoding="UTF-8" ?>
- <SOAP-ENV:Envelope xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:SOAP-
  ENV="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  - <SOAP-ENV:Body>
  - <ivpResponse xmlns="urn:iwaysoftware:ibse:jul2003:ivp:response"
    cid="A0328ED84ABFA055C4F64B8039C991AA">
    <CurrentTime>2004-01-05T19:15:48Z</CurrentTime>
    <Version>IWAY5.5</Version>
  </ivpResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

## Enabling Tracing for Servlet iBSE

iBSE provides tracing functionality for troubleshooting problems with Web services. Only enable this for troubleshooting as it can affect performance.

### **Procedure** How to Enable Tracing for Servlet iBSE

To enable tracing:

1. Open the Servlet iBSE configuration page:

```
http://hostname:port/ibse/IBSEConfig
```

where:

```
hostname
```

Is the hostname of the application server machine.

```
port
```

Is the port for the domain you are using. The port for the default domain is 7001.

For example:

```
http://localhost:7001/ibse/IBSEConfig
```

2. In the top *System* area, specify the level of tracing from the *Debug* drop-down list.
3. Click *Save*.

The default location for the trace information on Windows is:

```
C:\Program Files\bea\ibse\ibselogs
```

On other platforms, use the corresponding location.

## Creating and Configuring the iBSE Repository

---

iBSE requires a repository in which to store transactions and metadata needed for the delivery of Web services. In addition, a second repository can be used for information needed to monitor services and events. Using a JDBC-compliant database for repositories is recommended, but file system repositories are available and configured by default. To use database repositories, the SQL required to create the repository tables is installed with iBSE.

To set up repositories, you must:

- Create the repositories and tables.
- Configure iBSE to access the repositories.

### Creating the iBSE Repository

Follow the steps for your type of repository:

- For a **File System** repository, see *Configuring a File System Repository* on page 4-12.
- For **Microsoft SQL Server 2000**, see *How to Configure a Microsoft SQL Server 2000 Repository* on page 4-13.
- For **Oracle**, see *How to Configure an Oracle Repository* on page 4-15.
- For **Sybase**, see *How to Configure a Sybase Repository* on page 4-16.
- For **DB2**, see *How to Configure a DB2 Repository* on page 4-16.

### Reference **Configuring a File System Repository**

If you do not have access to a database for the repository, you can store repository information in an XML file on your local machine. However, a file system repository is less secure and efficient than a database repository. When iBSE is first installed, it is automatically configured to use a file system repository.

For Servlet iBSE, the default location is the root directory of the iBSE Web application. On Windows, this default location is:

```
C:\Program Files\iWay55\bea\ibse\ibserrepo.xml
```

On other platforms, use the corresponding location.

If you wish to use the iBSE monitoring information, a second repository is required. The default file for the monitoring repository on Windows is:

```
C:\Program Files\iWay55\bea\ibse\ibsemrepo.xml
```

On other platforms, use the corresponding location.

For a file system repository, no additional configuration is needed. You can proceed to Chapter 5, *Configuring Application Explorer*.

## **Procedure** How to Configure a Microsoft SQL Server 2000 Repository

To configure a Microsoft SQL Server 2000 repository:

1. Create a SQL Server database to use as the iBSE repository.
2. Ensure that SQL Server authentication is supported.

You can do this from the SQL Server Enterprise Manager by right-clicking your SQL Server, choosing *Properties*, and clicking the *Security* tab. If Authentication is set to *Windows only*, change it to *SQL Server and Windows*, and then restart SQL Server.

**Note:** SQL Server has two authentication modes, Windows and SQL Server. Windows Authentication uses the same IDs as the Windows operating system. SQL Server Authentication uses IDs defined within SQL Server. iBSE uses the Microsoft SQL Server 2000 JDBC driver, and this driver requires SQL Server authentication.

3. Create a SQL Server ID and grant it db\_owner rights to the iBSE repository database.
4. Open a command prompt and navigate to the iWay setup directory. The default location on Windows is:

```
C:\Program Files\iWay55\etc\setup
```

This directory contains SQL to create the repository tables in the following file:

```
iwse.sql
```

Once the database exists, you can use iwse.sql to create the database tables.

**Note:** If SQL Server is not on the same machine as iBSE, copy the iwse.sql file to the SQL Server machine. From a command prompt on the SQL Server machine, navigate to the directory containing the iwse.sql file.

5. Issue the following command:

```
osql -S hostname -d databasename -U loginID -P password -i iwse.sql
```

where:

*hostname*

Is the name of the machine where SQL Server is running.

*databasename*

Is the database you created in step 1 on page 4-13.

*loginID*

Is the SQL Server ID with db\_owner rights from step 3 on page 4-13.

*password*

Is the password for the SQL Server ID.

The tables should be created in your database.

If you wish to use the iBSE monitoring features, the SQL to create monitoring tables is in the following file:

```
C:\Program Files\iWay55\etc\setup\monitoring.sql
```

You can create these tables in the same database as the regular repository, or create a new database for the monitoring information. Creating a new database is recommended. Repeat the steps above, but submit monitoring.sql instead of iwse.sql when executing osql.

6. Proceed to *Configuring iBSE to Use a Repository Database* on page 4-17.

## **Procedure** How to Configure an Oracle Repository

To configure an Oracle repository:

1. Contact your database administrator to obtain an Oracle user ID and password to create the iBSE repository.

This user ID should have rights to create and modify tables as well as the ability to create and execute stored procedures.

2. Open a command prompt and navigate to the iWay setup directory. Its default location on Windows is:

```
C:\Program Files\iWay55\etc\setup
```

For other platforms, see the corresponding location.

This directory should contains SQL to create the repository tables.

- For Oracle 8: [iwse.ora](#)
- For Oracle 9: [iwse.ora9](#)

**Note:** If Oracle is not on the same machine as iBSE copy [iwse.ora](#) or [iwse.ora9](#) to the Oracle machine. Then, from a command prompt on the Oracle machine, navigate to the directory containing the [iwse.ora](#) or [iwse.ora9](#) file.

3. Issue the following command depending on your Oracle release:

```
sqlplus userid/password @database @ iwse.ora
```

or

```
sqlplus userid/password @database @ iwse.ora9
```

If you wish to use the iBSE monitoring features, SQL to create monitoring tables is provided.

- For Oracle 8: [monitoring.ora](#)
- For Oracle 9: [monitoring.ora9](#)

The monitoring tables are separate from the other iBSE tables, so you can create them in a different instance or tablespaces if you wish. To create an iBSE monitoring repository, submit the [monitoring.ora](#) SQL.

4. Proceed to *Configuring iBSE to Use a Repository Database* on page 4-17.

**Procedure** **How to Configure a Sybase Repository**

SQL needed to create the repository is installed in the following file on Windows:

`C:\Program Files\iWay55\etc\setup\sybase-iwse.sql`

For other platforms, see the corresponding location.

A Sybase DBA should submit this SQL to create the repository tables and structure.

If you wish to use the iBSE monitoring features, the SQL to create monitoring tables is in the following file on Windows:

`C:\Program Files\iWay55\etc\setup\sybase-monitoring.sql`

For other platforms, see the corresponding location.

A Sybase DBA should submit this SQL to create the monitoring tables and structure.

**Procedure** **How to Configure a DB2 Repository**

SQL needed to create the repository is installed in the following file on Windows:

`C:\Program Files\iWay55\etc\setup\db2-iwse.sql`

For other platforms, see the corresponding location.

A DB2 DBA should submit this SQL to create the repository tables and structure.

If you wish to use the iBSE monitoring features, the SQL to create monitoring tables is in the following file on Windows:

`C:\Program Files\iWay55\etc\setup\db2-monitoring.sql`

For other platforms, see the corresponding location.

A DB2 DBA should submit this SQL to create the monitoring tables and structure. You can create monitoring tables in the same database as the regular repository, or create a new database for the monitoring information. Creating a new database is recommended.

## Configuring iBSE to Use a Repository Database

After creating the repository database, you must provide the connection information that iBSE requires to access the repository.

### **Procedure** How to Enter Connection Information for Servlet iBSE

To enter connection information for Servlet iBSE:

1. Copy the JDBC driver for your database into the `ibse\WEB-INF\lib` directory where the iBSE Web application is deployed. For example:

`C:\Program Files\iWay55\bea\ibse\WEB-INF\lib`

The required driver files depend on your database and driver. For example:

#### **SQL Server 2000 (three files):**

`msbase.jar`  
`mssqlserver.jar`  
`msutil.jar`

#### **Oracle:**

`classes12.zip`  
 or  
`ojdbc14.jar` (SDK 1.4.x and higher)

#### **Sybase:**

`jconn.jar`

#### **DB2 Type2 App driver:**

`db2j2classes.zip`

Using the DB2 Type2 App driver is recommended. For the Type2 driver, you must install DB2 Client on the iBSE machine. For other DB2 drivers, see your driver documentation.

2. Add the JDBC driver to your domain's CLASSPATH:

CLASSPATH is set in different places depending on the server release and type of domain. It is often set in one of the following files:

Windows:

```
BEA_HOME\bea\user_projects\domains\your_domain\startWebLogic.cmd
BEA_HOME\bea\user_projects\domains\your_domain\setDomainEnv.cmd
BEA_HOME\bea\user_projects\domains\your_domain\startManagedWebLogic.cmd
BEA_HOME\bea\weblogic81\common\bin\commEnv.cmd
```

UNIX:

```
BEA_HOME/bea/user_projects/domains/your_domain/startWebLogic.sh
BEA_HOME/bea/user_projects/domains/your_domain/setDomainEnv.sh
BEA_HOME/bea/user_projects/domains/your_domain/startManagedWebLogic.sh
BEA_HOME/bea/weblogic81/common/bin/commEnv.sh
```

It may be set by a line similar to the following:

Windows:

```
set CLASSPATH=%WEBLOGIC_CLASSPATH%;%POINTBASE_CLASSPATH%;%JAVA_HOME%\j
re\lib\rt.jar;%WL_HOME%\server\lib\webservices.jar;%CLASSPATH%
```

UNIX:

```
CLASSPATH="${WEBLOGIC_CLASSPATH}:${POINTBASE_CLASSPATH}:${JAVA_HOME}/j
re/lib/rt.jar:${WL_HOME}/server/lib/webservices.jar:${CLASSPATH}"
```

Append your driver's file or files to the CLASSPATH setting by adding the full paths of any JDBC files, including file names. If you are not sure where to set CLASSPATH, consult BEA WebLogic documentation.

3. Restart the domain.

4. Log on to the Servlet iBSE Configuration page at:

<http://hostname:port/ibse>

**Note:** This page was introduced in *Configuring Servlet iBSE* on page 4-7.

5. At the bottom of the page, provide the repository connection information by completing the following fields:

Field	Description
Repository Type	Specify the type of repository you are using.
Repository URL	Provide a JDBC URL to connect to the database. Examples follow this table.

Repository Driver	<p>Provide the JDBC Class to connect to the database.</p> <p>For SQL Server:  <code>com.microsoft.jdbc.sqlserver.SQLServerDriver</code></p> <p>For Oracle:  <code>oracle.jdbc.driver.OracleDriver</code></p> <p>For Sybase:  <code>com.sybase.jdbc2.jdbc.SybDriver</code></p> <p>For the DB2 Type2 App driver:  <code>COM.ibm.db2.app.DB2Driver</code></p> <p>For other DB2 drivers, see your driver documentation.</p>
Repository User	Provide the user ID to access the repository database.
Repository Password	Provide the password to access the repository database.

The repository URLs have the following forms:

SQL Server	<code>jdbc:microsoft:sqlserver://hostname:port;DatabaseName=dbname;SelectMethod=cursor</code>
Oracle	<code>jdbc:oracle:thin:@hostname:port;SID</code>
Sybase	<code>jdbc:sybase:Tds:hostname:port</code>
DB2 Type2 Driver	<code>jdbc:db2:dbname@driverType=APP</code> For other DB2 drivers, see your driver documentation.

where:

*hostname*

Is the name of the machine for the database server.

*port*

Is the port number for the database server. The SQL Server default is 1433. The Oracle default is 1521.

*dbname*

Is the database name or DB2 database alias or location name.

*SID*

Is the ORACLE SID.

**6.** Click *Save*.

You should be redirected to the Servlet iBSE home page where you can test the sample Web service. However, until you redeploy or restart the server, your repository is not actually used.

**7.** Restart the server or redeploy the iBSE Web application.

After the server restarts or the application is redeployed, test it by going to the Servlet iBSE home page at:

<http://hostname:port/ibse/IBSEServlet>

If you receive an error, confirm the settings in:

<http://hostname:port/ibse/IBSEConfig>

If you receive an error, ensure CLASSPATH is properly set and redeploy the ibse Web application.

**8.** If you wish to use the iBSE monitoring, return to the Servlet iBSE Configuration page:

<http://hostname:port/ibse/IBSEConfig>

**9.** At the bottom of the page, click *More configuration...*

**10.** Specify the information to connect to the monitoring repository. If it is the same database as the regular iBSE repository, enter the same information as you did for the regular repository. If you set up a different database, provide the information for the monitoring database.

**11.** Click *Save Configuration*.

**12.** Click *Start Monitoring*.

**13.** Restart the server or redeploy the iBSE Web application.

---

---

## CHAPTER 5

# Configuring Application Explorer

### Topic:

- Configuring Swing Application Explorer
- Configuring Servlet Application Explorer

This section explains how to configure Application Explorer. Two versions of Application Explorer are available:

- **Swing Application Explorer** is a window accessible within BEA WebLogic Workshop.

For Swing Application Explorer, see *Configuring Swing Application Explorer* on page 5-2

- **Servlet Application Explorer** is a Web application accessible through a Web browser.

For Servlet Application Explorer, see *Configuring Servlet Application Explorer* on page 5-4.

## Configuring Swing Application Explorer

---

Swing Application Explorer is a GUI tool that uses adapters to create schemas and business services for use with Connector for JCA, iBSE, or other XML or Web services-based programs. It enables you to generate and publish a Web service from objects and procedures in many different systems, without requiring in-depth knowledge of the object or system.

### Accessing Swing Application Explorer

If BEA WebLogic Workshop is installed, Swing Application Explorer is installed automatically with the adapters and accessible from within BEA WebLogic Workshop.


**Note:** Java SDK 1.4.1 or higher is required to use Swing Application Explorer.

#### **Procedure** How to Access Swing Application Explorer

To access Swing Application Explorer:

1. Ensure your domain is started and iBSE and/or Connector for JCA are deployed.
2. Start BEA WebLogic Workshop.
3. Open Application Explorer by clicking *View, Windows*, and then *Application Explorer*.

Application Explorer appears in BEA WebLogic Workshop.

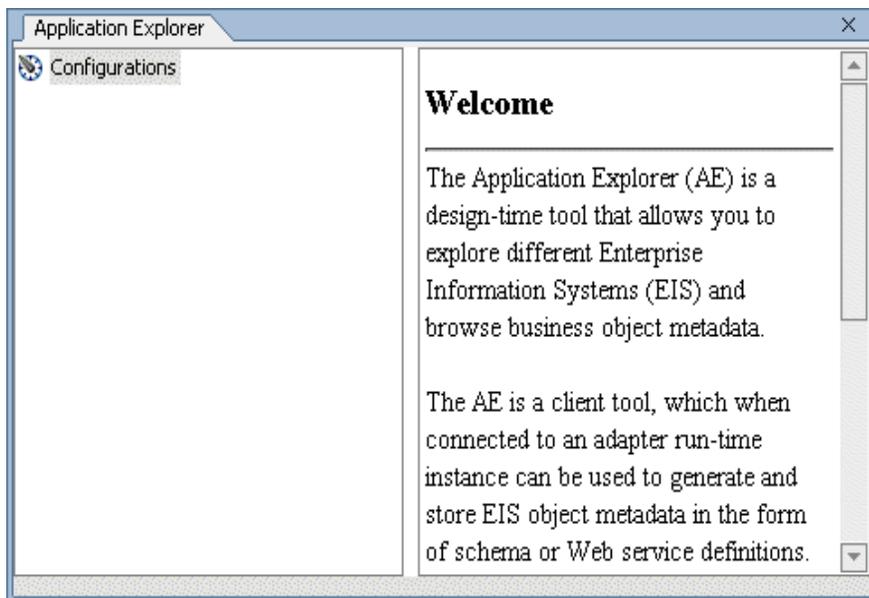

4. Right-click *Configurations* and select *New*.

You are prompted to name the configuration. A configuration specifies an instance of iBSE or a JCA configuration. For Connector for JCA, the name should match the configuration, base, by default. For iBSE, you can choose any name you wish.

**5.** Name the configuration and click *OK*.

You must set up the connection to iBSE or a JCA Configuration.

- For iBSE, specify the iBSE URL. This is the URL to access iBSE and depends upon the port on which your domain is listening. The URL is:

`http://hostname:port/ibse/IBSEServlet`

where:

`hostname`

Is the hostname of the application server machine.

`port`

Is the HTTP port for the domain where iBSE is deployed. The port for the default domain is 7001.

- For JCA, specify where the adapters are installed. For example:

`C:\Program Files\iWay55`

**6.** Specify the connection information and click *OK*.

Your configuration appears on the left under Configurations.

**7.** Right-click the configuration you created and select *Connect*.

A connection is made.

**8.** Expand *Service Adapters* and *Event Adapters* to see available adapters.

The available adapters may vary depending on which files are in the iWay55\lib directory. If your adapter requires third party drivers or libraries, they must be in the lib directory or your adapter may not appear.

When you create a Web service using Swing Application Explorer a complete XML response is not available within Swing Application Explorer. To fully test, Web services created using Swing Application Explorer, use the Servlet iBSE home page:

`http://hostname:port/ibse/IBSEServlet`

where:

`hostname`

Is the hostname of the application server machine.

`port`

Is the port on which your server is listening.

For example:

<http://localhost:7001/ibse/IBSEServlet>

## Configuring Servlet Application Explorer

---

Servlet Application Explorer is a GUI tool that uses adapters to create schemas and business services for use with Connector for JCA, iBSE, or other XML or Web services based programs. It enables you to generate and publish a Web service from objects and procedures in many different systems, without requiring in-depth knowledge of the object or system.

Servlet Application Explorer is a Web application installed as an expanded directory with the adapters. The default location on Windows is:

`C:\Program Files\iWay55\bea\iwae`

For other platforms, see the corresponding location.

## Configuring Servlet Application Explorer Communications

Servlet Application Explorer communications are defined in the Web application's web.xml file. The default location on Windows is:

`C:\Program Files\iWay55\bea\iwae\WEB-INF\web.xml`

For other platforms, see the corresponding location.

Communications vary depending on whether you access iBSE or Connector for JCA:

- To create Web services or schemas for iBSE, Application Explorer connects to iBSE. Therefore, Application Explorer must know the correct URL to access it.
- For Connector for JCA, Application Explorer handles schema generation and target configuration itself. Application Explorer then writes information to the configuration directories that Connector for JCA uses. Therefore, Application Explorer must know the location of the configuration directories.

By default Application Explorer is set to connect to both Servlet iBSE and the Connector for JCA base configuration. You must edit web.xml as explained below if you are not using Servlet iBSE, if you provided the wrong Base Url during installation, or if you wish to access a different connector configuration, If you are confident that default settings are sufficient, proceed to *Deploying Servlet Application Explorer* on page 5-7.

**Procedure How to Configure Application Explorer Communications**

To configure Application Explorer communications:

1. Open the web.xml file for the iwae Web application. The default location on Windows is:

```
C:\Program Files\iWay55\bea\iwae\WEB-INF\web.xml
```

For other platforms, see the corresponding location.

2. Find the "<service..." lines which define the connections. For example:

```
<explorer>
  <service displayName="ibse" url="http://localhost:7001/ibse/IBSEServlet"/>
  <service displayName="ijca" provider="com.ibi.adapter.jspae.CustomJCAIWAEConnection" url=C:\Program Files\iWay55#base"/>
</explorer>
```

3. If you are using Servlet iBSE but not Connector for JCA, remove the Connector for JCA line:

```
<service displayName="ijca" provider="com.ibi.adapter.jspae.CustomJCAIWAEConnection" url=C:\Program Files\iWay55#base"/>
```

4. If you are using Connector for JCA but not Servlet iBSE, remove the Servlet iBSE line:

```
<service displayName="ibse" url="http://localhost:7001/ibse/IBSEServlet"/>
```

5. Optionally add or edit "<service..." lines to define connections.

You can define as many connections as you wish. When you access Application Explorer in a browser, you choose the connections to access, and you can switch between them.

- For **Servlet iBSE**, ensure the correct port appears. If you wish to access Servlet iBSE installed on a different host, modify the hostname as well. The URL is as follows:

```
url="http://hostname:port/ibse/IBSEServlet/"
```

For example:

```
<service displayName="ibse" url="http://localhost:22001/ibse/IBSEServlet"/>
```

- For **Connector for JCA**, if you wish to use different configurations, edit or copy the existing JCA line and change the URL to indicate your configuration. The URL has the following form

```
url="IWAY_HOME#IWAY_CONFIG"
```

where:

*IWAY\_HOME*

Is the directory where the adapters are installed.

*IWAY\_CONFIG*

Is the Connector for JCA configuration instance. By default, a base configuration exists.

For example:

```
<service displayName="ijca configuration" provider="com.ibi.adapter.jspae.CustomJCAIWAYConnection" url="C:\Program Files\iWay55#test"/>
```

6. Save and exit the web.xml file.

## Deploying Servlet Application Explorer

Use the BEA WebLogic Console to deploy Servlet Application Explorer.

### **Procedure** How to Configure Servlet Application Explorer for BEA WebLogic

To deploy Servlet Application Explorer:

1. Access the BEA WebLogic console through a browser at:

<http://hostname:port/console>

where:

*hostname*

Is the name of the machine where BEA WebLogic is running.


*port*

Is the port for the domain you are using. The port for the default domain is 7001.

For example:

<http://localhost:7001/console>

A logon page appears. If the page does not open, ensure your domain is started, and you used the correct port.

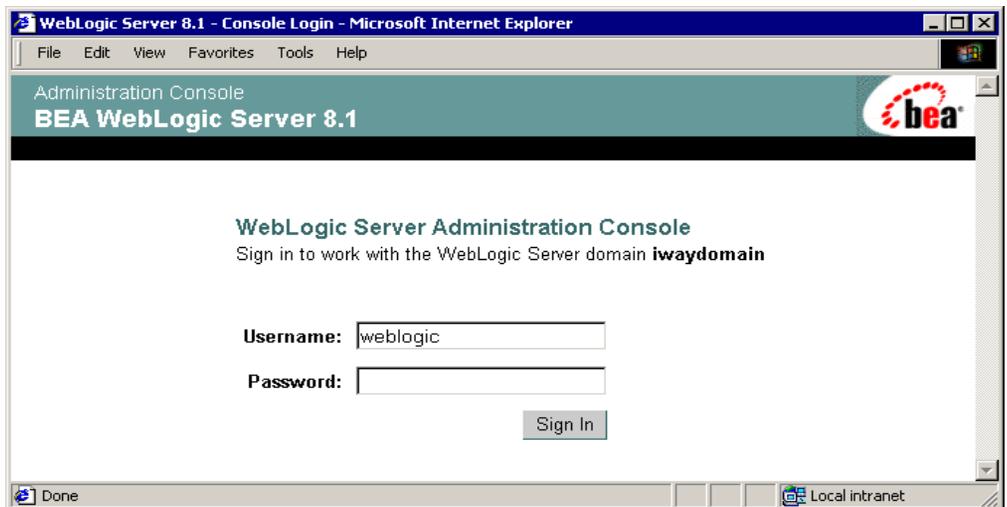


2. Log on to WebLogic.

**Warning:** To use Application Explorer, the server's *Listen Address* cannot be set to localhost. You can determine this by expanding the *Servers* folder on the left pane and clicking your server's name. The *Listen Address* appears on the *General* tab and must be either blank or the fully qualified hostname for WebLogic. This field should not say localhost.


3. In the left pane, expand the *Deployments* folder and then, click *Web Application Modules*.

A page appears for deploying and controlling Web applications. If other applications are already deployed, they appear.

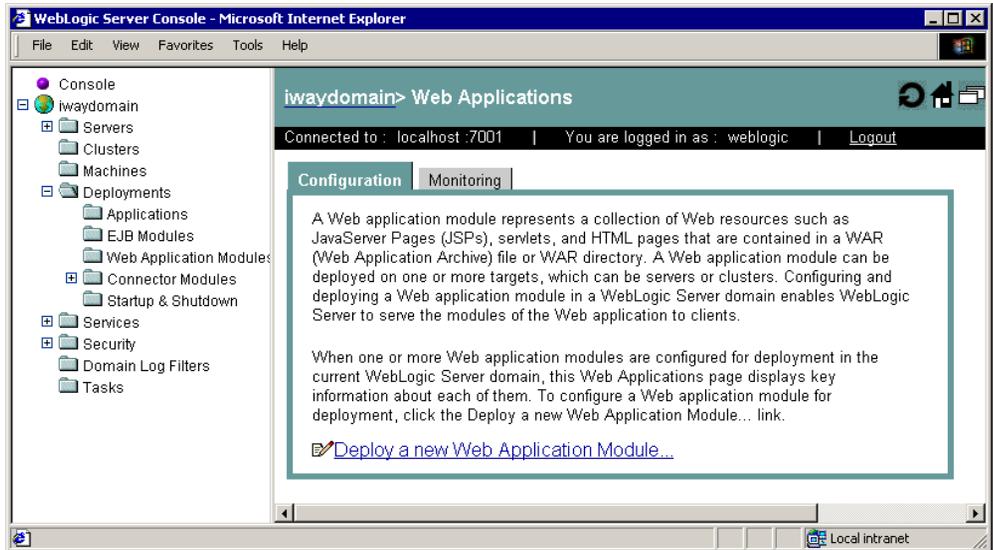


4. Click *Deploy a new Web Application Module*.

A page appears for you to specify where the Web application is located.

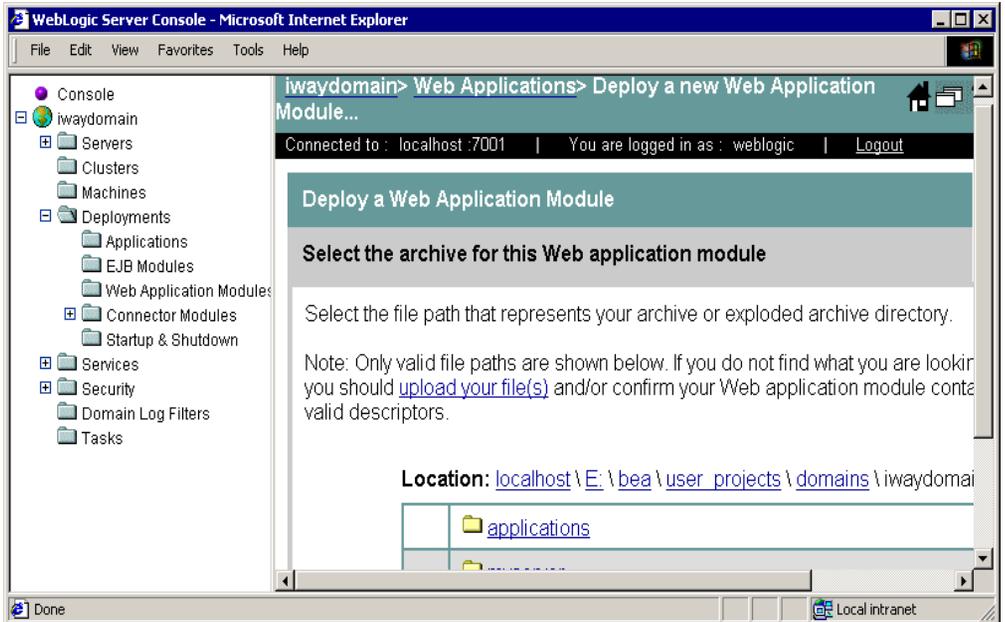

5. Click the links next to *Location* to view and specify the location of Servlet Application Explorer files.

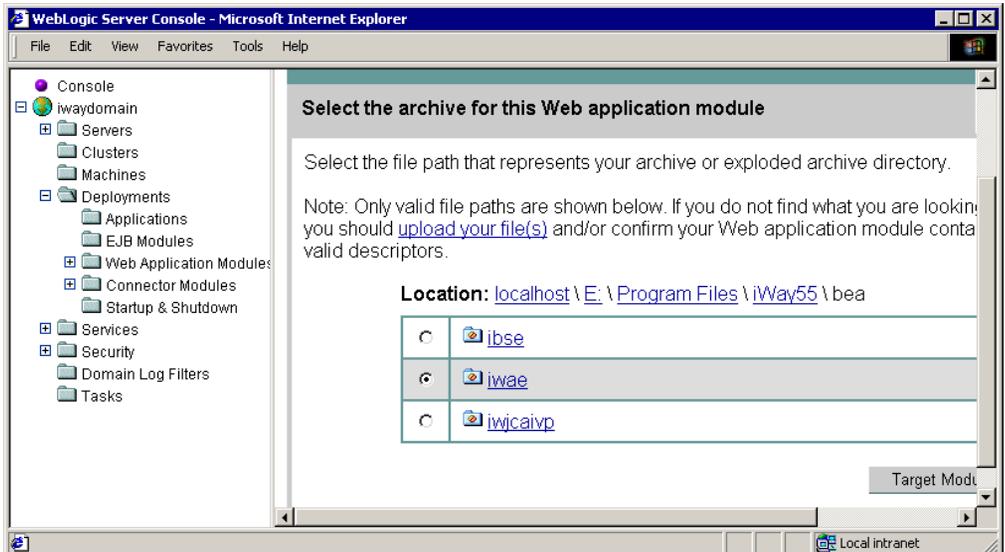


6. Select the option button next to the *iwa* directory and then, click *Target Module*.

If there are multiple servers in your domain, you are prompted to specify into which server or servers to deploy.

7. If prompted, check which servers to deploy to and click *Continue*.


If you are deploying into a single server, information about the server displays.

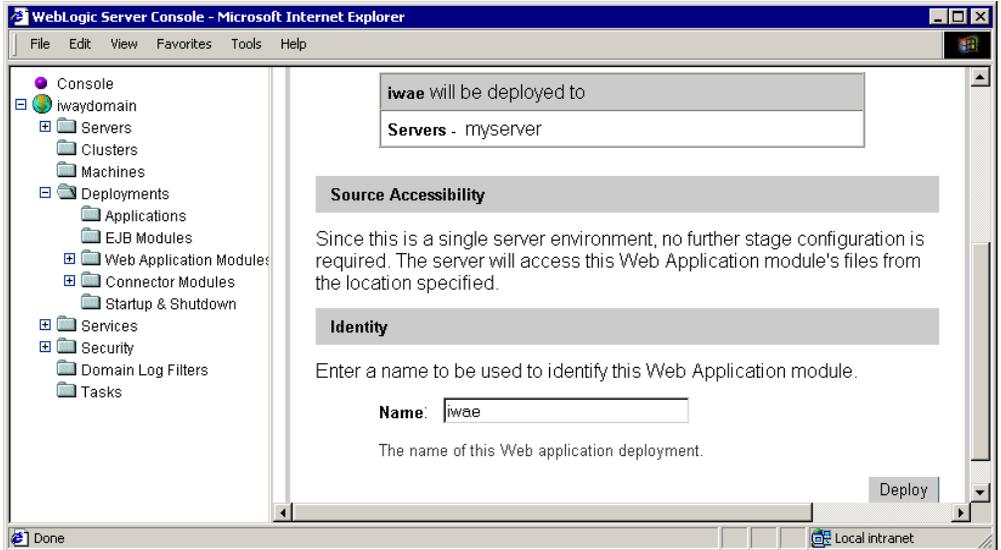

If you are deploying into multiple servers, you are prompted to copy the module to each server.

8. Click *Deploy*.

When deployment completes, *iwae* appears on the left below *Web Application Modules*.

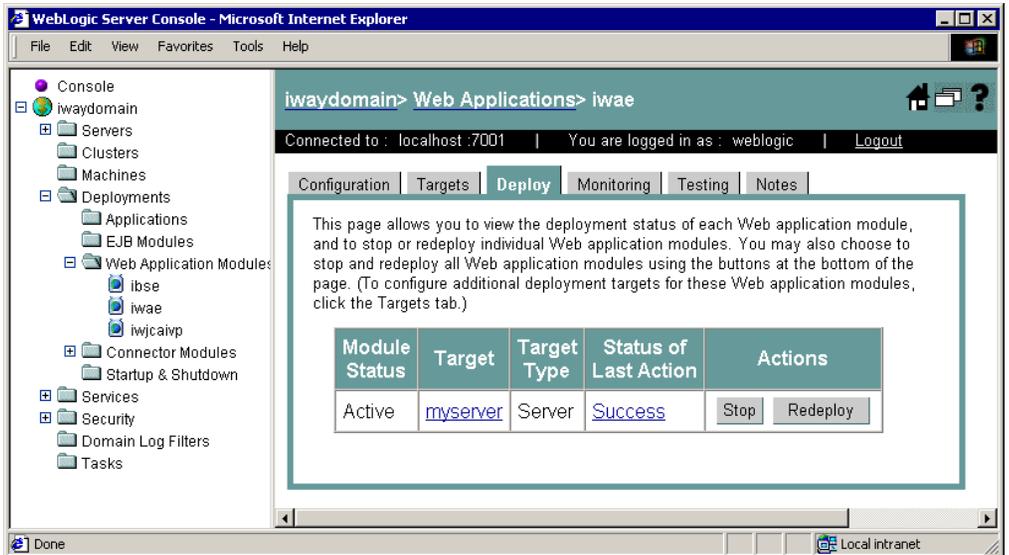

**Note:** You may need to expand the *Web Application Modules* folder to see *iwae*.

## Accessing Servlet Application Explorer

After Servlet Application Explorer is deployed through your application server, you can access it.

**Note:** You may receive errors if you use Internet Explorer 5.5 or earlier. Before using Application Explorer, update to Internet Explorer 6 or higher.

### Procedure How to Access Servlet Application Explorer

After Servlet Application Explorer is deployed through your application server, you can access it as follows:

1. Go to the following URL in a browser:

<http://hostname:port/iwae/index.html>

where:

*hostname*

Is the hostname for the application server machine.


*port*

Is the port for the domain you are using. The port for the default domain is 7001.

For example:

<http://localhost:7001/iwae/index.html>

Servlet Application Explorer opens in your browser.

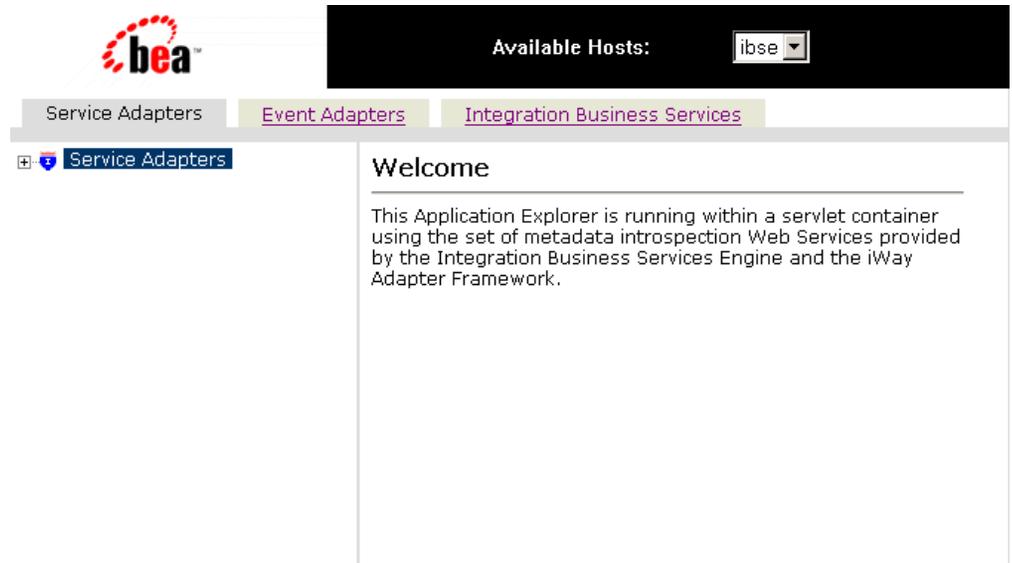

**2.** Expand *Service Adapters* to see available adapters.

Available adapters may vary depending on which files are in the iWay55\lib directory. If your adapter requires third party drivers or libraries, they must be in the lib directory or your adapter may not appear.

The *Available Hosts* drop-down list in the upper right determines which Connector for JCA configuration or Servlet iBSE instance you access. If one of them is not available, you receive an error if it is selected in the *Available Hosts* drop-down menu. You can remove, add, or modify connections by editing web.xml.

When you configure adapters, Web services, settings, or schemas, information is generated. This information is then stored in the repository and directories corresponding to what is selected in the *Available Hosts* drop down list.

For example, for file system repositories with the default base configuration:

- For Connector for JCA, information is created in the repository.xml file for the configuration. For example:

```
C:\Program Files\iway55\config\base\repository.xml
```

Additional information, such as schemas, is created in subdirectories of base.

- For Servlet iBSE, information is created in ibserepo.xml under the ibse Web application's root. For example:

```
C:\Program Files\iWay55\bea\ibse\ibserepo.xml
```

Additional information, such as schemas and wsdl, is created in subdirectories beneath the ibserepo.xml file.

For more information on Servlet Application Explorer, see the *Application Explorer (Java Servlet Version) User's Guide*.

