

FLEXCUBE UBS Oracle GL MDB Adapter Installation
Oracle FLEXCUBE Universal Banking
Release 12.87.06.0.0
[May] [2020]



Table of Contents

1. INSTALLATION STEPS	3
1.1 PREREQUISITE	3
1.2 STEPS	3

1. Installation Steps

1.1 Prerequisite

- ✓ Ensure that the basic KERNEL Oracle GL Adapter Environment Setup is done.

[Please refer [ADOGL_Installation.doc.](#)]

1.2 Steps

A. Modify ejb-jar.xml

- ✓ Edit <KERNEL_INSTALL_DIR>/ADOGL_MDB/config/ejb-jar.xml. This XML file shall have a similar section as the one shown below,

```
<resource-ref>
    <res-ref-name>ADOGL_DS</res-ref-name>
    <res-type>javax.sql.XADataSource</res-type>
    <res-auth>Container</res-auth>
</resource-ref>
```

Here **ADOGL_DS** is the name of the FLEXCUBE UBS Oracle GL Adapter Database Layer Instance.

- ✓ For each **res-ref-name** create an XA DataSource in WebSphere Application Server

[Refer: [WAS_ADOGL_DataSource_Creation.doc](#)]

B. Configure FLEXCUBE UBS MDB Gateway Properties

Edit `<KERNEL_INSTALL_DIR>/ADOGL_MDB/config/ADOGL_MDB_Prop.properties` file to give appropriate values for the properties as described below,

1. **ADOGL_EJB_JNDI_NAME**: This must be set to the JNDI name of the Oracle GL Facade Bean
e.g. `ADOGL_EJB_JNDI_NAME=AQBridgeFacade`
2. **ADOGL_EJB_CTX_FACTORY**: This property specifies which JNDI service provider is in use.
e.g. `ADOGL_EJB_CTX_FACTORY=com.ibm.websphere.naming.WsnInitialContextFactory`
3. **ADOGL_EJB_SERVER_URL**: This property specifies the URL of the service provider.
e.g. `ADOGL_EJB_SERVER_URL=iiop://10.80.4.102:2809`
4. **MAX_CLOB_LEN**: This property specifies the length till which oracle considers the incoming text as string. For Oracle 10g R2 Database, it should be 32512.
e.g. `MAX_CLOB_LEN=32512`
5. **DB_TIMEOUT**: This is the timeout in SECONDS for which the FCUBS MDB Gateway will wait for PL/SQL to finish its processing. If database does not return within this timeout, the call to PL/SQL will be timed out.
6. **MSG_SCHEMA_CON_POOLNAME**: This property specifies the FLEXCUBE UBS Oracle GL Adapter Database Layer Instance name.
7. **ADOGL_MDB_JMS_QCF**: This property specifies the Queue Connection Factory of the Queue Manager on which the MDB is deployed.
e.g. `ADOGL_MDB_JMS_QCF=ADOGL_MDBQCF`
8. **ADOGL_MDB_JMS_QUEUE_NAME**: This property specifies the Queue on which the MDB is listening.

`ADOGL_MDB_JMS_QUEUE_NAME=NOTIFY_DEST_QUEUE`
9. **ADOGL_MDB_JMS_DLQ_CF**: This property specifies the Queue Connection Factory of the Queue Manager having Dead Letter Queue.

e.g. **ADOGL_MDB_JMS_DLQ_CF=ADOGL_MDBQCF**

10. **ADOGL_MDB_JMS_DLQ**: This property specifies the Dead Letter Queue.

e.g. **ADOGL_MDB_JMS_DLQ=NOTIFY_DEST_QUEUE_DLQ**

11. **LOGGER_PATH**: This property specifies the path of the logger property file. This file can be found at <KERNEL_INSTALL_DIR>/ADOGL_MDB/config.

[NOTE: Give the logger path with forward slash (/).]

The ADOGL_MDB_Prop.properties will look similar as follows,

```
ADOGL_EJB_JNDI_NAME=AQBridgeFacade
```

```
ADOGL_EJB_CTX_FACTORY=com.ibm.websphere.naming.WsnInitialContextFactory
```

```
ADOGL_EJB_SERVER_URL=iiop://10.80.4.102:2809
```

```
MAX_CLOB_LEN=32512
```

```
DB_TIMEOUT=200
```

```
MSG_SCHEMA_CON_POOLNAME=ADOGL_DS
```

```
ADOGL_MDB_JMS_QCF=ADOGL_MDBQCF
```

```
ADOGL_MDB_JMS_QUEUE_NAME=NOTIFY_DEST_QUEUE
```

```
ADOGL_MDB_JMS_DLQ_CF=ADOGL_MDBQCF
```

```
ADOGL_MDB_JMS_DLQ=NOTIFY_DEST_QUEUE_DLQ
```

```
LOGGER_PATH=D:/Kernel7.2/ADOGL_MDB/config/adogl_mdb_logger.cfg
```

C. Configure logger parameters

Edit <KERNEL_INSTALL_DIR>/ADOGL_MDB/config/adogl_mdb_logger.cfg file to change the value of the property "AD.LOGGER.FPATH" to <KERNEL_INSTALL_DIR>/ADOGL_MDB/log/.

E.g. If the value of your <KERNEL_INSTALL_DIR> is D:/Kernel7.2, then the entry for this property will be,

```
AD.LOGGER.FPATH=D:/Kernel7.2/ADOGL_MDB/log/
```

[NOTE: Give AD.LOGGER.FPATH with forward slash (/) as file separator and remember to give a slash (/) at the end.]

D. Run the build file

✓ For WINDOWS

- Go to the folder <KERNEL_INSTALL_DIR>\setup in the command prompt, type "**set_env**" and press enter.
- Change directory to <KERNEL_INSTALL_DIR>\ADOGL_MDB\setup\WAS in the command prompt, type "**ws_ant**" and press enter.

✓ For UNIX

- Go to the folder <KERNEL_INSTALL_DIR>/setup in the shell prompt, type "**set_env.sh**" and press enter.
- Change directory to <KERNEL_INSTALL_DIR>/ADOGL_MDB/setup/WAS in the shell prompt, type "**ws_ant**" and press enter.

[NOTE: Please make sure that you get a message **BUILD SUCCESSFUL** after compilation.]

E. Deploy the MDB in WebSphere Application Server (WAS)

1. Stop the application server.

If the application server is already running, then stop the application server as follows:

- ✓ For Windows
 - Go to the <APP_SERVER_HOME>/bin directory in the command prompt, type **stopServer.bat server1** and press enter.

2. Start the application server.

- ✓ For Windows
 - Go to the < APP_SERVER_HOME>/bin .i.e. the application server installation directory in the command prompt, type **startServer.bat server1** and press enter.
 - This will start the server. Ensure that you get no error during start up. If the server start up is proper we shall get the following screen.

```
C:\Program Files\IBM\WebSphere\AppServer\bin>startServer.bat server1
ADMU0116I: Tool information is being logged in file C:\Program
Files\IBM\WebSphere\AppServer\profiles\default\logs\server1\startServer.log
ADMU0128I: Starting tool with the default profile
ADMU3100I: Reading configuration for server: server1
ADMU3200I: Server launched. Waiting for initialization status.
ADMU3000I: Server server1 open for e-business; process id is 1852
```

3. Open the administrative console of the application server


- ✓ Open an internet browser and type the WAS Admin Console URL Address of the server.

e.g. <http://10.80.4.102:9060/ibm/console>

Where, 10.80.4.102 is the machine IP Address on which WAS is running.

- ✓ Enter a user id for launching the WAS Admin Console window.

The user id can be any name e.g.: KERNEL 7.2

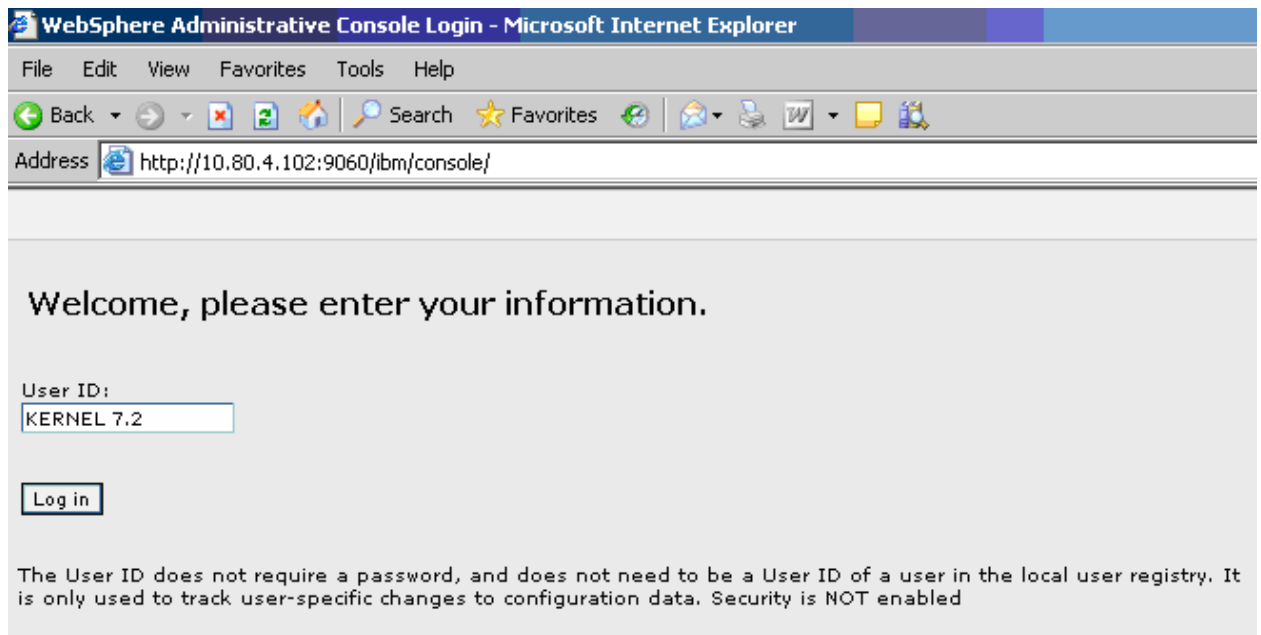

4. For each “res-ref-name” in ejb-jar.xml create an XA DataSource in WebSphere Application Server

[Refer: [WAS ADOGL DataSource Creation.doc](#)]

5. Create an XA QueueConnectionFactory with the name ADOGL_MDBQCF

[Refer: [WAS ADOGL DataSource Creation.doc](#)]

6. Create WebSphere MQ Queue Destinations with the following names

- a. NOTIFY_DEST_QUEUE_DLQ
- b. MDB_QUEUE_RESPONSE
- c. MDB_QUEUE_DLQ

[Refer: [WAS_ADOGL_WebSphereMQ_Installation.doc](#)]

7. Create Message Listener with the name OGL_MDB_LISTENER with Destination as NOTIFY_DEST_QUEUE and QueueConnectionFactory as ADOGL_MDBQCF


[Refer: [WAS_ADOGL_WebSphereMQ_Installation.doc](#)]

8. Stop and re-start the WebSphere Application Server

[Refer: Steps 1 and 2 above.]

9. Deploying ADOGL_MDB_Bean.ear

- ✓ Click on **Applications -> Install New Application**.
- ✓ Following screen will be displayed. Specify the local path of the enterprise archive file
(ie <KERNEL_INSTALL_DIR>/ADOGL_MDB/build/ADOGL_MDB_Bean.ear) and click on **Next**.

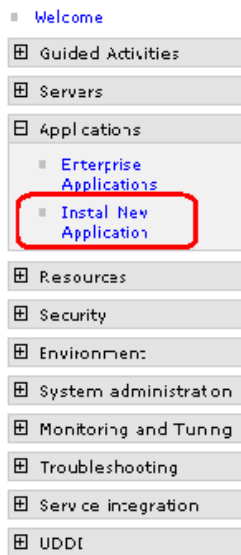

Enterprise Applications

Preparing for the application installation

Specify the EAR, WAR or JAR module to upload and install.

Path to the new application.

☒ Local file system

Specify path

D:\Kerne7.2_ot1\ADOG.

Browse...

☐ Remote file system

Specify path

Browse..

Context root

Used only for standalone Web modules (.war files)

Next

Cancel

10. Following screen will be displayed. Click on Next.

Enterprise Applications

[Close page](#)

Preparing for the application installation

Choose to generate default bindings and mappings.

☐ Generate Default Bindings

Override:

☒ Do not override existing bindings

☐ Override existing bindings

Specific bindings file

Browse...

Previous

Next

Cancel

11. Following screen will be displayed. Click on Next.

Install New Application

Specify options for installing enterprise applications and modules.

Step 1: Select installation options

[Step 2: Map modules to servers](#)

[Step 3: Provide listener bindings for message-driven beans](#)

[Step 4: Map resource references to resources](#)

[Step 5: Map resource env entry references to resources](#)

[Step 6: Summary](#)

Select installation options

Specify the various options that are available to prepare and install your application.

☐ Pre-compile JSP

Directory to install application

☒ Distribute application

☐ Use Binary Configuration

☐ Deploy enterprise beans

Application name

☒ Create MBeans for resources

☐ Enable class reloading

Reload interval in seconds

☐ Deploy Web services

Validate Input off/warn/fail

☐ Process embedded configuration

Next **Cancel**

12. Following screen will be displayed. Click on Next.

Install New Application

Specify options for installing enterprise applications and modules.

[Step 1](#) Select installation options

→ **Step 2: Map modules to servers**

[Step 3](#) Provide listener bindings for message-driven beans

★ [Step 4](#) Map resource references to resources

★ [Step 5](#) Map resource env entry references to resources

[Step 6](#) Summary

Map modules to servers

Specify targets such as application servers or clusters of application servers where you want to install the modules for application. Modules can be installed on the same application server or dispersed among several application servers, servers as targets that will serve as routers for requests to this application. The plug-in configuration file (plug-in-cfg.xml) server is generated based on the applications which are routed through it.

Clusters and Servers:

Select	Module	URI	Server
<input type="checkbox"/>	ADCGL_MDB_Bean.jar	ADCGL_MDB_Bean.jar,META-INF/ejb-jar.xml	WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1

13. Following screen will be displayed.

Give the Listener Name as provided in step 7 and click on Next.

Enterprise Applications

[Enterprise Applications](#) > [ADOGL_MDB_Bean](#) > **Provide listener bindings for message-driven beans**

Provide listener bindings for message-driven beans

Each message-driven enterprise bean in your application or module must be bound to a listener port name or to an activation specification JNDI name. When a message-driven enterprise bean is bound to an activation specification JNDI name you may also specify destination JNDI name and authentication alias.

☐ Apply Multiple Mappings

Select	EJB module	EJB	URI	Messaging Type	Bindings
<input checked="" type="checkbox"/>	ADOGL_MDB_Bean.jar	ADOGL_MDB_Bean	ADOGL_MDB_Bean.jar,META-INF/ejb-jar.xml	javax.jms.MessageListener	<input checked="" type="radio"/> Listener port Name <input type="text" value="OGL_MDB_LISTENER"/> <input type="radio"/> Activation Specification JNDI name <input type="text"/> Destination JNDI Name <input type="text"/> ActivationSpec Authentication Alias <input type="text"/>

14. Following screen will be displayed.

Give the mapping for Queue Connection Factory and Data Source that has been created in above steps 6 and 7.

Specify authentication method:

☐ none
☒ Use default method
 Select authentication data entry


☐ Use custom login configuration
 Select application login configuration

Select	Module	EJB	URI	Reference binding	JNDI name	Login configuration
<input checked="" type="checkbox"/>	ADOGL_MDB_Bean.jar	ADOGL_MDB_Bean	ADOGL_MDB_Bean.jar,META-INF/ejb-jar.xml	ADOGL_MDBQCF	<input type="text" value="ADOGL_MDBQCF"/>	Resource authorization: Container Authentication method: none

javax.sql.XADataSource

Select	Module	EJB	URI	Reference binding	JNDI name	Login configuration
<input checked="" type="checkbox"/>	ADOGL_MDB_Bean.jar	ADOGL_MDB_Bean	ADOGL_MDB_Bean.jar,META-INF/ejb-jar.xml	ADOGL_DS	<input type="text" value="ADOGL_DS"/>	Resource authorization: Container Authentication method: none

15. Following screen will be displayed. Click on Continue.

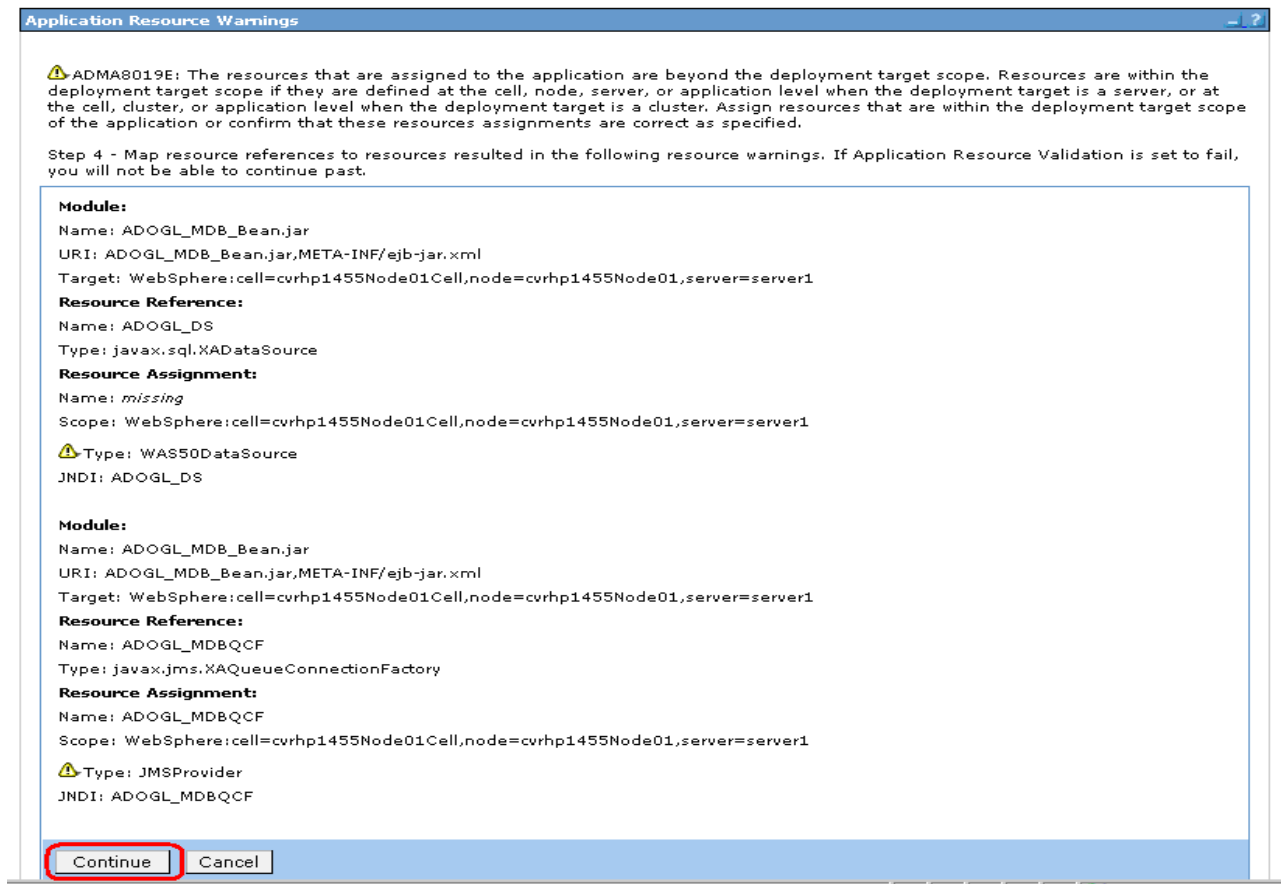

16. Following screen will be displayed.

- ✓ Give the JNDI name mapping for Queues same as their respective reference Bindings names.

Install New Application

[Close page](#)

Install New Application

Specify options for installing enterprise applications and modules.

[Step 1](#) Select installation options[Step 2](#) Map modules to servers[Step 3](#) Provide listener bindings for message-driven beans[Step 4](#) Map resource references to resources**→ Step 5: Map resource env entry references to resources**[Step 6](#) Summary

Map resource env entry references to resources

Each resource environment reference defined in your application must map to a resource.


☒ Apply Multiple Mappings

Select	Module	EJB	URI	Reference binding	JNDI name
<input checked="" type="checkbox"/>	ADOGL_MDB_Bean.jar	ADOGL_MDB_Bean	ADOGL_MDB_Bean.jar;META-INF/ejb-jar.xml	NOTIFY_DEST_QUEUE_DLQ	NOTIFY_DEST_QUEUE_DL

[Previous](#)[Next](#)[Cancel](#)

17. Following screen will be displayed. Click on Continue.

Application Resource Warnings
?


 ADMA8019E: The resources that are assigned to the application are beyond the deployment target scope. Resources are within the deployment target scope if they are defined at the cell, node, server, or application level when the deployment target is a server, or at the cell, cluster, or application level when the deployment target is a cluster. Assign resources that are within the deployment target scope of the application or confirm that these resources assignments are correct as specified.

Step 5 - Map resource env entry references to resources resulted in the following resource warnings. If Application Resource Validation is set to fail, you will not be able to continue past.

Module:
Name: ADOGL_MDB_Bean.jar
URI: ADOGL_MDB_Bean.jar,META-INF/ejb-jar.xml
Target: WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1

Resource Reference:
Name: NOTIFY_DEST_QUEUE_E
Type: null


Resource Assignment:
Name: NOTIFY_DEST_QUEUE_E
Scope: WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1

 Type: JMSProvider
JNDI: NOTIFY_DEST_QUEUE_E

Module:
Name: ADOGL_MDB_Bean.jar
URI: ADOGL_MDB_Bean.jar,META-INF/ejb-jar.xml
Target: WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1

Resource Reference:
Name: NOTIFY_DEST_QUEUE_DLQ
Type: null

Resource Assignment:
Name: NOTIFY_DEST_QUEUE_DLQ
Scope: WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1

 Type: JMSProvider
JNDI: NOTIFY_DEST_QUEUE_DLQ

18. Following screen will be displayed. Click on Finish.

[NOTE: This may take a few minutes.]

Install New Application ?

Specify options for installing enterprise applications and modules.

[Step 1](#) Select installation options

[Step 2](#) Map modules to servers

[Step 3](#) Provide listener bindings for message-driven beans

[Step 4](#) Map resource references to resources

[Step 5](#) Map resource env entry references to resources

→ **Step 6: Summary**

Summary

Summary of installation options

Options	Values
Use Binary Configuration	No
Create MBeans for resources	Yes
Cell/Node/Server	Click here
Reload interval in seconds	
Enable class reloading	No
Process embedded configuration	No
Application name	ADOGL_MDB_Bean
Validate Input off/warn/fail	warn
Directory to install application	
Distribute application	Yes
Deploy Web services	No
Pre-compile JSP	No
Deploy enterprise beans	No

Previous

Finish

Cancel

19. Following screen will be displayed. Click on “Save to Master Configuration”.

WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1, but of wrong resource type javax.jms.ResourceEnvironmentProvider. The expected resource type is JMSProvider.

ADMA0139W: Resource Assignment of name NOTIFY_DEST_QUEUE_E and type javax.jms.Queue, with JNDI name NOTIFY_DEST_QUEUE_E is found within scope of module ADOGL_MDB_Bean.jar with URI ADOGL_MDB_Bean.jar,META-INF/ejb-jar.xml deployed to target WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1, but of wrong resource type ResourceEnvironmentProvider. The expected resource type is JMSProvider.

ADMA0139W: Resource Assignment of name NOTIFY_DEST_QUEUE_DLQ and type javax.jms.Queue, with JNDI name NOTIFY_DEST_QUEUE_DLQ is found within scope of module ADOGL_MDB_Bean.jar with URI ADOGL_MDB_Bean.jar,META-INF/ejb-jar.xml deployed to target WebSphere:cell=cvrhp1455Node01Cell,node=cvrhp1455Node01,server=server1, but of wrong resource type ResourceEnvironmentProvider. The expected resource type is JMSProvider.

ADMA5068I: The resource validation for application ADOGL_MDB_Bean completed successfully, but warnings occurred during validation.

ADMA5058I: Application and module versions validated with versions of deployment targets.

ADMA5005I: The application ADOGL_MDB_Bean is configured in the WebSphere Application Server repository.

ADMA5053I: The library references for the installed optional package are created.

ADMA5005I: The application ADOGL_MDB_Bean is configured in the WebSphere Application Server repository.

ADMA5001I: The application binaries are saved in D:\Program Files\IBM\WebSphere\AppServer\profiles\default\wstemp\1134867395\workspace\cells\cvrhp1455Node01Cell\applications\ADOGL_MDB_Bean.ear\ADOGL_MDB_Bean.ear

ADMA5005I: The application ADOGL_MDB_Bean is configured in the WebSphere Application Server repository.

SECJ0400I: Successfully updated the application ADOGL_MDB_Bean with the appContextIDForSecurity information.

ADMA5011I: The cleanup of the temp directory for application ADOGL_MDB_Bean is complete.

ADMA5013I: Application ADOGL_MDB_Bean installed successfully.

Application ADOGL_MDB_Bean installed successfully.

To start the application, first save changes to the master configuration.

Save to Master Configuration

To work with installed applications, click the "Manage Applications" button.

Manage Applications

20. Following screen will be displayed. Click on Save.

Enterprise Applications

Enterprise Applications ? -

[Enterprise Applications](#) > **Save**

Save your workspace changes to the master configuration

Click Save to update the master repository with your changes. Click Discard to discard your changes and begin work again using the master repository configuration. Click Cancel to continue working with your changes.

+ Total changed documents: 10

Save Discard Cancel

21. Browse to Application -> Enterprise Applications.

- ✓ The deployed ADOGL_MDB_Bean will be displayed on the screen.
- ✓ Click the check box beside it and click on **Start**.

The screenshot shows the 'Enterprise Applications' management console. On the left is a navigation tree with 'Enterprise Applications' selected. The main panel displays a table of installed applications. The 'ADOGL_MDB_Bean' is selected, and the 'Start' button is highlighted with a red box.

Enterprise Applications

Lists installed applications. A single application can be deployed onto multiple servers.

Preferences

Start Stop Install Uninstall Update Rollout Update Remove File Export Export DDL

Select	Name	Status
<input type="checkbox"/>	ADOGL EJB FACADE Bean	➡
<input checked="" type="checkbox"/>	ADOGL MDB Bean	✖
<input type="checkbox"/>	AQBridgeFacade	➡
<input type="checkbox"/>	GW EJB Bean	➡
<input type="checkbox"/>	GW HTTP Servlet	➡
<input type="checkbox"/>	GW NOTIFY MDB Bean	➡
<input type="checkbox"/>	GW NOTIFY TIMER Bean	➡

Total 7

22. Following screen will be displayed with a green arrow as the status indicating that the deployed ADOGL_MDB_Bean is running.

Enterprise Applications ?

Messages

Application ADOGL_MDB_Bean on server server1 and node cvrhp1455Node01 started successfully.

Enterprise Applications
Lists installed applications. A single application can be deployed onto multiple servers.

Preferences

StartStopInstallUninstallUpdateRollout UpdateRemove FileExportExport DDL

Select	Name	Status
<input type="checkbox"/>	ADOGL EJB FACADE Bean	
<input type="checkbox"/>	ADOGL MDB Bean	
<input type="checkbox"/>	AQBridgeFacade	
<input type="checkbox"/>	GW EJB Bean	
<input type="checkbox"/>	GW HTTP Servlet	
<input type="checkbox"/>	GW NOTIFY MDB Bean	
<input type="checkbox"/>	GW NOTIFY TIMER Bean	

Total 7



FLEXCUBE UBS Oracle GL MDB Adapter Installation
[May] [2020]
Version 12.87.06.0.0

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax: +91 22 6718 3001
www.oracle.com/financialservices/

Copyright © [2007], [2020], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.