

# Oracle® Cloud

## Using the Shopify GraphQL Adapter with Oracle Integration 3



G13455-02  
February 2025



Oracle Cloud Using the Shopify GraphQL Adapter with Oracle Integration 3,

G13455-02

Copyright © 2024, 2025, Oracle and/or its affiliates.

Primary Author: Oracle Corporation

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## Preface

---

Audience	v
Documentation Accessibility	v
Diversity and Inclusion	v
Related Resources	vi
Conventions	vi

## 1 Understand the Shopify GraphQL Adapter

---

Shopify GraphQL Adapter Capabilities	1-1
What Application Version Is Supported?	1-2
Workflow to Create and Add a Shopify GraphQL Adapter Connection to an Integration	1-2

## 2 Create a Shopify GraphQL Adapter Connection

---

Prerequisites for Creating a Connection	2-1
Create a Connection	2-2
Configure Connection Properties	2-3
Configure Connection Security	2-4
Configure the Endpoint Access Type	2-4
Test the Connection	2-5
Upload a Certificate to Connect with External Services	2-6

## 3 Add the Shopify GraphQL Adapter Connection to an Integration

---

Basic Info Page	3-1
Trigger Event Page	3-1
Invoke Actions Page	3-2
Invoke Operations Page	3-3
Summary Page	3-3

## 4 Troubleshoot the Shopify GraphQL Adapter

---

Error While Invoking the API

4-1

# Preface

This guide describes how to configure this adapter as a connection in an integration in Oracle Integration.



## Note:

The use of this adapter may differ depending on the features you have, or whether your instance was provisioned using Standard or Enterprise edition. These differences are noted throughout this guide.

### Topics:

- [Audience](#)
- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)
- [Related Resources](#)
- [Conventions](#)

## Audience

This guide is intended for developers who want to use this adapter in integrations in Oracle Integration.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility/>.

### Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <https://support.oracle.com/portal/> or visit [Oracle Accessibility Learning and Support](#) if you are hearing impaired.

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and

---

the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

## Related Resources

See these Oracle resources:

- Oracle Cloud at <http://cloud.oracle.com>
- *Using Integrations in Oracle Integration 3*
- *Using the Oracle Mapper with Oracle Integration 3*
- Oracle Integration documentation on the Oracle Help Center.

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

# 1

## Understand the Shopify GraphQL Adapter

Review the following topics to learn about the Shopify GraphQL Adapter and how to use it as a connection in integrations in Oracle Integration. A typical workflow of adapter and integration tasks is also provided.

### Topics:

- [Shopify GraphQL Adapter Capabilities](#)
- [What Application Version Is Supported?](#)
- [Workflow to Create and Add a Shopify GraphQL Adapter Connection to an Integration](#)

## Shopify GraphQL Adapter Capabilities

The Shopify GraphQL Adapter enables you to create an integration in Oracle Integration that connects to the Shopify application using GraphQL APIs. You can configure the Shopify GraphQL Adapter as an invoke or trigger connection in an integration in Oracle Integration.

The Shopify GraphQL Adapter provides the following capabilities:

- For trigger endpoints:
  - Receives notifications whenever business events occur in the following modules:
    - \* Customers (Company Create/Company Delete/Company Update/Customer Creation/Customer Delete/Customer Disable/Customer Enable/Customer Update)
    - \* FulfillmentEvents (FulfillmentEvent Create/FulfillmentEvent Delete)
    - \* Fulfillments (Fulfillment Create/Fulfillment Update)
    - \* Inventory (Inventory Item Create/Inventory Item Update/Inventory Item Delete/Location Create/Location Update/Location Delete, Inventory Level Connect/Inventory Level Disconnect/Inventory Level Update )
    - \* Orders (Order Creation/Order Cancellation/Order Edit/Order Deletion/Order Fulfillment/Order Partial Fulfillment/Order Payment/Order Update/Refund Create/Transactions Create)
    - \* Order Returns (Return Approve/Return Cancel/Return Close/Return Decline/Return Reopen/Return Request/Return Update)
    - \* Products (Product Creation/Product Update/Product Deletion)

### Note:

Business events of the Order Returns module and Company events of the Customers module are only supported by API versions 2024-07 and 2024-10. To learn about all the API versions supported by the adapter, see the [Certification Matrix](#).

- For invoke endpoints:

- All the modules supported in the outbound direction are metadata-driven.
- Allows the following operations:
  - \* fetch (Query) data from Shopify
  - \* Mutate (Create/Update/Delete) data in Shopify
- Generates a query based on modules and operations selected and automatically validates them.
- Allows you to customize (edit) the query by adding response objects to the selection.
- Permits you to restore the original query by using the Reset Configuration option.
- Allows you to try the query (only in case of a data-retrieval operation) and see the sample response.
- Supports the Shopify Access Token Policy and Shopify Security Policy for establishing a connection with the application.
- Supports integration with publicly-accessible resources (direct connectivity over public internet) and private resources in your Virtual Cloud Network (VCN) with a private endpoint.

The Shopify GraphQL Adapter is one of many predefined adapters included with Oracle Integration. See the Adapters page in the Oracle Help Center.

## What Application Version Is Supported?

For information about which application version is supported by this adapter, see the [Connectivity Certification Matrix](#).

## Workflow to Create and Add a Shopify GraphQL Adapter Connection to an Integration

You follow a very simple workflow to create a connection with an adapter and include the connection in an integration in Oracle Integration.

This table lists the workflow steps for both adapter tasks and overall integration tasks, and provides links to instructions for each step.

Step	Description	More Information
1	Create the adapter connections for the applications you want to integrate. The connections can be reused in multiple integrations and are typically created by the administrator.	<a href="#">Create a Shopify GraphQL Adapter Connection</a>
2	Create the integration. When you do this, you add trigger (source) and invoke (target) connections to the integration.	Understand Integration Creation and Best Practices in <i>Using Integrations in Oracle Integration 3</i> and <a href="#">Add the Shopify GraphQL Adapter Connection to an Integration</a>
3	Map data between the trigger connection data structure and the invoke connection data structure.	Map Data in <i>Using Integrations in Oracle Integration 3</i>
4	(Optional) Create lookups that map the different values used by those applications to identify the same type of object (such as gender codes or country codes).	Manage Lookups in <i>Using Integrations in Oracle Integration 3</i>



<b>Step</b>	<b>Description</b>	<b>More Information</b>
5	Activate the integration.	Activate an Integration in <i>Using Integrations in Oracle Integration 3</i>
6	Monitor the integration on the dashboard.	Monitor Integrations During Runtime in <i>Using Integrations in Oracle Integration 3</i>
7	Track payload fields in messages during runtime.	Assign Business Identifiers for Tracking Fields in Messages and Track Integration Instances in <i>Using Integrations in Oracle Integration 3</i>
8	Manage errors at the integration level, connection level, or specific integration instance level.	Manage Errors in <i>Using Integrations in Oracle Integration 3</i>

# 2

## Create a Shopify GraphQL Adapter Connection

A connection is based on an adapter. You define connections to the specific cloud applications that you want to integrate.

### Topics:

- [Prerequisites for Creating a Connection](#)
- [Create a Connection](#)
- [Upload a Certificate to Connect with External Services](#)

## Prerequisites for Creating a Connection

You must satisfy the following prerequisites to create a connection with the Shopify GraphQL Adapter:

- [Create a Custom Application](#)
- [Obtain the Admin API Access Token and API Secret Key](#)
- [Obtain the Shopify API Credentials and Shared Secret](#)

### Create a Custom Application

To create a custom application in Shopify, you use the Shopify administration console. Follow the instructions mentioned under these topics:

- Create the app
- Select API scopes
- Install the app and get the API access tokens

See [Create and install a custom app](#).

### Obtain the Admin API Access Token and API Secret Key

You must obtain the values for your Admin API access token and API secret key.

See [Get the API credentials for a custom app](#).

### Obtain the Shopify API Credentials and Shared Secret

When you save your private application, Shopify automatically generates an API key, a password, and a shared secret.

To get the values for your API credentials and shared secret:

1. Open the private application that you created and saved.
2. Scroll to the **Admin API** section.

3. Copy the values for your API key, password, and shared secret. You'll need to enter those values on the Connections page when you configure security for your Shopify GraphQL Adapter connection in Oracle Integration. See [Configure Connection Security](#).

## Create a Connection


Before you can build an integration, you must create the connections to the applications with which you want to share data.



### Note:

You can also create a connection in the integration canvas. See why working with projects is preferred.

To create a connection in Oracle Integration:

1. Decide where to start:
  - Work in a project (see why working with projects is preferred).
    - a. In the navigation pane, click **Projects**.
    - b. Select the project name.
    - c. Click **Integrations** .
    - d. In the **Connections** section, click **Add** if no connections currently exist or **+** if connections already exist. The Create connection panel opens.
  - Work outside a project.
    - a. In the navigation pane, click **Design**, then **Connections**.
    - b. Click **Create**. The Create connection panel opens.
2. Select the adapter to use for this connection. To find the adapter, scroll through the list, or enter a partial or full name in the **Search** field.
3. Enter the information that describes this connection.

Element	Description
<b>Name</b>	Enter a meaningful name to help others find your connection when they begin to create their own integrations.
<b>Identifier</b>	Automatically displays the name in capital letters that you entered in the <b>Name</b> field. If you modify the identifier name, don't include blank spaces (for example, SALES OPPORTUNITY).

Element	Description
<b>Role</b>	<p>Select the role (direction) in which to use this connection.</p> <p><b>Note:</b> <i>Only</i> the roles supported by the adapter you selected are displayed for selection. Some adapters support all role combinations (trigger, invoke, or trigger and invoke). Other adapters support fewer role combinations.</p> <p>When you select a role, only the connection properties and security policies appropriate to that role are displayed on the Connections page. If you select an adapter that supports both invoke and trigger, but select only one of those roles, you'll get an error when you try to drag the adapter into the section you didn't select.</p> <p>For example, assume you configure a connection for the Oracle Service Cloud (RightNow) Adapter as only an <b>invoke</b>. Dragging the adapter to a <b>trigger</b> section in the integration produces an error.</p>
<b>Keywords</b>	Enter optional keywords (tags). You can search on the connection keywords on the Connections page.
<b>Description</b>	Enter an optional description of the connection.
<b>Share with other projects</b>	<p><b>Note:</b> This field only appears if you are creating a connection in a project.</p> <p>Select to make this connection publicly available in other projects. Connection sharing eliminates the need to create and maintain separate connections in different projects.</p> <p>When you configure an adapter connection in a different project, the <b>Use a shared connection</b> field is displayed at the top of the Connections page. If the connection you are configuring matches the same type and role as the publicly available connection, you can select that connection to reference (inherit) its resources.</p> <p>See <a href="#">Add and Share a Connection Across a Project</a>.</p>

4. Click **Create**.

Your connection is created. You're now ready to configure the connection properties, security policies, and (for some connections) access type.

5. Follow the steps to configure a connection.

The connection property and connection security values are specific to each adapter. Your connection may also require configuration with an access type such as a private endpoint or an agent group.

6. Test the connection.

## Configure Connection Properties

Enter connection information so your application can process requests.

1. Go to the **Properties** section.

2. In the **Hostname** field, enter the Shopify host name. The Shopify host name appears in the Shopify home URL. For example:

`https://hostname.myshopify.com`

3. In the **Shopify GraphQL API Version** field, enter the GraphQL API version. For example:

2024-04

## Configure Connection Security

Configure security for your Shopify GraphQL Adapter connection.

1. Go to the **Security** section.
2. From the **Security Policy** list, select the security policy:
  - **Shopify Access Token Policy**
  - **Shopify Security Policy**
3. If you select **Shopify Access Token Policy**:
  - a. In the **Admin API Access token** field, enter the admin API access token that you obtained after performing the prerequisite steps. See [Prerequisites for Creating a Connection](#).
  - b. (Optional) In the **API Secret Key** field, enter the API secret key that you obtained after performing the prerequisite steps. See [Prerequisites for Creating a Connection](#).
4. If you select **Shopify Security Policy**:
  - a. In the **Username** field, enter the API key that you obtained after performing the prerequisite steps. See [Prerequisites for Creating a Connection](#).
  - b. In the **Password** field, enter the password that you obtained after performing the prerequisite steps. See [Prerequisites for Creating a Connection](#).
  - c. (Optional) In the **Shared secret** field, enter the shared secret that you obtained after performing the prerequisite steps. See [Prerequisites for Creating a Connection](#).

### Note:

- The **Shopify Security Policy** can be used for invoke and trigger connections.
- The **Shared secret** is not marked with an asterisk (\*). This incorrectly implies that this field is not mandatory. When you configure this security policy for a trigger connection or trigger and invoke connection, then this field is mandatory. Thus, it is optional only in case of an invoke connection.

## Configure the Endpoint Access Type

Configure access to your endpoint. Depending on the capabilities of the adapter you are configuring, options may appear to configure access to the public internet, to a private endpoint, or to an on-premises service hosted behind a fire wall.

- [Select the Endpoint Access Type](#)

- [Ensure Private Endpoint Configuration is Successful](#)

### Select the Endpoint Access Type

1. Go to the **Access type** section.
2. Select the option for accessing your endpoint.

Option	This Option Appears If Your Adapter Supports ...
<b>Public gateway</b>	Connections to endpoints using the public internet.
<b>Private endpoint</b>	Connections to endpoints using a private virtual cloud network (VCN). <b>Note:</b> To connect to private endpoints, you must complete prerequisite tasks in the Oracle Cloud Infrastructure Console. Failure to do so results in errors when testing the connection. See <a href="#">Connect to Private Resources in <i>Provisioning and Administering Oracle Integration 3</i></a> and <a href="#">Troubleshoot Private Endpoints in <i>Using Integrations in Oracle Integration 3</i></a> .

### Ensure Private Endpoint Configuration is Successful

- To connect to private endpoints, you must complete prerequisite tasks in the Oracle Cloud Infrastructure Console. Failure to do so results in errors when testing the connection. See [Connect to Private Resources in \*Provisioning and Administering Oracle Integration 3\*](#).
- When configuring an adapter on the Connections page to connect to endpoints using a private network, specify the fully-qualified domain name (FQDN) and *not* the IP address. If you enter an IP address, validation fails when you click **Test**.
- IPsec tunneling and FastConnect are not supported for use with private endpoints.

## Test the Connection

Test your connection to ensure that it's configured successfully.

1. In the page title bar, click **Test**. What happens next depends on whether your adapter connection uses a Web Services Description Language (WSDL) file. Only some adapter connections use WSDLs.

If Your Connection...	Then...
Doesn't use a WSDL	The test starts automatically and validates the inputs you provided for the connection.
Uses a WSDL	A dialog prompts you to select the type of connection testing to perform: <ul style="list-style-type: none"> <li>• <b>Validate and Test:</b> Performs a full validation of the WSDL, including processing of the imported schemas and WSDLs. Complete validation can take several minutes depending on the number of imported schemas and WSDLs. No requests are sent to the operations exposed in the WSDL.</li> <li>• <b>Test:</b> Connects to the WSDL URL and performs a syntax check on the WSDL. No requests are sent to the operations exposed in the WSDL.</li> </ul>


2. Wait for a message about the results of the connection test.


- If the test was successful, then the connection is configured properly.
  - If the test failed, then edit the configuration details you entered. Check for typos and verify URLs and credentials. Continue to test until the connection is successful.
3. When complete, click **Save**.

## Upload a Certificate to Connect with External Services

Certificates allow Oracle Integration to connect with external services. If the external service/endpoint needs a specific certificate, request the certificate and then import it into Oracle Integration.

If you make an SSL connection in which the root certificate does not exist in Oracle Integration, an exception error is thrown. In that case, you must upload the appropriate certificate. A certificate enables Oracle Integration to connect with external services. If the external endpoint requires a specific certificate, request the certificate and then upload it into Oracle Integration.

1. Sign in to Oracle Integration.
2. In the navigation pane, click **Settings**, then **Certificates**.  
All certificates currently uploaded to the trust store are displayed on the Certificates page.
3. Click **Filter**  to filter by name, certificate expiration date, status, type, category, and installation method (user-installed or system-installed). Certificates installed by the system cannot be deleted.

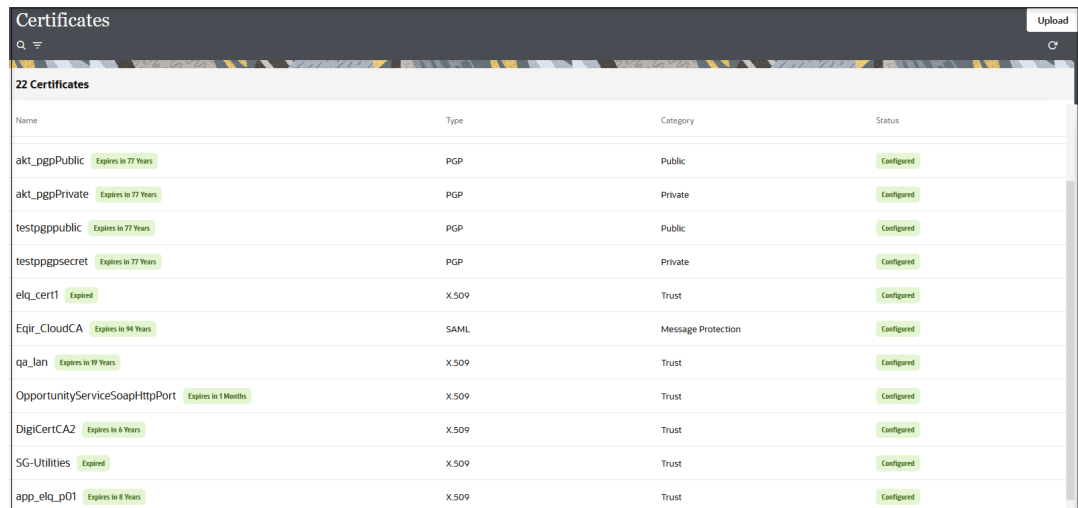

Name	Type	Category	Status
akt_pgppublic <small>Expires in 77 Years</small>	PGP	Public	Configured
akt_pgpprivate <small>Expires in 77 Years</small>	PGP	Private	Configured
testpgppublic <small>Expires in 77 Years</small>	PGP	Public	Configured
testpgppsecret <small>Expires in 77 Years</small>	PGP	Private	Configured
elq_cert1 <small>Expired</small>	X.509	Trust	Configured
Eqir_CloudCA <small>Expires in 94 Years</small>	SAML	Message Protection	Configured
qa_lan <small>Expires in 19 Years</small>	X.509	Trust	Configured
OpportunityServiceSoapHttpPort <small>Expires in 3 Months</small>	X.509	Trust	Configured
DigiCertCA2 <small>Expires in 6 Years</small>	X.509	Trust	Configured
SG-Utilities <small>Expired</small>	X.509	Trust	Configured
app_elq_p01 <small>Expires in 8 Years</small>	X.509	Trust	Configured

4. Click **Upload** at the top of the page.  
The Upload certificate panel is displayed.
5. Enter an alias name and optional description.
6. In the **Type** field, select the certificate type. Each certificate type enables Oracle Integration to connect with external services.
  - [Digital Signature](#)
  - [X.509 \(SSL transport\)](#)
  - [SAML \(Authentication & Authorization\)](#)
  - [PGP \(Encryption & Decryption\)](#)
  - [Signing key](#)

## Digital Signature

The digital signature security type is typically used with adapters created with the Rapid Adapter Builder. See Learn About the Rapid Adapter Builder in Oracle Integration in *Using the Rapid Adapter Builder with Oracle Integration 3*.

1. Click **Browse** to select the digital certificate. The certificate must be an X509Certificate. This certificate provides inbound RSA signature validation. See RSA Signature Validation in *Using the Rapid Adapter Builder with Oracle Integration 3*.
2. Click **Upload**.

## X.509 (SSL transport)

1. Select a certificate category.
  - a. **Trust**: Use this option to upload a trust certificate.
    - i. Click **Browse**, then select the trust file (for example, `.cer` or `.crt`) to upload.
  - b. **Identity**: Use this option to upload a certificate for two-way SSL communication.
    - i. Click **Browse**, then select the keystore file (`.jks`) to upload.
    - ii. Enter the comma-separated list of passwords corresponding to key aliases.

 **Note:**

When an identity certificate file (`.jks`) contains more than one private key, all the private keys must have the same password. If the private keys are protected with different passwords, the private keys cannot be extracted from the keystore.

- iii. Enter the password of the keystore being imported.
- c. Click **Upload**.

## SAML (Authentication & Authorization)

1. Note that **Message Protection** is automatically selected as the only available certificate category and cannot be deselected. Use this option to upload a keystore certificate with SAML token support. Create, read, update, and delete (CRUD) operations are supported with this type of certificate.
2. Click **Browse**, then select the certificate file (`.cer` or `.crt`) to upload.
3. Click **Upload**.

## PGP (Encryption & Decryption)

1. Select a certificate category. Pretty Good Privacy (PGP) provides cryptographic privacy and authentication for communication. PGP is used for signing, encrypting, and decrypting files. You can select the private key to use for encryption or decryption when configuring the stage file action.
  - a. **Private**: Uses a private key of the target location to decrypt the file.
    - i. Click **Browse**, then select the PGP file to upload.
    - ii. Enter the PGP private key password.
  - b. **Public**: Uses a public key of the target location to encrypt the file.



- i. Click **Browse**, then select the PGP file to upload.
  - ii. In the **ASCII-Armor Encryption Format** field, select **Yes** or **No**.
    - **Yes** shows the format of the encrypted message in ASCII armor. ASCII armor is a binary-to-textual encoding converter. ASCII armor formats encrypted messaging in ASCII. This enables messages to be sent in a standard messaging format. This selection impacts the visibility of message content.
    - **No** causes the message to be sent in binary format.
  - iii. From the **Cipher Algorithm** list, select the algorithm to use. Symmetric-key algorithms for cryptography use the same cryptographic keys for both encryption of plain text and decryption of cipher text. The following supported cipher algorithms are FIPS-compliant:
    - AES128
    - AES192
    - AES256
    - TDES
- c. Click **Upload**.

### Signing key

A signing key is a secret key used to establish trust between applications. Signing keys are used to sign ID tokens, access tokens, SAML assertions, and more. Using a private signing key, the token is digitally signed and the server verifies the authenticity of the token by using a public signing key. You must upload a signing key to use the OAuth Client Credentials using JWT Client Assertion and OAuth using JWT User Assertion security policies in REST Adapter invoke connections. Only PKCS1- and PKCS8-formatted files are supported.

1. Select **Public** or **Private**.
2. Click **Browse** to upload a key file.  
If you selected **Private**, and the private key is encrypted, a field for entering the private signing key password is displayed after key upload is complete.
3. Enter the private signing key password. If the private signing key is not encrypted, you are not required to enter a password.
4. Click **Upload**.

# 3

## Add the Shopify GraphQL Adapter Connection to an Integration

When you drag the Shopify GraphQL Adapter into the invoke or trigger area of an integration, the Adapter Endpoint Configuration Wizard is invoked. This wizard guides you through configuration of the Shopify GraphQL Adapter endpoint properties.

The following sections describe the wizard pages that guide you through configuration of the Shopify GraphQL Adapter as an invoke or trigger in an integration.

### Topics:

- [Basic Info Page](#)
- [Trigger Event Page](#)
- [Invoke Actions Page](#)
- [Invoke Operations Page](#)
- [Summary Page](#)

## Basic Info Page

You can enter a name and description on the Basic Info page of each adapter in your integration.

Element	Description
<b>What do you want to call your endpoint?</b>	Provide a meaningful name so that others can understand the responsibilities of this connection. You can include English alphabetic characters, numbers, underscores, and hyphens in the name. You can't include the following characters: <ul style="list-style-type: none"><li>• No blank spaces (for example, My Inbound Connection)</li><li>• No special characters (for example, #;83&amp; or righ(t)now4) except underscores and hyphens</li><li>• No multibyte characters</li></ul>
<b>What does this endpoint do?</b>	Enter an optional description of the connection's responsibilities. For example:  This connection receives an inbound request to synchronize account information with the cloud application.

## Trigger Event Page

Select the modules and associated events to receive notifications.

Element	Description
<b>Select Module</b>	<p>Select the module:</p> <ul style="list-style-type: none"> <li>• <b>Customers:</b> Configures customers and customer-related business events such as Customer creation/update/enable/disable/delete. Also configured is Company as a submodule. Company-related business events such as create/update /delete are also supported.</li> <li>• <b>FulfillmentEvents:</b> Configures fulfillment events and fulfillment event-related business events such as FulfillmentEvents create/delete.</li> <li>• <b>Fulfillments:</b> Configures fulfillments and fulfillment-related business events such as Fulfillment create/update.</li> <li>• <b>Inventory:</b> Configures inventory and inventory-related business events such as Inventory Item create/update and Inventory Level create/update.</li> <li>• <b>Orders:</b> Configures orders and order-related business events such as Order creation/edit/update/deletion/cancellation, Order payment, Order fulfillment/partial fulfillment, Transactions create, and Refund create.</li> <li>• <b>Order Returns:</b> Configures order returns and order return-related business events such as Return Approve/Cancel/Close/Decline/Reopen/Update/Request.</li> <li>• <b>Products:</b> Configures products and product-related business events such as Product creation/update/deletion.</li> </ul>
<b>Select Event</b>	Select an event name, such as Customer creation. The events available for selection are based on the module selected.
<b>Filter by Module Name</b>	Type the initial letters of the module name to filter the display of names in the list.
<b>Filter by Event Name</b>	Type the initial letters of the event name to filter the display of names in the list.

## Invoke Actions Page

Select the action to perform.

Element	Description
<b>Select the action you want to perform</b>	<p>Select the action you want to perform.</p> <ul style="list-style-type: none"> <li>• <b>Query:</b> Retrieves information from the Shopify application corresponding to the selected object and operation.</li> <li>• <b>Create, Update and Delete:</b> Creates, updates, or deletes a record in the Shopify application.</li> </ul>

## Invoke Operations Page

Select the module, the operations you want to perform in the Shopify application, and the response parameters .

Element	Description
<b>Select Module</b>	Select the module on which you want to perform operations (for example, Customers, Company, Fulfillment, Order, and Payment).
<b>Select Business Object</b>	Select an operation for a module such as Customer Create, Customer Merge, Customer Delete, Customer Merge Job Status, and so on. The operations available for selection are based on the module and action (Query/Create, Update or Delete) selected.
<b>Business Object Description</b>	Describes the business object or the operation selected above. For example, a description for the Customer Payment Method business object might be:  Returns a CustomerPaymentMethod resource by its Id.
<b>Available Response Objects</b>	List of objects that can be used to filter the response of the query/create/update or delete operation performed. <b>Note:</b> You can select a maximum of five response objects to filter your results. The Shopify GraphQL Adapter can filter results of up to three nested levels.
<b>Edit Query</b>	Allows you to edit the default query generated based on the action, module, business object, and response objects selected so far. <b>Note:</b> You cannot add a new response object or remove the selected one while editing the query.
<b>Try Query (Appears only if you select Query action)</b>	Allows you to execute the query and fetch a sample data for reference.
<b>Reset Configurations</b>	Allows you to discard a customized query and return to the default configuration state.

## Summary Page

You can review the specified adapter configuration values on the Summary page.

Element	Description
<b>Summary</b>	Displays a summary of the configuration values you defined on previous pages of the wizard.  The information that is displayed can vary by adapter. For some adapters, the selected business objects and operation name are displayed. For adapters for which a generated XSD file is provided, click the XSD link to view a read-only version of the file.  To return to a previous page to update any values, click the appropriate tab in the left panel or click <b>Go back</b> .  To cancel your configuration details, click <b>Cancel</b> .

# 4

## Troubleshoot the Shopify GraphQL Adapter


Review the following topic to learn about troubleshooting issues with the Shopify GraphQL Adapter.

### Topics:

- [Error While Invoking the API](#)

## Error While Invoking the API

You may encounter the following error when you perform any outbound operation with the Shopify GraphQL Adapter.

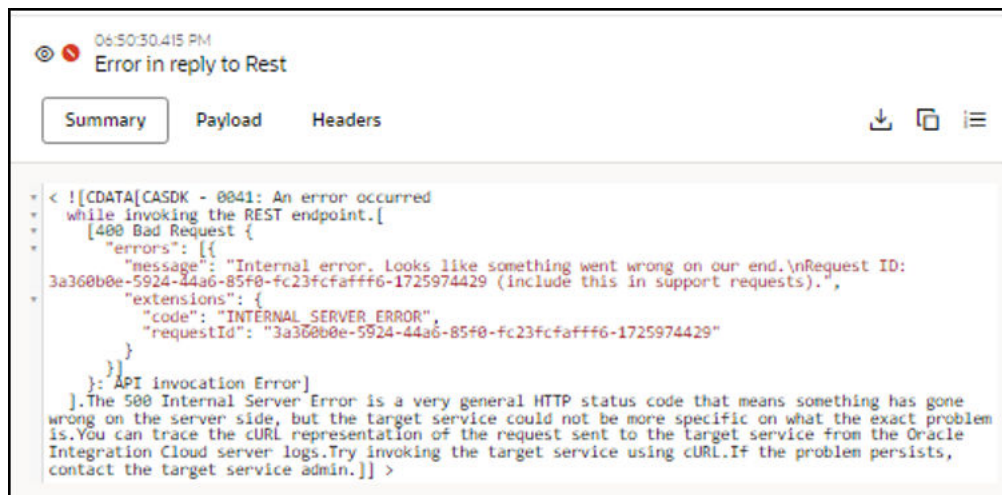

```
06:50:30.415 PM
Error in reply to Rest

Summary Payload Headers

< ![CDATA[CASDK - 0041: An error occurred
while invoking the REST endpoint.]]
[400 Bad Request {
  "errors": [{
    "message": "Internal error. Looks like something went wrong on our end.\nRequest ID:
3a360b0e-5924-44a6-85f0-fc23fcffff6-1725974429 (include this in support requests).",
    "extensions": {
      "code": "INTERNAL_SERVER_ERROR",
      "requestId": "3a360b0e-5924-44a6-85f0-fc23fcffff6-1725974429"
    }
  }]: API invocation Error]
].The 500 Internal Server Error is a very general HTTP status code that means something has gone
wrong on the server side, but the target service could not be more specific on what the exact problem
is.You can trace the cURL representation of the request sent to the target service from the Oracle
Integration Cloud server logs.Try invoking the target service using cURL.If the problem persists,
contact the target service admin.]] >
```

**Solution:** Shopify does not support several fields and throws an internal server error whenever they are sent as a part of API request. The error-causing fields are:

- **onboardingVisual**
- **usingShopifyBalance**
- **merchantApprovalSignals object**

A simple solution is to edit the query and remove the above fields from the request body. After updating, save and activate the integration for successful results.