Oracle® Database Graph Developer's Guide for Property Graph





Oracle Database Graph Developer's Guide for Property Graph, 24.2

F95688-03

Copyright © 2016, 2024, Oracle and/or its affiliates.

Primary Author: Lavanya Jayapalan

Contributors: Prashant Kannan, Chuck Murray, Melliyal Annamalai, Korbinian Schmid, Albert Godfrind, Oskar van Rest, Jorge Barba, Ana Estrada, Steve Serra, Ryota Yamanaka, Bill Beauregard, Hector Briseno, Hassan Chafi, Eugene Chong, Souripriya Das, Juan Garcia, Florian Gratzer, Zazhil Herena, Sungpack Hong, Roberto Infante, Hugo Labra, Gabriela Montiel-Moreno, Eduardo Pacheco, Joao Paiva, Matthew Perry, Diego Ramirez, Siva Ravada, Carlos Reyes, Jane Tao, Edgar Vazquez, Zhe (Alan) Wu

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

	Preface	
	Audience	XXV
	Documentation Accessibility	XXV
	Related Documents	XXV
	Conventions	XXV
	Changes in This Release for This Guide	
	Deprecated Features	xxix
	Desupported Features	XXX
Par	T Getting Started with Oracle Property Graphs	
1	Introduction to Property Graphs	
	1.1 What Are Property Graphs?	1-1
	1.2 About the Property Graph Feature of Oracle Database	1-2
	1.3 Overview of Property Graph Architecture	1-3
	1.3.1 Architecture Model for Running Graph Queries in the Database	1-3
	1.3.2 Architecture Model for Running Graph Analytics	1-4
	1.3.3 Developing Applications Using Graph Server Functionality as a Library	1-6
	1.4 Learn About the Graph Server (PGX)	1-6
	1.4.1 Overview of the Graph Server (PGX)	1-7
	1.4.1.1 Design of the Graph Server (PGX)	1-7
	1.4.1.2 Usage Modes of the Graph Server (PGX)	1-8
	1.5 Security Best Practices with Graph Data	1-9
	1.6 About Oracle Graph Server and Client Accessibility	1-10
2	Using Oracle Graph with the Autonomous Database	
	2.1 Two-Tier Deployments of Oracle Graph with Autonomous Database	2-1
	2.2 Three-Tier Deployments of Oracle Graph with Autonomous Database	2-2



Part II SQL Property Graphs

3.1 Quid	ck Start for Working with SQL Property Graphs	3
SQL DI	DL Statements for Property Graphs	
4.1 Crea	ating a SQL Property Graph	4
4.1.1	About Vertex and Edge Graph Element Tables	4
4.1.2	About Vertex and Edge Table Keys	4
4.1.3	About Labels and Properties	4
4.1.4	Using Graph Options to Create SQL Property Graphs	4
4.1.5	Granting System and Object Privileges for SQL Property Graphs	4-2
4.1.6	Retrieving Metadata for SQL Property Graphs	4-1
4.1.7	Retrieving SQL Creation DDL Using the DBMS_METADATA Package	4-1
4.1.8	Limitations of Creating a SQL Property Graph	4-1
4.2 Rev	alidating a SQL Property Graph	4-1
4.3 Ren	aming a SQL Property Graph	4-1
4.4 Droj	oping a SQL Property Graph	4-2
4.5 JSC	N Support in SQL Property Graphs	4-2
	t Graph Pattern	5
5.1.1	Graph Element Variables	5
5.1.2	Label Expressions	5
	Accessing Label Properties	
5.1.3	, tooosoning Labor 1 roportion	5
	able Length Path Patterns	
5.2 Vari		5
5.2 Vari 5.3 Con	able Length Path Patterns	5 5
5.2 Vari 5.3 Con 5.4 Vert	able Length Path Patterns uplex Path Patterns	5 5 5
5.2 Vari 5.3 Con 5.4 Vert 5.5 Usir	able Length Path Patterns nplex Path Patterns ex and Edge Identifiers	5 5 5-:
5.2 Vari5.3 Con5.4 Vert5.5 Usir5.6 Sele	able Length Path Patterns nplex Path Patterns ex and Edge Identifiers ng Aggregate Functions in SQL Graph Queries	5 5 5-: 5-:
5.2 Vari 5.3 Con 5.4 Vert 5.5 Usir 5.6 Sele 5.7 Usir	able Length Path Patterns Inplex Path Patterns ex and Edge Identifiers Ing Aggregate Functions in SQL Graph Queries Institute of the COLUMNS Clause	5 5 5-1 5-1 5-1
 5.2 Vari 5.3 Con 5.4 Vert 5.5 Usir 5.6 Sele 5.7 Usir 5.8 Run 	able Length Path Patterns applex Path Patterns ex and Edge Identifiers ag Aggregate Functions in SQL Graph Queries acting All Properties in the COLUMNS Clause ag the SOURCE and DESTINATION Predicates	5 5 5-: 5-: 5-:
5.2 Vari 5.3 Con 5.4 Vert 5.5 Usir 5.6 Sele 5.7 Usir 5.8 Run 5.9 Priv	able Length Path Patterns applex Path Patterns ex and Edge Identifiers ag Aggregate Functions in SQL Graph Queries acting All Properties in the COLUMNS Clause ag the SOURCE and DESTINATION Predicates aning SQL Graph Queries at a Specific SCN	5 5 5-1 5-1 5-1 5-1
 5.2 Vari 5.3 Con 5.4 Vert 5.5 Usir 5.6 Sele 5.7 Usir 5.8 Run 5.9 Priv 	able Length Path Patterns applex Path Patterns ex and Edge Identifiers ag Aggregate Functions in SQL Graph Queries acting All Properties in the COLUMNS Clause ag the SOURCE and DESTINATION Predicates aning SQL Graph Queries at a Specific SCN alleges to Query a SQL Property Graph amples for SQL Graph Queries	5-1 5-1 5-1 5-1 5-1 5-1
5.2 Vari 5.3 Con 5.4 Vert 5.5 Usir 5.6 Sele 5.7 Usir 5.8 Run 5.9 Priv 5.10 Ex 5.10.1	able Length Path Patterns applex Path Patterns ex and Edge Identifiers ag Aggregate Functions in SQL Graph Queries acting All Properties in the COLUMNS Clause ag the SOURCE and DESTINATION Predicates aning SQL Graph Queries at a Specific SCN alleges to Query a SQL Property Graph amples for SQL Graph Queries	5-2 5-2 5-1 5-1 5-1 5-2 5-2
5.2 Vari 5.3 Con 5.4 Vert 5.5 Usir 5.6 Sele 5.7 Usir 5.8 Run 5.9 Priv 5.10 Ex 5.10.1	able Length Path Patterns applex Path Patterns ex and Edge Identifiers g Aggregate Functions in SQL Graph Queries acting All Properties in the COLUMNS Clause g the SOURCE and DESTINATION Predicates ning SQL Graph Queries at a Specific SCN leges to Query a SQL Property Graph amples for SQL Graph Queries Setting Up Sample Data in the Database	5 5 5-1 5-1 5-1 5-1 5-2



	6.1 Loading a SQL Property Graph Using the readGraphByName API	6-1
	6.1.1 Loading a SQL Property Graph from a Different Schema	6-3
	6.1.2 Loading a SQL Property Graph Using Graph Optimization Options	6-4
	6.1.3 Loading a SQL Property Graph Using OnMissingVertex Options	6-6
	6.2 Loading a Subgraph Using PGQL Queries	6-7
	6.3 Expanding a Subgraph	6-8
	6.4 Handling Vertex and Edge Identifiers in the Graph Server (PGX)	6-9
	6.5 Mapping Oracle Database Types to PGX Types	6-10
	6.6 Privileges to Load a SQL Property Graph	6-11
	6.7 Restriction on Key Types	6-11
	6.8 Loading SQL Property Graphs with Unsupported Key Types	6-12
	Executing PGQL Queries Against SQL Property Graphs	
	7.1 Creating a SQL Property Graph Using PGQL	7-2
	7.2 Executing PGQL SELECT Queries on a SQL Property Graph	7-4
	7.3 Supported PGQL Features and Limitations for SQL Property Graphs	7-6
	7.3 Supported PGQL Features and Limitations for SQL Property Graphs Visualizing SQL Graph Queries Using the APEX Graph Vis Plug-in	
	Visualizing SQL Graph Queries Using the APEX Graph Vis	
	Visualizing SQL Graph Queries Using the APEX Graph Vis Plug-in	sualization
	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX	sualization 8-1
	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in	8-1 8-2 8-4 8-5
	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX	8-1 8-2 8-4
	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in	8-1 8-2 8-4 8-5
	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in 8.3.1 Settings	8-1 8-2 8-4 8-5 8-8
art	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in 8.3.1 Settings 8.3.2 Styles	8-1 8-2 8-4 8-5 8-8 8-8
art	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in 8.3.1 Settings 8.3.2 Styles 8.3.3 Expand PGQL Property Graphs	8-1 8-2 8-4 8-5 8-8 8-8
art	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in 8.3.1 Settings 8.3.2 Styles 8.3.3 Expand PGQL Property Graphs About PGQL Property Graphs	8-1 8-2 8-4 8-5 8-8 8-8 8-9
art	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in 8.3.1 Settings 8.3.2 Styles 8.3.3 Expand The PGQL Property Graphs 9.1 Creating PGQL Property Graphs on Oracle Database Tables	8-1 8-2 8-4 8-5 8-8 8-8 8-9
art	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in 8.3.1 Settings 8.3.2 Styles 8.3.3 Expand PGQL Property Graphs 9.1 Creating PGQL Property Graphs on Oracle Database Tables 9.1.1 Retrieving Metadata for PGQL Property Graphs	8-1 8-2 8-4 8-5 8-8 8-8 8-9
<u>art</u>	Visualizing SQL Graph Queries Using the APEX Graph Visualization 8.1 About the APEX Graph Visualization Plug-in 8.2 Getting Started with the APEX Graph Visualization Plug-in 8.2.1 Importing the Sample Graph Visualizations Application in APEX 8.3 Configure Attributes for the APEX Graph Visualization Plug-in 8.3.1 Settings 8.3.2 Styles 8.3.3 Expand The PGQL Property Graphs 9.1 Creating PGQL Property Graphs on Oracle Database Tables	8-1 8-2 8-4 8-5 8-8 8-8 8-9



9.2.2	Mapping GraphSON Types to Oracle Database Data Types	9-14
9.3 Using	g JSON to Store Vertex and Edge Properties	9-14
Loading	a PGQL property graph into the Graph Server (PGX)	
10.1 Loa	ding a PGQL Property Graph Using the readGraphByName API	10-2
10.1.1	Specifying Options for the readGraphByName API	10-3
10.1.2	Specifying the Schema Name for the readGraphByName API	10-5
10.2 Loa	ding a Graph Using a JSON Configuration File	10-
10.2.1	Configuring PARALLEL Hint when Loading a Graph	10-8
10.3 Loa	ding a Graph by Defining a Graph Configuration Object	10-8
10.4 Loa	ding a Subgraph from a PGQL Property Graph	10-10
10.4.1	PGQL Based Subgraph Loading	10-13
10.4.2	Prepared PGQL Queries	10-14
10.4.3	Providing Database Connection Credentials	10-1
10.4.4	Dynamically Expanding a Subgraph	10-16
11.1 Usiı	ng Sample Data for Graph Analysis	11-:
11.1.1	Importing Data from CSV Files	11-1
11.2 Qui	ck Start: Working with PGQL Property Graphs	11-3
=	ck Start: Using Graph Machine Learning on PGQL Property Graphs	11-10
_	ck Start: Using the Python Client as a Module	11-17
11.5 Ora	cle LiveLabs Workshops for Graphs	11-19
Getting	Started with the Client Tools	
12.3 Usi	ng the Graph Visualization Web Client	12-:
12.4 Usi	ng the Jupyter Notebook Interface	12-2
12.1 Inte	ractive Graph Shell CLIs	12-3
12.1.1	Starting the OPG4J Shell	12-4
12.1.2	Starting the OPG4Py Shell	12-6
12.2 Usi	ng Autonomous Database Graph Client	12-7
12.2.1	Prerequisites for Using Autonomous Database Graph Client	12-1
12.2.2	Using the PGX JDBC Driver with the AdbGraphClient API	12-17
12.5 Add	litional Client Tools for Querying PGQL Property Graphs	12-18
12.5.1	Using Oracle SQLcl	12-19
12.5.2	Using SQL Developer with PGQL Property Graphs	12-22



Property Graph Query Language (PGQL) 13

	13.1	Creating	a Property Graph Using PGQL	13-1
	13	3.1.1 Cre	eating a PGQL Property Graph with the BASE_GRAPHS Clause	13-4
	13	3.1.2 Cre	eating a PGQL Property Graph with Arbitrary Property Expressions	13-7
	13.2	Pattern M	latching with PGQL	13-8
	13.3	Edge Pat	terns Have a Direction with PGQL	13-9
	13.4	Vertex an	d Edge Labels with PGQL	13-9
	13.5	Variable-l	_ength Paths with PGQL	13-10
	13.6	Aggregati	ion and Sorting with PGQL	13-10
	13.7	Executing	PGQL Queries Against PGQL Property Graphs	13-10
	13	3.7.1 Sup	ported PGQL Features and Limitations for PGQL Property Graphs	13-11
		13.7.1.1	Additional Information on Supported PGQL Features with Examples	13-14
	13	3.7.2 SQ	L Translation for a PGQL Query	13-21
	13	3.7.3 Per	formance Considerations for PGQL Queries	13-22
 13.2 Pattern Matching with PGQL 13.3 Edge Patterns Have a Direction with PGQL 13.4 Vertex and Edge Labels with PGQL 13.5 Variable-Length Paths with PGQL 13.6 Aggregation and Sorting with PGQL 13.7 Executing PGQL Queries Against PGQL Property Graphs 13.7.1 Supported PGQL Features and Limitations for PGQL Property Graphs 	13-22			
		13.7.3.2	Using Query Optimizer Hints	13-24
		13.7.3.3		13-25
	13	3.7.4 Usi	ng the Java and Python APIs to Run PGQL Queries	13-26
		13.7.4.1	Creating a PGQL Property Graph	13-26
		13.7.4.2	Executing PGQL SELECT Queries	13-29
		13.7.4.3	Executing PGQL Queries to Modify PGQL Property Graphs	13-38
		13.7.4.4	Dropping A PGQL Property Graph	13-41
				14-1
	14	1.1.1 Ver	ifying Database Compatibility	14-2
	14	1.1.2 Dov	wnloading Oracle Graph Server and Client	14-2
	14.2	Oracle G	raph Server Installation	14-2
	14	1.2.1 Sys	stem Requirements for Installing Oracle Graph Server	14-3
	14	1.2.2 Usi	ng the RPM Installation	14-4
		14.2.2.1	Prerequisites for Installing Oracle Graph Server	14-4
		14.2.2.2	Installing Oracle Graph Server For Linux x86-64	14-4
		14.2.2.3	Installing Oracle Graph Server for Linux ARM	14-6
		14.2.2.4	Uninstalling Oracle Graph Server	14-7
		14.2.2.5	Upgrading Oracle Graph Server	14-7
	14	1.2.3 Dep	oloying Oracle Graph Server to a Web Server	14-8
		14.2.3.1	Deploying to Apache Tomcat	14-9



	14.2	.3.2	Deploying to Oracle Weblogic Server	14-10
	14.2.4	User	r Authentication and Authorization	14-11
	14.2	.4.1	Basic Steps for Using an Oracle Database for Authentication	14-11
	14.2	.4.2	Prepare the Graph Server for Database Authentication	14-15
	14.2	.4.3	Store the Database Password in a Keystore	14-16
	14.2	.4.4	Adding Permissions to Publish the Graph	14-21
	14.2	.4.5	Token Expiration	14-22
	14.2	.4.6	Customizing Roles and Permissions	14-22
	14.2	.4.7	Revoking Access to the Graph Server	14-26
	14.2	.4.8	Examples of Custom Authorization Rules	14-26
	14.2	.4.9	Kerberos Enabled Authentication for the Graph Server (PGX)	14-28
	14.3 Oracl	le Gra	aph Client Installation	14-31
	14.3.1	Grap	oh Clients	14-32
	14.3	.1.1	Oracle Graph Java Client	14-32
	14.3	.1.2	Oracle Graph Python Client	14-37
	14.3.2	Runi	ning the Graph Visualization Web Client	14-41
	14.4 Settir	ng Up	Transport Layer Security	14-42
	14.4.1	Usin	g a Self-Signed Server Keystore	14-43
	14.4	.1.1	Generating a Self-Signed Server Keystore	14-43
	14.4	.1.2	Configuring the Graph Server (PGX) When Using a Server Keystore	14-44
	14.4	.1.3	Configuring a Client to Trust the Self-Signed Keystore	14-45
	14.4.2	Usin	g a Self-Signed Server Certificate	14-46
	14.4	.2.1	Generating a Self-Signed Server Certificate	14-46
	14.4	.2.2	Configuring the Graph Server (PGX)	14-47
	14.4	.2.3	Configuring a Client to Trust the Self-Signed Certificate	14-48
15	Getting S	Start	ed with the Graph Server (PGX)	
	15.1 Starti	ing th	e Graph Server (PGX)	15-1
	15.1.1	Start	ting and Stopping the Graph Server (PGX) Using the Command Line	15-1
	15.1.2	Conf	figuring the Graph Server (PGX)	15-2
	15.2 Conn	ectin	g to the Graph Server (PGX)	15-6
	15.2.1	Coni	necting with the Graph Client CLIs	15-7
	15.2.2	Coni	necting with Java	15-12
	15.2	.2.1	Starting and Stopping the PGX Engine	15-12
	15.2.3	Coni	necting with Python	15-13
Part	V Usino	g the	e Graph Server (PGX)	
	•	-	•	



16 Developing Applications with Graph Analytics

16.1	Using the	Graph Server Administrator Dashboard	16-2
16.1	_	nory Usage	16-3
16.2		sions	16-4
16.2	1.3 Gra	phs	16-4
	'	tex and Edge IDs	16-5
		nagement in the Graph Server (PGX)	16-7
16.3	3.1 Rea	ding Graphs from Oracle Database into the Graph Server (PGX)	16-8
	16.3.1.1	Reading Entity Providers at the Same SCN	16-9
	16.3.1.2	Progress Reporting and Estimation for Graph Loading	16-12
	16.3.1.3	Graph Configuration Options	16-13
	16.3.1.4	Data Loading Security Best Practices	16-20
	16.3.1.5	Data Format Support Matrix	16-21
	16.3.1.6	Immutability of Loaded Graphs	16-21
16.3	3.2 Stor	ing a Graph Snapshot on Disk	16-22
16.3	3.3 Pub	lishing a Graph	16-23
16.3	3.4 Dele	eting a Graph	16-31
16.3	3.5 Gra	ph Sharing Options and Validating Graph Permissions	16-33
16.4 I	Keeping tl	ne Graph in Oracle Database Synchronized with the Graph Server	16-35
16.4	4.1 Syn	chronizing a SQL Property Graph	16-37
16.4	4.2 Syn	chronizing a PGQL Property Graph	16-40
16.4	4.3 Syn	chronizing a Published Graph	16-44
16.5	Optimizin	g Graphs for Read Versus Updates in the Graph Server (PGX)	16-50
16.6 I	Executing	Built-in Algorithms	16-51
16.6	6.1 Abo	ut Built-In Algorithms in the Graph Server (PGX)	16-52
16.6	6.2 Run	ning the Triangle Counting Algorithm	16-53
16.6	6.3 Run	ning the PageRank Algorithm	16-53
16.6	6.4 Gett	ting the Progress of a Running Algorithm	16-54
16.7	Using Cus	stom PGX Graph Algorithms	16-56
16.7	7.1 Writ	ing a Custom PGX Algorithm	16-57
	16.7.1.1	Collections	16-57
	16.7.1.2	Iteration	16-58
	16.7.1.3	Reductions	16-59
16.7	7.2 Con	npiling and Running a Custom PGX Algorithm	16-59
16.7	7.3 Exa	mple Custom PGX Algorithm: PageRank	16-62
16.7	7.4 Trac	king the Progress of a Running Custom PGX Graph Algorithm	16-62
16.8	Creating S	Gubgraphs	16-65
16.8		ut Filter Expressions	16-65
16.8	3.2 Usir	ng a Simple Filter to Create a Subgraph	16-66
16.8	8.3 Usir	ng a Complex Filter to Create a Subgraph	16-67
16.8	8.4 Usir	ng a Vertex Set to Create a Bipartite Subgraph	16-68



	16.9 User	-Defined Functions (UDFs) in PGX	16-70
	16.10 Usi	ng Graph Server (PGX) as a Library	16-73
	16.10.1	Using the PGX JDBC Driver when Graph Server (PGX) is Utilized as a Library	16-75
17	Using the	e Machine Learning Library (PgxML) for Graphs	
	17.1 Using	g the DeepWalk Algorithm	17-2
	17.1.1	Loading a Graph	17-2
	17.1.2	Building a Minimal DeepWalk Model	17-4
	17.1.3	Building a Customized DeepWalk Model	17-4
	17.1.4	Training a DeepWalk Model	17-6
	17.1.5	Getting the Loss Value For a DeepWalk Model	17-6
	17.1.6	Computing Similar Vertices for a Given Vertex	17-7
	17.1.7	Computing Similar Vertices for a Vertex Batch	17-8
	17.1.8	Getting All Trained Vertex Vectors	17-9
	17.1.9	Storing a Trained DeepWalk Model	17-10
	17.1	9.1 Storing a Trained Model in Another Database	17-11
	17.1.10	Loading a Pre-Trained DeepWalk Model	17-12
	17.1	10.1 Loading a Pre-Trained Model From Another Database	17-13
	17.1.11	Destroying a DeepWalk Model	17-15
	17.2 Usin	g the Supervised GraphWise Algorithm (Vertex Embeddings and Classification)	17-15
	17.2.1	Loading a Graph	17-16
	17.2.2	Building a Minimal GraphWise Model	17-18
	17.2.3	Advanced Hyperparameter Customization	17-19
	17.2.4	Building a GraphWise Model Using Partitioned Graphs	17-23
	17.2.5	Supported Property Types for Supervised GraphWise Model	17-26
	17.2.6	Classification Versus Regression Models on Supervised GraphWise Models	17-28
	17.2.7	Setting a Custom Loss Function and Batch Generator (for Anomaly Detection)	17-30
	17.2.8	Training a Supervised GraphWise Model	17-31
	17.2.9	Getting the Loss Value For a Supervised GraphWise Model	17-33
	17.2.10	Getting the Training Log for a Supervised GraphWise Model	17-34
	17.2.11	Inferring the Vertex Labels for a Supervised GraphWise Model	17-35
	17.2.12	Evaluating the Supervised GraphWise Model Performance	17-36
	17.2.13	Inferring Embeddings for a Supervised GraphWise Model	17-37
	17.2	2.13.1 Inferring Embeddings for a Model in Another Database	17-38
	17.2.14	Storing a Trained Supervised GraphWise Model	17-39
	17.2.15	Loading a Pre-Trained Supervised GraphWise Model	17-40
	17.2.16	Destroying a Supervised GraphWise Model	17-41
	17.2.17	Explaining a Prediction of a Supervised GraphWise Model	17-42
	17.3 Usin	g the Supervised EdgeWise Algorithm (Edge Embeddings and Classification)	17-46
	17.3.1	Loading a Graph	17-47
	17.3.2	Building a Minimal Supervised EdgeWise Model	17-49



1	.7.3.3	Advanced Hyperparameter Customization	17-49
1	7.3.4	Applying EdgeWise for Partitioned Graphs	17-53
1	7.3.5	Supported Property Types for Supervised EdgeWise Model	17-56
1	7.3.6	Classification Versus Regression on Supervised EdgeWise Models	17-58
1	7.3.7	Setting a Custom Loss Function and Batch Generator (for Anomaly Detection)	17-59
1	7.3.8	Setting the Edge Embedding Production Method	17-61
1	7.3.9	Training a Supervised EdgeWise Model	17-62
1	7.3.10	Getting the Loss Value for a Supervised EdgeWise Model	17-65
1	7.3.11	Getting the Training Log for a Supervised EdgeWise Model	17-65
1	7.3.12	Inferring Edge Labels for a Supervised EdgeWise Model	17-66
1	7.3.13	Evaluating Model Performance	17-68
1	7.3.14	Inferring Embeddings for a Supervised EdgeWise Model	17-70
1	7.3.15	Storing a Supervised EdgeWise Model	17-71
1	7.3.16	Loading a Pre-Trained Supervised EdgeWise Model	17-72
1	7.3.17	Destroying a Supervised EdgeWise Model	17-73
1	7.3.18	Example: Predicting Ratings on the Movielens Dataset	17-73
17.4	Using	the Unsupervised GraphWise Algorithm (Vertex Embeddings)	17-77
1	7.4.1	Loading a Graph	17-78
1	7.4.2	Building a Minimal Unsupervised GraphWise Model	17-79
1	7.4.3	Advanced Hyperparameter Customization	17-80
1	7.4.4	Supported Property Types for Unsupervised GraphWise Model	17-84
1	7.4.5	Building an Unsupervised GraphWise Model Using Partitioned Graphs	17-86
1	7.4.6	Training an Unsupervised GraphWise Model	17-89
1	7.4.7	Getting the Loss Value for an Unsupervised GraphWise Model	17-91
1	7.4.8	Getting the Training Log for an Unsupervised GraphWise Model	17-92
1	7.4.9	Inferring Embeddings for an Unsupervised GraphWise Model	17-93
1	7.4.10	Classifying the Vertices Using the Obtained Embeddings	17-94
1	7.4.11	Storing an Unsupervised GraphWise Model	17-95
1	7.4.12	Loading a Pre-Trained Unsupervised GraphWise Model	17-96
1	7.4.13	Destroying an Unsupervised GraphWise Model	17-97
1	7.4.14	Explaining a Prediction for an Unsupervised GraphWise Model	17-97
17.5	Using	the Unsupervised EdgeWise Algorithm	17-101
1	7.5.1	Loading a Graph	17-103
1	7.5.2	Building a Minimal Unsupervised EdgeWise Model	17-105
1	7.5.3	Advanced Hyperparameter Customization	17-105
1	7.5.4	Supported Property Types for Unsupervised EdgeWise Model	17-109
1	7.5.5	Applying Unsupervised EdgeWise for Partitioned Graphs	17-111
1	7.5.6	Setting the Edge Combination Production Method	17-114
1	7.5.7	Training an Unsupervised EdgeWise Model	17-115
1	7.5.8	Getting the Loss Value for an Unsupervised EdgeWise Model	17-118
1	7.5.9	Getting the Training Log for an Unsupervised EdgeWise Model	17-118
1	7.5.10	Inferring Embeddings for an Unsupervised EdgeWise Model	17-119



17.5.1	1 Classifying the Edges Using the Obtained Embeddings	17-120
17.5.1	2 Storing an Unsupervised EdgeWise Model	17-121
17.5.1	3 Loading a Pre-Trained Unsupervised EdgeWise Model	17-122
17.5.1	4 Destroying an Unsupervised Anomaly Detection GraphWise Model	17-123
17.5.1	5 Example: Computing Edge Embeddings on the Movielens Dataset	17-123
	ng the Unsupervised Anomaly Detection GraphWise Algorithm (Vertex	
Em	beddings and Anomaly Scores)	17-126
17.6.1	Loading a Graph	17-127
17.6.2	Building a Minimal Unsupervised Anomaly Detection GraphWise Model	17-128
17.6.3	Advanced Hyperparameter Customization	17-129
17.6.4	Building an Unsupervised Anomaly Detection GraphWise Model Using Partitioned Graphs	17-132
17.6.5	Training an Unsupervised Anomaly Detection GraphWise Model	17-135
17.6.6	Getting the Loss Value for an Unsupervised Anomaly Detection GraphWise Model	17-135
17.6.7	Inferring Embeddings for an Unsupervised Anomaly Detection GraphWise Model	17-136
17.6.8	Inferring Anomalies	17-137
17.6.9	Storing an Unsupervised Anomaly Detection GraphWise Model	17-139
17.6.1	D Loading a Pre-Trained Unsupervised Anomaly Detection GraphWise Model	17-140
17.6.1	Destroying an Unsupervised Anomaly Detection GraphWise Model	17-141
17.7 Us	ng the Pg2vec Algorithm	17-142
17.7.1	Loading a Graph	17-143
17.7.2	Building a Minimal Pg2vec Model	17-144
17.7.3	Building a Customized Pg2vec Model	17-145
17.7.4	Training a Pg2vec Model	17-146
17.7.5	Getting the Loss Value For a Pg2vec Model	17-147
17.7.6	Computing Similar Graphlets for a Given Graphlet	17-148
17.7.7	Computing Similars for a Graphlet Batch	17-149
17.7.8	Inferring a Graphlet Vector	17-150
17.7.9	Inferring Vectors for a Graphlet Batch	17-151
17.7.1	O Storing a Trained Pg2vec Model	17-152
17.7.1	Loading a Pre-Trained Pg2vec Model	17-153
17.7.1	2 Destroying a Pg2vec Model	17-154
17.8 Mo	del Repository and Model Stores	17-154
17.8.1	Database-Backed Model Repository	17-155
Executi	ng PGQL Queries Against the Graph Server (PGX)	
18.1 Ge	tting Started with PGQL	18-1
18.2 Cre	eating Property Graphs Using Options	18-3
18.3 Su	pported PGQL Features and Limitations on the Graph Server (PGX)	18-5
18.3.1	Support for Selecting All Properties	18-8



18

18.3.2	2 Unnesting of variable-Length Path Queries	18-9
18.3.3	B Using INTERVAL Literals in PGQL Queries	18-12
18.3.4	Using Path Modes with PGQL	18-13
18.3.5	Support for PGQL Lateral Subqueries	18-15
18.3.6	Support for PGQL GRAPH_TABLE Operator	18-16
18.3.7	Limitations on Quantifiers	18-17
18.3.8	B Limitations on WHERE and COST Clauses in Quantified Patterns	18-17
18.4 Ja	va APIs for Executing CREATE PROPERTY GRAPH Statements	18-18
18.5 Py	thon APIs for Executing CREATE PROPERTY GRAPH Statements	18-19
18.6 Ex	ecuting PGQL Queries Using the PGX JDBC Driver	18-19
18.6.2	Limitations of the PGX JDBC Driver	18-21
18.6.2	PGX Data Type Compatibility and Casting	18-21
18.7 Ja	va APIs for Executing SELECT Queries	18-23
18.7.2	Executing SELECT Queries Against a Graph in the Graph Server (PGX)	18-24
18.7.2	2 Executing SELECT Queries Against a PGX Session	18-24
18.7.3	B Iterating Through a Result Set	18-24
18.7.4	Printing a Result Set	18-26
18.8 Ja	va APIs for Executing UPDATE Queries	18-27
18.8.2	Updatability of Graphs Through PGQL	18-27
18.8.2	Executing UPDATE Queries Against a Graph in the Graph Server (PGX)	18-28
18.8.3	B Executing UPDATE Queries Against a PGX Session	18-29
18.8.4	Altering the Underlying Schema of a Graph	18-29
18.9 Py	thon APIs for Executing UPDATE Queries	18-30
18.10 F	GQL Queries with Partitioned IDs	18-33
18.11 S	ecurity Tools for Executing PGQL Queries	18-34
18.11	1 Using Bind Variables	18-35
18.11	2 Using Identifiers in a Safe Manner	18-36
18.12 E	est Practices for Tuning PGQL Queries	18-36
18.12	.1 Memory Allocation	18-37
18.12	.2 Parallelism	18-37
18.12	.3 Query Plan Explaining	18-37
REST	Endpoints for the Graph Server	
19.1 Gr	aph Server REST API Version 2	19-1
19.1.2	Get an Authentication Token	19-1
19.1.2	Refresh an Authentication Token	19-2
19.1.3	B Get Graphs	19-4
19.1.4	Run a PGQL Query	19-4
19.1.5	Get the Database Version	19-8
19.1.6	6 Get User	19-9
19.1.7	Asynchronous REST Endpoints	19-9



19

		19.1.7.	1 Run an Asynchronous PGQL Query	19-9
		19.1.7.	2 Check Asynchronous Query Completion	19-11
		19.1.7.	.3 Retrieve Asynchronous Query Result	19-12
		19.1.7.	.4 Cancel an Asynchronous Query Execution	19-14
	19.2	Graph S	Server REST API Version 1	19-14
	1	9.2.1 L	ogin	19-14
	1	9.2.2 G	et Graphs	19-15
	1	9.2.3 R	un a PGQL Query	19-16
	1	9.2.4 G	Set User	19-18
	1	9.2.5 Lo	ogout	19-19
	1	9.2.6 A	synchronous REST Endpoints	19-19
		19.2.6.	1 Run an Asynchronous PGQL Query	19-19
		19.2.6.	2 Check Asynchronous Query Completion	19-20
		19.2.6.	.3 Retrieve Asynchronous Query Result	19-20
		19.2.6.	.4 Cancel an Asynchronous Query Execution	19-23
Part	: VI	Graph	Nation Visualization	
21	Usir	ng the (Graph Visualization Application	
	21.1	Visualiz	ring PGQL Queries on Graphs Loaded Into the Graph Server (PGX)	21-2
	21.2		ring PGQL Queries on PGQL Property Graphs	21-2
	21.3		ring Graph Queries on SQL Property Graphs	21-5
	21.4		Visualization Modes	21-6
	21.5	•	Visualization Settings	21-7
	21.6	•	he Geographical Layout	21-9
	21.7	-	ive Search	21-12
22	Emb	peddin	g the Graph Visualization Library in a Web Application	
Part	: VII	Grap	h Server (PGX) Advanced User Guide	
23	Gra	ph Ser	ver (PGX) Configuration Options	
	23.1	Configu	ration Parameters for the Graph Server (PGX) Engine	23-1



23.2 Cor	nfiguration Parameters for Connecting to the Graph Server (PGX)	23-13
Memory	/ Consumption by the Graph Server (PGX)	
24.1 Me	mory Management	24-1
24.1.1	Configuring On-Heap Limits	24-2
24.1.2	Configuring Off-Heap Limits	24-4
Deployi	ng Oracle Graph Server Behind a Load Balancer	
25.1 Usi	ng HAProxy for PGX Load Balancing and High Availability	25-1
25.2 Dep	oloying Graph Server (PGX) Using OCI Load Balancer	25-3
25.3 Hea	alth Check in the Load Balancer	25-6
Names	paces and Sharing	
26.1 Def	fining Graph Names	26-1
26.2 Ret	rieving Graphs by Name	26-1
26.3 Che	ecking Used Names	26-2
26.4 Pro	perty Name Resolution and Graph Mutations	26-2
PGX Pr	ogramming Guides	
27.1 Des	sign of the Graph Server (PGX) API	27-3
27.2 Dat	a Types and Collections in the Graph Server (PGX)	27-4
27.2.1	Using Collections and Maps	27-6
27	.2.1.1 Collection Data Types	27-7
27	.2.1.2 Map Data Types	27-12
27.2.2	Using Datetime Data Types	27-17
27	.2.2.1 Loading Datetime Data	27-18
27	.2.2.2 Specifying Custom Datetime Formats	27-19
27	.2.2.3 APIs for Accessing Datetime Data	27-21
27	.2.2.4 Querying Datetime Data Using PGQL	27-22
27	.2.2.5 Accessing Datetimes from PGQL Result Sets	27-24
27.3 Hai	ndling Asynchronous Requests in Graph Server (PGX)	27-25
27.3.1	Blocking Operation	27-26
27.3.2	Chaining Operation	27-26
27.3.3	Cancelling Operation	27-27
27.3.4	Handling Concurrent Asynchronus Operations	27-28
27.4 Gra	aph Client Sessions	27-28
27.5 Gra	aph Mutation and Subgraphs	27-30
27.5.1	Altering Graphs	27-30



	27.5	.1.1	Loading Or Removing Additional Vertex or Edge Providers	27-31
	27.5.2	Simp	plifying and Copying Graphs	27-39
	27.5.3	Tran	nsposing Graphs	27-41
	27.5.4	Undi	irecting Graphs	27-41
	27.5.5	Adva	anced Multi-Edge Handling	27-42
	27.5	.5.1	Picking	27-43
	27.5	.5.2	Merging	27-44
	27.5	.5.3	StrategyBuilder in General	27-45
	27.5.6	Crea	ating a Subgraph	27-46
	27.5.7	Crea	ating a Bipartite Subgraph	27-46
	27.5.8	Crea	ating a Sparsified Subgraph	27-47
27	'.6 Grapl	h Buil	lder and Graph Change Set	27-48
	27.6.1	Build	ding Graphs Using GraphBuilder Interface	27-48
	27.6	.1.1	Creating a Simple Graph	27-48
	27.6	.1.2	Adding a Vertex Property	27-50
	27.6	.1.3	Using Strings as Vertex Identifiers	27-51
	27.6	.1.4	Referencing a Vertex for Creating Edges	27-53
	27.6	.1.5	Adding an Edge Property and a Label	27-54
	27.6	.1.6	Using Graph Builder with Implicit IDs	27-56
	27.6.2	Mod	lifying Loaded Graphs Using ChangeSet	27-57
	27.6	.2.1	Modifying Vertices	27-58
	27.6	.2.2	Adding Edges	27-59
	27.6	.2.3	GraphChangeSet with Partitioned IDs	27-60
	27.6	.2.4	Error Handling when Using a ChangeSet	27-61
27	.7 Mana	ging	Transient Data	27-62
	27.7.1	Man	aging Transient Properties	27-62
	27.7.2	Man	aging Collections and Scalars	27-64
27	'.8 Grapl	h Ver	rsioning	27-66
	27.8.1	Conf	figuring the Snapshots Source	27-66
	27.8.2	Crea	ating a Snapshot via Refreshing	27-67
	27.8.3	Crea	ating a Snapshot via ChangeSet	27-69
	27.8.4	Che	cking Out the Latest Snapshots of a Graph	27-71
	27.8.5	Che	cking Out Different Snapshots of a Graph	27-72
	27.8.6	Dire	ctly Loading a Specific Snapshot of a Graph	27-73
27	'.9 Label	ls and	d Properties	27-75
	27.9.1	Setti	ing and Getting Property Values	27-75
	27.9.2	Getti	ing Label Values	27-77
27	'.10 Filte	r Exp	pressions	27-77
	27.10.1	Syr	ntax	27-78
	27.10.2	Тур	pe System	27-82
	27.10.3	Pat	th Finding Filters	27-83
	27.10.4	Sul	bgraph Filters	27-83



	27.10.5	Ope	rations on Filter Expressions	27-83
	27.10	.5.1	Defining Filter Expressions	27-84
	27.10	.5.2	Defining Result Set Filters	27-85
	27.10	.5.3	Creating a Subgraph from PGQL Result Set	27-86
	27.10	.5.4	Defining Collection Filters	27-87
	27.10	.5.5	Creating a Subgraph from Collection Filters	27-88
	27.10	.5.6	Combining Filter Expressions	27-89
	27.10	.5.7	Creating a Subgraph Using Filter Expressions with Partitioned IDs	27-91
27.	11 Adva	nced	Task Scheduling Using Execution Environments	27-92
	27.11.1	Prere	equisites for Using the Enterprise Scheduler	27-92
	27.11.2	Enak	oling Enterprise Scheduler Features	27-93
	27.11.3	Retri	eving and Inspecting the Execution Environment	27-93
	27.11.4	Modi	ifying and Submitting Tasks Under an Updated Environment	27-95
	27.11.5	Usin	g Lambda Syntax	27-96
	27.11.6	Ente	rprise Scheduler Configuration Guide	27-97
27.	12 Admi	n API		27-99
	27.12.1	Get	a Server Instance	27-99
	27.12.2	Get	Inspection Data	27-100
	27.12.3	Get	Active Sessions	27-101
	27.12.4	Get	Cached Graphs	27-103
	27.12.5	Get	Published Graphs	27-104
	27.12.6	Get	Currently Loading Graphs	27-104
	27.12.7	Get	Tasks	27-105
	27.12.8	Get .	Available Memories	27-105
27.	13 PgxF	rame	s Tabular Data-Structure	27-105
	27.13.1	Conv	verting PgqlResultSet to a PgxFrame	27-106
	27.13.2	Stori	ing a PgxFrame to a Database	27-107
	27.13.3	Stori	ing a PgxFrame to a CSV File	27-109
	27.13.4	Unio	n of PGX Frames	27-110
	27.13.5	Joini	ing PGX Frames	27-111
	27.13.6	Print	ting the Content of a PgxFrame	27-112
	27.13.7	Dest	troying a PgxFrame	27-113
	27.13.8	Load	ling and Storing Vector Properties	27-113
	27.13.9	Flatt	ening Vector Properties	27-115
	27.13.10	Pg	xFrame Helpers	27-116
	27.13.11	Cor	nverting a PgxFrame to PgqlResultSet	27-119
	27.13.12	Pg	xFrame to Pandas DataFrame Conversions	27-120
	27.13.13	Loa	ading a PgxFrame from a Database	27-120
	27.13.14	Loa	ading a PgxFrame from a CSV File	27-123
	27.13.15	Loa	ading a PgxFrame from Client-Side Data	27-125
	27.13.16	Cre	eating a Graph from Multiple PgxFrame Objects	27-129



Working with Files Using the Graph Server (PGX)

	28.1 Loading Graph Data from Files	28-1
	28.1.1 Graph Configuration for Loading from File	28-3
	28.1.2 Specifying the File Path	28-7
	28.1.3 Supported File Access Protocols	28-7
	28.1.4 Plain Text Formats	28-7
	28.1.4.1 Comma-Separated Values (CSV)	28-9
	28.1.4.2 Adjacency List (ADJ_LIST)	28-12
	28.1.4.3 Edge List (EDGE_LIST)	28-13
	28.1.4.4 Two Tables (TWO_TABLES)	28-14
	28.1.5 XML File Formats	28-15
	28.1.6 Binary File Formats	28-16
	28.2 Loading Graph Data in Parallel from Multiple Files	28-22
	28.3 Exporting Graphs Into a File	28-24
	28.3.1 Exporting a Graph to Disk	28-25
	28.4 Exporting a Graph into Multiple Files	28-27
29	Log Management in the Graph Server (PGX)	
	29.1 Configuring Logback Logging	29-1
Part	Supplementary Information for Property Graph Support	
Α	Mapping Graph Server Roles to Default Privileges	
В	Disabling Transport Layer Security (TLS) in Graph Server	
С	Migrating Property Graph Applications from Before Release 21c	
D	Upgrading From Graph Server and Client 20.4.x to 21.x	
E	Third-Party License Information for Oracle Graph Server and Client	
	E.1 Third-Party License Information for Graph Visualization Toolkit	E-127





List of Figures

1-1	Simple Property Graph Example	1-2
1-2	Property Graph Architecture for Running Graph Queries	1-4
1-3	Property Graph Architecture for Running Graph Analytics	1-5
1-4	Graph Server (PGX) Design	1-7
1-5	Remote Server Mode	1-8
1-6	PGX as a Library	1-9
1-7	Enabling Accessibility in the Graph Visualization Application	1-11
3-1	Using SQL Developer to Create a SQL Property Graph	3-1
3-2	Visualizing a SQL Graph Query	3-3
4-1	STUDENTS_GRAPH	4-2
5-1	SQL Property Graphs in SQL Developer	5-29
5-2	Running SQL Graph queries in SQL Developer	5-30
7-1	PGQL on SQL Property Graphs in Oracle Database	7-1
8-1	Visualizing a SQL Graph Query in an APEX Application	8-3
8-2	Sample Graph Visualization Home Page	8-4
8-3	Expanding on a Specific Graph Vertex	8-11
9-1	PROPERTY_GRAPH_METADATA Graph Design	9-5
9-2	Financial Transactions Graph	9-15
10-1	Subgraph Visualization	10-12
10-2	Expanding a Subgraph	10-18
12-1	Creating a PGQL property graph in Jupyter Notebook	12-2
12-2	Running Graph Algorithms in Jupyter Notebook	12-3
12-3	PGQL Property Graphs in SQL Developer	12-21
12-4	Create a PGQL property graph	12-22
12-5	Running Multiple PGQL Queries	12-23
12-6	Dropping a PGQL Property Graph	12-23
13-1	Example Schema	13-5
13-2	Graphs Created from the Example Schema	13-6
13-3	Financial_Transactions Graph	13-6
13-4	PGQL on PGQL Property Graphs in Oracle Database	13-11
14-1	Graph Visualization Login	14-42
16-1	Administrator Dashboard Menu	16-2
16-2	Memory Usage Dashboard	16-3
16-3	Sessions	16-4
16-4	Graphs	16-5
16-5	Edges Matching src.prop == 10	16-66



16-6	Graph Created by the Simple Filter	16-66
16-7	Edges Matching the outDegree Filter	16-67
16-8	Graph Created by the outDegree Filter	16-68
17-1	Pg2vec - Visualization of Two Similar Graphlets	17-149
18-1	Visualizing Unnesting of Variable-Length Path Queries	18-10
21-1	Query Visualization	21-2
21-2	Creating a PGQL property graph	21-3
21-3	Updating an Edge in a PGQL property graph	21-3
21-4	Deleting an Edge in a PGQL property graph	21-4
21-5	Querying a PGQL property graph	21-4
21-6	Dropping a PGQL property graph	21-5
21-7	Graph Query on a SQL Property Graph	21-6
21-8	Graph Visualization Settings Window	21-7
21-9	Highlights Options for Vertices	21-8
21-10	Geographical Layout	21-10
21-11	Setting Geographical Layout	21-11
21-12	Selecting the Coordinates for the Geographical layout	21-11
25-1	Configuring Load Balancer Details	25-4
25-2	Adding Backends to Load Balancer	25-4
25-3	Configuring a Listener for the Load Balancer	25-5
25-4	Enabling Session Persistence	25-6
27-1	Picking Strategy	27-44
27-2	Merging Strategy	27-45



List of Tables

1-1	Graph Size Estimator	1-5
4-1	System Privileges for SQL Property Graph Objects	4-11
4-2	Object Privileges for SQL Property Graphs	4-11
4-3	List of Data Dictionary Views to Retrieve Metadata for SQL Property Graphs	4-12
5-1	Arrow Tokens for Edge Patterns	5-3
5-2	Supported Vertex and Edge Label Expressions	5-4
5-3	Quantifier Support for Variable Length Graph Patterns	5-8
6-1	Mapping Oracle Database Types to PGX Types	6-10
7-1	Supported PGQL Functionalities and Limitations for SQL Property Graphs	7-6
9-1	Metadata Tables for PGQL Property Graphs	9-1
9-2	Additional Metadata Tables	9-6
9-3	Database Connection Parameters	9-12
9-4	GraphImporter Configuration Parameters	9-12
9-5	SQL Storage Parameters	9-13
9-6	PGQL Supported Parameters	9-13
9-7	Mapping GraphSON Types to Oracle Database Types	9-14
10-1	Parameters for the readGraphByName method	10-1
10-2	PARALLEL_HINT_DEGREE values	10-8
13-1	CREATE PROPERTY GRAPH Statement Support	13-4
13-2	Supported PGQL Functionalities and Limitations for PGQL Property Graphs	13-12
13-3	Supported Quantifiers in PGQL SELECT Queries	13-15
13-4	PGQL Translation and Execution Options	13-21
14-1	Workflow for Installing Oracle Graph Server and Client	14-1
14-2	Components in the Oracle Graph Server and Client Deployment	14-2
14-3	System Requirements	14-3
14-4	Oracle Database Privileges and Roles Required for Using the Graph Server (PGX)	14-14
14-5	API for Checking Graph Permissions	14-23
14-6	Allowed Permissions	14-27
15-1	Configuration Parameters for the Graph Server (PGX)	15-2
16-1	Valid values for "as_of" Key in Graph Configuration	16-9
16-2	Example Scenario Using "as_of"	16-11
16-3	Asynchronous Graph Loading APIs	16-12
16-4	Graph Config JSON Fields	16-13
16-5	Provider Configuration JSON file Options	16-16
16-6	Property Configuration	16-17
16-7	Loading Configuration	16-19



16-8	Error Handling Configuration	16-20
16-9	Data Format Support Matrix	16-21
16-10	Graph Sharing Options	16-33
16-11	Overview of Built-In Algorithms	16-51
16-12	Fields for Each UDF	16-73
18-1	Graph Optimization Options	18-3
18-2	Supported PGQL Functionalities and Limitations on the Graph Server (PGX)	18-5
18-3	Valid values for fields in INTERVAL values	18-12
18-4	Data Type Compatibility	18-21
18-5	Additional Supported Types through Casting	18-22
18-6	Data Type Conversions for setObject Method	18-23
19-1	Request Body Parameters	19-1
19-2	Request Body Parameters	19-3
19-3	Request Body Parameters	19-5
19-4	Parameters	19-15
19-5	Request Query Parameters	19-16
23-1	Runtime Parameters for the Graph Server (PGX) Engine	23-1
23-2	Advanced Access Configuration Options	23-10
23-3	Enterprise Scheduler Parameters	23-11
23-4	Basic Scheduler Parameters	23-11
27-1	PGX API Interface	27-1
27-2	Overview of Data types	27-5
27-3	Overview of Datetime Data Types in PGX	27-17
27-4	Default Property Values	27-51
27-5	Default Temporal Formats	27-79
27-6	Session Information Options	27-102
27-7	Graph Information	27-103
27-8	Mapping between In-Place and Out-Place Operations	27-105
28-1	Loading a Partitioned Graph From File - Additional Graph Configuration Options	28-3
28-2	CSV Specific Options for Partitioned Graphs	28-4
28-3	Type Encoding	28-17
28-4	File Layout	28-17
28-5	Integer Vertex Keys	28-18
28-6	Long Vertex Keys	28-18
28-7	String Vertex Keys	28-18
28-8	String Key Element Layout	28-19
28-9	Primitive Type Layout	28-19



28-10	Vector Property Layout	28-19
28-11	String Type Layout	28-20
28-12	String Dictionary Layout	28-20
28-13	String Dictionary Element Layout	28-20
28-14	Vertex Labels Layout	28-20
28-15	Shared Pools Layout	28-21
28-16	Type == Enum	28-21
28-17	Type == Prefix	28-21
28-18	String Table for Shared Pools	28-21
28-19	Property Names Layout	28-22
28-20	Files CompressionScheme	28-24
28-21	Graph Configuration when Exporting Graph into Multiple Files	28-25
A-1	Mapping Graph Server Roles to Default Privileges	A-1



Preface

This document provides conceptual and usage information about Oracle Database support for working with property graph data.

- Audience
- Documentation Accessibility
- Related Documents
- Conventions

Audience

This document is intended for database and application developers in an Oracle Database environment.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info or visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs if you are hearing impaired.

Related Documents

For more information, see the following documents:

- Oracle Spatial Developer's Guide
- Oracle Database Graph Developer's Guide for RDF Graph
- Oracle Spatial GeoRaster Developer's Guide
- Oracle Spatial Topology and Network Data Model Developer's Guide
- Oracle Big Data Spatial and Graph User's Guide and Reference

Conventions

The following text conventions are used in this document:



Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.



Changes in This Release for This Guide

The following changes apply to property graph support that is shipped with Oracle Graph Server and Client.

Oracle Graph Server and Client is required for using the property graph feature of Oracle Database (see Oracle Graph Server and Client Installation), and is released four times a year.

New Features in Oracle Graph Server and Client 24.2

Features That Work With Oracle Database Release 23ai and Prior Oracle Database Releases

 Added support to track the progress of the running graph algorithms in the graph server (PGX).

See the following topics for more information:

- Getting the Progress of a Running Algorithm
- Tracking the Progress of a Running Custom PGX Graph Algorithm
- Added graph server (PGX) support for the following new built-in algorithms:
 - Harmonic Centrality: An alternative to closeness centrality algorithm that evaluates centrality by considering reciprocal sums of shortest path distances.
 - Article Rank: This is a variant of Pagerank. Page Rank follows the assumption that
 relationships originating from low-degree nodes have a higher influence than
 relationships from high-degree nodes. Article Rank lowers the influence of low-degree
 nodes.
 - Weighted Version of Speaker Listener: An example use case for this algorithm is to identify communities who share similar interests in social networks.
- Added PgxML support to monitor the training process which allows you to review how the
 loss and accuracy are improved during the training process. It also helps you determine
 how many training steps are needed in order to get to a desired accuracy on a validation
 data set.

See the following for more information:

- Training a Supervised GraphWise Model and Getting the Training Log for a Supervised GraphWise Model
- Training a Supervised EdgeWise Model and Getting the Training Log for a Supervised EdgeWise Model
- Training an Unsupervised GraphWise Model and Getting the Training Log for an Unsupervised GraphWise Model
- Training an Unsupervised EdgeWise Model and Getting the Training Log for an Unsupervised EdgeWise Model
- Added support to create PGQL property graphs with arbitrary property expressions.
 See Creating a PGQL Property Graph with Arbitrary Property Expressions for more information.



- Added PGQL support for LATERAL subqueries after MATCH clause and other LATERAL subqueries.
 - See Support for PGQL Lateral Subqueries for more information.
- Upgraded Logback to 1.3.x version and this requires the date pattern in the Logback configuration files to be provided as a string parameter. Therefore, if you are using a custom logback-server.xml or logback.xml file, then ensure to apply the required date pattern changes. The following describes the date pattern parameter for the old and new versions:
 - Old Version: This version is no longer supported.

```
<encoder>
     <pattern>%d{HH:mm:ss,SSS} [%t] %p %C{1} - %m%n</pattern> <- Old
version (throws error after upgrade)
</encoder>
```

The preceding version will throw Unknown time-zone ID: SSS error.

New Version: The supported date pattern is as shown:

```
<encoder>
     <pattern>%d{'HH:mm:ss,SSS'} [%t] %p %C{1} - %m%n</pattern> <- New
version (no errors thrown)
</encoder>
```

Key Property Graph Features in Oracle Database Release 23ai

- Support for creating SQL property graph objects in Oracle Database.
 See Introduction to SQL Property Graphs for more information.
- Support for running graph queries on SQL property graphs.
 See SQL Graph Queries for more information.
- Support for using aggregate functions in SQL graph queries.
 See Using Aggregate Functions in SQL Graph Queries for more information.
- Support for loading SQL property graphs into the graph server (PGX).
 See Loading a SQL Property Graph Using the readGraphByName API for more information.
- Support for loading a subgraph from a SQL property graph into the graph server (PGX).
 See Loading a Subgraph Using PGQL Queries for more information.
- Support for dynamically expanding a subgraph in the graph server (PGX).
 See Expanding a Subgraph for more information.
- Support for running PGQL SELECT queries against SQL property graphs.
 See Executing PGQL Queries Against SQL Property Graphs for more information.
- Support for selecting all the vertex or edge properties in the COLUMNS clause of a SQL graph query.
 - See Selecting All Properties in the COLUMNS Clause for more information.
- Support for determing the direction of edges using the SOURCE and DESTINATION predicates
 inside the WHERE or COLUMNS clause of a SQL graph query.
 See Using the SOURCE and DESTINATION Predicates for more information.
- Support for visualizing SQL graph queries on graphs in the database using the Graph Visualization application.
 See Visualizing Graph Queries on SQL Property Graphs for more information.

 Support for visualizing SQL graph queries using the APEX Graph Visualization plug-in in APEX applications.

See Visualizing SQL Graph Queries Using the APEX Graph Visualization Plug-in for more information.

Deprecated Features

Review the deprecated features in Oracle Graph Server and Client.

Desupported Features

Review the desupported features in Oracle Graph Server and Client.

Deprecated Features

Review the deprecated features in Oracle Graph Server and Client.

PG VIEW Field

The PG_VIEW constant is deprecated from GraphSource and SourceType. Instead, use PG_PGQL.

PgxSession.readSubgraph() methods

- session.readSubgraph().fromPgView() is deprecated. Instead, use session.readSubgraph().fromPgPggl().
- graph.expandGraph().withPgql().fromPgView() is deprecated. Instead, use graph.expandGraph().withPgql().fromPgPgql().

PgxSession.getGraphs() function

The PgxSession.getGraphs() method is deprecated. Instead, use getGraphs(Namespace namespace).

PvPGX

- PgxSession.read_subgraph_from_pg_view() is deprecated. Instead, use
 PgxSession.read subgraph from pg pgql().
- The following function signatures are deprecated for PgxGraph:
 - * get_or_create_edge_property(name, data_type=None, dim=0) Instead, use get_or_create_edge_property(type, /, name).

 - * get_or_create_vertex_property(name, data_type=None, dim=0) Instead, use get or create_vertex_property(type, /, name).
 - * get_or_create_vertex_vector_property(data_type, dim, name=None)
 Instead, use get_or_create_vertex_vector_property(type, dimension, /, name).

Note the following changes that apply for the new signatures:

- * name is no longer optional
- * type is the first argument followed by dimension, and name is the final argument
- * data type and dim are deprecated
- DeepWalkModel.validation_fraction, Pg2vecModel.validation_fraction, and the validation_fraction argument of Analyst.pg2vec_builder() are deprecated.
 The loss is computed on all samples.



- The following attributes on Operation are now deprecated: graph_id, operation_type, cost_estimate, total_cost_estimate, cardinality_estimate, pattern_info, and children. Instead, use the corresponding getter methods, such as get_graph_id(), get_operation_type(), and so on.
- The pgx_version attribute in ServerInstance class is deprecated. Instead, use get version().
- The attribute pg_view_name in PartitionedGraphConfig is deprecated. Instead, use source name and source type.
- set_standarize in GraphWiseModelConfig is deprecated. Instead, use set standardize.
- The return value of PgqlResultSet.get vertex labels may or may not be a list.

PgxML

- The methods setValidationFraction and getValidationFraction are deprecated for DeepWalk and Pg2vec, the loss is now computed on all samples.
- GraphWiseModel.inferAndGetExplanation() is deprecated. Instead, use
 GraphWiseModel.gnnExplainer() to obtain a GnnExplainer object for the model and
 use GnnExplainer.inferAndExplain().
- Pg2vecModelBuilder.setUseGraphletSize(java.lang.Boolean useGraphletSize)
 method in oracle.pgx.api.mllib API is deprecated. Instead, use the
 Pg2vecModelBuilder.setUseGraphletSize(boolean useGraphletSize) method.
- SupervisedGraphWiseModelBuilder.setLossFunction(SupervisedGraphWiseModelConfig.LossFunction...) is deprecated. Instead, use
 SupervisedGraphWiseModelBuilder.setLossFunction(LossFunction...) function.

GraphServer#getInstance API

The following GraphServer#getInstance APIs are deprecated:

- GraphServer.getInstance(ClientConfig clientConfig, String username, char[] password, int refreshTimeBeforeTokenExpiry)
- GraphServer.getInstance(String baseUrl, String username, char[] password, int refreshTimeBeforeTokenExpiry)
- GraphServer.getInstance(String baseUrl, String kerberosTicketPath, int refreshTimeBeforeTokenExpiry)

Instead, configure the refresh_time_before_token_expiry_seconds parameter in the pgx.conf file.

Methods deprecated for PgqlViewGraphExpander

PgqlViewGraphExpander.schema(String) and PgqlViewGraphExpander.owner(String) are deprecated. Instead, use PgqlViewGraphExpander.fromPgView(String, String).

Graph Server (PGX) Configuration Fields

The graph server configuration fields, server_cert and server_private_key are deprecated. Instead, use server keystore.

Subgraph Loading

Creating Subgraphs using filter expressions is deprecated. Instead, use Loading a Subgraph from a PGQL Property Graph.



Desupported Features

Review the desupported features in Oracle Graph Server and Client.

- Oracle JDK 8 is desupported.
- Oracle Graph HDFS connector is desupported.
- Creating a property graph in the Oracle database using the property graph schema objects is desupported. The related OPG_APIS and OPG_GRAPHOP PL/SQL packages for working with property graph schema objects are also desupported.
 Instead, you can create SQL Property Graphs or PGQL Property Graphs.
- Desupported the edge pattern syntax --, -->, and <-- from PGQL 0.9 and PGQL 1.0.
 Instead, use -, -> and <- respectively.
- The WHERE clause syntax WHERE n -> m in PGQL 0.9 is desupported.
 Instead, use WHERE (n) -> (m).
- pypgx.api.FlashbackSynchronizer is desupported. Instead, use pypgx.api.Synchronizer.
- The connection parameter in PgxGraph.create_synchronizer() is desupported. Instead, use jdbc_url, username, and password.
 - Also, note that the synchronizer_class and invalid_change_policy parameters are now keyword-only parameters.
- The following classes are desupported in pypgx package. Instead, use pypgx.api.filters subpackage to access these classes:
 - EdgeFilter
 - GraphFilter
 - VertexFilter
 - PathFindingFilter
- Analyst.deepwalk_builder(): the parameter validation_fraction has been removed. The loss is computed on all samples.
- set_standarize in GraphWiseModelConfig is desupported. Instead, use set_standardize.
- The parameters redirect_stdout and redirect_stderr in pypgx.get_session() are desupported.
- Apache HDFS on Cloudera CDH6 is desupported.
- Groovy support for using the Java API in Apache Zeppelin client is desupported.
- Oracle Linux 6 is desupported.
- Apache HBase is desupported.
- Support for mixed case string arguments in PyPGX for cases where there are a fixed, enumerated list of possible values (such as, ['linear', 'tanh', 'relu']) are desupported. Only lower case arguments are now supported.
- The two-table format is desupported.
- The following Java API classes are desupported:
 - oracle.pg.rdbms.OraclePgqlColumnDescriptor.java
 - oracle.pg.rdbms.OraclePgqlColumnDescriptorImpl.java



- oracle.pg.rdbms.OraclePgqlExecution.java
- oracle.pg.rdbms.OraclePgglExecutionFactory.java
- oracle.pg.rdbms.OraclePgqlPreparedStatement.java
- oracle.pq.rdbms.OraclePqqlResult.java
- oracle.pg.rdbms.OraclePgqlResultElement.java
- oracle.pg.rdbms.OraclePgqlResultElementImpl.java
- oracle.pg.rdbms.OraclePgqlResultImpl.java
- oracle.pg.rdbms.OraclePgqlResultIterable.java
- oracle.pg.rdbms.OraclePgqlResultIteratorImpl.java
- oracle.pg.rdbms.OraclePgqlResultSet.java
- oracle.pg.rdbms.OraclePgqlResultSetImpl.java
- oracle.pg.rdbms.OraclePgqlResultSetMetaData.java
- oracle.pg.rdbms.OraclePgqlResultSetMetaDataImpl.java
- oracle.pg.rdbms.OraclePgqlSqlTrans.java
- oracle.pg.rdbms.OraclePgqlSqlTransImpl.java
- oracle.pg.rdbms.OraclePgglStatement.java
- The following Java API methods, objects and fields in oracle.pgx.api are no longer supported:

Desupported Methods:

- PgxCollection methods:
 - * addAllAsync(Collection<E> source)
 - * removeAllAsync(Collection<E> source)
 - * addAll(ID...ids)
 - * removeAll(ID...ids)
- PaglResultSet methods:
 - * getResults(): instead, use PgqlResultSet to directly iterate the result set
 - * destrov()
- User-defined pattern matching semantic methods:
 - * PgxGraph#queryPgql(String, PatternMatchingSemantic): instead, use PgxGraph#queryPgql(String)
 - * PgxSession.setPatternMatchingSemantic(..)
- GraphMetaData constructors and related methods:
 - * GraphMetaData()
 - * GraphMetaData(GraphMetaData other, java.net.URI baseUri)
 - * GraphMetaData(IdType vertexIdType)
 - * GraphMetaData.setVertexIdType()
 - * GraphMetaData.setEdgeIdType()



- PgxSession#getAvailableSnapshots(GraphConfig): instead, use PgxSession#getAvailableSnapshots(PgxGraph)
- All Analyst#filteredBfs and Analyst#filteredDfs methods that accepts filter parameter: instead, use the navigator parameter

Desupported Objects

- PgqlResult(a result of resultSet.getResults().iterator().next(): instead, use PgxResult as returned from resultSet.iterator().next()

Desupported Fields

- pattern matching semantic configuration field
- The Java API method AbstractGraphConfigBuilder#setNodeIdType in oracle.pgx.config is desupported. Instead, use AbstractGraphConfigBuilder#setVertexIdType().
- The following PyPGX classes are desupported in pypgx.api package. Instead, use pypgx.api.frames subpackage to access these classes:
 - PgxCsvFrameReader
 - PgxCsvFrameStorer
 - PgxDbFrameReader
 - PgxDbFrameStorer
 - PgxFrame
 - PgxFrameBuilder
 - PgxFrameColumn
 - PgxGenericFrameReader
 - PgxGenericFrameStorer
 - PgxPgbFrameReader
 - PgxPgbFrameStorer
- The following Python API packages are no longer supported:
 - common: This internal package is desupported. Few of the classes from this package are moved to the public package pypqx.api.
 - utils: This internal package is renamed to utils.
- Graph property text search based on Apache Solr/Lucene is desupported. Instead, use PGQL query expressions.
- The PGX property type DATE is desupported. Instead, use LOCAL DATE or TIMESTAMP.
- Property Graph support for data stored in Oracle NoSQL Database is desupported.
- Support for Gremlin Groovy shell is desupported.
- Apache Tinkerpop API support for Oracle Database is desupported.
- Support for the Apache Groovy-based shell was deprecated in 19c and is now desupported.
- Support for Apache HBase and Apache HDFS on Cloudera CDH5 is desupported.



Part I

Getting Started with Oracle Property Graphs

Part I provides the fundamental information to get you started on the property graph feature of Oracle Database.

This part covers the following:

- Introduction to Property Graphs
 Property graphs give you a different way of looking at your data.
- Using Oracle Graph with the Autonomous Database
 Oracle Graph with the Autonomous Database allows you to create property graphs from data in your Autonomous Database.



1

Introduction to Property Graphs

Property graphs give you a different way of looking at your data.

You can model your data as a graph by making data entities **vertices** in the graph, and relationships between them as **edges** in the graph. For example, in a bank, customer accounts can be vertices, and cash transfer relationships between them can be edges.

When you view your data as a graph, you can analyze your data based on the connections and relationships between them. You can run graph analytics algorithms like PageRank to measure the relative importance of data entities based on the relationships between them (for instance, links between web pages).

What Are Property Graphs?

A property graph consists of a set of objects or **vertices**, and a set of arrows or **edges** connecting the objects.

About the Property Graph Feature of Oracle Database

The Property Graph feature delivers advanced graph query and analytics capabilities in Oracle Database.

Overview of Property Graph Architecture

The property graph feature of Oracle Database supports the following architecture models.

Learn About the Graph Server (PGX)

The in-memory graph server layer enables you to analyze property graphs using parallel in-memory execution.

Security Best Practices with Graph Data

Several security-related best practices apply when working with graph data.

About Oracle Graph Server and Client Accessibility

This section provides information on the accessibility features for Oracle Graph Server and Client.

1.1 What Are Property Graphs?

A property graph consists of a set of objects or **vertices**, and a set of arrows or **edges** connecting the objects.

Vertices and edges can have multiple properties, which are represented as key-value pairs.

Each vertex has a unique identifier and can have:

- A set of outgoing edges
- A set of incoming edges
- A collection of properties

Each edge has a unique identifier and can have:


- An outgoing vertex
- An incoming vertex
- A text label that describes the relationship between the two vertices

A collection of properties

For vertices and edges, each property is identified with a unique name.

The following figure illustrates a very simple property graph with two vertices and one edge. The two vertices have identifiers 1 and 2. Both vertices have properties name and age. The edge is from the outgoing vertex 1 to the incoming vertex 2. The edge has a text label knows and a property type identifying the type of relationship between vertices 1 and 2.

Figure 1-1 Simple Property Graph Example

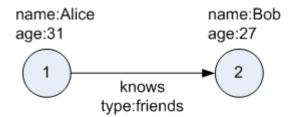

A property graph can have self-edges (that is, an edge whose source and destination vertex are the same), as well as multiple edges between the same source and destination vertices.

A property graph can also have different types of vertices and edges in the same graph. For example a graph can have a set of vertices with label Person and a set of vertices with label Place, with different properties relevant to these two sets of vertices.

The property graph data model is similar to the W3C standards-based Resource Description Framework (RDF) graph data model; however, the property graph data model is simpler and less precise than RDF.

The property graph data model features and analytic APIs make property graphs a good candidate for use cases such as these:

- Identifying influencers in a social network
- Predicting trends and customer behavior
- Discovering relationships based on pattern matching
- Identifying clusters to customize campaigns

1.2 About the Property Graph Feature of Oracle Database

The Property Graph feature delivers advanced graph query and analytics capabilities in Oracle Database.

This feature supports graph operations, indexing, queries, search, and in-memory analytics.

Graphs manage networks of linked data as vertices, edges, and properties of the vertices and edges. Graphs are commonly used to model, store, and analyze relationships found in social networks, cybersecurity, utilities and telecommunications, life sciences and clinical data, and knowledge networks.

Typical graph analyses encompass graph traversal, recommendations, finding communities and influencers, and pattern matching. Industries including telecommunications, life sciences and healthcare, security, media, and publishing can benefit from graphs.



The property graph features of Oracle Database support those use cases with the following capabilities:

- A scalable graph database
- Developer-based APIs based upon PGQL and Java graph APIs
- A parallel, in-memory graph server (PGX) for running graph queries and graph analytics
- A fast, scalable suite of social network analysis functions that include ranking, centrality, recommender, community detection, and path finding
- Parallel bulk load and export of property graph data in Oracle-defined flat files format
- A powerful Graph Visualization application
- Notebook support through integration with Jupyter

1.3 Overview of Property Graph Architecture

The property graph feature of Oracle Database supports the following architecture models.

- Architecture Model for Running Graph Queries in the Database
 Using any of the supported client tools, you can directly interact with the graph data stored in the relational tables in the database.
- Architecture Model for Running Graph Analytics
 You can load your property graph into the graph server (PGX) in order to perform
 specialized graph computations.
- Developing Applications Using Graph Server Functionality as a Library
 The graph functions available with the graph server (PGX) can be used as a library in your application.

1.3.1 Architecture Model for Running Graph Queries in the Database

Using any of the supported client tools, you can directly interact with the graph data stored in the relational tables in the database.

This approach runs graph queries, as shown in the following figure.



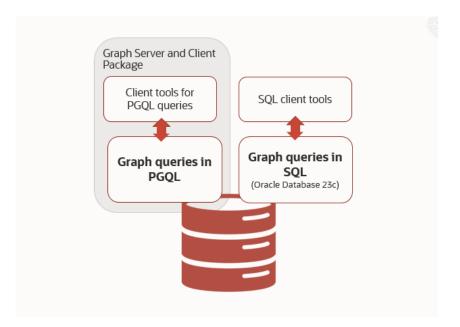


Figure 1-2 Property Graph Architecture for Running Graph Queries

This model allows you to create a property graph using any one of the following supported options:

- Create a SQL property graph directly over existing database schema objects using SQL DDL statement. See SQL Property Graphs for more information.
- Create a PGQL property graph directly over the graph data in the tables. See PGQL Property Graphs for more information.

You can directly query the graphs, without loading the graphs into the graph server (PGX), using PGQL. Additionally, you can also run graph pattern matching queries on SQL property graphs using the GRAPH_TABLE operator. See SQL Graph Queries for more information.

However, if you want to run graph analytics algorithms, then you must load this graph into the graph server (PGX). You can configure the graph server to periodically fetch data updates from the database to keep the graph synchronized.

1.3.2 Architecture Model for Running Graph Analytics

You can load your property graph into the graph server (PGX) in order to perform specialized graph computations.

Client
Server
and
Client
Package

Graph Server (PGX):
Run PGQL queries
and graph
analytics

PGX
deployed
standalone
, in WLS, or
Tomcat

Figure 1-3 Property Graph Architecture for Running Graph Analytics

As seen in the preceding architecture design, the graph server (PGX) is a mid-tier server that can run as a standalone, or in a container like Oracle WebLogic Server or Apache Tomcat. Using this approach, you can load your property graph into the graph server (PGX). This allows you to run graph queries and analytical operations in memory in the graph server.

You can create a graph directly from the relational tables in the graph server (PGX). In addition, you can load a PGQL property graph or a SQL property graph from the database. You can modify the graph in memory (insert, update, and delete vertices and edges, and create new properties for results of executing an algorithm). The graph server does not write the modifications back to the relational tables.

Property Graph Sizing Recommendations

You can compute the memory required by the graph server (PGX) by using this calculator, Graph Size Estimator.

For example, the following table shows the memory estimated by the calculator for the given input:

Table 1-1 Graph Size Estimator

Number of vertices	of	Properties per Vertex	Properties per Edge	Estimated graph size
10M	100M	• 4 - Integer Type • 1 - String Type(15 characters)	• 4 - Integer Type • 1 - String Type(15 characters)	15 GB
100M	1B	• 4 - Integer Type • 1 - String Type(15 characters)	• 4 - Integer Type • 1 - String Type(15 characters)	140 GB



Note:

- Reading a graph into memory can take upto twice the amount of memory needed to represent it in memory. So when you calculate the memory required for running PGX it is recommended that you double the amount of memory of the estimated graph size.
- CPU Processors: The recommended number of CPU processors for a graph with 10M vertices and 100M edges is 2-4 processors, and up to 16 processors for more compute-intensive workloads. Increasing CPU processors will improve performance.

1.3.3 Developing Applications Using Graph Server Functionality as a Library

The graph functions available with the graph server (PGX) can be used as a library in your application.

After the rpm install of the graph server, all the jar files can be found in /opt/oracle/graph/lib. In this case, the server installation and the client user application are in the same machine.

For such use cases, development and testing can be done using the interactive Java shell or the Python shell in embedded (local) mode. This means a local PGX instance is created and runs in the same JVM as the client. If you start the shell without any parameters it will start a local PGX instance and run in embedded mode.

See Using Graph Server (PGX) as a Library for more information to obtain reference to a local PGX instance.

1.4 Learn About the Graph Server (PGX)

The in-memory graph server layer enables you to analyze property graphs using parallel in-memory execution.

It provides over 60 analytic functions. Examples of the categories and specific functions include:

- Centrality Degree Centrality, Eigenvector Centrality, PageRank, Betweenness Centrality, Closedness Centrality
- Component and Community Strongly Connected Components (Tarjan's and Kosaraju's).
 Weakly Connected Components
- Twitter's Who-To-Follow, Label Propagation.
- Path Finding Single source all destination (Bellman-Ford), Dijsktra's shortest path, Hop Distance (Breadth-first search)
- Community Evaluation Coefficient (Triangle Counting), Conductance, Modularity, Adamic-Adar counter.
- Overview of the Graph Server (PGX)

The Graph Server (PGX) is an in-memory accelerator for fast, parallel graph query and analytics. The server uses light-weight in-memory data structures to enable fast execution of graph algorithms.



Related Topics

- Installing Oracle Graph Server For Linux x86-64
- Getting Started with the Graph Server (PGX)
 Once you have installed the graph server (PGX), you can start and connect to a graph server instance.

1.4.1 Overview of the Graph Server (PGX)

The Graph Server (PGX) is an in-memory accelerator for fast, parallel graph query and analytics. The server uses light-weight in-memory data structures to enable fast execution of graph algorithms.

There are multiple options to load a graph into the graph server either from Oracle Database or from files.

The graph server can be deployed standalone (it includes an embedded Apache Tomcat instance), or deployed in Oracle WebLogic Server or Apache Tomcat.

- Design of the Graph Server (PGX)
- Usage Modes of the Graph Server (PGX)

1.4.1.1 Design of the Graph Server (PGX)

The design of the graph server (PGX) is based on a Server-Client usage model. See Usage Modes of the Graph Server (PGX) for more details on the different graph server (PGX) execution modes.

The following figure shows the graph server (PGX) design:

Client#1 (session)

request

PGX (Server)

Engine (Thread-pools)

Figure 1-4 Graph Server (PGX) Design

The core concepts of the graph server (PGX) design are as follows:

- Multiple graph clients can connect to the graph server at the same time.
- Each client request is processed by the graph server asynchronously. The client requests are queued up first and processed later, when resources are available. The client can poll the server to check if a request has been finished.
- Internally, the server maintains its own engine (thread pools) for running parallel graph algorithms and queries. The engine tries to process each analytics request concurrently with as many threads as possible.

Isolation Between Concurrent Clients

The graph server (PGX) supports data isolation between concurrent clients. Each client has its own private workspace, called session. Sessions are isolated from each other. Each client can load a graph instance into its own session, independently from other clients. Therefore, each client can load a graph instance (as well as its properties) into its own session, independently from other clients.

1.4.1.2 Usage Modes of the Graph Server (PGX)

This section presents an overview of the different usage modes of the graph server (PGX). The graph server can be executed in one of the following usage modes.

Remote Server Mode

In the remote server mode, the main PGX execution engine is deployed as a RESTful application on a powerful server machine, and you can connect to it remotely from your machine using graph shell. Also, multiple clients can connect to the same graph server (PGX) at the same time and therefore the graph server is time-shared among these clients.

See Interactive Graph Shell CLIs for more information on the graph shell.

The following figure shows the graph server (PGX) in a remote execution mode:

PGX-Shell (Client)

PGX-Server

PGX

PGX-Server

Figure 1-5 Remote Server Mode

The remote server mode is useful for the following situations where you want to:

 Perform graph analysis on a large data set with a powerful server-class machine that has many cores and a large memory.



The server-class machine is shared by multiple clients.


See Starting the Graph Server (PGX) for instructions on how to start the graph server (PGX) in remote server mode.

Using Graph Server (PGX) as a Library

You can also include the graph server (PGX) as a normal Java library in your application.

The following figure shows the graph server (PGX) used as a library in an application:

Figure 1-6 PGX as a Library



The embedded mode is useful when you want to build an application having graph analysis as a part of its functionality.

See Using Graph Server (PGX) as a Library for more information.

Deploying Graph Server (PGX) as Servlet Web Application

You can deploy the graph server (PGX) as a web application using Apache Tomcat or Oracle WebLogic Server.

See Deploying Oracle Graph Server to a Web Server for instructions to deploy the graph server (PGX) in Apache Tomcat or Oracle WebLogic Server.

1.5 Security Best Practices with Graph Data

Several security-related best practices apply when working with graph data.

Sensitive Information

Graph data can contain sensitive information and should therefore be treated with the same care as any other type of data. Oracle recommends the following considerations when using a graph product:

- Avoid storing sensitive information in your graph if that information is not required for analysis. If you have existing data, only model the relevant subset you need for analysis as a graph, either by applying a preprocessing step or by using subgraph and filtering techniques that are part of graph product.
- Model your graph in a way that vertex and edge identifiers are not considered sensitive information.

- Do not deploy the product into untrusted environments or in a way that gives access to untrusted client connections.
- Make sure all communication channels are encrypted and that authentication is always enabled, even if running within a trusted network.

Least Privilege Accounts

The database user account that is being used by the graph server (PGX) to read data should be a low-privilege, read-only account. PGX is an in-memory accelerator that acts as a read-only cache on top of the database, and it does not write any data back to the database.

If your application requires writing graph data and later analyzing it using PGX, make sure you use two different database user accounts for each component.

Public Health Endpoint Security

Unless you run multiple graph servers behind a load balancer (Deploying Oracle Graph Server Behind a Load Balancer), it is a good security practice to disable the public endpoint of the graph server, which load balancers need to determine the health of the graph servers.

To disable the endpoint:

- 1. Locate the WAR file of the graph server. If you installed the graph server via RPM, then the file is located at /opt/oracle/graph/pgx/server/pgx-webapp-<version>.war.
- 2. Unzip the .war file into a location of your choice and then edit the WEB-INF/web.xml file inside the unzipped directory with a text editor of your choice.
- 3. Locate the pgx.auth.exceptions parameter in the file. The list of public endpoints can be seen as shown:

4. Remove the isReady endpoint from the list of public endpoints as shown:

- 5. Save your changes, repackage the WAR file and redeploy the file to its original location.
- Restart the graph server.


1.6 About Oracle Graph Server and Client Accessibility

This section provides information on the accessibility features for Oracle Graph Server and Client.

- For information on addressing accessibility for the Java and Python command line interfaces, which are installed on Oracle Linux, see Working With Accessibility Features in Oracle Linux 7.
- For information on keyboard shortcuts for the Java command line interface, which is built on top of the Java Shell (JShell), see Keyboard Shortcuts for JShell.

- For information on addressing accessibility for the Graph Visualization Application, which is based on Oracle JET, see About Oracle JET and Accessibility.
- You can enable accessibility in the Graph Visualization application by selecting the
 Accessibility Mode check box option from the user account drop-down menu on the top right of the user interface. Once enabled, the query output is always displayed in a tabular
 layout as shown:

Figure 1-7 Enabling Accessibility in the Graph Visualization Application

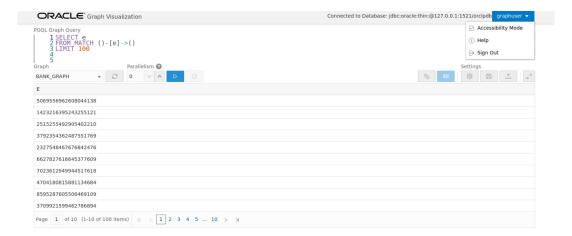



Using Oracle Graph with the Autonomous Database

Oracle Graph with the Autonomous Database allows you to create property graphs from data in your Autonomous Database.

When using Autonomous Database Serverless deployment, you can use Graph Studio, a fully managed service with a powerful user interface for developing applications that use graph analysis. Using Graph Studio, you can automate the modeling of graphs from tables in Autonomous Database. You can interactively analyze and visualize the graph queries using advanced notebooks with multiple visualization options. You can execute over 60 built-in graph algorithms in Graph Studio to gain useful insights on your graph data. See Using Graph Studio in Oracle Autonomous Database for more information.

You can also access few Graph Studio features using the Autonomous Database Graph Client API using the client shell CLIs or through your Java or Python application. See Using Autonomous Database Graph Client for more information.

Alternatively, you can use any version of Oracle Graph Server and Client with the family of Oracle Autonomous Database to create and work with property graphs. This includes any version of Oracle Autonomous Database Serverless or Oracle Autonomous Database Dedicated. You can always upgrade to the latest version of Graph Server and Client regardless of the version of your Autonomous Database. Note that the graph server is managed by the application in this case.

You can connect in two-tier mode (connect directly to Autonomous Database) or three-tier mode (connect to PGX on the middle tier, which then connects to Autonomous Database).

The database schema storing the graph must have the CREATE SESSION and CREATE TABLE privileges.

- Two-Tier Deployments of Oracle Graph with Autonomous Database
 In two-tier deployments, the client graph application connects directly to the Autonomous Database.
- Three-Tier Deployments of Oracle Graph with Autonomous Database
 In three-tier deployments, the client graph application connects to PGX in a middle tier, and PGX connects to the Autonomous Database.

Related Topics

Using Autonomous Database Graph Client
 Using the AdbGraphClient API, you can access Graph Studio features in Autonomous
 Database programmatically using the Oracle Graph Client or through your Java or Python
 application.

2.1 Two-Tier Deployments of Oracle Graph with Autonomous Database

In two-tier deployments, the client graph application connects directly to the Autonomous Database.

- Install Oracle Graph Client, as explained in Installing the Java Client From the Graph Server and Client Downloads.
- Establish a JDBC connection, as described in the Oracle Autonomous Warehouse documentation.

You must download the wallet and unzip it to a secure location. You can then reference it when establishing the connection as shown in Example 2-1.

3. Start the Java Shell as shown in the code:

```
/bin/opg4j --no_connect
```

4. Connect to your database as shown in Example 2-1.

Note:

If you need to use the Graph Visualization Application, you must additionally install the Oracle Graph Server.

- See Installing Oracle Graph Server for more details.
- See Running the Graph Visualization Web Client for more details.

Example 2-1 Creating a Database Connection in a Two-Tier Graph Deployment with Autonomous Database

```
opg4j> var jdbcUrl = "jdbc:oracle:thin:@<tns_alias>?
TNS_ADMIN=<wallet_location>" // jdbc url to the DB
opg4j> var user = "<user>"
opg4j> var pass = "<password>"
opg4j> var conn = DriverManager.getConnection(jdbcUrl, user, pass) //
connecting to the DB
conn ==> oracle.jdbc.driver.T4CConnection@57e6cb01
```

In the preceding example:

- <tns alias>: TNS alias used in tnsnames.ora file
- <wallet_location>: Path to the directory where the wallet is stored
- <use><use>>: Name of the database user
- <password>: Password for the user

2.2 Three-Tier Deployments of Oracle Graph with Autonomous Database

In three-tier deployments, the client graph application connects to PGX in a middle tier, and PGX connects to the Autonomous Database.

The wallets downloaded from the Oracle Cloud Console are mainly *routing wallets*, meaning they are used to route the connection to the right database and to encrypt the connection. In most cases, they are not auto-login wallets, so they do not contain the password for the actual connection. The password usually needs to be provided separately to the wallet location.

The graph server does not support a wallet stored on the client file system or provided directly by remote users. The high level implications of this are:

- The server administrator provides the wallet and stores the wallet securely on the server's file system.
- Similar to Java EE connection pools, remote users will use that wallet when connecting.
 This means the server administrator trusts all remote users to use the wallet. As with any
 production deployments, the PGX server must be configured to enforce authentication and
 authorization to establish that trust.
- Remote users still need to provide a user name and password when sending a graph read request, just as with non-autonomous databases.
- You can only configure one wallet for each PGX server.

Having the same PGX server connecting to multiple Autonomous Databases is not supported. If you have that use case, start one PGX server for each Autonomous Database.

Pre-loaded graphs

To read a graph from Autonomous Database into PGX at server startup, follow the steps described in Store the Database Password in a Keystore to:

- Create a Java Keystore containing the database password
- Create a PGX graph configuration file describing the location and properties of the graph to be loaded
- 3. Update the /opt/oracle/graph/pgx.conf file to reference the graph configuration file

As root user, edit the service file at /etc/systemd/system/pgx.service and specify the environment variable under the [Service] directive:

Environment="JAVA OPTS=-Doracle.net.tns admin=/etc/oracle/graph/wallets"

Make sure that the directory (/etc/oracle/graph/wallets in the preceding code) is readable by the Oracle Graph user, which is the user that starts up the PGX server when using systemd.

In addition, edit the ${\tt ExecStart}$ command to specify the location of the keystore containing the password:

ExecStart=/bin/bash start-server --secret-store /etc/keystore.p12



Please note that /etc/keystore.p12 must not be password protected for this to work. Instead protect the file via file system permission that is only readable by oraclegraph user.

After the file is edited, reload the changes using:

systemctl daemon-reload



Finally start the server:

```
sudo systemctl start pgx
```

On-demand graph loading

To allow remote users of PGX to read from the Autonomous Database on demand, you can choose from two approaches:

Provide the path to the wallet at server startup time via the oracle.net.tns_admin system
property. Remote users have to provide the TNS address name, username and keystore
alias (password) in their graph configuration files. The wallet is stored securely on the
graph server's file system, and the server administrator trusts all remote users to use the
wallet to connect to an Autonomous Database.

For example, the server administrator edits the service file at /etc/systemd/system/pqx.service and specifies the environment variable the under the [Service] directive:

```
Environment="JAVA_OPTS=-Doracle.net.tns_admin=/etc/oracle/graph/wallets"
```

and then start the server using

```
systemctl start pgx
```

The /etc/oracle/graph/wallets/tnsnames.ora file contains an address as follows:

```
sombrero_medium = (description= (retry_count=20) (retry_delay=3)
(address=(protocol=tcps) (port=1522) (host=adb.us-ashburn-1.oraclecloud.com))
(connect_data=(service_name=181gholga0ujxsa_sombrero_medium.adwc.oraclecloud.com)) (security=(ssl_server_cert_dn="CN=adwc.uscom-east-1.oraclecloud.com,OU=Oracle BMCS US,O=Oracle Corporation,L=Redwood City,ST=California,C=US")))
```

Now remote users can read data into the server by sending a graph configuration file with the following connection properties:

```
...
"jdbc_url": "jdbc:oracle:thin:@sombrero_medium",
"username": "hr",
"keystore_alias": "database1",
...
```

Note that the keystore still lives on the client side and should contain the password for the hr user referenced in the config object, as explained in Store the Database Password in a Keystore. A similar approach works for Tomcat or WebLogic Server deployments.

Use Java EE connection pools in your web application server. Remote users only have to
provide the name of the datasource in their graph configuration files. The wallet and the
connection credentials are stored securely in the web application server's file system, and
the server administrator trusts all remote users to use a connection from the pool to
connect to an Autonomous Database.

You can find instructions how to set up such a data source at the following locations:



- WebLogic Server: Configuring a WebLogic Data Source to use ATP
- Tomcat: https://www.oracle.com/technetwork/database/application-development/jdbc/documentation/atp-5073445.html#Tomcat

If you gave the data source the name adb_ds , you can the reference them by sending a graph configuration file with the following connection properties:

```
...
"datasource_id": "adb_ds",
...
```



Part II

SQL Property Graphs

Learn and work with SQL property graphs.

Effective with Oracle Database 23ai, you can create and query SQL property graphs.

The following chapters provide in-depth information on SQL property graphs:

- Introduction to SQL Property Graphs
 You can work with SQL property graphs in any SQL based interface (such as SQL Developer, SQLPLUS, or SQLcl) or from a Java program using JDBC.
- SQL DDL Statements for Property Graphs
 You can create, revalidate, rename, and drop SQL property graphs using SQL data
 definition language (DDL) statements.
- SQL Graph Queries
 You can query a SQL property graph using the GRAPH_TABLE operator to express graph
 pattern matching queries.
- Loading a SQL Property Graph into the Graph Server (PGX)
 You can load a full SQL property graph or a subgraph into memory in the graph server (PGX).
- Executing PGQL Queries Against SQL Property Graphs
 You can directly run PGQL queries against a SQL property graph in the database.
- Visualizing SQL Graph Queries Using the APEX Graph Visualization Plug-in You can use the Oracle Application Express (APEX) Graph Visualization plug-in to visualize and interact with SQL property graphs in an APEX application.



Introduction to SQL Property Graphs


You can work with SQL property graphs in any SQL based interface (such as SQL Developer, SQLPLUS, or SQLcl) or from a Java program using JDBC.

Using SQL statements, you can perform the following:

- Create a SQL property graph from existing database objects in your schema, such as:
 - Tables (with some exceptions as listed in Limitations of Creating a SQL Property Graph)
 - Materialized views
 - External tables
 - Synonyms for any of the preceding database objects
- Create a synonym for a SQL property graph.
- Revalidate a SQL property graph.
- Rename a SQL property graph
- Run graph pattern matching queries on a SQL property graph.
- Drop a SQL property graph.

For example, the following figure shows the creation of a SQL property graph using the SQL Developer tool.

Figure 3-1 Using SQL Developer to Create a SQL Property Graph

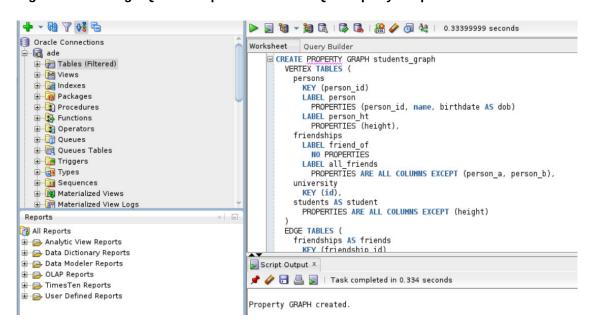

Quick Start for Working with SQL Property Graphs
 This tutorial helps you get started on creating, querying, and running graph algorithms on a SQL property graph.

3.1 Quick Start for Working with SQL Property Graphs

This tutorial helps you get started on creating, querying, and running graph algorithms on a SQL property graph.

In order to try this tutorial, ensure that you meet the following requirements:

- Load the sample bank graph data provided with the graph server installation in the database tables. See Using Sample Data for Graph Analysis for more information.
- You have the required privileges to create and drop a SQL property graph. See Granting System and Object Privileges for SQL Property Graphs for more information.

In the following tutorial, the examples in Step 1, Step 2, and Step 7 are performed using the SOLcl tool. However, you can run these examples using any SOL based interface.

1. Create a SQL property graph using the CREATE PROPERTY GRAPH DDL statement.

```
SQL> CREATE PROPERTY GRAPH bank sql pg
    VERTEX TABLES (
       bank accounts
 4
        KEY (id)
 5
        LABEL account
       PROPERTIES ALL COLUMNS
     )
 8
      EDGE TABLES (
 9
       bank txns
10
          KEY (txn id)
11
          SOURCE KEY (from acct id) REFERENCES bank accounts (id)
          DESTINATION KEY (to acct id) REFERENCES bank accounts (id)
13
          LABEL transfer
          PROPERTIES ALL COLUMNS
15*
      );
```

Property created.

On execution, the <code>bank_sql_pg</code> graph is created in the database. The graph is made up of one vertex graph element table (<code>bank_accounts</code>) and one edge graph element table (<code>bank_txns</code>).

See Creating a SQL Property Graph to learn the concepts of graph element tables, keys, labels and properties.

2. Run a SQL graph query, on the newly created graph, to list all the transactions from the account with id value 816.

```
SQL> SELECT * FROM GRAPH_TABLE (bank_sql_pg
2    MATCH
3    (a IS account WHERE a.id = 816) -[e IS transfer]-> (b IS account)
4    COLUMNS (a.id AS acc_a, e.amount AS amount, b.id AS acc_b)
5* );
ACC_A    AMOUNT    ACC_B
```




816	4713	287
816	8001	590
816	4186	934
816	3718	289
816	4039	812

See SQL Graph Queries for more information.

3. Optionally, if you have installed the graph server (PGX), then you can also visualize the preceding SQL graph query, using the graph visualization tool.

The only difference is that you must return the vertex and edge IDs in order to visualize the vertices and edges of the SQL graph query together with their IDs and all their labels and properties. Note that the <code>COLUMNS</code> clause in the following example uses the <code>VERTEX_ID</code> and <code>EDGE_ID</code> operators:

Figure 3-2 Visualizing a SQL Graph Query

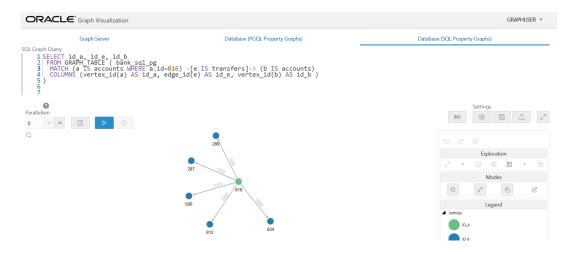

- See Vertex and Edge Identifiers to learn more about the VERTEX_ID and EDGE_ID operators.
- See Visualizing Graph Queries on SQL Property Graphs for more details.
- 4. Load the graph into the graph server (PGX) if you want to run graph algorithms.
 - JShell
 - Java
 - Python

JShell

```
opg4j> var graph = session.readGraphByName("BANK_SQL_PG",
GraphSource.PG_SQL)
graph ==> PgxGraph[name=BANK SQL PG,N=1000,E=5001,created=1681020302077]
```

Java

```
PgxGraph graph = session.readGraphByName("BANK_SQL_PG",
GraphSource.PG_SQL);
```

Python

```
>>> graph = session.read_graph_by_name("BANK_SQL_PG", "pg_sql")
>>> graph
PgxGraph(name: BANK_SQL_PG, v: 1000, e: 5001, directed: True, memory(Mb):
0)
```

See Loading a SQL Property Graph into the Graph Server (PGX) for more information.

- 5. Execute the PageRank algorithm as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var analyst = session.createAnalyst()
analyst ==> NamedArgumentAnalyst[session=0fb6bea7-
d467-458d-90c3-803d2932df12]
opg4j> analyst.pagerank(graph)
$3 ==> VertexProperty[name=pagerank,type=double,graph=BANK SQL PG]
```

Java

```
Analyst analyst = session.createAnalyst();
analyst.pagerank(graph);
```

Python

```
>>> analyst = session.create_analyst()
>>> analyst.pagerank(graph)
VertexProperty(name: pagerank, type: double, graph: BANK_SQL_PG)
```

- **6.** Query the graph to list the top 10 accounts by pagerank:
 - JShell



- Java
- Python

JShell

opg4j> session.queryPgql("SELECT a.id, a.pagerank FROM MATCH (a) ON BANK SQL PG ORDER BY a.pagerank DESC LIMIT 5").print()

```
+-----+
| id | pagerank | |
+------+
| 387 | 0.007302836252205924 | |
| 406 | 0.006734430614559079 | |
| 135 | 0.006725965475577353 | |
| 934 | 0.006641340764834484 | |
| 397 | 0.0057016075312134595 | |
```

\$5 ==> PgqlResultSetImpl[graph=BANK SQL PG,numResults=5]

Java

session.queryPgql("SELECT a.id, a.pagerank FROM MATCH (a) ON BANK_SQL_PG
ORDER BY a.pagerank DESC LIMIT 5").print();

Python

>>> session.query_pgql("SELECT a.id, a.pagerank FROM MATCH (a) ON
BANK_SQL_PG ORDER BY a.pagerank DESC LIMIT 5").print()

```
+-----+
| id | pagerank |
+------+
| 387 | 0.007302836252205924 |
| 406 | 0.006734430614559079 |
| 135 | 0.006725965475577353 |
| 934 | 0.006641340764834484 |
| 397 | 0.0057016075312134595 |
```

7. Drop the SQL property graph after running the graph queries.

```
SQL> DROP PROPERTY GRAPH bank_sql_pg;
Property dropped.
```



4

SQL DDL Statements for Property Graphs

You can create, revalidate, rename, and drop SQL property graphs using SQL data definition language (DDL) statements.

- Creating a SQL Property Graph
 - Using the CREATE PROPERTY GRAPH DDL statement, you can create a property graph object directly in an Oracle Database.
- Revalidating a SQL Property Graph
 - Using the ALTER PROPERTY GRAPH COMPILE DDL statement, you can revalidate an existing property graph object in the database.
- Renaming a SQL Property Graph
 - You can rename an existing SQL property graph using the RENAME DDL statement.
- Dropping a SQL Property Graph
 - Using the DROP PROPERTY GRAPH DDL statement, you can remove a property graph object in Oracle Database.
- JSON Support in SQL Property Graphs
 - When creating a SQL property graph, you can define a label property over a JSON data type column using simplified dot notation. You can later access this property inside the SQL graph query.

4.1 Creating a SQL Property Graph

Using the CREATE PROPERTY GRAPH DDL statement, you can create a property graph object directly in an Oracle Database.

Example 4-1 Creating a SQL Property Graph Using the CREATE PROPERTY GRAPH DDL Statement


This example creates a SQL property graph, students_graph, using persons, university, friends, and student of as the underlying database tables for the graph.

In order to run this example, ensure the following:

- 1. Set up the sample tables in the database as explained in Setting Up Sample Data in the Database.
- See Granting System and Object Privileges for SQL Property Graphs to ensure you have the required privileges to create a SQL property graph.

The following diagram illustrates the students graph:

Figure 4-1 STUDENTS_GRAPH

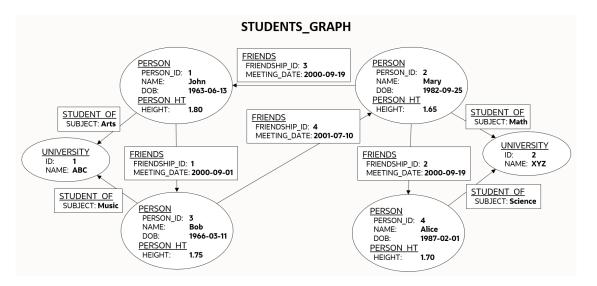

The corresponding SQL propery graph DDL statement is as shown:

```
CREATE PROPERTY GRAPH students graph
 VERTEX TABLES (
   persons KEY (person id)
      LABEL person
        PROPERTIES (person id, name, birthdate AS dob)
     LABEL person ht
       PROPERTIES (height),
    university KEY (id)
  EDGE TABLES (
    friends
      KEY (friendship id)
      SOURCE KEY (person a) REFERENCES persons (person id)
      DESTINATION KEY (person b) REFERENCES persons (person id)
      PROPERTIES (friendship id, meeting date),
    student of
      SOURCE KEY (s person id) REFERENCES persons (person id)
      DESTINATION KEY (s univ id) REFERENCES university(id)
      PROPERTIES (subject)
 );
```

On execution, the preceding example creates a SQL property graph object that uses the tables in your schema to define its graph element tables. Note that the creation of the new SQL property graph object, results only in the storage of the property graph metadata, and there is no copying of data from the underlying database objects into the graph element tables. This implies that when querying a SQL property graph, all the graph queries are performed on the current graph data in the database. You may also specify another schema to contain the SQL property graph provided that you have sufficient privileges.

The graph definition in the example creates a graph that comprises:

Two vertex graph element tables:

- persons: The table has an explicitly defined unique key, person_id, and it is associated with two labels:
 - * person: This label exposes person id, name and birthdate as properties.
 - * person ht: This label exposes only the height property.
- university: The label for the table is implicitly inferred and by default all visible columns of the underlying database table are exposed as properties.
- Two edge graph element tables:
 - friends: The edge table references persons as the underlying database table for both the source and destination vertex tables. The source and destination keys (person_a and person_b) for the edge table correspond to the unique key of the source and destination vertex tables respectively. The label for the edge table is automatically inferred from the name of the graph element table (friends, in this case) and exposes friendship id and meeting date as properties.
 - student_of: The edge table references persons and university as the underlying database tables for the source and destination vertex tables respectively. The source and destination keys (s_person_id and s_univ_id) for the edge table correspond to the unique key of the source and destination vertex tables respectively. The label for the edge table is automatically inferred from the name of the graph element table (student of, in this case) and exposes subject as the property.

It is important to note that once a SQL property graph is created, you cannot alter the graph definition. However, you can redefine a SQL property graph using the OR REPLACE clause in the CREATE PROPERTY GRAPH DDL statement. You can use this clause to change the definition of an existing SQL property graph without dropping, re-creating, and regranting object privileges that were earlier granted on it.



CREATE PROPERTY GRAPH in Oracle Database SQL Language Reference

The following sections explain more on the concepts of the graph element tables, keys, labels and properties:

- About Vertex and Edge Graph Element Tables
 The vertices and edges of a SQL property graph defined from the underlying database objects are stored in the graph element tables.
- About Vertex and Edge Table Keys
 Each vertex and edge table used in a SQL property graph definition must have a key in order to identify a unique vertex or an edge in a SQL property graph.
- About Labels and Properties
 Labels can be associated to one or more graph element tables and they enrich the graph definition. A label can be defined with or without properties.
- Using Graph Options to Create SQL Property Graphs
 You can use graph options to control the behavior of a SQL property graph at the time of
 its creation.
- Granting System and Object Privileges for SQL Property Graphs
 Learn about the new system and object privileges for performing operations on SQL property graphs.

- Retrieving Metadata for SQL Property Graphs

 The metadata of SQL property graphs can be accessed through a series of data dictionary views.
- Retrieving SQL Creation DDL Using the DBMS_METADATA Package
- Limitations of Creating a SQL Property Graph
 This section lists a few restrictions that apply when creating a SQL property graph.

4.1.1 About Vertex and Edge Graph Element Tables

The vertices and edges of a SQL property graph defined from the underlying database objects are stored in the graph element tables.

A graph element table can either be a vertex table or an edge table.

Refer to the graph definition in Example 4-1 to easily understand the following sections:

Vertex graph element table

- A vertex table is defined using the VERTEX TABLES clause.
- Each row in a vertex table corresponds to a vertex of the graph.
- A vertex graph element table has a name that is independent from the name of the underlying database object.
- By default, the name of the vertex graph element table is the same as the name of the underlying database object.
- A vertex table name must be unique for a graph. In case you want to define a SQL property graph with multiple graph element tables from the same database object, then you must specify an alternate graph element table name using the AS clause.

Edge graph element table

- An edge table is defined using the EDGE TABLES clause.
- It specifies a direct relationship between the source vertex table and the destination vertex table using the SOURCE and DESTINATION keywords that REFERENCES the respective vertex tables.
- Each row in an edge table corresponds to an edge of the graph.
- An edge graph element table has a name that is independent from the name of the underlying database object.
- By default, the name of the edge graph element table is the same as the name of the underlying database object.
- The edge table name must be unique for a graph. An edge table name cannot be shared with a vertex table or another edge table.

4.1.2 About Vertex and Edge Table Keys

Each vertex and edge table used in a SQL property graph definition must have a key in order to identify a unique vertex or an edge in a SQL property graph.

The key is defined from one or more columns of the underlying table. The key may be implicitly inferred based on an existing primary key or a unique constraint defined on the underlying table, or explicitly defined. The key should be unique.



However, note that the uniqueness constraint for the key column is required if you create the graph in ENFORCED MODE. Otherwise, you can create the graph in TRUSTED MODE using key columns that do not have a uniqueness constraint. See Using Graph Options to Create SQL Property Graphs for more information on the different modes that can be applied during graph creation.

Vertex or edge table keys can be defined for any of the following built-in data type columns:

- VARCHAR2
- NVARCHAR2
- NUMBER
- BINARY FLOAT
- BINARY DOUBLE
- CHAR
- NCHAR
- DATE
- INTERVAL (both YEAR TO MONTH and DAY TO SECOND)
- TIMESTAMP

Note that the TIMESTAMP WITH TIME ZONE data type is not supported.

Refer to the SQL property graph definition in Example 4-1 to easily understand the following sections:

Vertex Table Key

- By default, the key for a vertex table is automatically identified from a single PRIMARY KEY or UNIQUE key constraint on the underlying database object. If both exist, then the PRIMARY KEY constraint takes precedence over the UNIQUE key constraint.
- If the vertex table key is automatically inferred based on a single UNIQUE key, then the set of columns in that UNIQUE key must also be NOT NULL.
- If the underlying database object does not contain a unique constraint to enforce uniqueness, then you must explicitly define the KEY subclause in the VERTEX TABLES clause, to identify the columns that define a unique key for the vertex table. Note that the column names must match the column names of the underlying database object.
- Composite vertex table keys are also supported.

Edge Table Key

- By default, the key for an edge table is automatically identified from a single PRIMARY KEY or UNIQUE key constraint on the underlying database object. If both exist, then the PRIMARY KEY constraint takes precedence over the UNIQUE key constraint.
- If the edge table key is automatically inferred based on a single UNIQUE key, then the set of columns in that UNIQUE key must also be NOT NULL.
- If the underlying database object does not contain a unique constraint to enforce uniqueness, then you must explicitly define the KEY subclause in the EDGE TABLES clause, to identify the columns that define a unique key for the edge table. Note that the column names must match the column names of the underlying database object.



- By default, the SOURCE and DESTINATION table keys are automatically obtained from a single FOREIGN KEY constraint between the edge table and the underlying source and destination tables respectively.
- However, you must explicitly specify the KEY subclause for the SOURCE and DESTINATION vertex tables, if any of the following applies:
 - There is no FOREIGN KEY constraint between the edge and the referenced vertex tables.
 - There are multiple FOREIGN KEY constraints between the edge and the referenced vertex tables.
 - The underlying database objects for the edge table and its source and destination vertex tables are materialized views or external tables.



All restrictions that apply for primary key constraints on a database object also apply on vertex and edge table keys.

4.1.3 About Labels and Properties

Labels can be associated to one or more graph element tables and they enrich the graph definition. A label can be defined with or without properties.

You can optionally define LABELS and PROPERTIES for the vertex and edge tables in your graph. When not specified, the graph element tables are automatically assigned a label with the name of the graph element table, and all visible columns are exposed as properties, using the column name as property name.

Refer to the SQL property graph definition in Example 4-1 to easily understand the following sections:

Labels

- By default, the vertex and edge tables are automatically assigned a label with the name of the respective graph element tables.
- The DEFAULT LABEL subclause can also be used to explicitly apply the preceding rule.
- You can explicitly assign a new label name to a vertex or an edge graph element table using the LABEL subclause.
- Multiple labels can be associated with the same graph element table.
- The same label can be shared with multiple graph element tables.
 A label can be associated with more than one graph element table (shared label) provided the following conditions apply:
 - All graph element tables that share this label declare the same set of property names.
 Note that the property order does not matter in the label definition.
 - Different columns or value expression exposed by the same property name have union compatible types.
- Also, refer to Type Compatibility Rules for Determining Property Types for more information.



Properties

- By default, all the visible columns of a vertex or an edge table are automatically exposed as properties if there is no label declaration or if the DEFAULT LABEL subclause is used in the property graph definition. The property names are the same as the column names of the underlying database object.
- Columns of any Oracle built-in data types can be exposed as properties of labels in a SQL property graph. This includes virtual columns, JSON data type columns, CLOB and BLOB data types.

However, the following are not supported:

- XMLType and SDO GEOMETRY type columns are not supported.
- SQL/XML value expressions over XMLType column stored as binary XML, and SDO_GEOMETRY built-in functions over SDO_GEOMETRY object datatype column are allowed as long as they return a value of a type supported for properties. Any general object data type and user defined data type and their corresponding SQL operator value expression over them are not supported.
- Columns of type ANYTYPE cannot be exposed as property.
- At the time of the SQL property graph creation, the data type of a vertex or edge property is determined as follows:
 - Distinct properties associated with distinct labels have the same data type as the underlying database columns.
 - Properties with the same name coming from different labels have the same data type as the underlying database columns. However, you must use the ALLOW MIXED PROPERTY TYPES option when creating the SQL property graph.
 See Using Graph Options to Create SQL Property Graphs for an example using a shared property name.
 - Properties with the same name coming from the same label will have the UNION ALL compatible type of the underlying database columns. In addition, you must use the ALLOW MIXED PROPERTY TYPES option when creating the SQL property graph:
 - * See Using Graph Options to Create SQL Property Graphs for an example using a shared property name in a shared label.
 - * See Type Compatibility Rules for Determining Property Types for more information on the type rules that determine the property type.
- If you want to explicitly define the vertex or edge properties for a label, then the following property declarations are supported:
 - PROPERTIES [ARE] ALL COLUMNS: To expose all the visible columns of the graph element table as label properties. However, if any columns are added or deleted in the source database object, after the creation of the SQL property graph, then these will not be reflected on the graph.
 - PROPERTIES [ARE] ALL COLUMNS EXCEPT (<column_names_list>): To expose all the visible columns of the graph element table as label properties except those that are explicitly listed.
 - PROPERTIES (<1ist_of_column_names>): To expose only those columns of the graph element table that are explicitly listed as label properties. The property name defaults to the column name.



- PROPERTIES (<column_name AS property_name,...>): Same as the preceding option.
 However, if AS property_name is appended to the column_name, then property_name is used as the property name.
- PROPERTIES (<column_expressions AS property_name,...>): To declare a property
 which is an expression over columns. The AS clause is mandatory in this case. A value
 expression can either be a SQL operator expression defined over scalar data type
 columns or JSON expression. See JSON Support in SQL Property Graphs for an
 example using JSON expressions.
- NO PROPERTIES: No columns are exposed for a label.
- Peudo-columns cannot be exposed as a label property.

4.1.4 Using Graph Options to Create SQL Property Graphs

You can use graph options to control the behavior of a SQL property graph at the time of its creation.

Graph options can be specified at the end of the CREATE PROPERTY GRAPH DDL statement using the OPTIONS clause. You can use either the MODE or MIXED PROPERTY TYPES option, or both as required.

Using an Option to Specify the Mode of the Graph

You can specify the MODE of the graph by using one of the following option values at the time of creating the SQL property graph:

- **ENFORCED MODE:** This ensures that there is a dependency to the unique key constraint on the underlying database tables. If used when creating a SQL property graph, the CREATE PROPERTY GRAPH statement will throw an error if any of the following conditions apply:
 - The specified vertex or edge table KEY for the graph element table is neither a PRIMARY
 KEY nor a UNIQUE key defined on NOT NULL columns.
 - There is no explicit vertex or edge table KEY defined for the graph element table and also the system is unable to automatically identify the default vertex or edge key, as there is no single PRIMARY KEY or a single UNIQUE key constraint on NOT NULL columns on the underlying database table.
 - For a specified edge source key and corresponding source vertex key or for a specified edge destination key and corresponding destination vertex key, there does not exist a corresponding FOREIGN KEY between the underlying tables.
 - An edge table has no explicit keys for the source or for the destination and the system
 is unable to implicitly infer the keys, as there is no single FOREIGN KEY constraint
 between the edge table and the referenced source (or destination) vertex table.

For example, consider the following t1 table in the database that does not have any primary key, unique key or a NOT NULL constraint.

```
SQL> CREATE TABLE t1 (id NUMBER, name VARCHAR2(10));
INSERT INTO t1 (id, name) VALUES (1,'John');
INSERT INTO t1 (id, name) VALUES (2, 'Mary');
```



Create a SQL property graph using OPTIONS (ENFORCED MODE) as shown:

```
CREATE PROPERTY GRAPH g

VERTEX TABLES (

t1 KEY (id)

LABEL t PROPERTIES ARE ALL COLUMNS
) OPTIONS (ENFORCED MODE);
```

The graph creation fails with the following error as there are no key constraints to enforce uniqueness:

```
{\tt ORA-42434:} Columns used to define a graph element table key must be NOT NULL in ENFORCED MODE
```

If you omit the \mathtt{KEY} clause in the preceding graph definition, then the following error is thrown:

```
ORA-42402: cannot infer key for graph element table T1
```

• TRUSTED MODE (default): There is no dependency to the unique key constraint on the underlying database tables when using the TRUSTED mode. Therefore, the preceding example when run in TRUSTED mode will not throw any error. This implies that if you choose to use this option, then you must guarantee the uniqueness of primary keys on each of the graph element tables, as well as valid foreign key references between an edge table and its source and destination tables. Otherwise, your graph query results may be incorrect as the expected guarantees are not met.

Using an Option to Allow or Disallow Different Property Types for Shared Property Names

You can specify the MIXED PROPERTY TYPES options using one of the following values:

- ALLOW MIXED PROPERTY TYPES: This ensures that:
 - If two properties with the same name belong to different labels, then they can have completely different types.

For example, in addition to the sample tables persons and students (see Setting Up Sample Data in the Database), create the following additional table:

```
CREATE TABLE t2 (id NUMBER, height VARCHAR2(4), CONSTRAINT t2_pk PRIMARY KEY (id));

INSERT INTO t2 (id, height) VALUES (1, '1.80');
INSERT INTO t2 (id, height) VALUES (2, '1.65');

CREATE TABLE t3 (id NUMBER, height BINARY_DOUBLE, CONSTRAINT t3_pk PRIMARY KEY (id));

INSERT INTO t3 (id, height) VALUES (1, 1.80);
INSERT INTO t3 (id, height) VALUES (2, 1.65);
```

Run the following CREATE PROPERTY GRAPH DDL statement which uses three distinct labels for the same property name, height.

```
CREATE PROPERTY GRAPH g1
VERTEX TABLES (
persons
```



```
LABEL person PROPERTIES (name, height),
t2
LABEL t2 PROPERTIES (height),
t3
LABEL t3 PROPERTIES (height)
)OPTIONS(ALLOW MIXED PROPERTY TYPES);
```

When the graph is created, the property type for height in the vertex tables associated with:

- * LABEL person is FLOAT
- * LABEL t2 is VARCHAR
- * LABEL t3 is BINARY DOUBLE

However, when querying this graph, the property type for height is dependent on the label constraint used in the SQL graph query. See Accessing Label Properties for more information.

 If you are sharing property names inside shared labels, then they should be all union compatible types.

For example, run the following CREATE PROPERTY GRAPH DDL statement where the property name height is used inside the shared label t:

```
CREATE PROPERTY GRAPH g2

VERTEX TABLES (

persons

LABEL t PROPERTIES (height),

t2

LABEL t PROPERTIES (height)

) OPTIONS (ALLOW MIXED PROPERTY TYPES);
```

The graph creation fails as the column height in the tables persons and t2 has the data type FLOAT and VARCHAR respectively which are union incompatible. Therefore, the following error is thrown:

```
ORA-42414: cannot use mixed type for property HEIGHT of label T
```

However, the following graph will get created successfully as FLOAT and BINARY_DOUBLE belong to the numeric group and are union compatible.

```
CREATE PROPERTY GRAPH g3

VERTEX TABLES (

persons

LABEL t PROPERTIES (height),

t3

LABEL t PROPERTIES (height)

) OPTIONS (ALLOW MIXED PROPERTY TYPES);
```

See Type Compatibility Rules for Determining Property Types for more information.

• DISALLOW MIXED PROPERTY TYPES (default): This ensures that a property with the same name should strictly be the same data type. This applies to all labels irrespective of whether they are associated with a single or multiple graph element tables.

For example, run the following DDL statement using persons and t2 as the underlying database tables:

```
CREATE PROPERTY GRAPH g4

VERTEX TABLES (

persons

LABEL person PROPERTIES (name, height),

t2

LABEL t2 PROPERTIES (height)
);
```

The preceding code uses the default DISALLOW MIXED PROPERTY TYPES graph option and therefore throws an error as mixed property types are used in the graph definition:

```
ORA-42414: cannot use mixed type for property HEIGHT of label T2
```

The following table summarizes compatibility rules with respect to the MIXED PROPERTY TYPES options

Description	ALLOW	DISALLOW
Properties with the same name exposed by shared labels ¹	Union-compatible	Types must match
Shared properties ²	Any	Types must match

- ¹ A label with the same name can be associated with more than one graph element table.
- ² A property with the same name can be exposed by different labels.

4.1.5 Granting System and Object Privileges for SQL Property Graphs

Learn about the new system and object privileges for performing operations on SQL property graphs.

Table 4-1 System Privileges for SQL Property Graph Objects

System Privileges	Description
CREATE PROPERTY GRAPH	To create a SQL property graph in the grantee's schema
CREATE ANY PROPERTY	To create a SQL property graph in any schema except SYS and AUDSYS
GRAPH	
ALTER PROPERTY GRAPH	To alter a SQL property graph in the grantee's schema
ALTER ANY PROPERTY	To alter a SQL property graph in any schema except SYS and AUDSYS
GRAPH	
READ PROPERTY GRAPH	To query a SQL property graph in the grantee's schema
READ ANY PROPERTY GRAPH	To query a SQL property graph in any schema except SYS and AUDSY
SELECT PROPERTY GRAPH	To query a SQL property graph in the grantee's schema
DROP ANY PROPERTY GRAPH	To drop a SQL property graph in any schema except SYS and AUDSYS

Table 4-2 Object Privileges for SQL Property Graphs

Object Privileges	Description
ALTER	To alter a SQL property graph
READ	To query a SQL property graph with a SQL graph query

Table 4-2 (Cont.) Object Privileges for SQL Property Graphs

Object Privileges	Description
1 _{SELECT}	To query a SQL property graph with a SQL graph query

Note that the SELECT privilege behaves exactly as the READ privilege for the SQL property graph object. It is mainly present for compatibility with the SQL standards for a property graph object.

The following shows the examples for granting and revoking the SQL property graph related privileges. Ensure you have SYSDBA access to grant and revoke these privileges:

```
GRANT CREATE PROPERTY GRAPH, CREATE ANY PROPERTY GRAPH,
ALTER ANY PROPERTY GRAPH, DROP ANY PROPERTY GRAPH,
READ ANY PROPERTY GRAPH TO <graphuser>;
```

REVOKE CREATE PROPERTY GRAPH, CREATE ANY PROPERTY GRAPH,
ALTER ANY PROPERTY GRAPH, DROP ANY PROPERTY GRAPH,
READ ANY PROPERTY GRAPH FROM qraphuser>;

You can share your SQL property graph in the database with another user as shown.

GRANT SELECT ON PROPERTY GRAPH <graph name> TO <schema user>;

4.1.6 Retrieving Metadata for SQL Property Graphs

The metadata of SQL property graphs can be accessed through a series of data dictionary views.

The following table provides a complete list of the data dictionary views that you can access to retrieve the metadata for SQL property graphs. Note that the metadata for each category in the table exists across ALL_, USER_, and DBA_ view set. Depending upon your level of privilege, you can access the corresponding view.

Table 4-3 List of Data Dictionary Views to Retrieve Metadata for SQL Property Graphs

Vie	ew Name ¹	Description	
•	ALL_PROPERTY_GRAPHS USER_PROPERTY_GRAPHS DBA_PROPERTY_GRAPHS	To describe all the property graphs in the database.	
•	ALL_PG_ELEMENTS USER_PG_ELEMENTS DBA_PG_ELEMENTS	To describe all the graph element tables of the property graphs in the database.	
•	ALL_PG_EDGE_RELATIONS HIPS USER_PG_EDGE_RELATION SHIPS DBA_PG_EDGE_RELATIONS HIPS	To describe all the columns used to define the edge relationships.	



Table 4-3 (Cont.) List of Data Dictionary Views to Retrieve Metadata for SQL Property Graphs

View Name ¹		Description
•	ALL_PG_KEYS	To describe all the columns used as the key for the graph element
•	USER_PG_KEYS	tables.
•	DBA_PG_KEYS	
•	ALL_PG_LABELS	To describe labels of property graphs in the database.
•	USER_PG_LABELS	
•	DBA_PG_LABELS	
•	ALL_PG_LABEL_PROPERTIE S	To describe the properties of all the labels of the property graphs in the database.
•	USER_PG_LABEL_PROPER TIES	
•	DBA_PG_LABEL_PROPERTIES	
•	ALL_PG_PROP_DEFINITION S	To describe all the column expressions used to define the properties of labels.
•	USER_PG_PROP_DEFINITIONS	
•	DBA_PG_PROP_DEFINITION S	
•		To describe all the labels of all the graph element tables of the
•	USER_PG_ELEMENT_LABEL S	property graphs in the database.
•	DBA_PG_ELEMENT_LABELS	

¹ See *Oracle Database Reference* for more information on the views.

The following example retrieves the graph element tables that were defined for the SQL property graph (students_graph) created in Creating a SQL Property Graph.

SQL> SELECT * FROM USER PG ELEMENTS;

GRAPH_NAME OBJECT_NAME	ELEMENT_NAME	ELEMENT_KIND	OBJECT_OWNER	
STUDENTS GRAPH	PERSONS	VERTEX	GRAPHUSER	PERSONS
STUDENTS GRAPH	UNIVERSITY	VERTEX	GRAPHUSER	
UNIVERSITY				
STUDENTS_GRAPH	FRIENDS	EDGE	GRAPHUSER	FRIENDS
STUDENTS_GRAPH	STUDENT_OF	EDGE	GRAPHUSER	
STUDENT OF	_			

4.1.7 Retrieving SQL Creation DDL Using the DBMS_METADATA Package

You can retrieve the creation DDL for a SQL property graph using the DBMS METADATA package.

The following example displays the DDL for the graph created in Creating a SQL Property Graph using the DBMS_METADATA package.

```
SQL> SELECT DBMS METADATA.GET DDL('PROPERTY GRAPH', 'STUDENTS GRAPH') FROM
DUAL;
  CREATE PROPERTY GRAPH "GRAPHUSER". "STUDENTS GRAPH"
  VERTEX TABLES (
   "GRAPHUSER"."PERSONS" AS "PERSONS" KEY ("PERSON ID")
     LABEL PERSON PROPERTIES ("PERSON ID", "NAME", "BIRTHDATE" AS "DOB")
     LABEL PERSON HT PROPERTIES ("HEIGHT"),
   "GRAPHUSER"."UNIVERSITY" AS "UNIVERSITY" KEY ("ID")
     PROPERTIES ("ID", "NAME") )
  EDGE TABLES (
   "GRAPHUSER"."FRIENDS" AS "FRIENDS" KEY ("FRIENDSHIP ID")
     SOURCE KEY ("PERSON A") REFERENCES PERSONS ("PERSON ID")
     DESTINATION KEY ("PERSON B") REFERENCES PERSONS ("PERSON ID")
    PROPERTIES ("FRIENDSHIP ID", "MEETING DATE"),
   "GRAPHUSER"."STUDENT OF" AS "STUDENT OF" KEY ("S ID")
     SOURCE KEY("S PERSON ID") REFERENCES PERSONS ("PERSON ID")
     DESTINATION KEY("S UNIV ID") REFERENCES PERSONS ("ID")
     PROPERTIES ("SUBJECT") )
  OPTIONS (TRUSTED MODE, DISALLOW MIXED PROPERTY TYPES)
```

4.1.8 Limitations of Creating a SQL Property Graph

This section lists a few restrictions that apply when creating a SQL property graph.

- Views cannot be used as graph element tables in a SQL property graph.
- Hybrid partitioned tables, as well as views derived from these tables, cannot be used as graph element tables in a SQL property graph.
- Database links, as well as views defined using these links, cannot be used as graph element tables in a SQL property graph.
- Object tables (that is, table created with CREATE TABLE x OF myObjectType) and object views cannot be used as graph element tables in a SQL property graph.
- XMLType table (that is, table created with CREATE TABLE x OF XMLTYPE ...) cannot be used as graph element tables in a SQL property graph. However SQL/XML operators, XMLExists(), XMLCast(XMLQuery()) over XMLType column stored as binary XML to define property as SQL value expression is supported.
- Columns of type ANYTYPE cannot be exposed as properties or as keys for graph element tables.
- Pseudo-columns cannot be exposed as properties or as keys for graph element tables.
- Column expressions that comprise invocations to PL/SQL functions cannot be exposed as properties. Similarly, virtual columns defined over column expressions that comprise invocations to PL/SQL functions cannot be exposed as properties.
- SQL property graph are not editionable.
- A SQL property graph definition cannot be modified once the graph is created. However, you can redefine a SQL property graph using the OR REPLACE clause in the CREATE PROPERTY GRAPH DDL statement.

• SQL property graph creation is not supported in a shard catalog. However, you can create a property graph over sharded tables in the local shards.

4.2 Revalidating a SQL Property Graph

Using the ALTER PROPERTY GRAPH COMPILE DDL statement, you can revalidate an existing property graph object in the database.

A SQL property graph schema may become invalid due to the alteration of the underlying database objects. For instance, adding or dropping a column from the underlying database tables, used in the graph definition, can cause the graph to become invalid. Any invalidation of the graph will also invalidate cursors depending on the graph object. In such a case, you can recover your property graph from an **invalid** state as shown in the following example. Also, refer to Granting System and Object Privileges for SQL Property Graphs to ensure you have the required privilege to perform the ALTER PROPERTY GRAPH operation.

Example 4-2 Revalidating a SQL Property Graph

ALTER PROPERTY GRAPH students graph COMPILE;

See Also:

ALTER PROPERTY GRAPH in Oracle Database SQL Language Reference

4.3 Renaming a SQL Property Graph

You can rename an existing SQL property graph using the RENAME DDL statement.

The following example renames the property graph students graph to a new name students.

Example 4-3 Renaming a SQL Property Graph

RENAME students graph TO students;

4.4 Dropping a SQL Property Graph

Using the DROP PROPERTY GRAPH DDL statement, you can remove a property graph object in Oracle Database.

See Granting System and Object Privileges for SQL Property Graphs to ensure you have the required privilege to drop a SQL property graph.

Example 4-4 Dropping a SQL Property Graph

The following example removes the SQL property graph, students graph, in the database.

DROP PROPERTY GRAPH students graph;

Similar to database views, dropping a property graph object does not remove the underlying database tables.



DROP PROPERTY GRAPH in Oracle Database SQL Language Reference

4.5 JSON Support in SQL Property Graphs

When creating a SQL property graph, you can define a label property over a JSON data type column using simplified dot notation. You can later access this property inside the SQL graph query.

The label property defined over a JSON data type column can be of common SQL scalar data types, such as:

- VARCHAR
- NUMBER
- BINARY FLOAT
- BINARY DOUBLE
- DATE
- TIMESTAMP
- raw JSON data converted to a SQL data type
 via .string(), .number(), .float(), .double(), .date(), .timestamp(), .binary() or
 their equivalent using the JSON VALUE operator

Therefore, you can use either a JSON dot notation or the <code>JSON_VALUE</code> operator to select a scalar value in the JSON data to define a SQL property graph label property. This also applies when accessing a label property defined over the JSON data type column inside a SQL graph query.

Example 4-5 Defining a SQL Property Graph Using JSON Dot Notation and JSON Expressions for Label Properties

The following example creates a SQL property graph that contains label properties defined over a JSON data type column. The graph is created using the sample database tables (persons and friendships) defined in Setting Up Sample Data in the Database. The example uses both the JSON dot notation and the JSON VALUE expression to define the label property.

The graph gets created successfully and you can query the graph as shown in the following example:

Example 4-6 Querying a SQL Property Graph and Accessing Label Properties Defined As SQL/JSON Expressions

The following example queries the SQL property graph created in the preceding example to access the label properties created over a JSON data type column.

The query produces the following output:

Example 4-7 Creating and Querying a SQL Property Graph with JSON Data Type Label Property

The following example creates a SQL property graph with JSON data type label property:

```
CREATE PROPERTY GRAPH friends_graph_new
  VERTEX TABLES (
    persons AS p KEY (person_id)
        LABEL person
        PROPERTIES (name, birthdate AS dob, p.hr_data AS "p_data")
)
EDGE TABLES (
    friends
        KEY (friendship_id)
        SOURCE KEY (person_a) REFERENCES p(person_id)
        DESTINATION KEY (person_b) REFERENCES p(person_id)
        PROPERTIES (meeting_date)
);
```

You can then query the graph using a JSON VALUE expression as shown:

```
e.meeting_date,
b.name AS b)
);
```

A	a_works_in	a_works_as	${\tt MEETING_D}$	В
John	IT	Software Developer	01-SEP-00	Bob
Bob	IT	Technical Consultant	10-JUL-01	Mary



SQL Graph Queries

You can query a SQL property graph using the GRAPH_TABLE operator to express graph pattern matching queries.

Graph pattern matching allows you to define a set of path patterns and match it against a graph to obtain a set of solutions. You must provide the graph to be queried as an input to the GRAPH_TABLE operator along with the MATCH clause containing the graph patterns to be searched as shown:

```
SELECT * FROM GRAPH_TABLE (students_graph
   MATCH
   (a IS person) -[e IS friends]-> (b IS person WHERE b.name = 'Mary')
   WHERE a.name='John'
   COLUMNS (a.name AS person_a, b.name AS person_b)
);
```

A basic SQL graph query is made up of the following components:

- FROM clause: It includes the GRAPH_TABLE operator which takes the input graph name as the first parameter.
- MATCH clause: It expresses the graph element patterns (vertex or edge pattern) to be searched on the SQL property graph. It can optionally include an element pattern WHERE clause as seen in the preceding example ((b IS person WHERE b.name = 'Mary')) query. This in-line WHERE clause can access any matched variable.
- WHERE clause: This is an optional out-of-line WHERE clause. Similar to the element pattern WHERE clause, it has access to all the graph pattern variables and expresses a predicate that applies to the entire pattern in the MATCH clause.
- COLUMNS clause: This contains the query output columns.

See Also:

GRAPH TABLE Operator in Oracle Database SQL Language Reference

The following sections explain SQL graph queries in detail:

- About Graph Pattern
 - The GRAPH_TABLE operator in a SQL graph query contains a graph pattern.
- Variable Length Path Patterns
 Variable length graph patterns provide advanced querying support for SQL property graphs.
- Complex Path Patterns
 You can query a SQL property graph using complex path patterns.

Vertex and Edge Identifiers

You can uniquely identify each vertex and edge in a SQL property graph with the VERTEX_ID and EDGE_ID operators, respectively, in a SQL graph query.

Using Aggregate Functions in SQL Graph Queries

You can use aggregate functions in a SQL graph query to obtain an aggregated output.

Selecting All Properties in the COLUMNS Clause

You can select all the vertex or edge properties based on the element type (vertex or edge) and any label expression specified for the element in the COLUMNS clause of a SQL graph query.

Using the SOURCE and DESTINATION Predicates

You can determine if a vertex is a source or destination using the IS [NOT] SOURCE OF OR IS [NOT] DESTINATION OF predicate in a value expression inside a WHERE OR COLUMNS clause.

Running SQL Graph Queries at a Specific SCN

You can run a SQL graph query at a given System Change Number (SCN) or timestamp value.

Privileges to Query a SQL Property Graph

You must have the READ or SELECT object privilege to query a SQL property graph.

Examples for SQL Graph Queries

This section contains a few examples for querying a SQL property graph with fixed-length and variable-length graph pattern matching queries.

- Supported Features and Limitations for Querying a SQL Property Graph
 This section provides the list of supported and unsupported features for querying a SQL Property Graph.
- Tuning SQL Property Graph Queries
 You can tune a SQL graph query using the EXPLAIN PLAN statement.
- Type Compatibility Rules for Determining Property Types
 When using shared property names that are union compatible, the property type is determined by certain type compatibility rules.
- Viewing and Querying SQL Property Graphs Using SQL Developer
 Using SQL Developer 23.1, you can view all the SQL property graphs existing in your
 database schema by expanding SQL Property Graphs under the Property Graph node
 in the Connections navigator.

5.1 About Graph Pattern

The GRAPH TABLE operator in a SQL graph query contains a graph pattern.

A graph pattern is expressed between the input graph name and the COLUMNS clause inside the $GRAPH_TABLE$ operator.

A graph pattern contains one or more comma-separated path patterns, which are composed of vertex and edge patterns. For example, the following path pattern has two vertex patterns and one edge pattern:

$$(v1) - [e] -> (v2)$$

A vertex pattern is enclosed in parentheses and specifies how to match a single vertex. An edge pattern is enclosed by a square bracket with delimiters on the left and right side of the edge pattern and specifies how to match a single edge.



Also, the available arrow tokens for edge patterns are summarized in the following table:

Table 5-1 Arrow Tokens for Edge Patterns

Directionality	Bracketed Syntax	Abbreviated Syntax ¹
Directed to the right	-[]->	->
Directed to the left	<-[]-	->
Any directed edge (right or left)	<-[]-> or -[]-	-

- There are no brackets for the arrows in the "abbreviated syntax" column.
 - All edge labels will be considered as no edge label is specified. Hence, filtering on a specific edge is not supported.

A graph element pattern (which can either be a vertex or an edge pattern) may in turn optionally include:

- An element variable.
- A label expression which is that part in an element pattern that starts with the keyword IS
 and is followed by a list of one or more label names. If there is more than one label name,
 then these are separated by vertical bars.
- An element pattern WHERE clause which expresses a search condition on the element variable declared by the element pattern.



Graph Pattern in Oracle Database SQL Language Reference

The following sections explain the graph pattern concepts more in detail:

- Graph Element Variables
 Vertex and edge pattern variables ranges over vertices and edges respectively.
- Label Expressions

A label expression in a vertex or an edge element pattern is introduced by the keyword IS.

Accessing Label Properties

You can access a property inside a graph element pattern, in the out-of-line where clause or in the COLUMNS clause.

5.1.1 Graph Element Variables

Vertex and edge pattern variables ranges over vertices and edges respectively.

For example, consider the following graph pattern which contains three graph element variables.

$$(v1) - [e] -> (v2)$$

In the preceding graph pattern, v1 and v2 are two vertex pattern variables and e is an edge pattern variable.

Ensure that you apply the following rules for the graph pattern variables:

You cannot use the same variable name for both a vertex and an edge.



You can use the same variable name in two different vertex patterns as shown:
 MATCH (a IS person) -> (a IS person)

In the preceding example, the vertex variable a is used in two vertex patterns - (a IS person) and (a IS person). This implies that the two vertex patterns that declare the same vertex variable must bind to the same vertex. Thus the vertex variable binds to a unique vertex but the vertex pattern can appear multiple times in the same graph pattern.

- You can use the same variable name in two different edge patterns.
- Anonymous (that is, omitted) vertex and edge variables are supported. See Example 5-8.

5.1.2 Label Expressions

A label expression in a vertex or an edge element pattern is introduced by the keyword IS.

For example, in the following graph pattern, the vertex pattern associated with the graph element variable v1 has the label person. Also, the edge pattern associated with the graph element variable e contains the label friendof:

```
(v1 IS person) -[e IS friendOf]-> (v2)
```

If the label is omitted in a graph element pattern, then depending on the type of the element variable, either all vertex properties or all edge properties in the graph can be referenced. Otherwise, if a label expression is specified, then the set of properties that can be referenced is the union of the properties of labels belonging to vertex (or edge) tables that have at least one label that satisfies the label expression.

A label expression can also include an optional in-line SQL search condition that can access any matched variable. When accessing a property, you must specify a graph pattern variable.

The supported vertex and edge label expressions are described in the following table:

Table 5-2 Supported Vertex and Edge Label Expressions

Vertex Label Expression	Edge Label Expression	Description
(a)	[e]	 The vertex graph pattern variable a may match a vertex with any label. The edge graph pattern variable e may match an edge with any label.
()	[]	 The vertex pattern has no label and can match any vertex. The edge pattern has no label and can match any edge. When a graph pattern variable is not specified, a unique vertex or edge variable name is internally generated by the system. Therefore, you cannot reference the vertex or edge elsewhere in the query, as it is unknown.



Table 5-2 (Cont.) Supported Vertex and Edge Label Expressions

Vertex Label Expression	Edge Label Expression	Description	
(IS person)	[IS friend_of]	 The vertex pattern has only the person label. The edge pattern has only the friend_of label. When a graph pattern variable is not specified, a unique vertex or edge variable name is internally generated by the system. Therefore, you cannot reference the vertex or edge elsewhere in the query, as it is unknown. 	
(IS person place thing)	[IS friend_of student_of]	 The vertex pattern has an alternation of three labels, person, place and thing. This implies that the vertex pattern can match any vertex having those labels. The edge pattern has an alternation of two labels, friend_of and student_of. This implies that the edge pattern can match any edge having those labels. As there is no explicit graph pattern variable in the vertex or edge pattern, you cannot reference this vertex or edge elsewhere in the query. 	
(a IS person place thing)	<pre>[e IS friend_of student_of]</pre>	Same as the preceding table entry. However, the vertex and edge patterns contain a and e as vertex and edge graph pattern variables respectively. Therefore, you can reference the vertex or edge using the respective graph pattern variables elsewhere in the query. See Example 5-12.	
(a IS person), (a IS car)	(a)-[e IS L1]->(b), (a)-[e is L2]->(b)	 The vertex pattern a IS person implies that a must match vertices having the label person, and the vertex pattern a IS car implies that a must match vertices having the label car. Therefore, this represents that a must match vertices having both person and car as labels, effectively an AND of these two conditions. Also, you can reference a vertex as a elsewhere in the query. The edge pattern e IS L1 implies that e must match edges having the label L1, and the edge pattern e IS L2 implies that e must match edges having the label L2. Therefore, this represents that e must match edges having both L1 and L2 as labels, effectively an AND of these two conditions. Also, you can reference an edge as e elsewhere in the query. See Example 5-13. 	



Table 5-2 (Cont.) Supported Vertex and Edge Label Expressions

Vertex Label Expression	Edge Label Expression	Description
(a IS person WHERE a.name = 'Fred')	<pre>[e IS student_of WHERE e.subject = 'Arts']</pre>	 The vertex pattern has a label person and a vertex graph pattern variable a, which is qualified in the element pattern WHERE clause. The edge pattern has a label student_of and an edge graph pattern variable e, which is qualified in the
		element pattern WHERE clause. The only graph pattern variable that is visible within an element pattern is the graph pattern variable defined locally by the element pattern. Graph pattern variables from another element patterns cannot be accessed. See Example 5-5.

5.1.3 Accessing Label Properties

You can access a property inside a graph element pattern, in the out-of-line WHERE clause or in the COLUMNS clause.

Consider the following graph element pattern where a is a graph element variable and name is a property name:

```
(a IS person WHERE a.name='John')
```

You can then reference the property in the WHERE clause inside the graph element pattern as a name. This means a name references the property name of the graph element bound to the graph pattern variable a.

Also, the following conditions apply when accessing a property:

- The property name is part of at least one table that satisfies the label expression.
- A graph variable name must always be used to access a property.
- At the time of query compilation, certain type checking rules apply for the vertex or edge table properties. See Type Compatibility Rules for Determining Property Types for more information.

The following examples describe a few scenarios for determining property types when querying SQL property graphs. Note that Example 5-1 to Example 5-3 refer to the SQL property graph definition for g1 which contains height as a shared property across different labels.

Example 5-1 Determining the Property Type for a Single Label

The data type for a height in the following query is FLOAT:

```
SELECT * FROM GRAPH_TABLE (g1
MATCH
  (a IS person)
COLUMNS (a.height)
);
```



The query output is as shown:

```
1.8
1.65
1.75
```

Example 5-2 Determining Union Compatible Property Type for Two Different Labels

The data type for a.height in the following query is the union compatible type between FLOAT and BINARY DOUBLE:

```
SELECT * FROM GRAPH_TABLE (g1
MATCH
  (a IS person|t3)
COLUMNS (a.height)
);
```

The query output is as shown:

```
HEIGHT
------
1.8E+000
1.65E+000
1.75E+000
1.7E+000
1.8E+000
1.65E+000
```

In the SQL property graph g1, the property type for height associated with the labels person and t3 is FLOAT and BINARY_DOUBLE respectively. BINARY_DOUBLE takes precedence over FLOAT and hence the resulting output property type for a.height is BINARY_DOUBLE.

Example 5-3 No Union Compatible Property Type for Two Different Labels

Error is thrown for the following query as the data type for a.height is not union compatible across the tables, person (FLOAT) and t2 (VARCHAR):

```
SELECT * FROM GRAPH_TABLE (g1
  MATCH
   (a IS person|t2)
  COLUMNS (a.height)
);
```

On execution. the preceding query throws the error - ORA-01790: expression must have same datatype as corresponding expression

Example 5-4 Determining Union Compatible Property Type for Shared Labels

Consider the SQL property graph definition for g3 which uses a shared label (t) that is associated with a shared property name (height).



When querying g3, the data type for a.height in the following SQL graph query is $BINARY_DOUBLE$:

```
SELECT * FROM GRAPH_TABLE (g3
MATCH
  (a IS t)
COLUMNS (a.height)
);
```

The query output is a union of the property columns across all the graph element tables sharing the label. Also, the property type is <code>BINARY_DOUBLE</code> as per the Type Compatibility Rules for Determining Property Types:

```
HEIGHT
-----
1.8E+000
1.65E+000
1.75E+000
1.7E+000
1.8E+000
1.65E+000
```

5.2 Variable Length Path Patterns

Variable length graph patterns provide advanced querying support for SQL property graphs.

Variable length graph patterns require recursion such that there is a variable number of joins when translated into a relational query.

Bounded recursive path patterns that include one or more of the following quantifiers are supported:

Table 5-3 Quantifier Support for Variable Length Graph Patterns

Quantifier	Description
{n}	Exactly n
{n, m}	Between n and m (inclusive)
{, m}	Between 0 and m (inclusive)

Note that the maximum upper bound limit for the quantifiers in the preceding table is 10.

See Example 5-14 for example queries using recursive path patterns with bounded quantifiers.

5.3 Complex Path Patterns

You can query a SQL property graph using complex path patterns.

Cyclic Path Patterns

Vertex and edge path patterns can form cycles. For instance, consider the following graph pattern:

```
MATCH (a IS person) -[IS friends]-> (a IS person)
```

The preceding graph pattern describes a single path pattern, and it contains the vertex variable a twice. Thus, this finds cycles in the graph such that a binds to a person that has a friends edge to itself.

Also, note the following:

- The label person for the vertex variable a need not be repeated twice. The result is the same with or without repeating the label expression.
- You can use multiple in-line WHERE clauses to add conditions on the same pattern variable.
- Using the same edge variable twice in a path pattern also has the semantics that the edges must be the same.

Cycles can be longer than a single edge. See Example 5-11.

Multiple Path Patterns

A MATCH clause may have more than one path pattern, in a comma-separated list. For instance, the following example shows two path patterns:

```
MATCH (a IS person WHERE a.name='John') -[IS student_of]-> (b IS university), (a IS person WHERE a.name='John') -[IS friends]-> (c IS person)
```

Any graph pattern variables in common between two path patterns denotes an overlap between the path patterns. In the preceding example, the vertex variable a is shared. Note that the variable a must bind to the same graph element table in each element pattern of the graph pattern, and thus there is an implicit natural inner join on such repeated graph pattern variables.

If there are no shared variables between the two path patterns, then the resulting output set is a cross product of the outputs of the individual path patterns. See Example 5-9 and Example 5-10.

5.4 Vertex and Edge Identifiers

You can uniquely identify each vertex and edge in a SQL property graph with the VERTEX_ID and EDGE_ID operators, respectively, in a SQL graph query.

Graph element identifiers are based on the key value defined for the graph element tables. Therefore, it is important to note the following:

- Graphs in TRUSTED mode may produce duplicate identifiers for different vertices if some key columns do not have a UNIQUE constraint.
- Graphs in ENFORCED mode are guaranteed to always produce unique identifiers.

The VERTEX_ID and EDGE_ID operators can be used in any expression appearing in the COLUMNS or WHERE clause in a SQL graph query.



In order to use the <code>VERTEX_ID</code> and <code>EDGE_ID</code> operators, you must ensure that you have the <code>READ</code> or <code>SELECT</code> privilege on both the property graph object and its underlying database tables.



The input to the <code>VERTEX_ID</code> operator is a single vertex graph pattern variable coming from a matched vertex pattern as shown:

```
MATCH (v) COLUMNS (VERTEX ID (v) AS v id)
```

Similarly, the EDGE_ID operator takes as input a single edge graph pattern variable coming from a matched edge pattern as shown:

```
MATCH (v1)-[e]\rightarrow (v2) COLUMNS (EDGE ID(e) AS e id)
```

The output of these operators is a vertex or an edge identifier of JSON data type. The following shows an example of a JSON output describing the vertex identifier:

```
{
  "GRAPH_OWNER": "GRAPHUSER",
  "GRAPH_NAME": "STUDENTS_GRAPH",
  "ELEM_TABLE": "PERSONS",
  "KEY_VALUE": {
    "PERSON_ID": 1
  }
}
```

In the preceding JSON output:

- **GRAPH OWNER:** Owner of the property graph object
- GRAPH NAME: Name of the property graph object
- ELEM TABLE: Name of the vertex table
- KEY VALUE: Name and value of the key column

The same list of JSON output fields apply to an edge identifier also. However, the ELEM_TABLE field represents the name of an edge table. Also, all operations that can be performed on a JSON data type can be performed on the vertex and edge identifiers.

See Example 5-20 for more information.

```
VERTEX EQUAL and EDGE EQUAL Predicates
```

The VERTEX_EQUAL and EDGE_EQUAL predicates can be used to, respectively, compare two vertex and edge identifiers and return TRUE if they are equal.

The inputs to the <code>VERTEX_EQUAL</code> predicate are two vertex graph pattern variables. Similarly for <code>EDGE_EQUAL</code>, both inputs must be edge graph pattern variables. These predicates can be used in the <code>WHERE</code> clause in a SQL graph query.

See Example 5-21 for more information.

5.5 Using Aggregate Functions in SQL Graph Queries

You can use aggregate functions in a SQL graph query to obtain an aggregated output.

Both SQL built-in Aggregate Functions and user-defined aggregates are supported. These functions can be included in both fixed length and variable length path patterns in a SQL graph query.

The aggregate functions can be applied in the COLUMNS clause or in the graph pattern where clause of the SQL graph query. For instance, consider the following sample query:

The preceding graph query describes a variable length path pattern having {1,2} as the quantifier. The LISTAGG aggregate function is used in the COLUMNS clause to list all the ids along a path.

Similarly, you can also apply aggregations in a fixed length path pattern as shown:

The preceding graph query describes a fixed length path pattern. The AVG aggregate used in the WHERE clause determines only those paths where the average age >= 30 condition is met. The resulting query output is a list of ids along a path.

See Example 5-15 for example queries using aggregations.

```
See Also:
```

Graph Pattern in Oracle Database SQL Language Reference for more examples on aggregations

5.6 Selecting All Properties in the COLUMNS Clause

You can select all the vertex or edge properties based on the element type (vertex or edge) and any label expression specified for the element in the COLUMNS clause of a SQL graph query.

The set of properties is the union of properties of the vertex (or edge) labels belonging to tables that have at least one label that satisfies the label expression. In case some of these matching tables define a property while other tables do not, then NULL values will be returned for those tables that do not define the property.

For instance, the following example matches all the vertices in the graph g and retrieves all the valid properties through g. * in the COLUMNS clause.

```
SELECT *
FROM GRAPH_TABLE ( g
   MATCH (n IS person)
   COLUMNS ( n.* )
)
```



See Example 5-23 for more information.

5.7 Using the SOURCE and DESTINATION Predicates

You can determine if a vertex is a source or destination using the IS [NOT] SOURCE OF or IS [NOT] DESTINATION OF predicate in a value expression inside a WHERE or COLUMNS clause.

These predicates are mainly useful for determining the direction of edges that are matched through any-directed edge patterns (<-[]-> or -[]-).

The IS [NOT] SOURCE OF predicate takes a vertex and an edge as input and returns TRUE or FALSE depending on whether the vertex is (or not) the source of the edge.

The IS [NOT] DESTINATION OF predicate also takes a vertex and an edge as input and returns TRUE or FALSE depending on whether the vertex is (or not) the destination of the edge.

See Example 5-24 for more information.

5.8 Running SQL Graph Queries at a Specific SCN

You can run a SQL graph query at a given System Change Number (SCN) or timestamp value.

The graph name, which is the first operand of the GRAPH_TABLE operator, can be associated with either of the following clauses:

```
    AS OF SCN: See Example 5-18
```

AS OF TIMESTAMP: See Example 5-19

5.9 Privileges to Query a SQL Property Graph

You must have the READ or SELECT object privilege to query a SQL property graph.

If you are the graph creator, then you can allow other graph users to query your graph by granting any one of the following privileges:

```
GRANT READ ON PROPERTY GRAPH  graph_name> TO <schema_user>;
GRANT SELECT ON PROPERTY GRAPH  graph_name> TO <schema_user>;
```

It is important to note that granting the preceding privileges allows access only to the property graph object and not to its underlying database tables.

This allows the graph user to successfully run SQL graph queries on your graph without having access to the underlying tables. For example:

```
GRANT READ ON PROPERTY GRAPH students_graph TO hr;

SQL> conn hr/<password_for_hr>;
Connected.

SQL> SELECT * FROM GRAPH_TABLE (graphuser.students_graph MATCH (a IS person)
COLUMNS (a.name AS person_a));

PERSON_A
______
John
```



```
Mary
Bob
Alice
```

However, to perform SQL graph queries with <code>VERTEX_ID</code> and <code>EDGE_ID</code> operators, the graph user must additionally have <code>READ</code> or <code>SELECT</code> privilege on the underlying database tables.

5.10 Examples for SQL Graph Queries

This section contains a few examples for querying a SQL property graph with fixed-length and variable-length graph pattern matching queries.

All the queries shown in the examples are run on the SQL property graph, students_graph, created in Example 4-1:

Example 5-5 Query Using An Edge Pattern Directed Left-To-Right

The following example shows a GRAPH_TABLE query containing an edge pattern (-[e IS friends]->) which is directed from left-to-right:

```
SELECT * FROM GRAPH_TABLE (students_graph
   MATCH
   (a IS person) -[e IS friends]-> (b IS person WHERE b.name='Alice')
   WHERE a.name='Mary'
   COLUMNS (a.name AS person_a, b.name AS person_b)
);
```

The code produces the following output:

```
PERSON_A PERSON_B
------
Mary Alice
```

Example 5-6 Query Using An Edge Pattern Directed Right-To-Left

The following example shows a query containing an edge pattern (<-[e IS friends]-) which is directed from right-to-left:

```
SELECT * FROM GRAPH_TABLE (students_graph
   MATCH
   (a IS person) <-[e IS friends]- (b IS person WHERE b.name='Mary')
   WHERE a.name='Alice'
   COLUMNS (a.name AS person_a, b.name AS person_b)
);</pre>
```

The code produces the following output:



Example 5-7 Query Using Any-Directed Edge Pattern

The following example shows a query which contains any-directed edge pattern (-[e IS friends]-):

```
SELECT * FROM GRAPH_TABLE (students_graph
   MATCH
   (a IS person) -[e IS friends] - (b IS person WHERE b.name='Alice' OR
b.name='Mary')
   WHERE (a.name='Alice' OR a.name='Mary')
   COLUMNS (a.name AS person_a, b.name AS person_b)
);
```

The code produces the following output:

Example 5-8 Query Using an Anonymous Edge Variable

The following example shows a query where the edge element variable is omitted:

```
SELECT * FROM GRAPH_TABLE (students_graph
  MATCH
  (a IS person) -[]-> (b IS person)
  COLUMNS (a.name AS person_a, b.name AS person_b)
  );
```

Alternatively, you can replace the bracketed syntax for the edge pattern (-[]->) in the preceding query with an abbreviated syntax ->.

The code produces the following output:

Example 5-9 Query Using Multiple Path Patterns

The following example shows a query containing two path patterns (a) \rightarrow (b), (a) \rightarrow (c)) which have a common vertex as shown:

```
SELECT * FROM GRAPH_TABLE (students_graph
   MATCH
   (a IS person WHERE a.name = 'John') -> (b IS person), (a IS person WHERE
a.name = 'John') -> (c IS university)
   COLUMNS (a.name AS person_a, b.name AS person_b,c.name as university)
   );
```



The preceding code produces the following output:

Example 5-10 Query Using Disjoint Path Patterns

The following example shows a query containing two disjoint path patterns:

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH (a IS person WHERE a.name='John') -[IS student_of]-> (b IS university),
(x IS person) -[IS friends]-> (y IS person)
COLUMNS (a.name AS a, b.name as university, x.name AS x, y.name as y)
);
```

The resulting output is as shown:

A	UNIVERSITY	X	Y
John	ABC	Mary	John
John	ABC	Bob	Mary
John	ABC	John	Bob
John	ABC	Mary	Alice

Example 5-11 Query Using Cyclic Path Patterns

The following example uses a cyclic path pattern (MATCH (a)-[]->(b)-[]->(c)-[]->(a)) as shown. Note that the example uses the same vertex pattern variable name a (which is bound to person) twice. Thus, this finds cycles in the graph containing three edges that finally bind to a itself.

```
SELECT * FROM GRAPH_TABLE (students_graph
   MATCH
   (a IS person) -[IS friends]-> (b IS person) -[IS friends]->
   (c IS person) -[IS friends]-> (a)
   COLUMNS (a.name AS person_a, b.name AS person_b, c.name AS person_c)
);
```

The preceding code produces the following output:

PERSON_B	PERSON_C
Mary	John
Bob	Mary
John	Bob
	Mary Bob

Example 5-12 Query Using Label Disjunction

The following example uses label disjunction in the vertex label expression:

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH
```



```
(a is person|university)
COLUMNS (a.name, a.dob)
);
```

The code produces the following output:

NAME	DOB
John	13-JUN-63
Mary	25-SEP-82
Bob	11-MAR-66
Alice	01-FEB-87
ABC	NULL
XYZ	NULL

6 rows selected.

Example 5-13 Query Using Label Conjunction

The following example uses label conjunction in the vertex label expression:

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH
(a IS person), (a IS person_ht)
COLUMNS (a.name as name, a.dob as dob, a.height as height)
);
```

The code produces the following output:

NAME	DOB	HEIGHT
John	13-JUN-63	1.8
Mary	25-SEP-82	1.65
Bob	11-MAR-66	1.75
Alice	01-FEB-87	1.7

Example 5-14 Queries Using Recursive Path Patterns with Bounded Quantifiers

The following example uses a recursive path pattern to retrieve all friends within two hops:

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH (a is person WHERE a.name='Mary') -[is friends]->{2} (b is person)
COLUMNS (a.name AS a , b.name AS b)
);
```

The preceding code produces the following output:



The following example uses a recursive path pattern to retrieve all friends between one and two hops (inclusive):

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH (a is person WHERE a.name='Mary') -[is friends]->{1, 2} (b is person)
COLUMNS (a.name AS a , b.name AS b)
);
```

The preceding code produces the following output:

```
A B
-----
Mary Alice
Mary John
Mary Bob
```

The following example uses a recursive path pattern to retrieve all friends by performing from zero to two iterations:

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH (a is person WHERE a.name='Mary') -[is friends]->{,2} (b is person)
COLUMNS (a.name AS a , b.name AS b)
);
```

The preceding code produces the following output:

```
A B
-----
Mary Mary
Mary Alice
Mary John
Mary Bob
```

Note that in the first line of the preceding output, Mary is bound to both the element pattern variables, a and b. This is because the query includes a zero hop iteration and therefore, the vertex pattern to the left and the vertex pattern to the right must bind to the same graph element.

Example 5-15 Queries Using Aggregations

The following example finds all paths that have a length between two and three edges ({2,3}), starting from a person named John and following only outgoing edges labeled friends and vertices labeled person. Vertices along paths should not have the same person_id as John (WHERE p.person_id <> friend.person_id). The example uses the following four aggregates in the COLUMNS clause:

- LISTAGG: The first one creates a comma-separated list of the person names along the path and the second one creates a comma-separated list of the person ages along the path.
- AVG: This computes the average age of the person group in a path.
- COUNT: This computes the length of each path.

```
SQL> SELECT * FROM GRAPH_TABLE ( students_graph
MATCH (p IS person) (-[e IS friends]-> (friend IS person)
```

The preceding code produces the following output:

FNAMES	AGE_LIST	AVG_AGE_GROUP	PATH
Bob, Mary	57,41	49.00	2
Bob, Mary, Alice	57,41,36	44.67	3

The following example finds all paths between university ABC and university XYZ such that paths have a length of up to three edges ({, 3}). For each path, a JSON array is returned such that the array contains the friendship_id value for edges labeled friends, and the subject value for edges labeled student_of. Note that the friendship_id property is casted to VARCHAR (100) to make it type-compatible with the subject property.

The preceding code produces the following output:

Example 5-16 Query Using Bind Variables

The example declares a bind variable, name and assigns a value as shown:

```
SQL> variable name VARCHAR2(10);
SQL> BEGIN
   2 :name := 'Bob';
   3 END;
   4 /
PL/SQL procedure successfully completed.
```

Using this bind variable, the following query is performed:

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH
```

The code produces the following output:

```
A B MET_ON

John Bob 01-SEP-00
```

Example 5-17 Query Invoking a PL/SQL function Inside an Expression and in the COLUMNS Clause

The example declares a user defined function(UDF) as shown:

```
CREATE OR REPLACE FUNCTION get_age(
    id NUMBER
)
RETURN NUMBER
AS
    age NUMBER := 0;
BEGIN
    -- get age
        SELECT (EXTRACT(YEAR from SYSDATE) - EXTRACT(YEAR from birthdate))
        INTO age
        FROM persons
        WHERE person_id=id;
        -- return age
        RETURN age;
END;
/
Function created.
```

The following query invokes the UDF inside an expression in the where clause and again in the columns clause:

The code produces the following output:

```
A AGE B MET_ON
```

John	60	Bob	01-SEP-00
Bob	57	Mary	10-JUL-01

Example 5-18 Query Using SCN

Determine the current SCN value of the database as shown:

```
SQL> SELECT TIMESTAMP_TO_SCN(SYSDATE) FROM DUAL;

TIMESTAMP_TO_SCN(SYSDATE)

2117789
```

The following query using the preceding SCN value as shown:

```
SELECT * FROM GRAPH_TABLE (students_graph AS OF SCN 2117789
   MATCH
   (a IS person) -[e]-> (b IS person)
   COLUMNS (a.name AS a, b.name AS b, e.meeting_date AS met_on)
);
```

The query produces the following output:

A	В	MET_ON
Mary	John	19-SEP-00
Bob	Mary	10-JUL-01
John	Bob	01-SEP-00
Mary	Alice	19-SEP-00

Example 5-19 Query Using TIMESTAMP

The following query uses a TIMESTAMP value as shown:

```
SQL> SELECT * FROM GRAPH_TABLE (students_graph AS OF TIMESTAMP SYSTIMESTAMP
MATCH
  (a IS person WHERE a.name='John') -[e]-> (b IS person)
COLUMNS (a.name AS a, b.name AS b, e.meeting_date AS met_on)
);
```

The query produces the following output:

```
A B MET_ON
-----
John Bob 01-SEP-00
```

Example 5-20 Query Using the VERTEX ID and EDGE ID Identifiers

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH
  (a IS person ) -[e IS friends]-> (b IS person)
COLUMNS (JSON SERIALIZE(VERTEX ID(a)) AS id a , JSON SERIALIZE(EDGE ID(e)) AS
```

```
id_e)
);
```

The query produces a JSON data type output that includes the graph owner, graph name and graph element table name and the key value as shown:

```
ID A
_____
{"GRAPH OWNER": "GRAPHUSER", {"GRAPH OWNER": "GRAPHUSER", "GR
"GRAPH NAME": "STUDENTS GRAP APH NAME": "STUDENTS GRAPH", "EL
H", "ELEM TABLE": "PERSONS", " EM TABLE": "FRIENDS", "KEY VALUE
KEY VALUE":{"PERSON ID":1}} ":{"FRIENDSHIP ID":1}}
{"GRAPH OWNER": "GRAPHUSER", {"GRAPH OWNER": "GRAPHUSER", "GR
"GRAPH NAME": "STUDENTS GRAP APH NAME": "STUDENTS GRAPH", "EL
H", "ELEM TABLE": "PERSONS", " EM TABLE": "FRIENDS", "KEY VALUE
KEY VALUE":{"PERSON ID":2}} ":{"FRIENDSHIP ID":2}}
{"GRAPH OWNER": "GRAPHUSER", {"GRAPH OWNER": "GRAPHUSER", "GR
"GRAPH NAME": "STUDENTS GRAP APH NAME": "STUDENTS GRAPH", "EL
H", "ELEM TABLE": "PERSONS", " EM TABLE": "FRIENDS", "KEY VALUE
KEY VALUE":{"PERSON ID":2}} ":{"FRIENDSHIP ID":3}}
{"GRAPH OWNER": "GRAPHUSER", {"GRAPH OWNER": "GRAPHUSER", "GR
"GRAPH NAME": "STUDENTS GRAP APH NAME": "STUDENTS GRAPH", "EL
H", "ELEM TABLE": "PERSONS", " EM TABLE": "FRIENDS", "KEY VALUE
KEY VALUE":{"PERSON ID":3}} ":{"FRIENDSHIP ID":4}}
```

Example 5-21 Query Using the VERTEX EQUAL Predicate

```
SELECT * FROM GRAPH_TABLE (students_graph
MATCH
  (a IS person WHERE a.name='John') -[e IS friends]->{,1} (b IS person)
WHERE VERTEX_EQUAL(a,b)
COLUMNS (JSON_SERIALIZE(VERTEX_ID(a)) AS id_a , JSON_SERIALIZE(VERTEX_ID(b))
AS id_b)
);
```

The query produces a JSON data type output that includes the graph owner, graph name and graph element table name and the key value as shown:



Example 5-22 Query Using the IS SOURCE OF and IS DESTINATION OF Predicates

The following query matches FRIENDS edges that are either incoming or outgoing from <code>Mary</code>. For each edge, it return the <code>NAME</code> property for the source of the edge as well as the <code>NAME</code> property for the destination of the edge.

```
SELECT *
FROM GRAPH TABLE ( students graph
      MATCH (p1 IS person) -[e IS friends]- (p2 IS person)
      WHERE pl.name = 'Mary'
      COLUMNS (e.friendship id,
              e.meeting date,
              CASE WHEN p1 IS SOURCE OF e THEN p1.name ELSE p2.name END AS
from person,
              CASE WHEN p1 IS DESTINATION OF e THEN p1.name ELSE p2.name
END AS to person))
ORDER BY friendship id;
FRIENDSHIP ID MEETING DATE FROM PERSON TO PERSON
   -----
          2 19-SEP-00 Mary
                                 Alice
          3 19-SEP-00 Mary
                                 John
          4 10-JUL-01 Bob
                                 Mary
```

Example 5-23 Queries Fetching All the Vertex and Edge Properties

The following query matches all FRIENDS edges between two persons P1 and P2 and uses all properties references P1.* and E.* to retrieve all the properties of vertex P1 as well as all properties of edge E.

```
SELECT *
FROM GRAPH_TABLE ( students_graph
   MATCH (p1 IS person) -[e IS friends]-> (p2 IS person)
   COLUMNS ( p1.*, p2.name AS p2_name, e.* )
)
ORDER BY 1, 2, 3, 4, 5;
```

Note that the following result for P1.* includes properties PERSON_ID, NAME and DOB of label PERSON as well as property HEIGHT of label PERSON_HT. Furthermore, the result for E.* includes properties FRIENDSHIP ID and MEETING DATE of label FRIENDS.

PERSON_ID	NAME	DOB	HEIGHT	P2_NAME	FRIENDSHIP_ID	MEETING_D
1	John	13-JUN-63	1.8	Bob	1	01-SEP-00
2	Mary	25-SEP-82	1.65	Alice	2	19-SEP-00
2	Mary	25-SEP-82	1.65	John	3	19-SEP-00
3	Bob	11-MAR-66	1.75	Mary	4	10-JUL-01

The following query matches all vertices in the graph and retrieves all their properties:

```
SELECT *
FROM GRAPH_TABLE ( students_graph
    MATCH (v)
```



```
COLUMNS ( v.* )
)
ORDER BY 1, 2, 3, 4, 5;
```

The query produces the following result. Note that since the PERSON vertices do not have an ID property, the query returns NULL values (empty strings). Similarly, UNIVERSITY vertices do not have PERSON_ID, DOB and HEIGHT properties, and so again the query returns NULL values (empty strings).

PERSON_ID	NAME	DOB	HEIGHT	ID
1	John	13-JUN-63	1.8	
2	Mary	25-SEP-82	1.65	
3	Bob	11-MAR-66	1.75	
4	Alice	01-FEB-87	1.7	
	ABC			1
	XYZ			2

6 rows selected.

Example 5-24 Query Using the IS SOURCE OF and IS DESTINATION OF Predicates

The following query matches FRIENDS edges that are either incoming or outgoing from *Mary*. For each edge, it returns the *NAME* property for the source of the edge as well as the *NAME* property for the destination of the edge.

```
SELECT *

FROM GRAPH_TABLE ( students_graph

MATCH (p1 IS person) -[e IS friends]- (p2 IS person)

WHERE p1.name = 'Mary'

COLUMNS (e.friendship_id,

e.meeting_date,

CASE WHEN p1 IS SOURCE OF e THEN p1.name ELSE p2.name END AS from_person,

CASE WHEN p1 IS DESTINATION OF e THEN p1.name ELSE p2.name

END AS to_person))

ORDER BY friendship_id;

FRIENDSHIP_ID MEETING_DATE FROM_PERSON TO_PERSON

2 19-SEP-00 Mary Alice
3 19-SEP-00 Mary John
4 10-JUL-01 Bob Mary
```

Setting Up Sample Data in the Database

5.10.1 Setting Up Sample Data in the Database

In order to create the SQL property graph, students_graph, shown in Creating a SQL Property Graph, the following sample tables with data need to be set up in the database.

1. Connect to the database as the schema user.

2. Run the following SQL script to create the university, persons, students, and friendships tables with sample data in the database.

```
CREATE TABLE university (
   id NUMBER GENERATED ALWAYS AS IDENTITY (START WITH 1 INCREMENT BY 1),
    name VARCHAR2(10),
    CONSTRAINT u pk PRIMARY KEY (id));
INSERT INTO university (name) VALUES ('ABC');
INSERT INTO university (name) VALUES ('XYZ');
CREATE TABLE persons (
    person id NUMBER GENERATED ALWAYS AS IDENTITY (START WITH 1 INCREMENT
    BY 1),
    name VARCHAR2(10),
    birthdate DATE,
    height FLOAT DEFAULT ON NULL 0,
    hr data JSON,
    CONSTRAINT person pk PRIMARY KEY (person id)
  );
INSERT INTO persons (name, height, birthdate, hr data)
      VALUES ('John', 1.80, to date('13/06/1963', 'DD/MM/YYYY'),
'{"department":"IT", "role": "Software Developer"}');
INSERT INTO persons (name, height, birthdate, hr data)
       VALUES ('Mary', 1.65, to date('25/09/1982', 'DD/MM/YYYY'),
'{"department":"HR", "role":"HR Manager"}');
INSERT INTO persons (name, height, birthdate, hr data)
       VALUES ('Bob', 1.75, to date('11/03/1966', 'DD/MM/YYYY'),
'{"department":"IT", "role":"Technical Consultant"}');
INSERT INTO persons (name, height, birthdate, hr data)
       VALUES ('Alice', 1.70, to date('01/02/1987', 'DD/MM/YYYY'),
'{"department":"HR", "role":"HR Assistant"}');
CREATE TABLE student of (
      s id NUMBER GENERATED ALWAYS AS IDENTITY (START WITH 1 INCREMENT BY
1),
      s univ id NUMBER,
      s person id NUMBER,
      subject VARCHAR2(10),
      CONSTRAINT stud pk PRIMARY KEY (s id),
      CONSTRAINT stud fk person FOREIGN KEY (s person id) REFERENCES
persons (person id),
      CONSTRAINT stud fk univ FOREIGN KEY (s univ id) REFERENCES
university(id)
INSERT INTO student of (s univ id, s person id, subject) VALUES (1,1,'Arts');
INSERT INTO student of (s univ id, s person id, subject) VALUES
(1,3,'Music');
INSERT INTO student of (s univ id, s person id, subject) VALUES (2,2,'Math');
INSERT INTO student of (s univ id, s person id, subject) VALUES
(2,4,'Science');
```

```
CREATE TABLE friends (
    friendship id NUMBER GENERATED ALWAYS AS IDENTITY (START WITH 1
INCREMENT BY 1),
    person a NUMBER,
    person b NUMBER,
    meeting date DATE,
    CONSTRAINT fk person a id FOREIGN KEY (person a) REFERENCES
persons (person id),
    CONSTRAINT fk person b id FOREIGN KEY (person b) REFERENCES
persons (person id),
    CONSTRAINT fs pk PRIMARY KEY (friendship id)
);
INSERT INTO friends (person_a, person_b, meeting_date) VALUES (1, 3,
to date('01/09/2000', 'DD/MM/YYYY'));
INSERT INTO friends (person a, person b, meeting date) VALUES (2, 4,
to date('19/09/2000', 'DD/MM/YYYY'));
INSERT INTO friends (person a, person b, meeting date) VALUES (2, 1,
to_date('19/09/2000', 'DD/MM/YYYY'));
INSERT INTO friends (person_a, person_b, meeting_date) VALUES (3, 2,
to date('10/07/2001', 'DD/MM/YYYY'));
```

5.11 Supported Features and Limitations for Querying a SQL Property Graph

This section provides the list of supported and unsupported features for querying a SQL Property Graph.

Supported Features

- Single label, no label, label disjunction and label conjunction are supported in label expressions inside a graph pattern. For more information, see:
 - Table 5-2 in Label Expressions
 - Examples for SQL Graph Queries
- Any directed edge patterns (MATCH (a) [e] (b) are supported.
 See Example 5-7.
- Anonymous vertex (MATCH ()-[e]->()) and edge (MATCH (a)-[]->(b)) variables are supported.

 See Example 5-8.
- Complex path pattern queries are supported.
 See Example 5-9, Example 5-10 and Example 5-11.
- Bounded recursive path pattern queries are supported.
 See Example 5-14.
- Bind variables are supported inside a WHERE clause.
 See Example 5-16.
- VERTEX_ID and EDGE_ID operators that uniquely identify a vertex and an edge respectively
 can be used within a SQL graph query.
 - See Vertex and Edge Identifiers.



- See Example 5-20.
- VERTEX_EQUAL and EDGE_EQUAL predicates for matching vertex and edge identifiers are supported.
 - See Vertex and Edge Identifiers.
 - See Example 5-21.
- SQL and JSON expressions are supported inside WHERE and COLUMNS clauses.
 See Example 4-7.
- JSON simplified syntax is supported to access properties of type JSON.
 See Example 4-7.
- PL/SQL functions are supported inside a WHERE or COLUMNS clause.
 See Example 5-17.
- Single line and multi-line comments are supported within a graph query.
- All identifiers within the GRAPH_TABLE operator in a SQL graph query, such as graph names, alias names, graph element pattern variable names, labels and property names follow the standard SQL rules about case sensitivity:
 - Identifiers within double quotes are case sensitive.
 - Identifiers not enclosed in double quotes are implicitly converted to uppercase and enclosed in double quotes.
- SQL hints are supported inside and outside the SQL graph query for tuning.
 See Tuning SQL Property Graph Queries for more information.
- You can query a graph defined in another schema if you have the required privileges.
 See Granting System and Object Privileges for SQL Property Graphs for more information.

Limitations

- Variable-length pattern matching goals (such as ANY, ALL, ALL SHORTEST, ANY CHEAPEST, and so on) are not supported.
- Path pattern variables (MATCH p = (n) [e] -> (m)) are not supported.
- Clauses such as COST and TOTAL COST are not supported.
- Inline subqueries and LATERAL inline views are not supported.
- SQL Macros are not supported.

5.12 Tuning SQL Property Graph Queries

You can tune a SQL graph query using the EXPLAIN PLAN statement.

The GRAPH_TABLE operator with the property graph is internally translated into equivalent SQL. You can therefore generate the EXPLAIN PLAN for the property graph query as shown:

```
SQL> EXPLAIN PLAN FOR SELECT * FROM GRAPH_TABLE (students_graph
MATCH (a is person)-[e is friends]-> (b is person)
COLUMNS (a.name AS a , b.name AS b)
);
Explained.
```



The EXPLAIN PLAN can be viewed as shown:

```
SQL> SELECT * FROM TABLE(DBMS XPLAN.DISPLAY(format=>'ALL'));
Plan hash value: 1420380663
| Id | Operation
               | Name | Rows | Bytes | Cost (%CPU)|
Time |
| 0 | SELECT STATEMENT | 4 | 264 | 10 (10)|
00:00:01
|* 1 | HASH JOIN
                1
                             4 | 264 | 10 (10) |
00:00:01
|* 2 | HASH JOIN |
                             4 | 184 | 7 (15) |
00:00:01 I
| 3 | TABLE ACCESS FULL| PERSONS | 4 | 80 | 3 (0)|
00:00:01 |
4 | TABLE ACCESS FULL | FRIENDSHIPS | 4 | 104 | 3
                                                 (0)
00:00:01
1 5 1
      TABLE ACCESS FULL | PERSONS | 4 | 80 | 3
                                                 (0)
00:00:01 |
______
Query Block Name / Object Alias (identified by operation id):
  1 - SEL$B92C7F25
  3 - SEL$B92C7F25 / "A"@"SEL$213F43E5"
  4 - SEL$B92C7F25 / "E"@"SEL$213F43E5"
  5 - SEL$B92C7F25 / "B"@"SEL$213F43E5"
```

You can tune the preceding query by using optimizer hints. For instance, the following example uses the PARALLEL hint and the hint usage can be seen in the following execution plan:

```
SQL> EXPLAIN PLAN FOR SELECT /*+ PARALLEL(4) */ * FROM GRAPH TABLE
(students graph
MATCH (a is person) - [e is friends] -> (b is person)
COLUMNS (a.name AS a , b.name AS b)
);
Explained.
SQL> SELECT * FROM TABLE(DBMS XPLAN.DISPLAY(format=>'ALL'));
Plan hash value: 1486901074
______
| Id | Operation
                             | Name
                                     | Rows | Bytes | Cost
(%CPU) | Time | TQ |IN-OUT| PQ Distrib |
| 4 | 264 |
```

```
(0) | 00:00:01 | Q1,00 | P->S | QC (RAND) |
   3 | NESTED LOOPS
                                         | 4 | 264 |
   (0) | 00:00:01 | Q1,00 | PCWP |
   4 | NESTED LOOPS
                                             4 | 264 |
   (0) | 00:00:01 | Q1,00 | PCWP |
  5 | NESTED LOOPS |
(0) | 00:00:01 | Q1,00 | PCWP |
6 | PX BLOCK ITERATOR |
                                         4 | 184 |
3
         | Q1,00 | PCWC | |
  7 | TABLE ACCESS FULL | FRIENDSHIPS | 4 | 104 | (0) | 00:00:01 | Q1,00 | PCWP |
   8 | TABLE ACCESS BY INDEX ROWID| PERSONS | 1 | 20 |
  (0) | 00:00:01 | Q1,00 | PCWP | |
11 | TABLE ACCESS BY INDEX ROWID | PERSONS | 1 | 20 |
  (0) | 00:00:01 | Q1,00 | PCWP | |
Query Block Name / Object Alias (identified by operation id):
  1 - SEL$B92C7F25
  7 - SEL$B92C7F25 / "E"@"SEL$213F43E5"
  8 - SEL$B92C7F25 / "A"@"SEL$213F43E5"
  9 - SEL$B92C7F25 / "A"@"SEL$213F43E5"
 10 - SEL$B92C7F25 / "B"@"SEL$213F43E5"
 11 - SEL$B92C7F25 / "B"@"SEL$213F43E5"
Hint Report (identified by operation id / Query Block Name / Object Alias):
Total hints for statement: 1
 0 - STATEMENT
PLAN TABLE OUTPUT
______
       PARALLEL (4)
Note
  - dynamic statistics used: dynamic sampling (level=2)
```

5.13 Type Compatibility Rules for Determining Property Types

- Degree of Parallelism is 4 because of hint

When using shared property names that are union compatible, the property type is determined by certain type compatibility rules.


The following summarizes the rules for determining the type of a property for union compatible properties at the time of DDL creation and also during query compilation:

- If expressions exposed by a same property of a shared label are character data, then the data type of the property is determined as follows:
 - If all expressions are of data type CHAR of equal length, then the property has a data type CHAR of that length. If the expression are all of data type CHAR, but with different lengths, then the property type is VARCHAR2 with the length of the larger CHAR type.
 - If any, or all of the expressions are of data type VARCHAR2, then the property has data type VARCHAR2. The length of the VARCHAR2 is the maximum length size of the input columns.
- If expressions exposed by a same property of a shared label are numeric data, then the data type of the property is determined by numeric precedence:
 - If any expression exposed by a property is of data type BINARY DOUBLE, then the
 property has the data type BINARY DOUBLE.
 - If no expression defining the property are of data type BINARY DOUBLE, but any
 expression is of type BINARY FLOAT, then the property has data type BINARY FLOAT.
 - If all expressions defining the property are of data type NUMBER, then the property has data type NUMBER.
- If expressions exposed by a same property of a shared label are date and timestamp data, then the data type of the property is determined as follows:
 - If all expressions are of data type DATE, then property has data type DATE.
 - If any, or all of the expressions are of data type TIMESTAMP, then the property has data type TIMESTAMP.

5.14 Viewing and Querying SQL Property Graphs Using SQL Developer

Using SQL Developer 23.1, you can view all the SQL property graphs existing in your database schema by expanding **SQL Property Graphs** under the **Property Graph** node in the **Connections** navigator.

Figure 5-1 SQL Property Graphs in SQL Developer

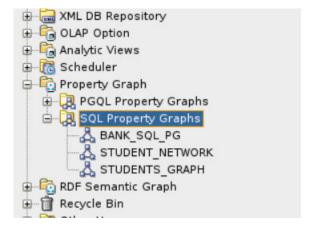

The following steps show an example for running graph queries on a SQL property graph:

1. Click on any SQL property graph.

This opens a SQL worksheet in another tab.

2. Run one or more graph queries in the SQL worksheet.

For example:

Figure 5-2 Running SQL Graph queries in SQL Developer

```
A STUDENTS_GRAPH
Worksheet
          Query Builder
    SELECT * FROM GRAPH TABLE (students graph
       (a IS person) -[e IS friends] -> (b IS person WHERE b.name='Alice')
       WHERE a.name='Mary'
       COLUMNS (a.name AS person a, b.name AS person b)
     );
   SELECT * FROM GRAPH_TABLE (students_graph
       (a IS person) -[] -> (b IS person)
       COLUMNS (a.name AS person_a, b.name AS person_b)
    SELECT * FROM GRAPH TABLE (students graph
       HATCH
       (a IS person WHERE a.name = 'Bob')-> (b IS person)
       COLUMNS (a.name AS person a. b.name AS person b)
Script Output X
📌 🥟 🖥 🚇 📕 | Task completed in 1.253 seconds
          В
Mary
          Alice
Mary
          John
          В
          Alice
Mary
Mary
          John
Mary
          Bob
```



6

Loading a SQL Property Graph into the Graph Server (PGX)

You can load a full SQL property graph or a subgraph into memory in the graph server (PGX).



Ensure that you drop the graph when it is no longer in use to release the graph server (PGX) memory. See Deleting a Graph for more information.

The following topics describe the various ways to load a SQL property graph into the graph server (PGX).

- Loading a SQL Property Graph Using the readGraphByName API You can load a SQL property graph into the graph server (PGX) by calling the readGraphByName API on a PgxSession object.
- Loading a Subgraph Using PGQL Queries
 You can create an in-memory subgraph from a SQL property graph using the
 PgSqlSubgraphReader API.
- Expanding a Subgraph
 You can expand an in-memory subgraph by loading graph data from a SQL property graph
 into memory, and merging it with the current subgraph.
- Handling Vertex and Edge Identifiers in the Graph Server (PGX)
 The Oracle Database maintains globally unique identifiers in JSON format.
- Mapping Oracle Database Types to PGX Types
 Learn how the input Oracle database types are mapped to its corresponding PGX types, when a graph from the database is loaded into the graph server (PGX).
- Privileges to Load a SQL Property Graph
 Learn about the privileges required to load a SQL property graph into the graph server(PGX).
- Restriction on Key Types
 Learn about the vertex and edge keys restrictions when loading a full or partial SQL property graph into memory in the graph server (PGX).
- Loading SQL Property Graphs with Unsupported Key Types
 If existing keys in a SQL graph cannot be loaded into the graph server (PGX), then generated keys maintained by the database may be used instead.

6.1 Loading a SQL Property Graph Using the readGraphByName API

You can load a SQL property graph into the graph server (PGX) by calling the readGraphByName API on a PqxSession object.

When loading a SQL property graph into the graph server (PGX), the full graph schema will be determined and mapped to a graph configuration. The graphs will be loaded as partitioned graphs where each vertex or edge table will be mapped to the respective vertex or edge provider of the same name. Labels and properties will also be loaded as defined.

However, note that only one label per vertex or edge table is supported in order to load a SQL graph into the graph server (PGX).

For example, consider the following SQL property graph:

```
CREATE PROPERTY GRAPH student_network

VERTEX TABLES (
   persons KEY (person_id)
        LABEL person
        PROPERTIES (person_id, name, birthdate AS dob)
)

EDGE TABLES (
   friendships AS friends
        KEY (friendship_id)
        SOURCE KEY (person_a) REFERENCES persons(person_id)
        DESTINATION KEY (person_b) REFERENCES persons(person_id)
        PROPERTIES (friendship_id, meeting_date)
);
```

You can load this SQL graph into memory as shown:

- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.readGraphByName
("STUDENT_NETWORK",GraphSource.PG_SQL)
graph ==> PgxGraph[name=STUDENTS NETWORK,N=4,E=4,created=1681007796946]
```

Java

```
PgxGraph graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG SQL);
```

Python

```
>>> graph = session.read_graph_by_name("STUDENT_NETWORK", "pg_sql")
>>> graph
PgxGraph(name: STUDENTS NETWORK, v: 4, e: 4, directed: True, memory(Mb): 0)
```



- Loading a SQL Property Graph from a Different Schema
 - You can specify the schema name when using the readGraphByName API for loading a SQL property graph.
- Loading a SQL Property Graph Using Graph Optimization Options
 You can optimize the read or update performance, when loading a SQL property graph using the graph optimization options.
- Loading a SQL Property Graph Using OnMissingVertex Options
 If either the source or destination vertex or both are missing for an edge, then you can use the OnMissingVertexOption to specify the behavior for handling the edge with the missing vertex.

6.1.1 Loading a SQL Property Graph from a Different Schema

You can specify the schema name when using the readGraphByName API for loading a SQL property graph.

If you only provide the graph name when calling the <code>readGraphByName</code> API, it is assumed that the graph is owned by current user. But if you want to load a graph owned by another user, then you must provide the schema name as well. Also, ensure that you have <code>SELECT</code> permission on the SQL graph and all its underlying data tables.

The following example loads a SQL property graph from the GRAPHUSER schema:

- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.readGraphByName("GRAPHUSER", "STUDENT_NETWORK",
GraphSource.PG_SQL)
graph ==> PgxGraph[name=STUDENT_NETWORK, N=4, E=4, created=1680769031393]
```

Java

```
PgxGraph graph = session.readGraphByName("GRAPHUSER", "STUDENT_NETWORK",
GraphSource.PG SQL);
```

Python

```
>>> graph = session.read_graph_by_name("STUDENT_NETWORK", "pg_sql",
"GRAPHUSER")
>>> graph
PgxGraph(name: STUDENT_NETWORK_2, v: 4, e: 4, directed: True, memory(Mb): 0)
```





Privileges to Load a SQL Property Graph

6.1.2 Loading a SQL Property Graph Using Graph Optimization Options

You can optimize the read or update performance, when loading a SQL property graph using the graph optimization options.

The following example shows loading a SQL property graph optimized for READ operation:

- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG_SQL,
...> ReadGraphOption.optimizeFor(GraphOptimizedFor.READ))
graph ==> PgxGraph[name=STUDENT NETWORK, N=4, E=4, created=1681008951415]
```

Java

```
PgxGraph graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG_SQL,
    ReadGraphOption.optimizeFor(GraphOptimizedFor.READ);
```

Python

```
>>> session.read_graph_by_name('STUDENT_NETWORK', 'pg_sql',
options=['optimized_for_read'])
PgxGraph(name: STUDENT_NETWORK, v: 4, e: 4, directed: True, memory(Mb): 0)
```

The following example shows loading a SQL property graph optimized for UPDATE operation. Also, note that the READ and UPDATE options cannot be used at the same time.

- JShell
- Java
- Python



JShell

```
opg4j> var graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG_SQL,
...> ReadGraphOption.optimizeFor(GraphOptimizedFor.UPDATES))
graph ==> PgxGraph[name=STUDENT NETWORK 2, N=4, E=4, created=1681009073501]
```

Java

```
PgxGraph graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG_SQL,
    ReadGraphOption.optimizeFor(GraphOptimizedFor.UPDATES));
```

Python

```
>>> session.read_graph_by_name('STUDENT_NETWORK', 'pg_sql',
options=['optimized_for_updates'])
PgxGraph(name: STUDENT_NETWORK, v: 4, e: 4, directed: True, memory(Mb): 0)
```

The following example shows loading a SQL property graph with the SYNCHRONIZABLE optimization option. This option can be used in combination with the READ and UPDATE options.

- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG_SQL,
...> ReadGraphOption.SYNCHRONIZABLE)
graph ==> PgxGraph[name=STUDENT_NETWORK, N=4, E=4, created=1696341305374]
```

Java

```
PgxGraph graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG_SQL,
    ReadGraphOption.SYNCHRONIZABLE);
```

```
>>> session.read_graph_by_name('STUDENT_NETWORK', 'pg_sql',
options=['synchronizable'])
PgxGraph(name: STUDENT NETWORK 2, v: 4, e: 4, directed: True, memory(Mb): 0)
```



6.1.3 Loading a SQL Property Graph Using OnMissingVertex Options

If either the source or destination vertex or both are missing for an edge, then you can use the <code>OnMissingVertexOption</code> to specify the behavior for handling the edge with the missing vertex.

The supported values are:

- OnMissingVertex.ERROR (default): Specifies that an error must be thrown for edges with missing source or destination vertex.
- OnMissingVertex.IGNORE_EDGE: Specifies that the edge for a missing source or destination vertex must be ignored.
- OnMissingVertex.IGNORE_EDGE_LOG: Specifies that the edge for a missing source or destination vertex must be ignored and all ignored edges must be logged.
- OnMissingVertex.IGNORE_EDGE_LOG_ONCE: Specifies that the edge for a missing source or destination vertex must be ignored and only the first ignored edge must be logged.

The following example loads a SQL property graph by ignoring the edges with missing vertices and logging only the first ignored edge.

- JShell
- Java
- Python

JShell

```
opg4j> session.readGraphByName("STUDENT_NETWORK", GraphSource.PG_SQL,
...>
ReadGraphOption.onMissingVertex(OnMissingVertex.IGNORE_EDGE_LOG_ONCE))
$2 ==> PgxGraph[name=STUDENT NETWORK 2,N=4,E=4,created=1697264084059]
```

Java

```
PgxGraph graph = session.readGraphByName("STUDENT_NETWORK",
GraphSource.PG_SQL,
    ReadGraphOption.onMissingVertex(OnMissingVertex.IGNORE EDGE LOG ONCE));
```



6.2 Loading a Subgraph Using PGQL Queries

You can create an in-memory subgraph from a SQL property graph using the PgSqlSubgraphReader API.

You can specify the subgraph to be loaded in one or more PGQL queries. Each of these PGQL queries will be executed on the database and all the matched vertices and edges will be loaded as part of the subgraph. Therefore, vertices and edges will be loaded only if they match at least one of the queries.

Also, note that you can only create subgraphs from SQL property graphs that exist in the current database user schema.

The following example creates a subgraph from a SQL property graph using multiple PGQL queries:

- JShell
- Java
- Python

JShell

Java

```
PgxGraph graph = session.readSubgraph()
    .fromPgSql("STUDENT_NETWORK")
    .queryPgql("MATCH (v1 IS Person)-[e IS friends]->(v2 IS Person) WHERE
id(v1) = 'PERSONS(1)'")
    .queryPgql("MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'")
    .load();
```

```
>>> graph = session.read_subgraph_from_pg_sql("STUDENT_NETWORK",
... ["MATCH (v1 IS Person)-[e IS friends]->(v2 IS Person) WHERE id(v1) =
'PERSONS(1)'",
... "MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'"])
>>> graph
PgxGraph(name: STUDENT_NETWORK, v: 3, e: 1, directed: True, memory(Mb): 0)
```



Loading Subgraphs with Custom Names

By default, the new subgraph gets created with the same name as the SQL property graph. Alternatively, if you want to load a subgraph with a custom name, then you can configure the subgraph name as shown:

- JShell
- Java
- Python

JShell

Java

```
PgxGraph graph = session.readSubgraph()
    .fromPgSql("STUDENT_NETWORK")
    .queryPgql("MATCH (v1 IS Person)-[e IS friends]->(v2 IS Person) WHERE
id(v1) = 'PERSONS(1)'")
    .queryPgql("MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'")
    .load("student subgraph");
```

Python

```
>>> graph = session.read_subgraph_from_pg_sql("STUDENT_NETWORK",
... ["MATCH (v1 IS Person)-[e IS friends]->(v2 IS Person) WHERE id(v1) =
'PERSONS(1)'",
... "MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'"],
... graph_name="student_subgraph")
>>> graph
PgxGraph(name: student subgraph, v: 3, e: 1, directed: True, memory(Mb): 0)
```

6.3 Expanding a Subgraph

You can expand an in-memory subgraph by loading graph data from a SQL property graph into memory, and merging it with the current subgraph.

The following applies when merging two subgraphs:

- Expanding a subgraph with data from another SQL graph is only possible if the graph schemas are compatible.
- The initial subgraph for expanding can also be loaded from a PGQL property graph and need not necessarily originate from a SQL property graph.
- You can only expand a subgraph by loading graph data from a property graph that exists in the current database schema.
- Also, see Dynamically Expanding a Subgraph for additional information.

The following example shows the expansion of the subgraph created in Loading a Subgraph Using PGQL Queries:

- JShell
- Java
- Python

JShell

```
opg4j> graph = graph.expandGraph().
...> withPgql().
...> fromPgSql("STUDENT_NETWORK").
...> queryPgql("MATCH (v1 IS Person) WHERE id(v1) = 'PERSONS(4)'").
...> expand()
graph ==> PgxGraph[name=anonymous graph 31, N=4, E=1, created=1681011908378]
```

Java

```
PgxGraph graph = graph.expandGraph()
  .withPgql()
  .fromPgSql("STUDENT_NETWORK")
  .queryPgql("MATCH (v1 IS Person) WHERE id(v1) = 'PERSONS(4)'")
  .expand();
```

Python

```
>>> graph = graph.expand_with_pgql("MATCH (v1 IS Person) WHERE id(v1) =
'PERSONS(4)'", pg_sql_name="STUDENT_NETWORK")
>>> graph
PgxGraph(name: anonymous graph 34, v: 4, e: 1, directed: True, memory(Mb): 0)
```

6.4 Handling Vertex and Edge Identifiers in the Graph Server (PGX)

The Oracle Database maintains globally unique identifiers in JSON format.

The following shows an example of a JSON output describing the vertex identifier:

```
{
  "GRAPH_OWNER": "GRAPHUSER",
  "GRAPH_NAME": "STUDENTS_GRAPH",
  "ELEM_TABLE": "PERSONS",
  "KEY_VALUE": {
     "PERSON_ID": 1
  }
}
```

See Vertex and Edge Identifiers for more information.

However, the graph server (PGX) will not load the full identifiers, but only the $\texttt{KEY_VALUE}$ column. This ID will then be maintained as a partitioned ID. For instance, the partitioned ID constructed from the preceding JSON output is: PERSONS(1)

Note that when working with graphs loaded from SQL property graphs, always use the partitioned ID format to refer to the elements by ID.

6.5 Mapping Oracle Database Types to PGX Types

Learn how the input Oracle database types are mapped to its corresponding PGX types, when a graph from the database is loaded into the graph server (PGX).

The following table applies for both SQL property graphs and PGQL property graphs.

Table 6-1 Mapping Oracle Database Types to PGX Types

Oracle Database Type ¹	PGX Type
NUMBER	The following implicit type conversion rules apply: NUMBER => LONG (for key columns)
	• NUMBER => DOUBLE (for non-key columns)
	• NUMBER (m) with $m \le 9 = > INTEGER$
	• NUMBER (m) with $9 < m \le 18 \Rightarrow$ LONG
	• NUMBER(m,n) => DOUBLE
	In the preceding entries, m is the variable for precision and n is the variable for scale.
CHAR or NCHAR	STRING
VARCHAR, VARCHAR2, or NVARCHAR2	STRING
BINARY_FLOAT	FLOAT
BINARY_DOUBLE	DOUBLE
FLOAT	The following implicit type conversion rules apply: • FLOAT (m) with $m \le 23 \Rightarrow$ FLOAT
	• FLOAT (m) with 23 < m => DOUBLE
	In the preceding entries, $\it m$ is the variable for precision.
DATE or TIMESTAMP	TIMESTAMP
TIMESTAMP WITH LOCAL TIME ZONE	TIMESTAMP
TIMESTAMP WITH TIME ZONE	TIMESTAMP WITH TIME ZONE

Data types for PGQL property graphs and SQL Property Graphs share a one-to-one mapping with Oracle Database data types.

6.6 Privileges to Load a SQL Property Graph

Learn about the privileges required to load a SQL property graph into the graph server(PGX).

Ensure that you have the following set of permissions:

- SELECT permission is required for the SQL property graph.
 - If you are the graph owner, you will automatically get this permission.
 - Otherwise, you can grant the permission as shown:
 GRANT SELECT ON PROPERTY GRAPH < graph name> TO < user name>;
- SELECT permission is required for all the underlying data tables of the SQL property graph
 - This permission is required to access entity keys.
 - Note that these permissions are handled separately from the graph permissions.
 - You can grant the permission as shown: GRANT SELECT ON <table_name> TO <user_name>;

6.7 Restriction on Key Types

Learn about the vertex and edge keys restrictions when loading a full or partial SQL property graph into memory in the graph server (PGX).

The following applies when loading an entire SQL property graph into memory:

- It is mandatory that the vertex keys are both accessible and of a supported type. For vertices, keys need to be one these (PGX) types: INTEGER, LONG, or STRING.
- Composite vertex keys are not supported. This implies that each vertex table can have one and only one key column.
- Loading edge keys are optional. This means that if an edge key type is not supported, then
 the SQL graph can still be loaded using the readGraphByName API. In such as case, the
 graph server (PGX) will not load the edge key, but generate a new one instead.
 For edges, keys can only be numeric and the only supported type is LONG.
- Composite edge keys are not supported.

However, when loading a subgraph from a SQL property graph, both the vertex and edge keys must be of a supported PGX type. If the graph has at least one edge table where keys cannot be loaded (either because keys are missing, composite keys, or unsupported types), then you cannot load a subgraph into the graph server (PGX).

In most cases, this restriction can be worked around by using generated numeric keys instead of existing keys. See Loading SQL Property Graphs with Unsupported Key Types for an example.

See Also:

Mapping Oracle Database Types to PGX Types



6.8 Loading SQL Property Graphs with Unsupported Key Types

If existing keys in a SQL graph cannot be loaded into the graph server (PGX), then generated keys maintained by the database may be used instead.

Consider the following SQL property graph which is defined with composite edge keys (USER1, USER2) for its edge table FRIENDS WITH:

```
CREATE PROPERTY GRAPH SOCIAL_NETWORK

VERTEX TABLES (

ACCOUNT

KEY (ID) LABEL USER PROPERTIES (FULL_NAME, USERNAME)
)

EDGE TABLES (

FRIENDS_WITH

KEY (USER1, USER2)

SOURCE KEY (USER1) REFERENCES ACCOUNT (USERNAME)

DESTINATION KEY (USER2) REFERENCES ACCOUNT (USERNAME)

NO PROPERTIES
)

OPTIONS (TRUSTED MODE);
```

Although the SOCIAL_NETWORK graph can be loaded into the graph server (PGX), the edge keys will not be loaded. Also, subgraph loading is not supported for composite edge keys.

In order to resolve these issues, you can perform the following workaround steps on the underlying FRIENDS WITH edge table.

Add a numeric key column to the FRIENDS WITH table.

```
ALTER TABLE FRIENDS WITH ADD ID NUMBER(5) GENERATED ALWAYS AS IDENTITY;
```

The data table of the FRIENDS_WITH provider now has an additional ID column which will automatically be populated with generated numeric keys.

Note that using GENERATED AS IDENTITY columns require additional permissions in the database, such as CREATE ANY SEQUENCE.

- Update the graph definition to use this new column as a key for the FRIENDS_WITH edge table.
 - If you want to create a graph with the same name, then you must first drop the existing graph.

```
DROP PROPERTY GRAPH SOCIAL NETWORK;
```

b. Update and run the new graph definition.

```
CREATE PROPERTY GRAPH SOCIAL_NETWORK

VERTEX TABLES (

ACCOUNT

KEY (ID)

LABEL USER

PROPERTIES (FULL_NAME, USERNAME)
```



```
EDGE TABLES (
   FRIENDS_WITH
   KEY (ID)
   SOURCE KEY (USER1) REFERENCES ACCOUNT (USERNAME)
   DESTINATION KEY (USER2) REFERENCES ACCOUNT (USERNAME)
   NO PROPERTIES
)
OPTIONS (TRUSTED MODE);
```

Alternatively, you may also use a CREATE OR REPLACE PROPERTY GRAPH statement, which will override a graph definition, if one with the same name exists already.

The new graph definition supports subgraph loading using the ${\tt SOCIAL_NETWORK}$ SQL graph.




Executing PGQL Queries Against SQL Property Graphs

You can directly run PGQL queries against a SQL property graph in the database.

The PGQL query execution flow is shown in the following figure:

Figure 7-1 PGQL on SQL Property Graphs in Oracle Database

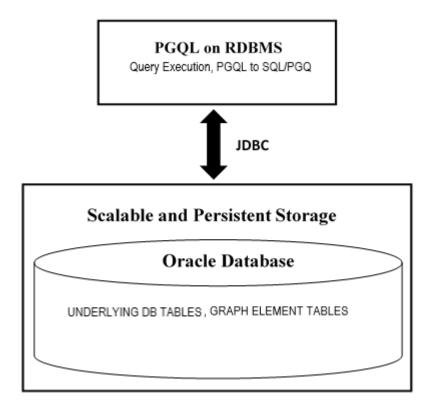

The basic execution flow is:

- 1. The PGQL query is performed on a SQL property graph through a Java API.
- The PGQL query is translated to SQL/PGQ (SQL graph query).
- 3. The translated SQL/PGQ is submitted to Oracle Database by JDBC.
- 4. The SQL/PGQ result set is wrapped as a PGQL result set and returned to the caller.

See Supported PGQL Features and Limitations for SQL Property Graphs for a complete list of supported and unsupported features.

Creating a SQL Property Graph Using PGQL
 You can create a SQL property graph from the database tables using the CREATE PROPERTY
 GRAPH PGQL DDL statement.

- Executing PGQL SELECT Queries on a SQL Property Graph
 You can execute PGQL SELECT queries, on a SQL property graph, using the Java API in
 the oracle.pg.rdbms.pgql package.
- Supported PGQL Features and Limitations for SQL Property Graphs
 Learn about the supported PGQL features and limitations for SQL property graphs.

7.1 Creating a SQL Property Graph Using PGQL

You can create a SQL property graph from the database tables using the CREATE PROPERTY GRAPH PGQL DDL statement.

The following example uses the dataset tables that are created by Importing Data from CSV Files:

- JShell
- Java
- Python

JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host name>:<port>/<service>"
opg4j> var conn =
DriverManager.getConnection(jdbcUrl, "<username>", "<password>");
opg4j> var pgglConn = PgglConnection.getConnection(conn)
opg4j> var pgglStmt = pgglConn.createStatement()
opg4j> var pgql =
...> "CREATE PROPERTY GRAPH bank sql pg "
...> + "VERTEX TABLES ( BANK ACCOUNTS "
...> + "KEY (ID) "
...> + "LABEL Account "
...> + "PROPERTIES (ID, NAME) "
...> + ") "
...> + "EDGE TABLES ( BANK TXNS "
...> + "KEY (TXN ID) "
...> + "SOURCE KEY (FROM ACCT ID) REFERENCES BANK ACCOUNTS (ID) "
...> + "DESTINATION KEY (TO ACCT ID) REFERENCES BANK ACCOUNTS (ID) "
...> + "LABEL TRANSFER "
...> + "PROPERTIES (FROM ACCT ID, TO ACCT ID, AMOUNT, DESCRIPTION) "
...> + ") OPTIONS (PG SQL) "
opg4j> pgqlStmt.execute(pgql)
```

Java

```
import java.sql.Connection;
import java.sql.Statement;
import java.sql.DriverManager;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlStatement;
```



```
/*
* This example creates a SQL property graph.
*/
public class CreateSQLGraph
 public static void main(String[] args) throws Exception
   int idx=0;
                             = args[idx++];
   String jdbcUrl
   String username
                            = args[idx++];
   String password
                            = args[idx++];
   String graph
                              = args[idx++];
    Connection conn = null;
    PgqlStatement pgqlStmt = null;
   try {
     //Get a jdbc connection
     conn = DriverManager.getConnection(jdbcUrl, username, password);
     conn.setAutoCommit(false);
     // Get a PGQL connection
     PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
     // Create a PGQL Statement
     pgqlStmt = pgqlConn.createStatement();
     // Execute PGQL Query
     String pggl =
       "CREATE PROPERTY GRAPH " + graph + " " +
       "VERTEX TABLES ( bank accounts " +
       "KEY (id) " +
       "LABEL Account " +
       "PROPERTIES (id, name)" +
        ") " +
       "EDGE TABLES ( bank_txns " +
       "KEY (txn id) " +
       "SOURCE KEY (from acct id) REFERENCES bank accounts (id) " +
        "DESTINATION KEY (to acct id) REFERENCES bank accounts (id) " +
        "LABEL Transfer " +
       "PROPERTIES (from_acct_id, to_acct_id, amount, description)" +
        ") OPTIONS (PG SQL) ";
      // Print the results
     pgqlStmt.execute(pgql);
    finally {
     // close the statement
     if (pgqlStmt != null) {
        pgqlStmt.close();
      // close the connection
     if (conn != null) {
        conn.close();
```

```
}
}
}
```

Python

```
>>> pgql_conn = opg4py.pgql.get_connection("<username>","<password>",
"jdbc:oracle:thin:@<host name>:<port>/<service>")
>>> pgql statement = pgql conn.create statement()
>>> pgql = """
... CREATE PROPERTY GRAPH bank sql pg
... VERTEX TABLES (
      BANK ACCOUNTS
        KEY (ID)
        LABEL Account
        PROPERTIES (ID, NAME)
... EDGE TABLES (
      BANK TXNS
        KEY (TXN ID)
        SOURCE KEY (FROM ACCT ID) REFERENCES BANK ACCOUNTS (ID)
        DESTINATION KEY (TO ACCT ID) REFERENCES BANK ACCOUNTS (ID)
        LABEL TRANSFER
        PROPERTIES (FROM ACCT ID, TO ACCT ID, AMOUNT, DESCRIPTION)
   ) OPTIONS (PG SQL)
>>> pgql statement.execute(pgql)
False
```

See Creating a Property Graph Using PGQL to understand the PGQL concepts.

7.2 Executing PGQL SELECT Queries on a SQL Property Graph

You can execute PGQL SELECT queries, on a SQL property graph, using the Java API in the oracle.pg.rdbms.pgql package.

The following example shows a PGQL SELECT query execution:

- JShell
- Java
- Python

JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host_name>:<port>/<db_service>"
opg4j> var conn =
```



```
DriverManager.getConnection(jdbcUrl,"<username>","<password>")
opg4j> conn.setAutoCommit(false)
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
opg4j> var pgqlStmt = pgqlConn.createStatement()
opg4j> String query = "SELECT n.name FROM MATCH (n:person) ON STUDENTS_GRAPH"
opg4j> var rs = pgqlStmt.executeQuery(query)
opg4j> rs.print()
+-----+
| NAME |
+-----+
| John |
| Mary |
| Bob |
| Alice |
+-----+
```

Java

```
>>> pgql_conn = opg4py.pgql.get_connection("<username>","<password>",
"<jdbcUrl>")
>>> pgql_statement = pgql_conn.create_statement()
>>> query = "SELECT n.name FROM MATCH (n:person) ON STUDENTS_GRAPH"
>>> rs = pgql_statement.execute_query(query)
>>> rs.print()
+-----+
| NAME |
+-----+
| John |
| Mary |
| Bob |
| Alice |
+------+
```



7.3 Supported PGQL Features and Limitations for SQL Property Graphs

Learn about the supported PGQL features and limitations for SQL property graphs.

The following table provides the complete list of supported and unsupported PGQL functionalities for SQL property graphs:

Table 7-1 Supported PGQL Functionalities and Limitations for SQL Property Graphs

Features	PGQL on SQL Property Graphs
CREATE PROPERTY GRAPH	Supported
DROP PROPERTY GRAPH	Supported
Fixed-length pattern matching	Supported
Variable-length pattern matching goals	Not Supported
Variable-length pattern matching quantifiers	Not Supported
Variable-length path unnesting	Not Supported
GROUP BY	Supported
HAVING	Supported
Aggregations	Supported: COUNT MIN, MAX, AVG, SUM LISTAGG Not supported: ARRAY_AGG JSON_ARRAYAGG
DISTINCT	Supported
 SELECT DISTINCT Aggregation with DISTINCT (such as, COUNT (DISTINCT e.prop)) 	
SELECT v.*	Not Supported
ORDER BY (+ASC/DESC), LIMIT, OFFSET	Supported
Data Types	All available Oracle RDBMS data types supported



Table 7-1 (Cont.) Supported PGQL Functionalities and Limitations for SQL Property Graphs

Features	PGQL on SQL Property Graphs			
JSON	Supported: JSON storage: JSON strings (VARCHAR2) JSON objects JSON functions: Any JSON function call that follows the syntax, json_function_name(arg1, arg2,). For example: json_value(department_data, '\$.department') Limitations: Simple Dot Notation Any optional clause in a JSON function call (such as RETURNING, ERROR, and so on) is not supported. For example: json_value(department_data,			
Operators	<pre>'\$.employees[1].hireDate' RETURNING DATE) Supported: • Relational: +, -, *, /, %, - (unary minus) • Arithmetic: =, <>, <, >, <=, >= • Logical: AND, OR, NOT • String: (concat)</pre>			
Functions and predicates	Supported are all available functions in the Oracle RDBMS that take the form function_name (arg1, arg2,) with optional schema and package qualifiers. Supported PGQL functions/predicates: IS NULL, IS NOT NULL LOWER, UPPER SUBSTRING ABS, CEIL/CEILING, FLOOR, ROUND EXTRACT CAST CASE IN and NOT IN Unsupported PGQL functions/predicates are all vertex/edge functions			
User-defined functions	Supported: PL/SQL functions Functions created via the Oracle Database Multilingual Engine (MLE)			
Subqueries:	Supported subqueries: EXISTS NOT EXISTS Not supported: Scalar subqueries LATERAL subquery			
GRAPH_TABLE operator	Not supported			
INSERT/UPDATE/DELETE	Not supported			
INTERVAL literals and operations	Not supported			



Visualizing SQL Graph Queries Using the APEX Graph Visualization Plug-in

You can use the Oracle Application Express (APEX) Graph Visualization plug-in to visualize and interact with SQL property graphs in an APEX application.

The following topics explain more about the plug-in:

- About the APEX Graph Visualization Plug-in
 The APEX Graph Visualization plug-in integrates a Java Script Library that supports graph visualization in APEX applications.
- Getting Started with the APEX Graph Visualization Plug-in
 This section helps you get started with the Graph Visualization plug-in in your APEX application.
- Configure Attributes for the APEX Graph Visualization Plug-in
 Learn how to customize your graph visualization using the Graph Visualization plug-in
 attributes in your APEX application.

8.1 About the APEX Graph Visualization Plug-in


The APEX Graph Visualization plug-in integrates a Java Script Library that supports graph visualization in APEX applications.

See Graph JavaScript API Reference for Property Graph Visualization for more information.

The plug-in mainly allows you to:

- Visualize SQL property graph queries from the graph data in your database.
- Explore the graph vertices and edges. You can also select and visualize these graph elements individually or in groups.
- Interact with the graph visualization by performing various actions such as changing the graph layouts, grouping or ungrouping selected vertices, removing selected vertices or edges, and so on.
- Style the vertices and edges in the graph by configuring the style settings such as size, color, icon, label values, and so on.
- Visualize and study the evolution of the graph over time.

The following figure shows an example of graph visualization in an APEX application using the plug-in:

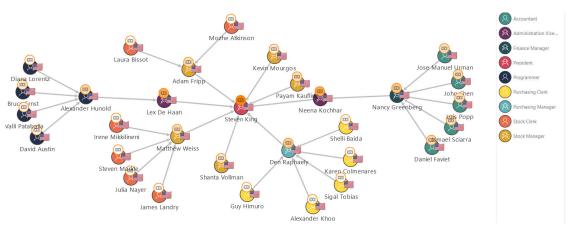

Note that the plug-in supports icons in the Font APEX library.

8.2 Getting Started with the APEX Graph Visualization Plug-in

This section helps you get started with the Graph Visualization plug-in in your APEX application.

Before you get started, ensure that your APEX workspace meets the following requirements:

- The target application into which you want to import the plug-in exists.
- The target application is connected to Oracle Database 23ai.
- The SQL property graph to be used for visualization exists in the default database schema.
 Using the command editor in the SQL Workshop component, you can create a SQL
 property graph using the CREATE PROPERTY GRAPH DDL statement (see Using the
 Command Editor).
- Download the Graph Visualization (Preview) plug-in (region type plugin graphviz.sql) from the Oracle APEX GitHub repository.
- 2. Sign in to your APEX workspace (see Signing In to Your Workspace).
- Create the DBMS GVT package in your APEX workspace.
 - a. Download the optional-23ai-only/gvt_sqlgraph_to_json.sql file from the Oracle APEX GitHub repository.
 - Upload and run the gvt_sqlgraph_to_json.sql script in your APEX workspace (see Uploading a SQL Script).
- 4. Import the downloaded plug-in script (region_type_plugin_graphviz.sql) file into your target APEX application (see Importing Plug-ins).
- 5. Implement the plug-in in an application page to perform various graph visualizations.

The following basic example describes the steps to visualize a graph existing in your database using the Graph Visualization plug-in.

- a. Open the application page in Page Designer.
- b. Select the **Rendering** tab on the left pane of the Page Designer.
- c. Right-click an existing component and add a new region component.
- d. Select the new region and configure the following attributes in the **Region** tab of the **Property Editor** on the right pane of the Page Designer:
 - Enter the Identification Title.



- ii. Select Graph Visualization (Preview) as Identification Type.
- iii. Select the source Location as Local Database.
- iv. Select the Type value.You can choose either SQL Query or PropertyGraph as the Type value.
- v. Embed the SQL graph query to retrieve the graph data. Depending on the type selected in the previous step, you can provide the query as shown in the following examples:
 - SQL Query: Enter the SQL graph query input as shown:

- **PropertyGraph**: Provide the SQL graph query as shown:
 - Graph Name: Select the SQL property graph name.
 - Match Clause: Enter the MATCH clause of the graph query. For example: (a IS account) -[e IS transfer]-> (b IS account)
 - Columns Clause: Enter the COLUMNS clause of the graph query. For example:
 (vertex id(a) AS id a, edge id(e) AS id e, vertex id(b) AS id b)
 - Where Clause: Optionally, enter the WHERE clause of the query. For
- example, a.id = 816.e. Run the application page to visualize the graph rendered by the plugin.

Figure 8-1 Visualizing a SQL Graph Query in an APEX Application





You can use the **Height** attribute to control the size of the visualization panel.

6. Optionally, if you wish to implement pagination in the preceding graph visualization, then perform the following steps:



- a. Switch ON the **SQL Query Supports Pagination** setting in the **Attributes** tab of the Property Editor for the graph visualization component in your APEX application.
- **b.** Set the **Page Size** value in the **Attributes** tab of the Property Editor.
- Save and rerun the application page.The graph gets rendered with pagination.
- 7. Optionally, you can import and run the **Sample Graph Visualizations** application from Oracle APEX GitHub repository.

See Importing the Sample Graph Visualizations Application in APEX for more information.

Importing the Sample Graph Visualizations Application in APEX
 The Sample Graph Visualizations application demonstrates the use of the Graph Visualization plug-in.

8.2.1 Importing the Sample Graph Visualizations Application in APEX


The **Sample Graph Visualizations** application demonstrates the use of the Graph Visualization plug-in.

Perform the following steps to import the **Sample Graph Visualizations** application:

- 1. Download the **Sample Graph Visualizations** application from Oracle APEX GitHub repository.
- 2. Create the DBMS GVT package if it is not already added in your APEX workspace.
 - a. Download the optional-23ai-only/gvt_sqlgraph_to_json.sql file from the Oracle APEX GitHub repository.
 - b. Upload and run the gvt_sqlgraph_to_json.sql script in your APEX workspace (see Uploading a SQL Script).
- 3. Import the sample-apps/sample-graph-visualizations/sample-graph-visualizations_23ai.sql into your APEX instance and install the application by following the steps in Importing an Application.

You can directly run the sample application once it is installed.

Figure 8-2 Sample Graph Visualization Home Page

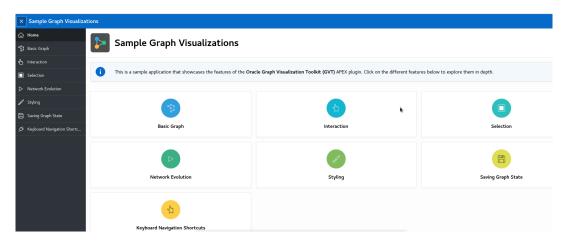



Also, note that the sample application requires a secure HTTPS connection. If you want to disable secure connection, then perform the following steps:



Caution:

It is **not** recommended to disable secure connections in production deployment.


- a. Navigate to the sample application home page in App Builder.
- b. Click Shared Components.
- c. Click Authentication Schemes under Security.
- d. Click the Current authentication scheme.
- e. Click the **Session Sharing** tab and turn off the **Secure** switch.
- f. Click **Apply Changes** and then run the application.

8.3 Configure Attributes for the APEX Graph Visualization Plug-in

Learn how to customize your graph visualization using the Graph Visualization plug-in attributes in your APEX application.

You can configure the attributes for the plug-in component in the **Attributes tab** (Property Editor) on the right pane of the Page Designer.



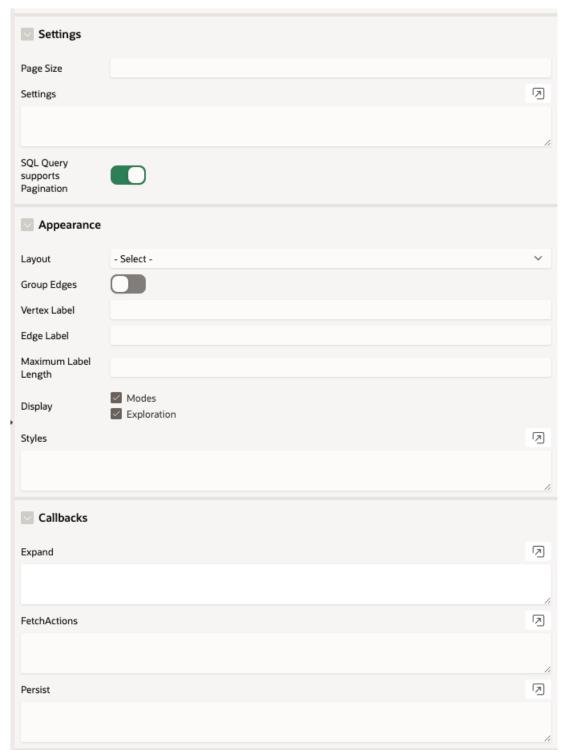

See the Interface page in *Graph JavaScript API Reference for Property Graph Visualization* which describes the interface mapping for the plugin attributes.

The attributes are grouped as per their scope in the following panels:

Settings

Attribute	Description
Page Size	Specify the number of vertices and edges to be displayed per page.



Attribute	Description		
Settings	Specify the graph settings in JSON format. See Settings for more information.		
SQL Query supports Pagination	Switch on this toggle if you are implementing the paginate interface.		

Appearance

Attribute	Description				
Layout	Specify the graph layout.				
Group Edges	Switch on this toggle to group edges.				
Vertex Label	Specify the property to be used for the vertex label.				
Edge Label	Specify the property to be used for the edge label.				
Maximum Label Length	Specify the maximum length of the label.				
Display Modes	Select this checkbox to display the modes panel with the following options: • Select:				
	 Fit to Screen Toggles Sticky Mode 				
Display Exploration	Select this checkbox to display the following graph exploration actions: Drop - Delete selected vertices Group - Group selected vertices Ungroup - Ungroup selected vertices Undo last action Redo last action Reset the visualization to its default state				
Styles	Specify the styles configuration in JSON format. See Styles for more information.				

Callbacks

Attribute	Description
Expand	To expand a selected vertex in the graph visualization, see Expand for more information.
FetchActions	To retrieve the graph actions from a data source, refer to fetchActions for more information.
Persist	To persist the graph actions to a data source, refer to persist for more information.

Settings

You can apply different graph settings such as switching layouts, grouping edges, or showing the evolution of the graph entities based on a property using the **Settings** attribute in the Property Editor of the Page Designer.

Styles

You can style a graph using the ${\bf Styles}$ attribute in the Property Editor of the Page Designer.

Expand

You can expand a selected vertex in the graph and fetch the adjacent vertices using the Expand attribute in the Property Editor of the Page Designer.



8.3.1 Settings

You can apply different graph settings such as switching layouts, grouping edges, or showing the evolution of the graph entities based on a property using the **Settings** attribute in the Property Editor of the Page Designer.

- Select the graph visualization component in the Rendering tab on the left pane of the Page Designer.
- Select Attributes in the Property Editor on the right pane of the Page Designer.
- 3. Enter the input for the desired action in JSON format in the **Settings** input box in the Settings panel.

See settings in Oracle Graph JavaScript API Reference for Property Graph Visualization for more information on the Settings interface.

For instance, the following JSON example provides the layout and pageSize configurations:

```
{
"pageSize": 10,
"layout": "concentric"
}
```

Note:

If the JSON input contains the settings for properties that are already set in the **Appearance** panel (such as **Layout** or **Group Edges**) or **Settings** panel (**Page Size**), then the property values that are provided directly will override the JSON values.

The following JSON example shows a sample configuration for adding network evolution to the graph visualization. The evolution of the graph data is based on the HireDate property:

```
{
    "evolution": {
        "chart": "line",
        "unit": "year",
        "vertex": "properties.HireDate"
    }
}
```

8.3.2 Styles

You can style a graph using the **Styles** attribute in the Property Editor of the Page Designer.

- Select the graph visualization component in the Rendering tab on the left pane of the Page Designer.
- 2. Select **Attributes** in the Property Editor on the right pane of the Page Designer.
- **3.** Enter the input for styling in JSON format in the **Styles** input box.



See styles in Oracle Graph JavaScript API Reference for Property Graph Visualization for more information on the Style interface.

The following example shows the JSON input to add a vertex style.

```
{
   "vertex":{
        "size":12,
        "label":"${properties.FirstName} ${properties.LastName}",
        "color":"#d5445a",
        "icon":"fa-user"
   }
}
```

Note:

If the JSON input contains styling for properties that are already set in the **Appearance** panel (such as **Vertex Label**, **Edge Label**, or **Maximum Label Length**), then the property values that are provided directly will override the JSON values.

8.3.3 Expand

You can expand a selected vertex in the graph and fetch the adjacent vertices using the Expand attribute in the Property Editor of the Page Designer.

- Switch to the Processing tab on the left pane of the Page Designer and navigate to the After Submit node.
- 2. Right-click and select **Create Process** from the context menu.
- Enter the process Name.
- Specify Type as Execute Code.
- 5. Select the source Location as Local Database.
- Select the source Language as PL/SQL and enter the following code in the PL/SQL input box.

In the preceding code:

- <graph_name>: Name of the graph
- <hops>: Number of hops to be expanded
- <helper_function>: Name of the function that provides the CURSOR for the SQL graph query as input to the ORA_SQLGRAPH_TO_JSON function and obtains the JSON output for visualization.

Note that the process takes the vertex id to be expanded as input and returns the resulting output as JSON.

- Select the execution Point as Ajax Callback.
- 8. Switch to the **Rendering** tab on the left pane of the Page Designer and select the graph visualization component.
- Switch to the Attributes tab on the right pane and enter the following code in the Expand input box in the Callbacks panel.

```
const data = await apex.server.process('rocess_name>', {
    x01: ids[0]
}, { dataType: 'text' });
try {
    return JSON.parse(data);
} catch (error) {
    return [];
}
```

In the preceding code, code, codess_name refers to the name of process that was provided at step-3.

- 10. Click Save.
- 11. Run the application page and you can now click expand (as shown highlighted in the following figure) on any specific vertex in the graph.



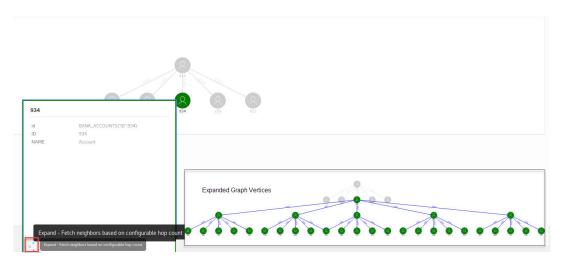


Figure 8-3 Expanding on a Specific Graph Vertex

The inset image in the preceding figure shows the graph with expanded vertices as rendered by the plug-in.



Part III

PGQL Property Graphs

Learn and work with PGQL property graphs (also known as property graph views).

You can work with PGQL property graphs if you are using Oracle Database 23ai or earlier database versions.

- About PGQL Property Graphs
 - You can create PGQL property graphs over data stored in Oracle Database. You can perform various graph analytics operations using PGQL on the graphs.
- Loading a PGQL property graph into the Graph Server (PGX)
 You can load a full PGQL property graph or a subgraph into the graph server (PGX).
- Quick Starts for Using PGQL Property Graphs
 This chapter contains quick start tutorials and other resources to help you get started on working with PGQL property graphs.
- Getting Started with the Client Tools
 You can use multiple client tools to interact with the graph server (PGX) or directly with the
 graph data in the database.
- Property Graph Query Language (PGQL)
 PGQL is a SQL-like query language for property graph data structures that consist of *vertices* that are connected to other vertices by *edges*, each of which can have key-value pairs (properties) associated with them.



About PGQL Property Graphs

You can create PGQL property graphs over data stored in Oracle Database. You can perform various graph analytics operations using PGQL on the graphs.

The following sections explain PGQL property graphs in detail:

- Creating PGQL Property Graphs on Oracle Database Tables
 The CREATE PROPERTY GRAPH statement in PGQL can be used to create a view-like object that contains metadata about the graph. This graph can be queried using PGQL.
- Creating a PGQL Property Graph By Importing a GraphSON file
 Using the GraphImporterBuilder API, you can create a PGQL property graph by importing
 graph data from a GraphSON file.
- Using JSON to Store Vertex and Edge Properties
 You can adopt a flexible schema approach in a PGQL property graph by encoding the
 vertex and edge properties as a single JSON value. You can then map this to a property
 value in a PGQL property graph.

9.1 Creating PGQL Property Graphs on Oracle Database Tables

The CREATE PROPERTY GRAPH statement in PGQL can be used to create a view-like object that contains metadata about the graph. This graph can be queried using PGQL.

PGQL property graphs are created directly over data that exists in the relational database tables. These graphs are stored in the database tables and therefore they have a schema.

One of the main benefits of PGQL property graphs is that all updates to the database tables are immediately reflected in the graph.

Metadata Tables for PGQL Property Graphs

Each time a CREATE PROPERTY GRAPH statement is executed, metadata tables are created in the user's own schema.

The following table describes the set of metadata tables that are created for each graph on executing CREATE PROPERTY GRAPH statement.

All columns shown underlined in the Table 9-1 are part of the primary key of the table. Also all columns have a NOT NULL constraint.

Table 9-1 Metadata Tables for PGQL Property Graphs

Table Name	Description
graphName_ ELEM_TABLE \$	Metadata for graph element (vertex/edge) tables (one row per element table): • ET NAME: the name of the element table (the "alias")
	ET_TYPE: either "VERTEX" or "EDGE"
	 SCHEMA_NAME: the name of the schema of the underlying table
	 TABLE_NAME: the name of underlying table

Table 9-1 (Cont.) Metadata Tables for PGQL Property Graphs

Table Name	Description				
graphName_ LABEL\$	Metadata on labels of element tables (one row per label; one label per element table) • LABEL_NAME: the name of the label • ET_NAME: the name of the element table (the "alias") • ET_TYPE: either "VERTEX" or "EDGE"				
graphName_ PROPERTY \$	Metadata describing the columns that are exposed through a label (one row per property) • PROPERTY_NAME: the name of the property • ET_NAME: the name of the element table (the "alias") • ET_TYPE: either "VERTEX" or "EDGE" • LABEL_NAME: the name of the label that this property belongs to • COLUMN_NAME: the name of the column (initially, only the case where property				
graphName KEY \$	names equal column names is allowed) Metadata describing a vertex/edge key (one row per column in the key)				
	 COLUMN_NAME: the name of the column in the key COLUMN_NUMBER: the number of the column in the key For example, in KEY (a, b, c), "a" has number 1, "b" has number 2 and "c" has number 3. KEY_TYPE: either "VERTEX" or "EDGE" ET_NAME: the name of the element table (the "alias") 				
graphName_ SRC_DST_KEY \$	 Metadata describing the edge source/destination keys (one row per column of a key) ET_NAME: the name of the element table (the "alias"), which is always an edge table VT_NAME: the name of the vertex table KEY_TYPE: either "EDGE_SOURCE" or "EDGE_DESTINATION" ET_COLUMN_NAME: the name of the key column ET_COLUMN_NUMBER: the number of the column in the key. For example, in KEY (a, b, c), "a" has number 1, "b" has number 2 and "c" has number 3. 				
	Note: Currently, support is only for SOURCE KEY () PRESERVENCES TIL So only the edge source/destination				

Currently, support is only for SOURCE KEY (...)
REFERENCES T1. So only the edge source/destination key is stored.

Example 9-1 To create a PGQL property graph

Consider the following CREATE PROPERTY GRAPH statement:

```
CREATE PROPERTY GRAPH student_network
VERTEX TABLES(
   person
   KEY ( id )
   LABEL student
   PROPERTIES( name ),
   university
```



```
KEY ( id )
    PROPERTIES( name )
)

EDGE TABLES(
    knows
    key (person1, person2)
    SOURCE KEY ( person1 ) REFERENCES person (id)
    DESTINATION KEY ( person2 ) REFERENCES person (id)
    NO PROPERTIES,
    person AS studentOf
    key (id, university)
    SOURCE KEY ( id ) REFERENCES person (id)
    DESTINATION KEY ( university ) REFERENCES university (id)
    NO PROPERTIES
)
OPTIONS (PG_PGQL)
```

The OPTIONS clause allows the creation of a PGQL property graph. You must simply pass the CREATE PROPERTY GRAPH statement to the execute method:



- You can create PGQL property graphs using the RDBMS Java API or through SQLcl.
- · You can query PGQL property graphs using the graph visualization tool or SQLcl.

```
stmt.execute("CREATE PROPERTY GRAPH student network ...");
```

This results in the creation of the following metadata tables:

SQL> SELECT * FROM STUDENT NETWORK ELEM TABLE\$;

ET_NAME	ET_TYPE	SCHEMA_NAME	TABLE_NAME
PERSON UNIVERSITY KNOWS STUDENTOF	VERTEX VERTEX EDGE EDGE	SCOTT SCOTT SCOTT SCOTT	PERSON UNIVERSITY KNOWS PERSON
SQL> SELECT * F	ROM STUDENT	_NETWORK_LABEL\$;	

LABEL_NAME	ET_NAME	ET_TYPE
STUDENT	PERSON	VERTEX
UNIVERSITY	UNIVERSITY	VERTEX
KNOWS	KNOWS	EDGE
STUDENTOF	STUDENTOF	EDGE

SQL> SELECT * FROM STUDENT_NETWORK_PROPERTY\$;

PROPERTY_NA	ME ET_NAME	ET_T	YPE :	LABEL_NAME	COLUMN_NAME
				STUDENT UNIVERSITY	
SQL> SELECT	* FROM STUDENT	_NETWORK_K	EY\$;		
COLUMN_NAME	COLUMN_NUN	BER KEY_TY	ET_NAMI	E 	
ID ID PERSON1 PERSON2 ID UNIVERSITY		1 VERTEX 1 VERTEX 1 EDGE 2 EDGE 1 EDGE 2 EDGE	UNIVERS KNOWS KNOWS STUDENS	TOF	
SQL> SELECT * FROM STUDENT_NETWORK_SRC_DST_KEY\$;					
ET_NAME	VT_NAME 	KEY_TYPE		ET_COLUMN_NAME	ET_COLUMN_NUMBER
KNOWS STUDENTOF	PERSON PERSON PERSON UNIVERSITY	EDGE_DEST	INATION CE	PERSON2 ID	1 1 1

You can now run PGQL queries on the student network PGQL property graph.

See Executing PGQL Queries Against PGQL Property Graphs for more details to create, query and drop PGQL property graphs.

- Retrieving Metadata for PGQL Property Graphs
 You can retrieve the metadata of PGQL property graphs created in the database using the built-in PROPERTY GRAPH METADATA graph in your PGQL queries.
- Privileges for Working with PGQL Property Graphs
 Learn about the privileges that are required for working with PGQL property graphs.

9.1.1 Retrieving Metadata for PGQL Property Graphs

You can retrieve the metadata of PGQL property graphs created in the database using the built-in PROPERTY_GRAPH_METADATA graph in your PGQL queries.

The PROPERTY_GRAPH_METADATA graph structure including properties is as shown:



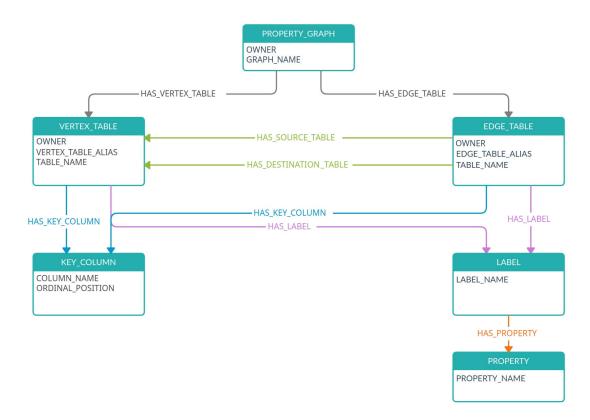


Figure 9-1 PROPERTY GRAPH METADATA Graph Design

The following describes the preceding design of the metadata graph:

```
PROPERTY_GRAPH - [:HAS_VERTEX_TABLE] -> VERTEX_TABLE
- [:HAS_EDGE_TABLE] -> EDGE_TABLE

VERTEX_TABLE - [:HAS_KEY_COLUMN] -> KEY_COLUMN
- [:HAS_LABEL] -> LABEL

EDGE_TABLE - [:HAS_KEY_COLUMN] -> KEY_COLUMN
- [:HAS_LABEL] -> LABEL
- [:HAS_SOURCE_TABLE] -> VERTEX_TABLE
- [:HAS_DESTINATION_TABLE] -> VERTEX_TABLE

LABEL - [:HAS_PROPERTY] -> PROPERTY
```

It is important to note the following when using PROPERTY GRAPH METADATA in PGQL queries:

- The PROPERTY_GRAPH_METADATA graph is automatically created and updated the first time you attempt to access it in a PGQL query.
- The PROPERTY_GRAPH_METADATA graph is similar to a PGQL property graph and has its own set of metadata tables that describe its structure. In addition to the metadata tables for PGQL property graphs that are described in Table 9-1, the graph data for PROPERTY_GRAPH_METADATA is also stored in database objects that are listed in the following table:

Table 9-2 Additional Metadata Tables

Table Name	Description
PROPERTY_GRAPH_METADATA_GRAPH_LIST\$	Metadata table describing the list of PGQL property graphs to which the current user has access
PROPERTY_GRAPH_METADATA_EDGE_KEY_COLUM NS\$	Metadata table describing the edge key columns
PROPERTY_GRAPH_METADATA_EDGE_LABELS\$	Metadata table describing the edge labels
PROPERTY_GRAPH_METADATA_EDGE_TABLES\$	Metadata table describing the edge tables
PROPERTY_GRAPH_METADATA_LABEL_PROPERTIES\$	Metadata table describing the vertex and edge label properties
PROPERTY_GRAPH_METADATA_LABELS\$	Metadata table describing the vertex and edge labels
PROPERTY_GRAPH_METADATA_VERTEX_KEY_COL UMNS\$	Metadata table describing the vertex key columns
PROPERTY_GRAPH_METADATA_VERTEX_LABELS\$	Metadata table describing the vertex labels
PROPERTY_GRAPH_METADATA_VERTEX_TABLES\$	Metadata table describing the vertex tables



It is important that you do not alter or remove any of the metadata tables for the PROPERTY_GRAPH_METADATA graph.

• When running PGQL queries using the Java API, you must disable autocommit on the JDBC connection (conn.setAutoCommit(false)). This ensures that PROPERTY GRAPH METADATA graph gets created automatically.

The following examples show using PROPERTY_GRAPH_METADATA in PGQL queries to retrieve the required metadata.

You can retrieve the list of graphs to which you have access as shown:

- JShell
- Java
- Python

JShell

```
opg4j> String pgql =
...> "SELECT g.graph_name "
...> +"FROM MATCH (g:property_graph) ON property_graph_metadata "
...> +"ORDER BY g.graph_name"
pgql ==> "SELECT g.graph_name FROM MATCH (g:property_graph) ON
property_graph_metadata ORDER BY g.graph_name"
opg4j> pgqlStmt.executeQuery(pgql).print()
```



Java

```
String pgql = "SELECT g.graph_name "+
"FROM MATCH (g:property_graph) ON property_graph_metadata "+
"ORDER BY g.graph_name";
PgqlResultSet rs = pgqlStmt.executeQuery(pgql);
rs.print();
```

Python

```
>>> pgql = '''
... SELECT g.graph_name
... FROM MATCH (g:property_graph) ON property_graph_metadata
... ORDER BY g.graph_name
... '''
>>> pgql statement.execute query(pgql).print()
```

On execution, the preceding query produces the following result:

```
+-----+
| GRAPH_NAME |
+-----+
| BANK_GRAPH_VIEW |
| FINANCIAL_TRANSACTIONS |
| FRIENDS |
```

You can retrieve the vertex properties of a graph as shown:

- JShell
- Java
- Python

JShell

```
opg4j> String pgql =
...> "SELECT p.property_name "
...> +"FROM MATCH(g:property_graph)-[:has_vertex_table]->(v)-[:has_label]-
>(l:label)-[:has_property]->(p:property) "
...> +"ON property_graph_metadata "
...> +"WHERE g.graph_name = 'FRIENDS' "
pgql ==> "SELECT p.property_name FROM MATCH(g:property_graph)-
[:has_vertex_table]->(v)-[:has_label]->(l:label)-[:has_property]-
>(p:property) ON property_graph_metadata WHERE g.graph_name = 'FRIENDS' "
opg4j> pgqlStmt.executeQuery(pgql).print()
```



Java

```
String pgql = "SELECT p.property_name "+
"FROM MATCH(g:property_graph)-[:has_vertex_table]->(v)-[:has_label]-
>(l:label)-[:has_property]->(p:property) "+
"ON property_graph_metadata "+
"WHERE g.graph_name = 'FRIENDS' ";
PgqlResultSet rs = pgqlStmt.executeQuery(pgql);
rs.print();
```

Python

```
>>> pgql = '''
... SELECT p.property_name
... FROM MATCH(g:property_graph)-[:has_vertex_table]->(v)-[:has_label]-
>(l:label)-[:has_property]->(p:property)
... ON property_graph_metadata
... WHERE g.graph_name = 'FRIENDS'
... '''
>>> pgql statement.execute query(pgql).print()
```

On execution, the preceding guery produces the following result:

```
+----+
| PROPERTY_NAME |
+-----+
| BIRTHDATE |
| HEIGHT |
| NAME |
```

9.1.2 Privileges for Working with PGQL Property Graphs

Learn about the privileges that are required for working with PGQL property graphs.

In order to create PGQL property graphs, ensure that you have the following privileges:

```
CREATE SESSION CREATE TABLE
```

Note that these privileges can be granted directly to the user:

```
GRANT CREATE SESSION, CREATE TABLE TO <graphuser>
```

Or they can be granted indirectly through an appropriate role:

```
GRANT CREATE SESSION, CREATE TABLE TO GRAPH DEVELOPER
```



For loading a PGQL property graph created by another user into the graph server (PGX), you must have:

- SELECT permission on the underlying source database tables or views.
- SELECT permission on the metadata tables used by the PGQL property graph. See Table 9-1 and Table 9-2 for more details on the metadata tables.

9.2 Creating a PGQL Property Graph By Importing a GraphSON file

Using the GraphImporterBuilder API, you can create a PGQL property graph by importing graph data from a GraphSON file.

This import functionality consists of the following steps:

- Parsing of the GraphSON to a data structure.
- Creating the SQL tables from the data structure and inserting the data.
- 3. Generating and running the CREATE PROPERTY GRAPH statement.

The following example show using the GraphImporterBuilder API to create a PGQL property graph from a GraphSON file.

- JShell
- Java
- Python

JShell

Java

```
import oracle.pg.imports.*;
GraphImporter importer = new GraphImporter.Builder()
          .setFilePath("<path_to_graphson_file>")
          .setBatchSize(2)
```



```
.setInputFormat(GraphImportInputFormat.GRAPHSON)
.setOutputFormat(GraphImportOutputFormat.PG_PGQL)
.setThreads(4)
.setDbJdbcUrl("<jdbc_url>")
.setDbUsername("<username>")
.setDbPassword("<password>")
.setGraphName("mygraph")
.build();
```

Python

```
>>> from opg4py.graph importer import GraphImporter
>>> config = {
         'jdbc url'
                       : '<jdbc url>',
         'username'
                       : '<username>',
                       : '<password>',
        'password'
. . .
         'file_path' : '<path_to_graphson_file>',
         'graph name' : 'mygraph',
. . .
         'output format': 'pg pgql',
          'input format' : 'graphson'
>>> importer = GraphImporter(config)
>>> importer.import graph()
```

The preceding example sets up the required SQL tables in the database, generates and runs the DDL statement to create *mygraph*. For instance, this example generates the following CREATE PROPERTY GRAPH DDL statement:

```
"CREATE PROPERTY GRAPH mygraph
  VERTEX TABLES (
     software
      KEY (id)
      LABEL software
      PROPERTIES ARE ALL COLUMNS,
     person
      KEY (id)
      LABEL person
       PROPERTIES ARE ALL COLUMNS
  EDGE TABLES (
     created
      KEY (id)
       SOURCE KEY (sid) REFERENCES person (id)
      DESTINATION KEY (did) REFERENCES software (id)
      LABEL created
       PROPERTIES ARE ALL COLUMNS,
     knows
      KEY (id)
       SOURCE KEY (sid) REFERENCES person (id)
       DESTINATION KEY (did) REFERENCES person (id)
      LABEL knows
```

```
PROPERTIES ARE ALL COLUMNS
) OPTIONS ( PG PGQL )"
```

Alternatively, you can also create a connection to the database by using a data source to connect to the database as shown in the following example:

- JShell
- Java

JShell

```
opg4j> import oracle.pg.imports.*
opg4j> import oracle.jdbc.pool.OracleDataSource
opg4j> var ds = new OracleDataSource() // setup the data source
ds ==> oracle.jdbc.pool.OracleDataSource@4154ecd3
ds.setURL("<jdbc url>")
ds.setUser("<username>")
ds.setPassword("<password>")
opg4j> var importer = new GraphImporter.Builder().
        setFilePath("<path_to_graphson_file>").
...>
...>
        setBatchSize(2).
      setInputFormat(GraphImportInputFormat.GRAPHSON).
...>
     setOutputFormat(GraphImportOutputFormat.PG PGQL).
...>
       setThreads(4).
...>
        setDataSource(ds).
       setGraphName("mygraph").
...>
     build()
...>
importer ==> oracle.pg.imports.GraphImporter@5d957cf0
opg4j> var ddl = importer.importGraph()
```

Java

```
import oracle.pg.imports.*;
import oracle.jdbc.pool.OracleDataSource;
//Setup the datasource
var ds = new OracleDataSource();
ds.setURL(<jdbc url>)
ds.setUser(<username>);
ds.setPassword(<password>);
//Setup the GraphImporter
GraphImporter importer = new GraphImporter.Builder()
     .setFilePath("<path to graphson file>")
     .setBatchSize(2)
     .setInputFormat(GraphImportInputFormat.GRAPHSON)
     .setOutputFormat(GraphImportOutputFormat.PG PGQL)
     .setThreads(4)
     .setDataSource(ds)
     .setGraphName("mygraph")
```



```
.build();
var ddl = importer.importGraph();
```

Also, note the following:

- The GraphImporterBuilder API supports GraphSON file format version 3.0 only.
- Only GraphSON data types listed in Table 9-7 are supported.

The following sections provide more details on the GraphImporter parameters and the data type mapping between GraphSON and Oracle Database.

- Additional Information on the GraphImporter Parameters
 Learn more about the parameters used by the GraphImporter.
- Mapping GraphSON Types to Oracle Database Data Types
 The GraphSON data types can be mapped to their corresponding Oracle Database data types.

9.2.1 Additional Information on the GraphImporter Parameters

Learn more about the parameters used by the GraphImporter.

Table 9-3 Database Connection Parameters

Parameter	Description	Setter in API	Default Value	Optional
dataSource	Data source for the database	setDataSource	NULL	Only if passing dbJdbcUrl, dbUsername and dbPassword
dbJdbcUrl	JDBC url of the database	setDbJdbcUrl	11 11	Only if passing a dataSouce
dbPassword	Database password	setDbPassword	11 11	Only if passing a dataSouce
dbUsername	Database user name	setDbUsername	""	Only if passing a dataSouce

Table 9-4 GraphImporter Configuration Parameters

Parameter	Description	Setter in API	Default Value	Optional
pathName	Path to the GraphSON file	setPathname	11 11	No
graphName	Resulting graph name	setGraphName	""	Yes
inFormat	Input format for the importer	setInputFormat	GraphIm portInp utForma t.GRAPH SON	Yes



Table 9-4 (Cont.) GraphImporter Configuration Parameters

Parameter	Description	Setter in API	Default Value	Optional
outFormat	Output format for the importer	setOutputFormat	GraphIm portOut putForm at.PG_P GQL	Yes
batchSize	Number of rows read before inserting data to the database	setBatchSize	1000	Yes
threads	Number of threads to be used to insert to the database	setThreads	1	Yes

Table 9-5 SQL Storage Parameters

Parameter	Description	Setter in API	Default Value	Optional
stringFieldSize	GraphSON String data type is translated as VARCHAR2 in the database. This parameter represents the VARCHAR2 size for the data storage.	setStringFields Size	100	Yes
fractionalSecon dsPrecision	The fractional seconds precision parameter found in TIMESTAMP data type in the Oracle Database.	setFractionalSe condsPrecision	6	Yes

Table 9-6 PGQL Supported Parameters

Parameter	Description	Setter in API	Default Value	Optional
parallel	Degree of parallelism to use for query and update operations	setPathname	0	Yes
dynamicSampling	Dynamic sampling value	setGraphName	2	Yes
matchOptions	Additional options used to influence query translation and execution	setMatchOptions	NULL	Yes



Table 9-6 (Cont.) PGQL Supported Parameters

Parameter	Description	Setter in API	Default Value	Optional
options	Additional options used to influence modify translation and execution	setOptions	NULL	Yes

9.2.2 Mapping GraphSON Types to Oracle Database Data Types

The GraphSON data types can be mapped to their corresponding Oracle Database data types.

The following table shows GraphSON data types mapping to Oracle Database data types:

Table 9-7 Mapping GraphSON Types to Oracle Database Types

GraphSON Type	Oracle Database Type
String	VARCHAR2 ¹
g:Int32	NUMBER(10)
g:Int64	NUMBER(10)
g:Float	FLOAT
g:Double	FLOAT
g:Date	DATE
g:Timestamp	TIMESTAMP ²
g:UUID	CHAR (36)

¹ You can use the <code>stringFieldSize</code> parameter to determine the string size for the database to store on the <code>String</code> columns.

9.3 Using JSON to Store Vertex and Edge Properties

You can adopt a flexible schema approach in a PGQL property graph by encoding the vertex and edge properties as a single JSON value. You can then map this to a property value in a PGQL property graph.

PGQL property graphs do not provide schema flexibility by nature since adding a new label requires adding a new vertex or edge table, and adding a new property requires adding a new column, both of which are schema update operations. However, through the use of JSON you can model schema flexibility on top of PGQL property graphs.

For example, consider the following graph which represents financial transactions between two Account vertices. The Account can be owned either by a Person or a Company.

You can use the fractionalSecondsPrecision parameter to specify the precision on the columns of type Timestamp.

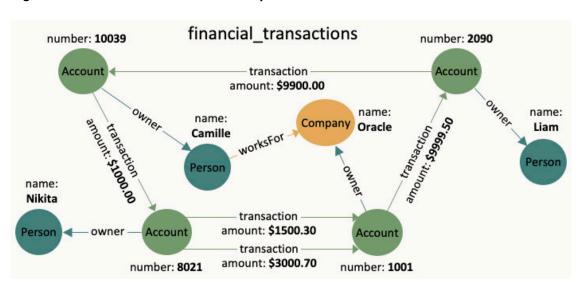


Figure 9-2 Financial Transactions Graph

You can create a single table for storing all the vertices and another single table for storing all the edges, as shown:

```
CREATE TABLE fin vertex table (
  id NUMBER PRIMARY KEY,
  properties VARCHAR2 (2000)
);
INSERT INTO fin vertex table VALUES ( 1, '{"type":"Person", "name": "Nikita"}');
INSERT INTO fin vertex table VALUES ( 2,
'{"type":"Person", "name": "Camille"}');
INSERT INTO fin vertex table VALUES ( 3,
                                         '{"type":"Person", "name": "Liam"}');
INSERT INTO fin vertex table VALUES ( 4,
'{"type":"Company", "name":"Oracle"}');
INSERT INTO fin vertex table VALUES (5, '{"type":"Account", "number":10039}');
INSERT INTO fin vertex table VALUES ( 6, '{"type":"Account", "number":2090}');
INSERT INTO fin vertex table VALUES ( 7, '{"type":"Account", "number":8021}');
INSERT INTO fin vertex table VALUES ( 8, '{"type":"Account", "number":1001}');
CREATE TABLE fin edge table (
  id NUMBER PRIMARY KEY,
  src NUMBER REFERENCES fin vertex table ( id ),
  dst NUMBER REFERENCES fin vertex table ( id ),
  properties VARCHAR2(2000)
);
INSERT INTO fin edge table VALUES ( 1, 7, 1, '{"type":"owner"}');
INSERT INTO fin edge table VALUES ( 2, 5, 2, '{"type":"owner"}');
INSERT INTO fin edge table VALUES ( 3, 6, 3, '{"type":"owner"}');
INSERT INTO fin edge table VALUES ( 4, 8, 4, '{"type":"owner"}');
INSERT INTO fin edge table VALUES ( 5, 2, 4, '{"type":"worksFor"}');
INSERT INTO fin edge table VALUES ( 6, 5, 7,
'{"type":"transaction", "amount":1000.00}');
INSERT INTO fin edge table VALUES ( 7, 7, 8,
'{"type":"transaction", "amount":1500.30}');
```

```
INSERT INTO fin_edge_table VALUES ( 8, 7, 8,
'{"type":"transaction", "amount":3000.70}');
INSERT INTO fin_edge_table VALUES ( 9, 8, 6,
'{"type":"transaction", "amount":9999.50}');
INSERT INTO fin_edge_table VALUES ( 10, 6, 5,
'{"type":"transaction", "amount":9900.00}');
```

As seen in the preceding code, each vertex and edge is represented by a single row in the respective tables. The first column is the unique key of the vertex or the edge. The second and third columns of the edge table are its source key and destination key respectively. The last column of the vertex and edge tables encodes all the properties as well as the labels in a JSON object. A JSON is an unordered set of name and value pairs. Here, you can use such pairs to encode the property names and their values as well as the label's value. In case of the label, you can choose an arbitrary name such as "type" or "label". In this example we use "type".

Because all the labels and properties of a vertex or an edge are encoded as a single JSON value, you do not need to update the schema when new labels or properties are added to the graph. Instead, you can add new labels and properties by inserting additional vertices and edges or by updating the JSON value in the underlying table through SQL.

The following two examples demonstrate how you can extract labels and property values from JSON objects for PGQL on RDBMS and PGQL on PGX respectively.

Example 9-2 Extracting JSON properties using JSON_VALUE (PGQL on RDBMS)

The following code creates a PGQL property graph using the fin_vertex_table and fin edge table tables and executes a PGQL SELECT query:

```
PgglStatement pgglStmnt = pgglConn.createStatement();
/* Create the property graph */
pgqlStmnt.execute(
  "CREATE PROPERTY GRAPH financial transactions " +
    VERTEX TABLES ( " +
      fin vertex table PROPERTIES ( properties ) ) " +
    EDGE TABLES ( " +
      fin edge table " +
         SOURCE KEY ( src ) REFERENCES fin vertex table (id) " +
         DESTINATION KEY ( dst ) REFERENCES fin vertex table (id) " +
         PROPERTIES ( properties ) ) " +
    OPTIONS ( PG PGQL )");
^{\prime\star} Set the name of the graph so that we can omit the ON clause from queries ^{\star\prime}
pgqlConn.setGraph("FINANCIAL TRANSACTIONS");
/* PGQL query: find all outgoing transactions from account 8021. Output the
   transaction amount and the destination account number. */
PgqlResultSet rs = pgqlStmnt.executeQuery(
  "SELECT JSON VALUE(trans.properties, '$.amount') AS transaction amount, " +
          JSON VALUE(account2.properties, '$.number') AS account number " +
  "FROM MATCH (account1) -[trans]-> (account2) " +
  "WHERE JSON VALUE (account1.properties, '\$.number') = 8021 " +
  " AND JSON VALUE(trans.properties, '$.type') = 'transaction'");
rs.print();
```

```
rs.close();
pgqlStmnt.close();
```

In the preceding code, the CREATE PROPERTY GRAPH statement maps the JSON column into a property named "properties". This property will thus contain all the labels and properties of the vertex or the edge. The PGQL SELECT query extracts these labels and properties using JSON VALUE.

For example, instead of account1.number = 8021, you must use JSON_VALUE(account1.properties, '\$.number') = 8021. This causes the query to become a bit lengthier.

The output of the Java code is:

Example 9-3 Using a UDF to extract a JSON property value (PGQL on PGX)

This example consists of two parts. The first part shows the creation of a UDF and the second part shows loading of the graph into the graph server (PGX) followed by the execution of a PGQL query using the UDF.

Since the Graph Server (PGX) does not have a built-in JSON_VALUE function like in PGQL on RDBMS, you can create a Java UDF instead.

Create the Java class (MyJsonUtils.java) that implements the UDF:

```
import com.fasterxml.jackson.core.JsonProcessingException;
import com.fasterxml.jackson.databind.JsonNode;
import com.fasterxml.jackson.databind.ObjectMapper;

public class MyJsonUtils {
   private final static ObjectMapper mapper = new ObjectMapper();
   public static String get_prop(String json_string, String prop_name) throws
JsonProcessingException {
    JsonNode node = mapper.readTree(json_string);
    return node.path(prop_name).asText();
   }
}
```

Compile the class with the JARs from <code>/opt/oracle/graph/pgx/server/lib/*</code> added to the class path. This is because the library folder contains the necessary Jackson libraries that are required to parse the JSON.

```
mkdir ./target
javac -classpath .:/opt/oracle/graph/pgx/server/lib/* -d ./target *.java
cd target
jar cvf MyJsonUtils.jar *
```

Using the following UDF JSON configuration file (my_udfs.json), you can now register the Java UDF on the graph server (PGX) by following step-3 to step-6 in User-Defined Functions (UDFs) in PGX:

```
"user defined functions": [
      "namespace": "my",
      "function name": "get prop",
      "language": "java",
      "implementation reference": "MyJsonUtils",
      "return type": "string",
      "arguments": [
          "name": "json string",
          "type": "string"
        },
          "name": "prop name",
          "type": "string"
      1
    }
 1
}
```

On implementing the UDF for extracting property values from the JSON, you can now load the graph into the Graph Server (PGX) and issue a PGQL query:

```
/* Load the graph into the Graph Server (PGX) */
ServerInstance instance = GraphServer.getInstance("http://localhost:7007",
username, password.toCharArray());
session = instance.createSession("my-session");
PqxGraph q = session.readGraphByName("FINANCIAL TRANSACTIONS",
GraphSource.PG PGQL);
/* PGQL query: find all shortest paths from account 10039 to account 2090
following only outgoing transaction
  edges. Output the list of transaction amounts along each path as well as
the total amount of the transactions
  along each path. */
q.queryPqql(
  " SELECT LISTAGG(my.get prop(e.properties, 'amount'), ' + ') || ' = ' AS
amounts along path, " +
           SUM (CAST (my.get prop (e.properties, 'amount') AS DOUBLE)) AS
total amount " +
 " FROM MATCH ALL SHORTEST (a) (-[e]-> WHERE my.get prop(e.properties,
'type') = 'transaction') * (b) " +
 " WHERE my.get prop(a.properties, 'number') = '10039' AND " +
           my.get prop(b.properties, 'number') = '2090' " +
  "ORDER BY total amount").print().close();
```

The output of the Java code is:

+-						-+
	amounts_a	along_pat	h	- 1	total_amount	
+.						-+
	1000.0 +	1500.3 +	9999.5	=	12499.8	
	1000.0 +	3000.7 +	9999.5	=	14000.2	
Ψ.						-+



Loading a PGQL property graph into the Graph Server (PGX)

You can load a full PGQL property graph or a subgraph into the graph server (PGX).



Ensure that you drop the graph when it is no longer in use to release the graph server (PGX) memory. See Deleting a Graph for more information.

There are several ways to load a PGQL property graph into the graph server (PGX).

- Loading a PGQL Property Graph Using the readGraphByName API
 You can load a PGQL property graph by name into the graph server (PGX).
- Loading a Graph Using a JSON Configuration File
 To load a PGQL property graph into the graph server (PGX), you can create a graph configuration file, which contains the graph metadata to be loaded.
- Loading a Graph by Defining a Graph Configuration Object You can load a graph from Oracle Database by first defining the graph configuration object using the GraphConfigBuilder class and then reading the graph into the graph server (PGX).
- Loading a Subgraph from a PGQL Property Graph
 You can create a subgraph from a PGQL property graph and load it into memory in the graph server (PGX).

10.1 Loading a PGQL Property Graph Using the readGraphByName API

You can load a PGQL property graph by name into the graph server (PGX).

You can use the PgxSession#readGraphByName API to load a PGQL property graph:

readGraphByName(String schemaName, String graphName, GraphSource source, ReadGraphOption options)

The arguments used in the method are described in the following table:

Table 10-1 Parameters for the readGraphByName method

Parameter	Description	Optional
schemaName	Schema owner	Yes
graphName	Name of the PGQL property graph	No



Table 10-1 (Cont.) Parameters for the readGraphByName method	Table 10-1 ((Cont.) Parameters	for the readGraphB	yName method
--	--------------	--------------------	--------------------	--------------

Parameter	Description	Optional
source	 Source format for the graph: GraphSource.PG_PGQL: This applies for PGQL property graphs. GraphSource.PG_SQL: This applies for SQL Property Graphs (refer to Loading a SQL Property Graph Using the readGraphByName API). 	No
options	Represents the graph optimization options	Yes

The <code>readGraphByName()</code> method reads the PGQL property graph metadata tables and internally generates the graph configuration to load the graph. You must have <code>PGX SESSION NEW GRAPH permission</code> to use this API.

For example you can load the PGQL property graph as shown:

- JShell
- Java
- Python

JShell

opg4j> var graph = session.readGraphByName("BANKDATA", GraphSource.PG_PGQL)
\$12 ==> PgxGraph[name=bankdata,N=1000,E=5001,created=1625730942294]

Java

PgxGraph graph = session.readGraphByName("BANKDATA", GraphSource.PG_PGQL);
Graph: PgxGraph[name=bankdata,N=1000,E=5001,created=1625732149262]

Python

```
>>> graph = session.read_graph_by_name('BANKDATA', 'pg_pgql')
>>> graph
PgxGraph(name: bankdata, v: 1000, e: 5001, directed: True, memory(Mb): 0)
```

- Specifying Options for the readGraphByName API
 You can specify graph optimization options, OnMissingVertexOption or both when using the readGraphByName API for loading a PGQL property graph.
- Specifying the Schema Name for the readGraphByName API
 You can specify the schema name when using the readGraphByName API for loading a
 PGQL property graph.



Mapping Oracle Database Types to PGX Types for more information on the supported types in the graph server (PGX)

10.1.1 Specifying Options for the readGraphByName API

You can specify graph optimization options, OnMissingVertexOption or both when using the readGraphByName API for loading a PGQL property graph.

The ReadGraphOption interface supports an additional options parameter when loading a PGQL property graph by name.

The following sections explain the various options supported by the ReadGraphOption interface.

Using the Graph Optimization Options

You can optimize the read or update performance when loading a PGQL property graph by name by using one of the following options:

- ReadGraphOption.optimizeFor(GraphOptimizedFor.READ): Specifies that the loaded graph is optimized for READ.
- ReadGraphOption.optimizeFor(GraphOptimizedFor.UPDATES): Specifies that the loaded graph is optimized for UPDATE.
- ReadGraphOption.synchronizable(): Specifies that the loaded graph can be synchronized.

It is important to note the following:

- synchronizable() option can be used in combination with UPDATE and READ. However, the UPDATE and READ options cannot be used at the same time.
- If you are loading a PGQL property graph for SYNCHRONIZABLE option, then ensure that the vertex and edge keys are numeric and non-composite.

The following example loads a PGQL property graph for READ and SYNCHRONIZABLE options:

- JShell
- Java
- Python

```
opg4j> var graph = session.readGraphByName("BANK_GRAPH", GraphSource.PG_PGQL,
...>
ReadGraphOption.optimizeFor(GraphOptimizedFor.READ),
...> ReadGraphOption.synchronizable())
graph ==> PgxGraph[name=BANK_GRAPH_2,N=1000,E=5001,created=1648457198462]
```



Java

```
PgxGraph graph = session.readGraphByName("BANK_GRAPH", GraphSource.PG_PGQL,
ReadGraphOption.optimizeFor(GraphOptimizedFor.READ),
ReadGraphOption.synchronizable());
```

Python

```
>>> graph = session.read_graph_by_name('BANK_GRAPH',
... 'pg pgql', options=['optimized for read', 'synchronizable'])
```

Using the OnMissingVertex Options

If either the source or destination vertex or both are missing for an edge, then you can use the <code>OnMissingVertexOption</code> which specifies the behavior for handling the edge with the missing vertex. The following values are supported for this option:

- ReadGraphOption.onMissingVertex (OnMissingVertex.ERROR): This is the default option
 and this specifies that an error must be thrown for edges with missing vertices.
- ReadGraphOption.onMissingVertex(OnMissingVertex.IGNORE_EDGE): Specifies that the edge for a missing vertex must be ignored.
- ReadGraphOption.onMissingVertex(OnMissingVertex.IGNORE_EDGE_LOG): Specifies that the edge for a missing vertex must be ignored and all ignored edges must be logged.
- ReadGraphOption.onMissingVertex(OnMissingVertex.IGNORE_EDGE_LOG_ONCE):
 Specifies that the edge for a missing vertex must be ignored and only the first ignored edge must be logged.

The following example loads the PGQL property graph by ignoring the edges with missing vertices and logging only the first ignored edge. Note, to view the logs, you must update the default Logback configuration file in /etc/oracle/graph/logback.xml and the graph server (PGX) logger configuration file in /etc/oracle/graph/logback-server.xml to log the DEBUG logs. You can then view the ignored edges in /var/opt/log/pgx-server.log file.

- JShell
- Java
- Python

```
opg4j> session.readGraphByName("REGIONS", GraphSource.PG_PGQL,
...>
ReadGraphOption.onMissingVertex(OnMissingVertex.IGNORE_EDGE_LOG_ONCE))
$7 ==> PgxGraph[name=REGIONVIEW 3,N=27,E=18,created=1655903219910]
```



Java

PgxGraph graph = session.readGraphByName("REGIONS", GraphSource.PG_PGQL, ReadGraphOption.onMissingVertex(OnMissingVertex.IGNORE EDGE LOG ONCE));

Python

```
>>> graph = session.read_graph_by_name('REGIONS',
... 'pg_pgql', options=['on_missing_vertex_ignore_edge_log_once'])
```

10.1.2 Specifying the Schema Name for the readGraphByName API

You can specify the schema name when using the readGraphByName API for loading a PGQL property graph.

This feature allows you to load a PGQL property graph from another user schema into the graph server (PGX). However, ensure that you have READ permission on all the underlying metadata and data tables when loading a PGQL property graph from another schema.

The following example loads a PGQL property graph from the GRAPHUSER schema:

- JShell
- Java

JShell

```
opg4j> var graph = session.readGraphByName("GRAPHUSER", "FRIENDS",
GraphSource.PG_PGQL)
graph ==> PgxGraph[name=FRIENDS, N=6, E=4, created=1672743474212]
```

Java

```
PgxGraph graph = session.readGraphByName("GRAPHUSER", "FRIENDS",
GraphSource.PG PGQL);
```

10.2 Loading a Graph Using a JSON Configuration File

To load a PGQL property graph into the graph server (PGX), you can create a graph configuration file, which contains the graph metadata to be loaded.

The following shows a sample JSON configuration file:

```
{
  "name": "BANK_GRAPH",
```



```
"source name": "BANK GRAPH",
"source_type": "pg_pgql",
"jdbc url": "jdbc:oracle:thin:@localhost:1521/orclpdb",
"username": "graphuser",
"keystore alias": "database1",
"vertex providers":[
          "name": "Accounts",
          "format": "rdbms",
          "database_table_name":"BANK_ACCOUNTS",
          "key_column":"ID",
          "key type": "integer",
          "parallel hint degree": 3,
           "props":[
               {
                       "name":"ID",
                       "type": "integer"
               },
                       "name": "NAME",
                       "type": "string"
          ]
 ],
  "edge_providers":[
          "name": "Transfers",
          "format": "rdbms",
          "database table name": "BANK TXNS",
          "key column":"ID",
          "parallel hint degree": 3,
          "source_column":"FROM_ACCT_ID",
          "destination column": "TO ACCT ID",
          "source vertex provider": "Accounts",
          "destination_vertex_provider": "Accounts",
          "props":[
               {
                       "name":"FROM ACCT_ID",
                       "type":"integer"
               },
                       "name": "TXN AMOUNT",
                       "type": "float",
                       "column": "AMOUNT"
               },
                       "name": "DESCRIPTION",
                       "type":"string"
               },
                       "name": "TO ACCT ID",
```

The preceding configuration uses a Java keystore alias to reference the database password that is stored in a keystore file. See Store the Database Password in a Keystore for more information.

Also, the edge property AMOUNT is renamed to TXN_AMT. This implies that when loading a graph into the graph server (PGX), you can optionally rename the vertex or edge properties to have different names other than the names of the underlying columns in the database.

See Also:

- Configuring PARALLEL Hint when Loading a Graph
- Graph Configuration Options for more details on the graph configuration options.

You can now read the graph into the graph server as shown:

- JShell
- Java

JShell

```
./bin/opg4j --secret_store /etc/oracle/graph/keystore.p12
enter password for keystore /etc/oracle/graph/keystore.p12:
For an introduction type: /help intro
Oracle Graph Server Shell 24.2.0
Variables instance, session, and analyst ready to use
opg4j> var g = session.readGraphWithProperties("<path_to_json_configuration>")
g ==> PgxGraph[name=BANK GRAPH NEW, N=999, E=4993, created=1675960224397]
```

Java



Configuring PARALLEL Hint when Loading a Graph

10.2.1 Configuring PARALLEL Hint when Loading a Graph

You can also optimize the graph loading performance by configuring a specific parallel hint value using the GraphConfig field, PARALLEL_HINT_DEGREE, which will be used by the underlying SQL queries. This can be applied when loading a graph using a JSON configuration file or through the GraphConfigBuilder API.

The following table describes how the internal queries are configured based on the specified PARALLEL HINT DEGREE values.

Table 10-2 PARALLEL HINT DEGREE values

PARALLEL_HINT_DEGREE Value	Parallel hint used in the SQL Statement
Positive integer(n)	Uses the given n degree: SELECT /*+ PARALLEL(n) */
Zero	Uses a plain hint: SELECT /*+ PARALLEL */
Negative integer (Default value: -1)	No PARALLEL hint: SELECT

See Also:

- Loading a Graph Using a JSON Configuration File for an example using parallel hint configuration.
- Loading a Graph by Defining a Graph Configuration Object for an example using parallel hint configuration.

10.3 Loading a Graph by Defining a Graph Configuration Object

You can load a graph from Oracle Database by first defining the graph configuration object using the GraphConfigBuilder class and then reading the graph into the graph server (PGX).

The following example loads a PGQL property graph into memory, authenticating as <database user>/<database password> with the database:

- JShell
- Java

```
...>
                                               setParallelHintDegree (3).
...>
setDatabaseTableName("BANK ACCOUNTS").
                                              addProperty("ID",
PropertyType.INTEGER).
                                              build()
...>
opg4j> var edgeConfig = new RdbmsEntityProviderConfigBuilder().
                                         setName("Transfer").
...>
                                         setKeyColumn("TXN ID").
                                         setSourceColumn("FROM ACCT ID").
...>
                                         setDestinationColumn("TO ACCT ID").
...>
                                         setSourceVertexProvider("Account").
...>
setDestinationVertexProvider("Account").
                                         setParallelHintDegree (3).
...>
                                         createKeyMapping(true).
                                          setDatabaseTableName("BANK TXNS").
...>
...>
                                         addProperty("FROM ACCT ID",
PropertyType.INTEGER).
...>
                                         addProperty("TO ACCT ID",
PropertyType.INTEGER).
                                         addProperty("AMOUNT",
PropertyType.FLOAT).
                                         build()
...>
opg4j> var cfg = GraphConfigBuilder.forPartitioned().
...>
                      setJdbcUrl("jdbc:oracle:thin:@localhost:1521/orclpdb").
                      setUsername("graphuser").
...>
                      setPassword("<password>").
...>
...>
                      setName ("bank graph").
...>
                      setSourceName("bank graph").
...>
                      setSourceType(SourceType.PG PGQL).
...>
                      setVertexIdType(IdType.INTEGER).
                      addVertexProvider(vertexConfig).
...>
                      addEdgeProvider(edgeConfig).
                      build()
...>
opg4j> var g = session.readGraphWithProperties(cfg)
q ==> PqxGraph[name=bank graph, N=999, E=4993, created=1676806306348]
Java
// Build the vertex provider
RdbmsEntityProviderConfig vertexConfig = new
RdbmsEntityProviderConfigBuilder()
                                                .setName("Account")
                                                .setKeyColumn("ID")
                                                .setParallelHintDegree(3)
                                                .setDatabaseTableName("BANK ACCO
UNTS")
                                                .addProperty("ID",
PropertyType.INTEGER)
                                                .build();
// Build the edge provider
```

```
RdbmsEntityProviderConfig edgeConfig = new RdbmsEntityProviderConfigBuilder()
                                                .setName("Transfer")
                                                .setKeyColumn("TXN ID")
                                                .setSourceColumn("FROM ACCT ID")
                                                .setDestinationColumn("TO ACCT I
D")
                                                .setSourceVertexProvider("Accoun
t.")
                                                .setDestinationVertexProvider("A
ccount")
                                                .setParallelHintDegree(3)
                                                .createKeyMapping(true)
                                                .setDatabaseTableName("BANK TXNS
")
                                                .addProperty("FROM_ACCT_ID",
PropertyType.INTEGER)
                                                .addProperty("TO ACCT ID",
PropertyType.INTEGER)
                                                .addProperty("AMOUNT",
PropertyType.FLOAT)
                                                .build();
// Build the graph
GraphConfig cfg = GraphConfigBuilder.forPartitioned()
                            .setJdbcUrl("jdbc:oracle:thin:@localhost:1521/
orclpdb")
                            .setUsername("graphuser")
                            .setPassword("<password>")
                            .setName("bank graph")
                            .setSourceName("bank graph")
                            .setSourceType(SourceType.PG PGQL)
                            .setVertexIdType(IdType.INTEGER)
                            .addVertexProvider(vertexConfig)
                            .addEdgeProvider(edgeConfig)
                            .build();
PgxGraph g = session.readGraphWithProperties(cfg);
```

See Also:

Configuring PARALLEL Hint when Loading a Graph

10.4 Loading a Subgraph from a PGQL Property Graph

You can create a subgraph from a PGQL property graph and load it into memory in the graph server (PGX).

Instead of loading a full graph into memory, you can load a subgraph. This would consume less memory.

The following sections explain in detail on loading and expanding of subgraphs:

PGQL Based Subgraph Loading

You can use the PgViewSubgraphReader#fromPgPgql API to create an in-memory subgraph from a PGQL property graph using a set of PGQL queries.

Prepared PGQL Queries

You can also use prepared queries when loading a subgraph from a PGQL property graph.

Providing Database Connection Credentials

You can specify the database connection credentials with the ${\tt PgViewSubgraphReader\#fromPgPgql} \ \, \mbox{API instead of using the default credentials of the current user.}$

Dynamically Expanding a Subgraph

You can expand an in-memory subgraph by loading another subgraph into memory and merging it with the current in-memory subgraph.

10.4.1 PGQL Based Subgraph Loading

You can use the PgViewSubgraphReader#fromPgPgql API to create an in-memory subgraph from a PGQL property graph using a set of PGQL queries.

These PGQL queries define the vertices and edges that are to be loaded into the subgraph. You can also use multiple PGQL queries and the resulting output graph is a union of the subgraphs, each being loaded independently by each PGQL query.

Note:

- Only non-composite vertex and edge keys are supported.
- Only numeric edge keys are supported.
- PGQL queries with GROUP BY or ORDER BY clauses are not supported for loading of subgraphs from a PGQL property graph.

The following example creates a subgraph from a PGQL property graph using multiple PGQL queries:

- JShell
- Java
- Python



```
...> load()
graph ==> PgxGraph[name=FRIENDS, N=3, E=1, created=1646726883194]
```


Java

Python

```
>>> graph = session.read_subgraph_from_pg_pgql("FRIENDS", ["MATCH (v1:Person)-
[e:FRIENDOF]->(v2:Person) WHERE id(v1) = 'PERSONS(1)'",
... "MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'"])
>>> graph
PgxGraph(name: FRIENDS, v: 3, e: 1, directed: True, memory(Mb): 0)
```

The following displays the output for the preceding PGQL query using the graph visualization tool.

Figure 10-1 Subgraph Visualization

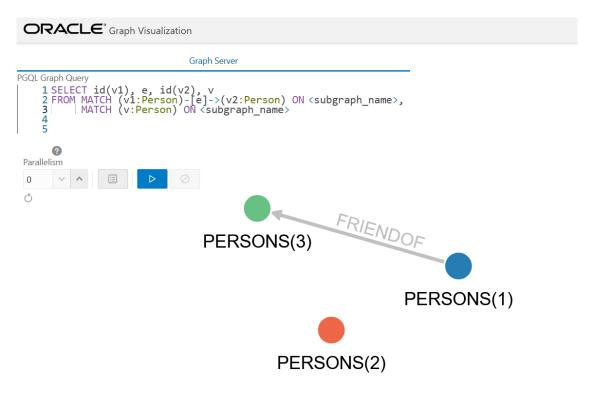

Loading Subgraphs with Custom Names

By default, the new subgraph gets created with the same name as the PGQL property graph. Alternatively, if you want to load a subgraph with a custom name, then you can configure the subgraph name as shown:

- JShell
- Java
- Python

JShell

Java

Python

```
>>> graph = session.read_subgraph_from_pg_pgql("FRIENDS",
... ["MATCH (v1:Person)-[e:FRIENDOF]->(v2:Person) WHERE
id(v1) = 'PERSONS(1)'",
... "MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'"],
... graph_name="friends_network")
>>> graph
PgxGraph(name: friends_network, v: 3, e: 1, directed: True, memory(Mb): 0)
```

Loading a Subgraph by Explicitly Specifying the Schema Name

If you want to load a subgraph by reading a PGQL property graph from another schema, you can additionally provide the schema name as an argument to the

PgViewSubgraphReader#fromPgPgql API. You must also ensure that you have READ permission on all the underlying metadata and data tables for the PGQL property graph.

For example:

- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.readSubgraph()
...> .fromPgPgql("GRAPHUSER", "FRIENDS")
...> .queryPgql("MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'")
...> .load()
graph ==> PgxGraph[name=FRIENDS, N=1, E=0, created=1672743755511]
```

Java

Python

```
>>> graph = session.read_subgraph_from_pg_pgql("FRIENDS",
... ["MATCH (v:Person) WHERE id(v) = 'PERSONS(2)'"],
... schema="GRAPHUSER")
```

10.4.2 Prepared PGQL Queries

You can also use prepared queries when loading a subgraph from a PGQL property graph.

You can pass bind variables using prepared PGQL queries. The PreparedPgViewPgqlQuery#preparedPgqlQuery method adds a prepared query to a list of queries that are executed to load the subgraph. The PreparedPgViewPgqlQuery API sets the bindings for the variables and continues with the loading of the subgraph.

For example:

- JShell
- Java
- Python



JShell

Java

```
import oracle.pgx.api.subgraph.*;
...
...
PgViewSubgraphReader pgViewSubgraphReader=
session.readSubgraph().fromPgPgql("FRIENDS");
PreparedPgViewPgqlQuery preparedPgqlQuery =
pgViewSubgraphReader.preparedPgqlQuery("MATCH (v1:Person)-[e:FriendOf]->(v2:Person) WHERE id(v2)=?");
preparedPgqlQuery = preparedPgqlQuery.withStringArg(1, "PERSONS(3)");
PgxGraph graph = preparedPgqlQuery.load();
```

Python

```
>>> from pypgx.api import PreparedPgqlQuery
>>> from pypgx.api import PreparedPgqlQueryStringArgument
>>> graph = session.read_subgraph_from_pg_pgql("FRIENDS",
... [PreparedPgqlQuery("MATCH (v1:Person)-[e:FriendOf]->(v2:Person) WHERE
id(v2)=?", [PreparedPgqlQueryStringArgument("PERSONS(3)")])])
>>> graph
PgxGraph(name: FRIENDS, v: 3, e: 2, directed: True, memory(Mb): 0)
```

10.4.3 Providing Database Connection Credentials

You can specify the database connection credentials with the

 ${\tt PgViewSubgraphReader\#fromPgPgql} \ \ \textbf{API instead of using the default credentials of the current user.}$

The following example shows loading of a subgraph for non-default database connection settings:

- JShell
- Java



JShell

```
opg4j> var graph = session.readSubgraph().
                          fromPgPgql("FRIENDS").
...>
                          username("graphuser").
...>
                          password("<password for graphuser>").
                          keystoreAlias("database1").
...>
                          schema("GRAPHUSER").
...>
                          jdbcUrl("jdbc:oracle:thin:@localhost:1521/orclpdb").
...>
...>
                          connections (12).
                          queryPgql("MATCH (a:Person)").
...>
...>
                          load()
graph ==> PgxGraph[name=FRIENDS, N=4, E=0, created=1648541234520]
```

Java

10.4.4 Dynamically Expanding a Subgraph

You can expand an in-memory subgraph by loading another subgraph into memory and merging it with the current in-memory subgraph.

The PgxGraph.expandGraph() method can be used to expand a subgraph. The following applies when merging two graphs:

- Both the graphs can have separate sets of providers.
- A graph can have some providers same as the other graph. In this case:
 - The providers with the same names must have the same labels.
 - The graph being merged must have the same or a common subset of properties as the base graph. However, it is possible that either of the graphs may have more number of properties.

The following example shows the expansion of the subgraph created in PGQL Based Subgraph Loading:

- JShell
- Java



Python

JShell

```
opg4j> graph = graph.expandGraph().
...> withPgql().
...> fromPgPgql("FRIENDS").
...> queryPgql("MATCH (v1:PERSON) -[e:FRIENDOF]-> (v2:PERSON) WHERE
id(v1) = 'PERSONS(2)'").
...> preparedPgqlQuery("MATCH (v:PERSON) WHERE id(v)
in ?").withStringArg(1, "PERSONS(4)").
...> expand()
graph ==> PgxGraph[name=anonymous_graph_152,N=4,E=3,created=1647347092964]
```


Java

Python

The following displays the output for the preceding PGQL query using the graph visualization tool. The subgraph is now expanded to include the friendOf relationship for PERSONS (2) in addition to PERSONS (1) which was already existing in the subgraph.



Figure 10-2 Expanding a Subgraph

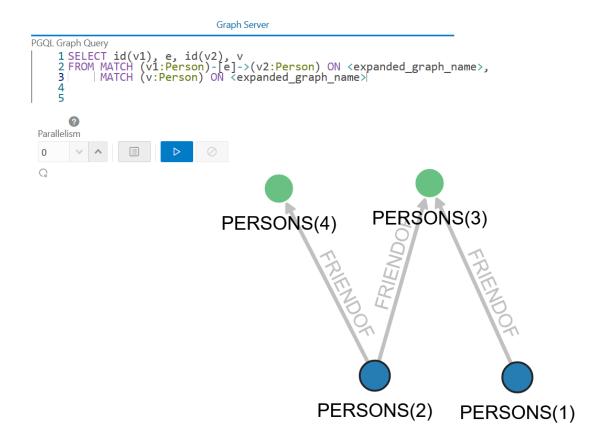

Expanding a Subgraph by Explicitly Specifying the Schema Name

When expanding a graph, you can load another subgraph by reading a PGQL property graph from a different schema. For this, you must provide the schema name as an argument to the PgqlViewGraphExpander#fromPgPgql API. You must also ensure that you have READ permission on all the underlying metadata and data tables for the PGQL property graph.

For example:

- JShell
- Java
- Python

```
opg4j> graph = graph.expandGraph().
...> withPgql().
...> fromPgPgql("GRAPHUSER", "FRIENDS").
...> queryPgql("MATCH (v:Person) WHERE id(v) = 'PERSONS(1)'").
...> expand()
graph ==> PgxGraph[name=anonymous graph 18,N=1,E=0,created=1672848726308]
```

Java

```
graph = graph.expandGraph()
    .withPgql()
    .fromPgPgql("GRAPHUSER", "FRIENDS")
    .queryPgql("MATCH (v:Person) WHERE id(v) = 'PERSONS(1)'")
    .expand();
```

Python

```
>>> graph = graph.expand_with_pgql("MATCH (v:Person) WHERE id(v) =
'PERSONS(1)'",
... pg_view_name="FRIENDS", schema="GRAPHUSER")
>>> graph
PgxGraph(name: anonymous_graph_6, v: 2, e: 0, directed: True, memory(Mb): 0)
```

Using Merging Strategy

When expanding a graph, some vertices and edges that are in the new graph data may have already been loaded in the base graph. In such cases, if the vertex and edge property values differ for all vertices and edges that are both in the base graph and in the new graph to be merged, then the following applies:

- If the merging strategy is KEEP_CURRENT_VALUES, then the vertex and edge property values coming from the new graph are ignored.
- If the merging strategy is <code>UPDATE_WITH_NEW_VALUES</code>, then the vertex and edge property values are updated with the ones found in the new graph.

For example:

- JShell
- Java

```
opg4j> import oracle.pgx.api.expansion.PropertyMergeStrategy
opg4j> graph = graph.expandGraph().
...> withPgql().
...> fromPgPgql("FRIENDS").
...> queryPgql("MATCH (v1:PERSON) -[e:FRIENDOF]-> (v2:PERSON) WHERE
id(v1) = 'PERSONS(2)'").
...> preparedPgqlQuery("MATCH (v:PERSON) WHERE id(v)
in ?").withStringArg(1, "PERSONS(4)").
...>
vertexPropertiesMergingStrategy(PropertyMergeStrategy.UPDATE_WITH_NEW_VALUES).
...> expand()
```



Java



Quick Starts for Using PGQL Property Graphs

This chapter contains quick start tutorials and other resources to help you get started on working with PGQL property graphs.

- Using Sample Data for Graph Analysis
- Quick Start: Working with PGQL Property Graphs
 This tutorial helps you get started on creating, querying and executing graph algorithms on PGQL property graphs.
- Quick Start: Using Graph Machine Learning on PGQL Property Graphs
 This tutorial helps you get started on applying the DeepWalk machine learning algorithm on a PGQL property graph.
- Quick Start: Using the Python Client as a Module
 This section describes how to use the Python client as a module in Python applications.
- Oracle LiveLabs Workshops for Graphs
 You can also explore Oracle Property Graph features using the graph workshops in Oracle LiveLabs.

11.1 Using Sample Data for Graph Analysis

The rpm installation of the graph server provides you with sample graph data which can be used for graph analysis. You can access this sample graph data either in <code>/opt/oracle/graph/data or <client dir>/data directory.</code>

The <code>bank_graph</code> folder contains data that represent the vertices and edges of a graph in <code>bank_nodes.csv</code> and <code>bank_edges_amt.csv</code> files respectively. You can import the graph data from these <code>.csv</code> files into the database. You can then create a graph for querying and analyses.

Importing Data from CSV Files

11.1.1 Importing Data from CSV Files

You can import data from CSV files into the database through Oracle SQL Developer or by using Oracle Database utilities (such as SQL*Loader or External Tables).

- See Data Import Wizard in Oracle SQL Developer User's Guide on how to import data from files into tables.
- See Oracle Database Utilities for more information on data transfer utilities.

The following instructions enable you to load data into the database tables using Oracle SQL Loader.

As a prerequisite requirement, you must execute the following SQL statements to create the vertex (bank accounts) and edge (bank txns) tables in the database:

```
CREATE TABLE bank_accounts(id NUMBER, name VARCHAR2(10));

CREATE TABLE bank_txns(from_acct_id NUMBER, to_acct_id NUMBER, description VARCHAR2(10), amount NUMBER);
```

You can then perform the following steps to load the data:

1. Create a SQL*Loader control file to load the vertices from bank nodes.csv as shown:

```
load data
infile '<path_to_bank_nodes.csv>'
into table bank_accounts
fields terminated by "," optionally enclosed by '"'
( id, name )
```

2. Invoke SQL*Loader from the command line to load the vertices in bank_accounts table, using the preceding configuration file as shown:

```
sqlldr <dbuser>/<password> CONTROL=<path_to_vertex_loader.ctl>
```

The bank accounts table gets successfully loaded with 1000 rows.

3. Create a SQL*Loader control file to load the edge from bank edges amt.csv as shown:

```
load data
infile '<path_to_bank_edges_amt.csv>'
into table bank_txns
fields terminated by "," optionally enclosed by '"'
(from acct id, to acct id, description, amount)
```

4. Invoke SQL*Loader from the command line to load the edges in bank_txns table, using the preceding configuration file as shown:

```
sqlldr <dbuser>/<password> CONTROL=<path_to_edge_loader.ctl>
```

The bank txns table gets successfully loaded with 4996 rows.

5. Execute the following SQL statement to add the primary key constraint in the bank_accounts table:

```
ALTER TABLE bank accounts ADD PRIMARY KEY (id);
```

6. Execute the following SQL statements to add a primary key column to the bank_txns table, populate it with ROWNUM values and then define the primary key constraint:

```
ALTER TABLE bank_txns ADD txn_id NUMBER;

UPDATE bank_txns SET txn_id = ROWNUM;

COMMIT;

ALTER TABLE bank txns ADD PRIMARY KEY (txn id);
```



7. Execute the following SQL statements to add the foreign key constraints to the bank_txns table:

```
ALTER TABLE bank_txns MODIFY from_acct_id REFERENCES bank_accounts(id); ALTER TABLE bank_txns MODIFY to_acct_id REFERENCES bank_accounts(id);
```

The sample bank graph data is now available in the database tables.

11.2 Quick Start: Working with PGQL Property Graphs

This tutorial helps you get started on creating, querying and executing graph algorithms on PGQL property graphs.

The instructions assume that you have loaded the sample bank graph data provided with the graph server installation in the database tables. See Using Sample Data for Graph Analysis for more information.

The following instructions are supported with examples that can be executed either with the OPG4J Java shell or OPG4PY Python shell or through a Java program using the PGX API.

- 1. Start the interactive graph shell CLI:
 - JShell
 - Python

JShell

```
cd /opt/oracle/graph
./bin/opg4j --no_connect
Oracle Graph Server Shell 24.2.0
```

Python

```
cd /opt/oracle/graph
./bin/opg4py --no_connect
Oracle Graph Server Shell 24.2.0
```

- Obtain a JDBC database connection, if using OPG4J shell or a Java program.
 - JShell
 - Java

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host>:<port>/<sid>"
jdbcUrl ==> "jdbc:oracle:thin:@localhost:1521/orclpdb"
```

```
opg4j> var conn =
DriverManager.getConnection(jdbcUrl,"<username>","<password>")
conn ==> oracle.jdbc.driver.T4CConnection@7d463c9f
opg4j> conn.setAutoCommit(false);
```

Java

```
import java.sql.DriverManager;
import java.sql.Connection;
import java.sql.Statement;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlStatement;
import oracle.pg.rdbms.pgql.PgqlResultSet;
import oracle.pgx.api.*;
import oracle.pgx.api.*;
import oracle.pg.rdbms.GraphServer;

// Get a jdbc connection
String jdbcUrl="jdbc:oracle:thin:@"+<host>+":"+<port>+"/"+<service>;
conn = DriverManager.getConnection(jdbcUrl, <username>, <password>);
conn.setAutoCommit(false);
```

- 3. Create a PGQL connection.
 - JShell
 - Java
 - Python

JShell

```
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
pgqlConn ==> oracle.pg.rdbms.pgql.PgqlConnection@5c5c784c
```

Java

PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);

Python

```
>>> pgql_conn = opg4py.pgql.get_connection("<username>","<password>",
"jdbc:oracle:thin:@<host>:<port>/<sid>")
```

Create a PGQL statement to execute PGQL queries.

- JShell
- Java
- Python

JShell

```
opg4j> var pgqlStmt = pgqlConn.createStatement()
pgqlStmt ==> oracle.pg.rdbms.pgql.PgqlExecution@29e3c28
Java
```

PgqlStatement pgqlStmt = pgqlConn.createStatement();

Python

```
>>> pgql statement = pgql conn.create statement()
```

- 5. Create a PGQL property graph using the CREATE PROPERTY GRAPH statement:
 - JShell
 - Java
 - Python

JShell

```
opg4j> String pgql =
...> "CREATE PROPERTY GRAPH bank_graph "
...> + "VERTEX TABLES ( BANK_ACCOUNTS AS ACCOUNTS "
...> + "KEY (ID) "
...> + "LABEL ACCOUNTS "
...> + "PROPERTIES (ID, NAME) "
...> + "PROPERTIES (ID, NAME) "
...> + "EDGE TABLES ( BANK_TXNS AS TRANSFERS "
...> + "KEY (FROM_ACCT_ID, TO_ACCT_ID, AMOUNT) "
...> + "SOURCE KEY (FROM_ACCT_ID) REFERENCES ACCOUNTS (ID) "
...> + "DESTINATION KEY (TO_ACCT_ID) REFERENCES ACCOUNTS (ID) "
...> + "LABEL TRANSFERS "
...> + "PROPERTIES (FROM_ACCT_ID, TO_ACCT_ID, AMOUNT, DESCRIPTION) "
...> + ") OPTIONS (PG_PGQL) "
opg4j> pgq1Stmt.execute(pgq1)
```

Java

```
"VERTEX TABLES ( BANK_ACCOUNTS AS ACCOUNTS " +
"KEY (ID) " +
"LABEL ACCOUNTS " +
"PROPERTIES (ID, NAME)" +
") " +
"EDGE TABLES ( BANK_TXNS AS TRANSFERS " +
"KEY (FROM_ACCT_ID, TO_ACCT_ID, AMOUNT) " +
"SOURCE KEY (FROM_ACCT_ID) REFERENCES ACCOUNTS (ID) " +
"DESTINATION KEY (TO_ACCT_ID) REFERENCES ACCOUNTS (ID) " +
"LABEL TRANSFERS " +
"PROPERTIES (FROM_ACCT_ID, TO_ACCT_ID, AMOUNT, DESCRIPTION)" +
") OPTIONS(PG_PGQL)";
pgqlStmt.execute(pgql);
```

Python

```
>>> pgql = """
           CREATE PROPERTY GRAPH bank graph
           VERTEX TABLES (
            BANK ACCOUNTS
            LABEL ACCOUNTS
            PROPERTIES (ID, NAME)
          )
. . .
           EDGE TABLES (
. . .
            BANK TXNS
              SOURCE KEY (FROM ACCT ID) REFERENCES BANK ACCOUNTS (ID)
. . .
               DESTINATION KEY (TO ACCT ID) REFERENCES BANK ACCOUNTS (ID)
               LABEL TRANSFERS
               PROPERTIES (FROM ACCT ID, TO ACCT ID, AMOUNT, DESCRIPTION)
           ) OPTIONS (PG PGQL)
>>> pgql statement.execute(pgql)
False
```

The graph gets created successfully.

- **6.** Execute the following query to retrieve the first 10 elements of the graph as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> String pgqlQuery =
...> "SELECT e.from_acct_id, e.to_acct_id, e.amount FROM "
...> + "MATCH (n:ACCOUNTS) -[e:TRANSFERS]-> (m:ACCOUNTS) ON BANK_GRAPH "
...> + "LIMIT 10"
```

```
opq4j> var rs = pqqlStmt.executeQuery(pqqlQuery)
rs ==> oracle.pg.rdbms.pgql.pgview.PgViewResultSet@1e368085
opg4j> rs.print()
| FROM_ACCT_ID | TO_ACCT_ID | AMOUNT |
| 121 | 94 | 1000
          | 255
1 121
                     | 1000
           . 221
| 121
                     | 1000
| 122
           | 27
                     | 1000
| 122
           | 606
                    | 1000
| 122
           1 495
                     | 1000
                     | 1000
1 122
           | 640
| 122
           | 140
                     | 1000
| 123
           1 95
                     | 1000
| 123
           | 130 | 1000
```

\$16 ==> oracle.pg.rdbms.pgql.pgview.PgViewResultSet@1e368085

Java

```
String pgqlQuery =
    "SELECT e.from_acct_id, e.to_acct_id, e.amount FROM " +
    "MATCH (n:ACCOUNTS) -[e:TRANSFERS]-> (m:ACCOUNTS) ON BANK_GRAPH " +
    "LIMIT 10";
PgqlResultSet rs = pgqlStmt.executeQuery(pgqlQuery);
rs.print();
```

Python

```
>>> pggl = """
... SELECT e.from acct id, e.to acct id, e.amount FROM
... MATCH (n:ACCOUNTS) -[e:TRANSFERS]-> (m:ACCOUNTS) on BANK GRAPH
... limit 10
... """
>>> pgql statement.execute query(pgql).print()
+----+
| FROM ACCT ID | TO ACCT ID | AMOUNT |
+-----
| 121 | 94 | 1000 |
          | 255
                    | 1000
| 121
                    | 1000
121
          | 221
| 122
          | 27
                    | 1000
          | 606
| 122
                    | 1000
| 122
          | 495
                     | 1000
                    | 1000
| 122
          | 640
| 122
          | 140
                    | 1000
                     | 1000
I 123
           | 95
          | 130
                    | 1000
```



- Load the graph into the graph server (PGX). This will enable you to run a variety of different built-in algorithms on the graph and will also improve query performance for larger graphs.
 - JShell
 - Java
 - Python

```
opg4j> var instance = GraphServer.getInstance("https://localhost:7007",
   "<username>", "<password>".toCharArray())
   instance ==> ServerInstance[embedded=false,baseUrl=https://localhost:7007]
   opg4j> var session = instance.createSession("mySession")
   session ==>
   PgxSession[ID=43653128-59cd-4e69-992c-1a2beac05857,source=mySession]
   opg4j> var graph =
   session.readGraphByName("BANK_GRAPH",GraphSource.PG_PGQL)
   graph ==> PgxGraph[name=BANK_GRAPH,N=1000,E=4996,created=1643308582055]
```

Java

```
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "<username>", "<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
PgxGraph graph = session.readGraphByName("BANK GRAPH",GraphSource.PG PGQL);
```

Python

```
>>> instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
>>> session = instance.create_session("my_session")
>>> graph = session.read_graph_by_name('BANK_GRAPH', 'pg_pgql')
>>> graph
PgxGraph(name: BANK_GRAPH, v: 1000, e: 4996, directed: True, memory(Mb): 0)
```

- 8. Execute the PageRank algorithm as shown:
 - JShell
 - Java
 - Python

```
opg4j> var analyst = session.createAnalyst()
analyst ==> NamedArgumentAnalyst[session=3f0a9a71-f349-4aac-b75f-a7c4ae50851b]
opg4j> analyst.pagerank(graph)
$10 ==> VertexProperty[name=pagerank,type=double,graph=BANK GRAPH]
```

Java

```
Analyst analyst = session.createAnalyst();
analyst.pagerank(graph);
```

Python

```
>>> analyst = session.create_analyst()
>>> analyst.pagerank(graph)
VertexProperty(name: pagerank, type: double, graph: BANK GRAPH)
```

- 9. Query the graph to list the top 10 accounts by pagerank:
 - JShell
 - Java
 - Python

JShell

```
opg4j> String pgql ==> "SELECT a.id, a.pagerank FROM MATCH (a) ON
BANK GRAPH ORDER BY a.pagerank DESC LIMIT 10"
opg4j> session.queryPgql(pgql).print()
+----+
| id | pagerank
+----+
| 387 | 0.007292323575404966
| 406 | 0.0067300944623203615 |
| 135 | 0.0067205459831892545 |
| 934 | 0.00663484385036358
| 397 | 0.005693569761570973
| 559 | 0.0052584383114609844 |
| 352 | 0.005216329599236731 |
| 330 | 0.005093350408942336
| 222 | 0.004682551613749817
| 4 | 0.004569682370461633 |
```

\$18 ==> PgqlResultSetImpl[graph=BANK GRAPH,numResults=10]



```
String pgQuery = "SELECT a.id, a.pagerank FROM MATCH (a) ON BANK_GRAPH
ORDER BY a.pagerank DESC LIMIT 10";
session.queryPgql(pgQuery).print();
```

Python

```
>>> pgql = "SELECT a.id, a.pagerank FROM MATCH (a) ON BANK GRAPH ORDER BY
a.pagerank DESC LIMIT 10"
>>> session.query pgql(pgql).print()
+----+
| id | pagerank
+----+
| 387 | 0.007292323575404966
| 406 | 0.0067300944623203615 |
| 135 | 0.0067205459831892545 |
| 934 | 0.00663484385036358
| 397 | 0.005693569761570973
| 559 | 0.0052584383114609844 |
| 352 | 0.005216329599236731
| 330 | 0.005093350408942336
| 222 | 0.004682551613749817
| 4 | 0.004569682370461633 |
```

11.3 Quick Start: Using Graph Machine Learning on PGQL Property Graphs

This tutorial helps you get started on applying the DeepWalk machine learning algorithm on a PGQL property graph.

The instructions assume that the PGQL property graph is already existing in your current database.

Run the following steps to build and work with a Deep Walk model.

1. Load the PGQL property graph into the graph server (PGX).

- JShell
- Java
- Python

JShell

```
opg4j> var instance = GraphServer.getInstance("https://localhost:7007",
   "<username>", "<password>".toCharArray())
instance ==> ServerInstance[embedded=false,baseUrl=https://localhost:7007]
```

```
opg4j> var session=instance.createSession("mySession")
session ==>
PgxSession[ID=5af9c362-10a3-4a7c-953c-602553d4606b,source=mySession]
opg4j> var graph =
session.readGraphByName("BANK_GRAPH",GraphSource.PG_PGQL)
graph ==> PgxGraph[name=BANK_GRAPH,N=1000,E=4997,created=1684315831352]
```

```
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "<username>", "<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
PgxGraph graph = session.readGraphByName("BANK GRAPH",GraphSource.PG PGQL);
```

Python

```
>>> instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
>>> session = instance.create_session("my_session")
>>> graph = session.read_graph_by_name("BANK_GRAPH", "pg_pgql")
>>> graph
PgxGraph(name: BANK_GRAPH, v: 1000, e: 4997, directed: True, memory(Mb): 0)
```

- 2. Build a Deep Walk model using customized hyper-parameters as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var model = session.createAnalyst().deepWalkModelBuilder().
...>
                     setMinWordFrequency(1).
...>
                     setBatchSize(512).
...>
                     setNumEpochs(1).
...>
                     setLayerSize(100).
                     setLearningRate(0.05).
...>
                     setMinLearningRate(0.0001).
...>
                     setWindowSize(3).
...>
...>
                     setWalksPerVertex(6).
...>
                     setWalkLength(4).
...>
                     setNegativeSample(2).
                     build()
...>
model ==> oracle.pgx.api.mllib.DeepWalkModel@6e0f259e
```



Python

- Train the Deep Walk model as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> model.fit(graph)
```

Java

```
model.fit(graph);
```



Python

>>> model.fit(graph)

- 4. Get the loss value as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var loss = model.getLoss()
loss ==> -2.097562355629634E-5
```

Java

```
double loss = model.getLoss();
```

Python

```
>>> loss = model.loss
>>> loss
-2.0706271243398078e-05
```

- Compute similar vertices as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var similars = model.computeSimilars("ACCOUNTS(280)",10)
batchSimilars ==> oracle.pgx.api.frames.internal.PgxFrameImpl@308e465b
opg4j> batchSimilars.print()
```



```
import oracle.pgx.api.frames.*;

PgxFrame similars = model.computeSimilars("ACCOUNTS(280)", 10);
similars.print();
```

Python

```
>>> similars = model.compute_similars("ACCOUNTS(280)",10)
>>> similars.print()
```

The example produces a similar output:

6. Get all trained vectors and store them in a database table as shown:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexVectors = model.getTrainedVertexVectors().flattenAll()
vertexVectors ==> oracle.pgx.api.frames.internal.PgxFrameImpl@46cb9794
opg4j>
vertexVectors.write().db().name("deepwalkframe").tablename("vertexVectors")
.overwrite(true).store()
```

Java

PgxFrame vertexVectors = model.getTrainedVertexVectors().flattenAll();
vertexVectors.write()

```
.db()
.name("vertex vectors")
.tablename("vertexVectors")
.overwrite(true)
.store();
```

Python

```
>>> vertex_vectors = model.trained_vectors.flatten_all()
>>> vertex_vectors.write().db(). \
... table_name("vertex_vectors"). \
... overwrite(True). \
... store()
```

- 7. Store the trained model in the database as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> model.export().db().
...> modelstore("bank_model").
...> modelname("model").
...> description("DeepWalk Model for Bank data").
...> store()
```

Java

```
model.export().db()
  .modelstore("bank_model")
  .modelname("model2")
  .description("DeepWalk Model for Bank data")
  .store();
```

Python

```
>>> model.export().db(model_store="bank_model",
... model_name="model",
... model_description="DeepWalk Model for Bank data")
```

8. Load a pre-trained model from the database as shown:

- JShell
- Java
- Python

```
opg4j> session.createAnalyst().loadDeepWalkModel().db().
...> modelstore("bank_model").
...> modelname("model").
...> load()
```

Java

```
model = session.createAnalyst().loadDeepWalkModel().db()
   .modelstore("bank_model")
   .modelname("model")
   .load();
```

Python

- 9. Destroy the model as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> model.destroy()
```

Java

model.destroy();

Python

>>> model.destroy()

See Using the Machine Learning Library (PgxML) for Graphs for more information on the supported machine learning algorithms.

11.4 Quick Start: Using the Python Client as a Module

This section describes how to use the Python client as a module in Python applications.

Remote Server

For this mode, all you need is the Python client to be installed. In your Python program, you must authenticate with the remote server before you can create a session as illustrated in the following example. Note that you must replace the values for <code>base_url</code>, <code>jdbc_url</code>, <code>username</code>, and <code>password</code> with values to match your environment details.

```
import pypgx
import opg4py
import opg4py.graph server as graph server
pgql conn = opg4py.pgql.get connection("<username>","<password>",
"<jdbc url>")
pgql statement = pgql conn.create statement()
pgql = """
        CREATE PROPERTY GRAPH bank graph
        VERTEX TABLES (
          bank accounts
            LABEL ACCOUNTS
            PROPERTIES (ID, NAME)
        )
        EDGE TABLES (
          bank txns
            SOURCE KEY (from acct id) REFERENCES bank accounts (ID)
            DESTINATION KEY (to acct id) REFERENCES bank accounts (ID)
            LABEL TRANSFERS
            PROPERTIES (FROM ACCT ID, TO ACCT ID, AMOUNT, DESCRIPTION)
        ) OPTIONS (PG PGQL)
pgql statement.execute(pgql)
instance = graph server.get instance("<base url>", "<username>", "<password>")
session = instance.create session("my session")
graph = session.read graph by name('BANK GRAPH', 'pg pgql')
analyst = session.create analyst()
analyst.pagerank(graph)
rs = graph.query pgql("SELECT id(x), x.pagerank FROM MATCH (x) LIMIT 5")
rs.print()
```

To execute, save the above program into a file named program.py and run the following command:

```
python3 program.py
```



You will see the following output:

Converting PGQL result set into pandas dataframe

Additionally, you can also convert the PGQL result set to a pandas. DataFrame object using the to_pandas() method. This makes it easier to perform various data filtering operations on the result set and it can also be used in Lambda functions. For example,

```
example_query = (
    "SELECT n.name AS name, n.age AS age "
    "WHERE (n)"
)
result_set = sample_graph.query_pgql(example_query)
result_df = result_set.to_pandas()

result_df['age_bin'] = result_df['age'].apply(lambda x: int(x)/20) # create
age bins based on age ranges
```

Note:

To view the complete set of available Python APIs, see OPG4PY Python API Reference.

Embedded Server

For this mode, the Python client and the Graph Server RPM package must be installed on the same machine.

```
import os
os.environ["PGX_CLASSPATH"] = "/opt/oracle/graph/lib/*"
instance = graph_server.get_embedded_instance()
session = instance.create_session("python_pgx_client")
print(session)
```

To execute, save the above program into a file named program.py and run the following command.

```
python3 program.py
```



After successful login, you must see a similar message indicating a PGX session was created:

PgxSession(id: 32fc7037-18f1-4381-ba94-107e5f63aec2, name: python pgx client)



To view the complete set of available Python APIs, see OPG4PY Python API Reference.

11.5 Oracle LiveLabs Workshops for Graphs

You can also explore Oracle Property Graph features using the graph workshops in Oracle LiveLabs.

See the Oracle LiveLabs Workshop for a complete example on querying, analyzing and visualizing graphs using data stored in a free tier Autonomous Database instance. You will provision a new free tier Autonomous Database instance, load data into it, create a graph, and then query, analyze and visualize the graph.



Getting Started with the Client Tools

You can use multiple client tools to interact with the graph server (PGX) or directly with the graph data in the database.

The following sections explain how to use the various client tools:

Interactive Graph Shell CLIs

Both the Oracle Graph server and client packages contain interactive command-line applications for interacting with the Java APIs and the Python APIs of the product, locally or on remote computers.

Using Autonomous Database Graph Client

Using the AdbGraphClient API, you can access Graph Studio features in Autonomous Database programmatically using the Oracle Graph Client or through your Java or Python application.

Using the Graph Visualization Web Client

You can use the Graph Visualization application to visualize graphs that are either loaded into the graph server (PGX) or stored in the database.

Using the Jupyter Notebook Interface

You can use the Jupyter notebook interface to create, load, and query PGQL property graphs through Python.

Additional Client Tools for Querying PGQL Property Graphs

When working with PGQL property graphs in the database, you can use other supported client tools.

Related Topics

Oracle Graph Client Installation

You can interact with the various graph features using the client CLIs and the graph visualization web client.

12.3 Using the Graph Visualization Web Client

You can use the Graph Visualization application to visualize graphs that are either loaded into the graph server (PGX) or stored in the database.

To run the graph visualization application for your installation, see Running the Graph Visualization Web Client.

Related Topics

Graph Visualization Application

The Graph Visualization application enables interactive exploration and visualization of property graphs. You can visualize graphs that are loaded into the graph server(PGX) and the graphs stored in the database.

12.4 Using the Jupyter Notebook Interface

You can use the Jupyter notebook interface to create, load, and query PGQL property graphs through Python.

Perform the following steps to perform graph analysis using Jupyter Notebook:

1. Install the Jupyter Notebook application following the Jupyter documentation. The following example installs Jupyter with pip:

```
pip3 install --user jupyter
```

- 2. Ensure that your Jupyter installation is added to the PATH environment variable.
- 3. Run the notebook server using the jupyter notebook command.
- 4. Launch the web application using the generated URL and open a new notebook.
- Create and analyse a property graph.
 - The following example shows creating a PGQL property graph and running graph queries:

Figure 12-1 Creating a PGQL property graph in Jupyter Notebook

 The following example shows loading the PGQL property graph into the graph server (PGX) and running graph algorithms for analysis:

Figure 12-2 Running Graph Algorithms in Jupyter Notebook

12.1 Interactive Graph Shell CLIs

Both the Oracle Graph server and client packages contain interactive command-line applications for interacting with the Java APIs and the Python APIs of the product, locally or on remote computers.

The interactive graph shells dynamically interpret command-line inputs from the user, execute them by invoking the underlying functionality, and can print results or process them further. The graph shells provide a lightweight and interactive way of exercising graph functionality without creating a Java or Python application.

The graph shells are especially helpful if you want to do any of the following:

- Quickly run a "one-off" graph analysis on a specific data set, rather than creating a large application
- Run getting started examples and create demos on a sample data set
- Explore the data set, trying different graph analyses on the data set interactively
- Learn how to use the product and develop a sense of what the built-in algorithms are good for
- Develop and test custom graph analytics algorithms

The graph shell for the Java API (OPG4J) is implemented on top of the Java Shell tool (JShell). As such, it inherits all features provided by JShell such as tab-completion, history, reverse search, semicolon inference, script files, and internal variables. The graph shell for the Python API (OPG4Py) uses IPython in case it is installed.

The following sections explain in detail on how to start the graph shell CLIs:

- Starting the OPG4J Shell
- Starting the OPG4Py Shell



See Also

- Java API Reference for information on the Java APIs
- Python API Reference for information on the Python APIs

12.1.1 Starting the OPG4J Shell

Launching the OPG4J Shell

The Java shell executables are found in /opt/oracle/graph/bin after the graph server (PGX) installation, and in <CLIENT_INSTALL_DIR>/bin after the Java client installation.

The OPG4J shell uses JShell, which means the shell needs to run on Java 11 or later. See Installing the Java Client From the Graph Server and Client Downloads for more details on the prerequisites. You can then launch the OPG4J shell by entering the following in your terminal:

```
cd /opt/oracle/graph
./bin/opg4j
```

When the shell has started, the following command line prompt appears:

```
For an introduction type: /help intro
Oracle Graph Server Shell 24.2.0
Variables instance, session, and analyst ready to use.
opg4j>
```

By default, the OPG4J shell creates a local PGX instance, to run graph functions in the same JVM as the shell as described in Developing Applications Using Graph Server Functionality as a Library.

Command-line Options

To view the list of available command-line options, add --help to the opg4j command:

```
./bin/opg4j --help
```

To start the opg4j shell without connecting to the graph server (PGX), use the --no_connect option as shown:

```
./bin/opg4j --no_connect
```

Starting the OPG4J Shell on Remote Mode

The OPG4J shell can connect to a graph server (PGX) instance that is running on another JVM (possibly on a different machine). In order to launch the OPG4J shell in remote mode, you must specify the --base_url parameter as shown:

```
./bin/opg4j --base_url https://<host>:7007 --username <graphuser>
```

where:



- <host>: is the server host
- <graphuser>: is the database user
 You will be prompted for the database password.



The graph server (PGX), listens on port 7007 by default. If needed, you can configure the graph server to listen on a different port by changing the port value in the server configuration file (server.conf). See Configuring the Graph Server (PGX) for details.

When the shell has started, the following command line prompt appears:

```
Oracle Graph Server Shell 24.2.0 Variables instance, session, and analyst ready to use. opg4j>
```

If you have multiple versions of Java installed, you can easily switch between installations by setting the JAVA HOME variable before starting the shell. For example:

```
export JAVA HOME=/usr/lib/jvm/java-11-oracle
```

Batch Execution of Scripts

The OPG4J shell can execute a script by passing the path(s) to the script(s) to the opg4j command. For example:

```
./bin/opg4j /path/to/script.jsh
```

Predefined Functions

The OPG4J shell provides the following utility functions:

- println(String): A shorthand for System.out.println(String).
- loglevel(String loggerName, String levelName): A convenient function to set the loglevel.

The loglevel function allows you to set the log level for a logger. For example, loglevel ("ROOT", "INFO") sets the level of the root logger to INFO. This causes all logs of INFO and higher (WARN, ERROR, FATAL) to be printed to the console.

Script Arguments

You can also provide parameters to the script executed by the graph server (PGX). For example:

```
./bin/opg4j /path/to/script.jsh script-arg-1 script-arg-2
```



The script /path/to/script.jsh can then access the arguments through the arguments.scriptArgs variable. The arguments are provided as an array of strings (String[]). For example:

```
Arrays.stream(arguments.scriptArgs).forEach((a) ->
    System.out.println(a));
```

The preceding example prints the output as shown:

```
script-arg-1
script-arg-2
```

Staying in Interactive Mode

By default, the OPG4J shell exits after it finishes execution. To stay in interactive mode after the script finishes *successfully*, pass the --keep running flag to the shell. For example:

```
./bin/opg4j -b https://myserver.com:7007/ /path/to/script.jsh --keep running
```

12.1.2 Starting the OPG4Py Shell

Launching the OPG4Py Shell

The OPG4Py shell executables are found in /opt/oracle/graph/bin after the graph server (PGX) installation, and in <CLIENT INSTALL DIR>/bin after the Python client installation.

Before launching the OPG4Py shell, verify that your system meets these prerequisites. You can then launch the OPG4Py shell by entering the following in your terminal:

```
cd /opt/oracle/graph
./bin/opg4py
```

When the shell has started, the following command line prompt appears:

```
Oracle Graph Server Shell 24.2.0 >>>
```

If IPython is installed the following prompt will appear:

```
In [1]:
```

By default, the OPG4Py shell creates a local PGX instance, to run graph functions in the same JVM as the shell as described in Developing Applications Using Graph Server Functionality as a Library.

Command-line Options

To view the list of available command-line options, add --help to the opg4py command:

```
./bin/opg4py --help
```



To start the PyPGX shell without connecting to the graph server (PGX), use the --no_connect option as shown:

```
./bin/opg4py --no connect
```

Starting the OPG4Py Shell on Remote Mode

The OPG4Py shell can connect to a graph server (PGX) instance that is running on another JVM (possibly on a different machine). In order to launch the OPG4Py shell in remote mode, you must specify the --base url parameter as shown:

```
./bin/opg4py --base url https://<host>:7007 --username <graphuser>
```

where:

- <host>: is the server host
- <graphuser>: is the database user
 You will be prompted for the database password.



The graph server (PGX), listens on port 7007 by default. If needed, you can configure the graph server to listen on a different port by changing the port value in the server configuration file (server.conf). See Configuring the Graph Server (PGX) for details.

When the OPG4Py shell has started, the following command line prompt appears:

```
Oracle Graph Server Shell 24.2.0 >>>
```

12.2 Using Autonomous Database Graph Client

Using the AdbGraphClient API, you can access Graph Studio features in Autonomous Database programmatically using the Oracle Graph Client or through your Java or Python application.

This API provides the following capabilities:

- Authenticate with Autonomous Database
- Manage the Graph Studio environment
- Execute graph queries and algorithms against the graph server (PGX)
- Execute graph queries directly against Oracle Database

To use the AdbGraphClient API, you must have access to Oracle Graph Client installation. The API is provided by the Oracle Graph Client library which is a part of the Oracle Graph Server and Client distribution. See Installing Oracle Graph Client on how to install and get started with the graph client shell CLIs for Java or Python.

Also, prior to using the Autonomous Database Graph Client, ensure you meet all the prerequisite requirements explained in Prerequisites for Using Autonomous Database Graph Client.

The following example shows using the AdbGraphClient API to establish a connection to Graph Studio, start an environment with allocated memory, load a PGQL property graph into memory, execute PGQL gueries and run algorithms against the graph.



See the Javadoc and Python API Reference for more information on AdbGraphClient API.

Start the interactive graph shell CLI and connect to your Autonomous Database instance with the AdbGraphClient using one of the following methods:

Configuring the AdbGraphClient using Tenancy Details

- JShell
- Java
- Python

JShell

```
cd /opt/oracle/graph
./bin/opg4j --no_connect
For an introduction type: /help intro
Oracle Graph Server Shell 24.2.0
opg4j> import oracle.pg.rdbms.*
opg4j> var config = AdbGraphClientConfiguration.builder()
opg4j> config.database("<DB_name>")
opg4j> config.tenancyOcid("<tenancy_OCID>")
opg4j> config.databaseOcid("<database_OCID>")
opg4j> config.username("ADBDEV")
opg4j> config.password("<password_for_ADBDEV>")
opg4j> config.endpoint("https://<hostname-
prefix>.adb.<region>.oraclecloudapps.com/")
opg4j> var client = new AdbGraphClient(config.build())
client ==> oracle.pg.rdbms.AdbGraphClient@7b8d1537
```

Java

```
import oracle.pg.rdbms.*;

var config = AdbGraphClientConfiguration.builder();
config.tenancyOcid("<tenancy_OCID>");
config.databaseOcid("<database_OCID>");
config.database("<DB_name>");
config.username("ADBDEV");
config.password("<password_for_ADBDEV>");
config.endpoint("https://<hostname-
prefix>.adb.<region>.oraclecloudapps.com/");
```



```
var client = new AdbGraphClient(config.build());
```

Python

Configuring the AdbGraphClient using JDBC Connection

You can also configure the AdbGraphClient to use a JDBC connection to connect to your Autonomous Database instance (as shown in the following code). See Connect with JDBC Thin Driver in Using Oracle Autonomous Database Serverless on how to obtain the JDBC URL to connect to the Autonomous Database.

However, ensure that you have READ access to the v\$pdbs view in your Autonomous Database instance. By default, the ADMIN user has READ access to the v\$pdbs view. For all other users (non-administrator users), the READ access can be granted by the ADMIN (GRANT SELECT ON v\$pdbs TO $\langle user \rangle$).

- JShell
- Java
- Python

JShell

```
import oracle.pg.rdbms.*
opg4j> var conn = DriverManager.getConnection(<jdbcUrl>, <username>,
<password>)
opg4j> var config = AdbGraphClientConfiguration.fromConnection(conn,
<password>)
opg4j> var client = new AdbGraphClient(config)
```



```
import oracle.pg.rdbms.*;
AdbGraphClientConfiguration config =
AdbGraphClientConfiguration.fromCredentials(<jdbcUrl>, <username>,
<password>);
AdbGraphClient client = new AdbGraphClient(config);
```

Python

```
>>> from opg4py.adb import AdbClient
>>> client = AdbClient.from connection(<jdbcUrl>, <username>, <password>)
```

Start the PGX server environment with the desired memory as shown in the following code.

This submits a job in Graph Studio for environment creation. job.get() waits for the environment to get started. You can always verify if the environment has started successfully with client.isAttached(). The method returns a boolean true if the environment is running.

However, you can skip the step of creating an environment, if client.isAttached() returns true in the first step of the code.

- JShell
- Java
- Python

JShell

```
opg4j> client.isAttached()
$9 ==> false
opg4j> var job=client.startEnvironment(10)
job ==> oracle.pg.rdbms.Job@117e9a56[Not completed]
opg4j> job.get()
$11 ==> null
opg4j> job.getName()
$11 ==> "Environment Creation - 16 GBs"
opg4j> job.getType()
$12 ==> ENVIRONMENT_CREATION
opg4j> job.getCreatedBy()
$13 ==> "ADBDEV"
opg4j> client.isAttached()
$11 ==> true
```

Java

```
if (!client.isAttached()) {
    var job = client.startEnvironment(10);
```

```
job.get();
    System.out.println("job details: name=" + job.getName() + "type=
" + job.getType() +"created_by= " + job.getCreatedBy());
    }
job details: name=Environment Creation - 16 GBstype=
ENVIRONMENT CREATIONcreated by= ADBDEV
```

Python

```
>>> client.is_attached()
False
>>> job = client.start_environment(10)
>>> job.get()
>>> job.get_name()
'Environment Creation - 16 GBs'
>>> job.get_created_by()
'ADBDEV'
>>> client.is_attached()
True
```

- 3. Create an instance and a session object as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var instance = client.getPgxInstance()
instance ==> ServerInstance[embedded=false,baseUrl=https://<hostname-
prefix>.adb.<region>.oraclecloudapps.com/graph/pgx]
opg4j> var session = instance.createSession("AdbGraphSession")
session ==> PgxSession[ID=c403be26-
ad0c-45cf-87b7-1da2a48bda54,source=AdbGraphSession]
```

Java

```
ServerInstance instance = client.getPgxInstance();
PgxSession session = instance.createSession("AdbGraphSession");
```

Python

```
>>> instance = client.get_pgx_instance()
>>> session = instance.create_session("adb-session")
```

- 4. Load a PGQL property graph from your Autonomous Database instance into memory.
 - JShell
 - Java
 - Python

```
opg4j> var graph = session.readGraphByName("BANK_GRAPH",
GraphSource.PG_PGQL)
graph ==> PgxGraph[name=BANK GRAPH, N=1000, E=5001, created=1647800790654]
```

Java

```
PgxGraph graph = session.readGraphByName("BANK_GRAPH",
GraphSource.PG PGQL);
```

Python

```
>>> graph = session.read graph by name("BANK GRAPH", "pg pgql")
```

- 5. Create an Analyst and execute a Pagerank algorithm on the graph as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> session.createAnalyst().pagerank(graph)
$16 ==> VertexProperty[name=pagerank,type=double,graph=BANK GRAPH]
```

Java

```
session.createAnalyst().pagerank(graph);
```

Python

```
>>> session.create_analyst().pagerank(graph)
VertexProperty(name: pagerank, type: double, graph: BANK GRAPH)
```

- **6.** Execute a PGQL query on the graph and print the result set as shown:
 - JShell
 - Java
 - Python

opg4j> graph.queryPgql("SELECT a.acct_id AS source, a.pagerank, t.amount,
b.acct_id AS destination FROM MATCH (a)-[t]->(b) ORDER BY a.pagerank DESC
LIMIT 3").print()

Java

```
PgqlResultSet rs = graph.queryPgql("SELECT a.acct_id AS source,
a.pagerank, t.amount, b.acct_id AS destination FROM MATCH (a)-[t]->(b)
ORDER BY a.pagerank DESC LIMIT 3");
rs.print();
```

Python

```
>>> rs = graph.query_pgql("SELECT a.acct_id AS source, a.pagerank,
t.amount, b.acct_id AS destination FROM MATCH (a)-[t]->(b) ORDER BY
a.pagerank DESC LIMIT 3").print()
```

On execution, the query produces the following output:

387	+-	source		pagerank		amount		destination	+
	İ	387	İ	0.007302836252205922	İ	1000.0	İ	374	1 1 1 .

Optionally, you can execute a PGQL query directly against the graph in the database as shown in the following code.

In order to establish a JDBC connection to the database, you must download the wallet and save it in a secure location. See JDBC Thin Connections with a Wallet on how to determine the JDBC URL connection string.

JShell

- Java
- Python

```
opg4j> String jdbcUrl="jdbc:oracle:thin:@<tns_alias>?
TNS_ADMIN=<path_to_wallet>"
opg4j> var conn =
DriverManager.getConnection(jdbcUrl,"ADBDEV","<password_for_ADBDEV>")
conn ==> oracle.jdbc.driver.T4CConnection@36ee8c7b
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
pgqlConn ==> oracle.pg.rdbms.pgql.PgqlConnection@5f27d271
opg4j> var pgqlStmt = pgqlConn.createStatement()
pgqlStmt ==> oracle.pg.rdbms.pgql.PgqlExecution@4349f52c
opg4j> pgqlStmt.executeQuery("SELECT a.acct_id AS source, t.amount, b.acct_id AS destination FROM MATCH (a)-[t]->(b) ON BANK_GRAPH LIMIT 3").print()
```

Java

```
import oracle.pg.rdbms.pggl.PgglConnection;
import oracle.pg.rdbms.pgql.PgqlStatement;
import oracle.pg.rdbms.pgql.PgqlResultSet;
import oracle.pgx.api.*;
import oracle.pg.rdbms.GraphServer;
import oracle.pg.rdbms.pgql.jdbc.PgqlJdbcRdbmsDriver;
DriverManager.registerDriver(new PgqlJdbcRdbmsDriver());
String jdbcUrl="jdbc:oracle:thin:@<tns alias>?TNS ADMIN=<path to wallet>";
Connection conn =
DriverManager.getConnection(jdbcUrl,"ADBDEV","<password for ADBDEV>");
PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
PgqlStatement pgqlStmt = pgqlConn.createStatement();
PgglResultSet rs = pgglStmt.executeQuery("SELECT a.acct id AS source,
t.amount, b.acct id AS destination FROM MATCH (a)-[t]->(b) ON BANK GRAPH
LIMIT 3");
rs.print();
```

Python

```
>>> jdbcUrl = "jdbc:oracle:thin:@<tns_alias>?TNS_ADMIN=<path_to_wallet>"
>>> pgql_conn =
opg4py.pgql.get_connection("ADBDEV","<password_for_ADBDEV>", jdbcUrl)
>>> pgql_statement = pgql_conn.create_statement()
>>> pgql_statement.execute_query("SELECT a.acct_id AS source, t.amount,
b.acct_id AS destination FROM MATCH (a)-[t]->(b) ON BANK_GRAPH LIMIT
3").print()
```



On execution, the query produces the following output:

+	
1000 1000 921 1000 1000 662 1000 1000 506	

8. Close the session after executing all graph queries as shown:

- JShell
- Java
- Python

JShell

```
opg4j> session.close()
```

Java

```
opg4j> session.close();
```

Python

```
>>> session.close()
```

- Prerequisites for Using Autonomous Database Graph Client
- Using the PGX JDBC Driver with the AdbGraphClient API
 Starting from Graph Server and Client Release 24.1.0, you can use the PGX JDBC driver with the AdbGraphClient API to query graphs stored in the memory of the graph server in Graph Studio on Autonomous Database.

12.2.1 Prerequisites for Using Autonomous Database Graph Client

As a prerequisite requirement to get started with the AdbGraphClient API, you must:

- Provision an Autonomous Database instance in Oracle Autonomous Database.
- Obtain the following information if you are configuring the AdbGraphClient using the tenancy details. Otherwise, skip this step.

Key Description		More Information				
tenancy OCID	The Oracle Cloud ID (OCID) of your tenancy	Fin	To determine the OCID for your tenancy, see "Where to Find your Tenancy's OCID" in: Oracle Cloud Infrastructure Documentation.			
databas e	Database name of your Autonomous Database instance	1.	Open the OCI console and click Oracle Database in the left navigation menu.			
	instance	2.	Click Autonomous Database and navigate to the Autonomous Databases page.			
			Select the required Autonomous Database under the Display Name column and navigate to the Autonomous Database Details page.			
			Note the Database Name under "General Information" in the Autonomous Database Information tab.			
databas e OCID	The Oracle Cloud ID (OCID) of your Autonomous Database	1.	Open the OCI console and click Oracle Database in the left navigation menu.			
	Database		Click Autonomous Database and navigate to the Autonomous Databases page.			
			Select the required Autonomous Database under the Display Name column and navigate to the Autonomous Database Details page.			
		4.	Note the Database OCID under "General Information" in the Autonomous Database Information tab.			
usernam e	Graph enabled Autonomous Database username, used for logging into Graph Studio	See Create a Graph User for more information.				
passwor d	Database password for the graph user	If the password for a graph user is forgotten, then you can always reset password for the graph user by logging into Database Actions as the ADMIN user. See Edit User for more information.				
endpoint	Graph Studio endpoint URL	1.	Select your Autonomous Database instance and navigate to the Autonomous Database Details page.			
		2.	Click the Tools tab.			
		3.	Click on Graph Studio.			
		4.	Copy the URL of the new tab that opens the Graph Studio login screen.			
		5.	Edit the URL to remove the part after oraclecloudapps.com to obtain the endpoint URL. For example, the following shows the format of a sample endpoint URL:			
			<pre>https:// <hostname_prefix>.adb.<region_identifier>. oraclecloudapps.com</region_identifier></hostname_prefix></pre>			

- Access Graph Studio and create a PGQL property graph.
- Download, install and start the Oracle Graph Java or Python client.

12.2.2 Using the PGX JDBC Driver with the AdbGraphClient API

Starting from Graph Server and Client Release 24.1.0, you can use the PGX JDBC driver with the AdbGraphClient API to query graphs stored in the memory of the graph server in Graph Studio on Autonomous Database.

To use the PGX JDBC driver to connect to your Autonomous Database instance, note the following:

Register the PGX JDBC driver with the DriverManager:

```
import java.sql.DriverManager;
import oracle.pgx.jdbc.PgxJdbcDriver;
...
DriverManager.registerDriver(new PgxJdbcDriver());
```

- Use one of the following two ways to establish the connection using the PGX JDBC Driver:
 - Using Properties

```
properties = new Properties();
properties.put("tenancy_ocid", "<tenancy_OCID>");
properties.put("database_ocid", "<database_OCID>");
properties.put("database", "<database_name>");
properties.put("username", "<username>");
properties.put("password", "<password>");
Connection connection =
DriverManager.getConnection("jdbc:oracle:pgx:https://<hostname-prefix>.adb.region>.oraclecloudapps.com", properties);
```

Using a Wallet

```
Connection connection =
DriverManager.getConnection("jdbc:oracle:pgx:@<db_TNS_name>?
TNS ADMIN=<path to wallet>", "<ADB username>", "<ADB password>")
```

Note that the JDBC URL in the preceding code samples, use jdbc:oracle:pgx: as the prefix.

Example 12-1 Using the PGX JDBC Driver to run graph queries in Autonomous Database

The following example establishes a connection using the PGX JDBC driver to connect to an Autonomous Database instance, starts the compute environment in Graph Studio, loads a graph into the graph server (PGX), creates a statement, and runs a PGQL query on the graph.

```
import java.sql.*;
import oracle.pgx.jdbc.*;
import oracle.pg.rdbms.*;
import oracle.pgx.api.*;

public class AdbPgxJdbc {
   public static void main(String[] args) throws Exception {
        DriverManager.registerDriver(new PgxJdbcDriver());
    }
}
```

```
try (Connection conn =
DriverManager.getConnection("jdbc:oracle:pgx:@<db TNS name>?
TNS ADMIN=<path to wallet>","ADB username","<ADB password>")) {
     AdbGraphClient client = conn.unwrap(AdbGraphClient.class);
     if (!client.isAttached()) {
        var job = client.startEnvironment(10);
         job.get();
         System.out.println("job details: name=" + job.getName() + "type= " +
job.getType() +"created by= " + job.getCreatedBy());
       }
     PgxSession session = conn.unwrap(PgxSession.class);
     PgxGraph graph = session.readGraphByName("BANK PGQL GRAPH",
GraphSource.PG PGQL);
     Statement stmt = conn.createStatement();
     ResultSet rs = stmt.executeQuery("SELECT * "+
                                         "FROM GRAPH TABLE ( BANK PGQL GRAPH
"+
                                         "MATCH (a IS ACCOUNTS) -[e IS
TRANSFERS] -> (b IS ACCOUNTS) "+
                                         "WHERE a.ID = 179 AND b.ID = 688 "+
                                         "COLUMNS (e.AMOUNT AS AMOUNT ))");
     while(rs.next()){
        System.out.println("AMOUNT = " + rs.getLong("AMOUNT"));
      }
```

The resulting output of the preceding code is as shown:

```
AMOUNT = 7562
```

Related Topics

- PGX Data Type Compatibility and Casting
 - You can configure a compatibility mode for the PGX JDBC driver to determine the data type returned when calling the ResultSet#getObject() method.
- Limitations of the PGX JDBC Driver Review the limitations of the PGX JDBC driver.

12.5 Additional Client Tools for Querying PGQL Property Graphs

When working with PGQL property graphs in the database, you can use other supported client tools.

- Using Oracle SQLcl
- You can access the graph in the database using SQLcl.
 - Using SQL Developer with PGQL Property Graphs
 Using SQL Developer 23.1, you can view all the PGQL property graphs existing in your database schema by expanding PGQL Property Graphs under the Property Graph node in the Connections navigator.

12.5.1 Using Oracle SQLcl

You can access the graph in the database using SQLcl.

You can run PGQL queries on the graph in SQLcl with a plug-in that is available with Oracle Graph Server and Client. See PGQL Plug-in for SQLcl in *Oracle SQLcl User's Guide* for more information.

The example in this section helps you get started on executing PGQL queries on a graph in SQLcl. As a prerequisite, to perform the steps in the example, you must set up the bank graph data in your database schema using the sample data provided with the graph server installation. See Using Sample Data for Graph Analysis for more information.

The following example creates a PGQL property graph using the PGQL CREATE PROPERTY GRAPH statement, executes PGQL queries against the graph and finally drops the graph using SQLcl.

1. Start SQLcl with your database schema credentials. In the following command, *graphuser* is the database user used to connect to SQLcl.

```
sql graphuser/<password_for_graphuser>@<tns_alias>

SQLcl: Release 21.2 Production on Sun Jan 30 04:30:09 2022
Copyright (c) 1982, 2022, Oracle. All rights reserved.
Connected to:
Oracle Database 21c Enterprise Edition Release 21.0.0.0.0 - Production
Version 21.3.0.0.0
```

Enable PGQL mode as shown:

```
SQL> pgql auto on;
PGQL Auto enabled for schema=[null], graph=[null], execute=[true],
translate=[false]
```

Note that no arguments are used in the preceding PGQL command.

3. Create a PGQL property graph on the bank graph data tables.

```
PGQL> CREATE PROPERTY GRAPH bank graph
 2
           VERTEX TABLES (
              bank accounts
                 LABEL ACCOUNTS
                 PROPERTIES (ID, NAME)
 5
            )
            EDGE TABLES (
              bank txns
 9
                 SOURCE KEY (from acct id) REFERENCES bank accounts (id)
10
                 DESTINATION KEY (to acct id) REFERENCES bank accounts (id)
11
                 LABEL TRANSFERS
12
                 PROPERTIES (FROM ACCT ID, TO ACCT ID, AMOUNT, DESCRIPTION)
             ) OPTIONS (PG PGQL);
```

Graph created

 Set bank_graph as the default graph using the graph argument when enabling PGQL mode.

```
PGQL> pgql auto on graph bank_graph;

PGQL Auto enabled for schema=[null], graph=[BANK_GRAPH], execute=[true],
translate=[false]
```

5. Execute PGQL queries against the default graph. For example, the following PGQL query retrieves the total number of vertices as shown:

```
PGQL> SELECT COUNT(*) AS num_vertices FROM MATCH(n);

NUM_VERTICES

1000
```

Note that in the preceding query, the graph name is not specified using the \mbox{ON} clause as part of the MATCH clause.

6. Reconnect to SQLcl as another schema user.

```
PGQL> conn system/<password_for_system>@<tns_alias>;
Connected.
```

7. Enable PGQL mode using the schema argument to set the default schema used for creating the graph. Also, set bank graph as the default graph using the graph argument:

```
PGQL> pgql auto on schema graphuser graph bank_graph;

PGQL Auto enabled for schema=[graphuser], graph=[BANK_GRAPH], execute=[true], translate=[false]
```

8. Execute a PGQL query to retrieve all the edge properties on the graph as shown:

PGQL> SELECT e.* FROM MATCH (n:accounts) -[e:transfers]-> (m:accounts) LIMIT 10;

AMOUNT	DESCRIPTION	FROM_ACCT_ID	TO_ACCT_ID
1000	transfer	178	921
1000	transfer	178	462
1000	transfer	179	688
1000	transfer	179	166
1000	transfer	179	397
1000	transfer	179	384
1000	transfer	179	900
1000	transfer	180	855
1000	transfer	180	984
1000	transfer	180	352

10 rows selected.



Therefore, you can set a default schema and execute PGQL queries against a default graph in SQLcl.

9. Finally, drop the graph after executing the required graph queries.


```
PGQL> DROP PROPERTY GRAPH bank_graph;
Graph dropped
```

Also, see Execute PGQL Queries in SQLcl for more information.

12.5.2 Using SQL Developer with PGQL Property Graphs

Using SQL Developer 23.1, you can view all the PGQL property graphs existing in your database schema by expanding **PGQL Property Graphs** under the **Property Graph** node in the **Connections** navigator.

Figure 12-3 PGQL Property Graphs in SQL Developer

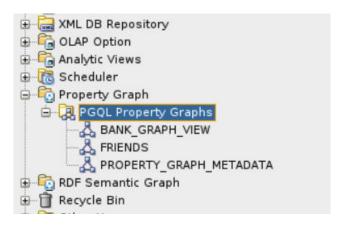

The following steps show a few examples for working with PGQL property graphs using SQL Developer.

1. Right-click the **Property Graph** node and select **Open PGQL Worksheet**.

PGQL Worksheet opens in a new tab and it supports the following actions:

- Run Query: To run a single PGQL guery
- Run Script: To run multiple PGQL queries
- 2. Create a PGQL property graph by running a CREATE PROPERTY GRAPH statement in the PGQL Worksheet. For example:



Figure 12-4 Create a PGQL property graph



The result of the query execution is displayed in the bottom pane of the Editor. On successful query execution, you can right click and refresh the **PGQL Property Graphs** object to view the newly created graph under **PGQL Property Graphs**.

3. Click on the newly created graph.


This opens a **PGQL Worksheet** in a new tab with the following default query:

```
SELECT e, v, n FROM MATCH (v)-[e]-(n) ON <graph name> LIMIT 100
```

Run one or more PGQL queries.

For example, the following shows the execution of PGQL INSERT and SELECT queries:


Figure 12-5 Running Multiple PGQL Queries

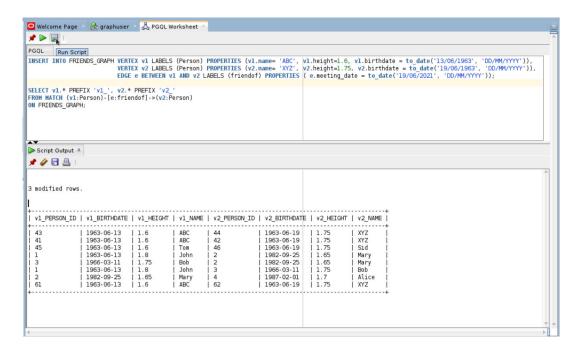

You can view the results in the **Script Output** tab.

5. Delete the PGQL property graph as shown:

Figure 12-6 Dropping a PGQL Property Graph





The graph is dropped.

Property Graph Query Language (PGQL)

PGQL is a SQL-like query language for property graph data structures that consist of *vertices* that are connected to other vertices by *edges*, each of which can have key-value pairs (properties) associated with them.

The language is based on the concept of *graph pattern matching*, which allows you to specify patterns that are matched against vertices and edges in a data graph.



The graph server (PGX) 24.2.0 supports PGQL 2.0 and earlier versions.

The property graph support provides two ways to execute Property Graph Query Language (PGQL) queries through Java APIs:

- Use the oracle.pgx.api Java package to query an in-memory snapshot of a graph that
 has been loaded into the graph server (PGX), as described in Executing PGQL Queries
 Against the Graph Server (PGX).
- Use the oracle.pg.rdbms.pgql Java package to directly query graph data stored in Oracle
 Database. See Executing PGQL Queries Against PGQL Property Graphs and Executing
 PGQL Queries Against SQL Property Graphs for more information.

For more information about PGQL, see the PGQL Specification.

- Creating a Property Graph Using PGQL
- Pattern Matching with PGQL
- · Edge Patterns Have a Direction with PGQL
- Vertex and Edge Labels with PGOL
- Variable-Length Paths with PGQL
- Aggregation and Sorting with PGQL
- Executing PGQL Queries Against PGQL Property Graphs
 This topic explains how you can execute PGQL queries directly against PGQL property graphs on Oracle Database tables.

13.1 Creating a Property Graph Using PGQL

CREATE PROPERTY GRAPH is a PGQL DDL statement to create a PGQL property graph from the database tables.

The CREATE PROPERTY GRAPH statement starts with the name you give the graph, followed by a set of vertex tables and edge tables. The graph can have no vertex tables or edge tables (an empty graph), or vertex tables and no edge tables (a graph with only vertices and no edges), or both vertex tables and edge tables (a graph with vertices and edges). However, a graph cannot be specified with only edge tables and no vertex tables.

Optionally, you can also create a PGQL property graph from existing graphs. See Creating a PGQL Property Graph with the BASE GRAPHS Clause for more information.

Note:

The following best practices are recommended when creating a PGQL property graph:

- Ensure that a primary key constraint exist for a vertex or an edge key so that the graph does not contain duplicate vertex or edge keys.
- Ensure that a foreign key constraint exists between the edge and the referenced vertex tables so that the graph does not contain edges with missing vertices.
- Run the pg.validate() function after creating the graph to verify that the vertex and edge table keys are unique and the source and destination of the edges exist.

```
pgqlStmt.execute("CALL pg.validate('<graph_name>')")
```

For example, consider the <code>bank_accounts</code> and <code>bank_txns</code> database tables created using the sample graph data in <code>opt/oracle/graph/data</code> directory. See Importing Data from CSV Files for more information.

- BANK_ACCOUNTS is a table with columns id, name. A row is added into this table for every new account.
- BANK_TXNS is a table with columns txn_id, from_acct_id, to_acct_id, description, and amount. A row is added into this table for every new transaction from from_acct_id to to acct id.

You can create a PGQL property graph using the database tables as shown:

```
CREATE PROPERTY GRAPH bank_graph

VERTEX TABLES(

bank_accounts AS accounts

KEY(id)

LABEL accounts

PROPERTIES (id, name)

)

EDGE TABLES(

bank_txns AS transfers

KEY (txn_id)

SOURCE KEY (from_acct_id) REFERENCES accounts (id)

DESTINATION KEY (to_acct_id) REFERENCES accounts (id)

PROPERTIES (description, amount)

) OPTIONS (PG_PGQL)
```

The following graph concepts are explained by mapping the database tables to the graph and using the preceding PGQL DDL statement:

- Vertex tables: A table that contains data entities is a vertex table (for example, bank accounts).
 - Each row in the vertex table is a vertex.

- The columns in the vertex table are properties of the vertex.
- The name of the vertex table is the default label for this set of vertices. Alternatively, you can specify a label name as part of the CREATE PROPERTY GRAPH statement.
- Edge tables: An edge table can be any table that links two vertex tables, or a table that has data that indicates an action from a source entity to a target entity. For example, transfer of money from FROM ACCOUNT ID to TO ACCOUNT ID is a natural edge.
 - Foreign key relationships can give guidance on what links are relevant in your data.
 CREATE PROPERTY GRAPH will default to using foreign key relationships to identify edges.
 - Some of the properties of an edge table can be the properties of the edge. For
 example, an edge from from_acct_id to to_acct_id can have properties description
 and amount.
 - The name of an edge table is the default label for the set of edges. Alternatively, you
 can specify a label name as part of the CREATE PROPERTY GRAPH statement.

Keys:

- Keys in a vertex table: The key of a vertex table identifies a unique vertex in the graph. The key can be specified in the CREATE PROPERTY GRAPH statement; otherwise, it defaults to the primary key of the table. If there are duplicate rows in the table, the CREATE PROPERTY GRAPH statement will return an error.
- Key in an edge table: The key of an edge table uniquely identifies an edge in the graph. The KEY clause when specifying source and destination vertices uniquely identifies the source and destination vertex keys.
- Table aliases: Vertex and edge tables must have unique names. If you need to identify
 multiple vertex tables from the same relational table, or multiple edge tables from the same
 relational table, you must use aliases. For example, you can create two vertex tables
 bank_accounts and accounts from one table bank_accounts, as shown:

```
CREATE PROPERTY GRAPH bank_transfers

VERTEX TABLES (bank_accounts KEY(id)

bank_accounts AS accounts KEY(id))
```

In case any of your vertex and edge table share the same name, then you must again use a table alias. In the following example, table alias is used for the edge table, DEPARTMENTS, as there is a vertex table referenced with the same name:

```
CREATE PROPERTY GRAPH hr

VERTEX TABLES (
employees KEY(employee_id)

PROPERTIES ARE ALL COLUMNS,
departments KEY(department_id)

PROPERTIES ARE ALL COLUMNS
)

EDGE TABLES (
departments AS managed_by

SOURCE KEY ( department_id ) REFERENCES departments ( department_id )

DESTINATION employees

PROPERTIES ARE ALL COLUMNS
) OPTIONS (PG_PGQL)
```



Properties: The vertex and edge properties of a graph are derived from the columns of the
vertex and edge tables respectively and by default have the same name as the underlying
table columns. However, you can choose a different property name for each column. This
helps to avoid conflicts when two tables have the same column name but with different
data types.

In the following example, the vertex properties id and name are renamed to acct_no and acct_name respectively:

```
CREATE PROPERTY GRAPH bank_transfers

VERTEX TABLES (
   bank_accounts AS accounts
   LABEL accounts
   PROPERTIES (id AS acct_no, name AS acct_name)
)
```

 REFERENCES clause: This connects the source and destination vertices of an edge to the corresponding vertex tables.

For more details on the CREATE PROPERTY GRAPH statement, see the PGQL Specification.

Refer to the following table for creating a property graph:

Table 13-1 CREATE PROPERTY GRAPH Statement Support

Method	More Information
Create a property graph in the graph server (PGX) using the oracle.pgx.api Java package	Java APIs for Executing CREATE PROPERTY GRAPH Statements
Create a property graph in the graph server (PGX) using the pypgx.api Python package	Python APIs for Executing CREATE PROPERTY GRAPH Statements
Create a PGQL property graph on Oracle Database tables	Creating a PGQL Property Graph

- Creating a PGQL Property Graph with the BASE_GRAPHS Clause
 You can create a PGQL property graph by providing a list of existing PGQL property
 graphs.
- Creating a PGQL Property Graph with Arbitrary Property Expressions
 You can create a PGQL property graph with vertex and edge properties mapped to
 arbitrary property expressions.

13.1.1 Creating a PGQL Property Graph with the BASE_GRAPHS Clause

You can create a PGQL property graph by providing a list of existing PGQL property graphs.

You can specify the BASE GRAPHS clause in the CREATE PROPERTY GRAPH DDL statement for specifying one or more existing PGQL property graphs from which you wish to create the new PGQL property graph. It is allowed to specify the BASE GRAPHS clause without specifying the VERTEX TABLES and EDGE TABLES clauses.

The syntax of the BASE GRAPHS clause in the CREATE PROPERTY GRAPH statement is as shown:

```
CreatePropertyGraph ::= 'CREATE' 'PROPERTY' 'GRAPH' GraphName

BaseGraphs?

VertexTables?

EdgeTables?
```



```
::= 'BASE' 'GRAPHS' '(' BaseGraph ( ',' BaseGraph )* ')'
BaseGraphs
BaseGraph
                     ::= SchemaQualifiedName
ElementTablesClause
                     ::= AllElementTables
                          | ElementTablesList
AllElementTables
                     ::= 'ALL' 'ELEMENT' 'TABLES' ExceptElementTables?
ExceptElementTables ::= 'EXCEPT' '(' ElementTableReference ( ','
ElementTableReference )* ')'
                     ::= '(' ElementTable ( ',' ElementTable )* ')'
ElementTablesList
ElementTable
                     ::= ElementTableReference TableAlias?
ElementTableReference ::= Identifier
```


The BASE GRAPHS clause option allows you to duplicate a graph using a different name.

```
CREATE PROPERTY GRAPH <new_graph>
BASE GRAPHS (<old_graph>)
OPTIONS ( PG PGQL )
```

Also, note that once the <code>new_graph</code> is created, it does not have any dependency on <code>old_graph</code>. This implies that updating or deleting the <code>old graph</code> has no impact on the <code>new graph</code>.


Consider the following example schema:


Figure 13-1 Example Schema

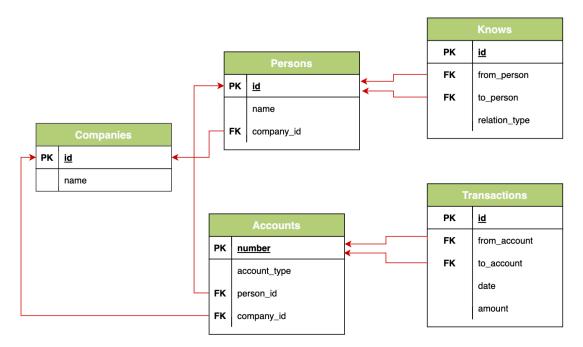

Assume that the following two graphs, <code>social_network</code> and <code>bank_transactions</code>, are created from the preceding schema:


Figure 13-2 Graphs Created from the Example Schema



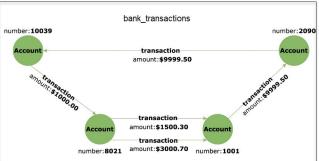

Using the BASE GRAPHS clause, you can then create a new PGQL property graph by establishing a relationship between both the preceding graphs as shown:

Figure 13-3 Financial_Transactions Graph

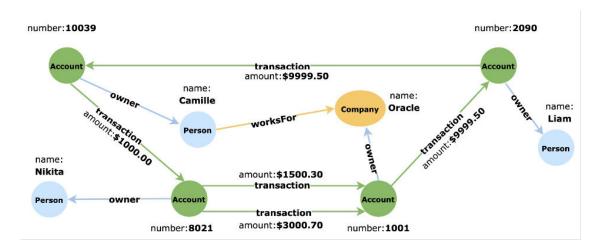

To obtain this new graph based on the social network and bank transactions graphs:

- 1. Specify the names of the two graphs, <code>social_network</code> and <code>bank_transactions</code>, in the <code>BASE GRAPHS</code> clause. If a base graph does not exist in the current schema, then the user must specify the schema name.
- 2. Eliminate the Knows edge in the social_network graph. This can be achieved by using the ALL ELEMENT TABLES EXCEPT clause and specifying the table_name of that edge. Alternatively, you can use the ELEMENT TABLES clause and specify only the two tables, Persons and Companies.
- 3. Create a new edge between the Accounts vertex in the bank_transactions graph and the Persons vertex in the social network graph.
- 4. Create a new edge between the Accounts vertex in the bank_transactions graph and the Companies vertex in the social network graph.



The optimized CREATE PROPERTY GRAPH statement with the BASE GRAPHS clause to create the new PGQL property graph is as shown:

```
CREATE PROPERTY GRAPH financial_transactions

BASE GRAPHS(
    bank_transactions,
    social_network ALL ELEMENT TABLES EXCEPT ( knows )
)

EDGE TABLES(
    Accounts AS PersonOwner
    SOURCE KEY ( "number" ) REFERENCES Accounts ( "number" )
    DESTINATION Persons
    LABEL owner NO PROPERTIES,
    Accounts AS CompanyOwner
    SOURCE KEY ( "number" ) REFERENCES Accounts ( "number" )
    DESTINATION Companies
    LABEL owner NO PROPERTIES
) OPTIONS ( PG PGQL )
```

13.1.2 Creating a PGQL Property Graph with Arbitrary Property Expressions

You can create a PGQL property graph with vertex and edge properties mapped to arbitrary property expressions.

For instance, consider the following example data. The table contains emp_dtls as a JSON column.

You can then create a PGQL property graph with vertex and edge properties mapped to JSON data using the <code>JSON_VALUE</code> function.

```
CREATE PROPERTY GRAPH g

VERTEX TABLES (

emp_data PROPERTIES (

JSON_VALUE(emp_dtls, '$.name') AS name,

JSON_VALUE(emp_dtls, '$.department') AS department,
```

```
JSON_VALUE(emp_dtls, '$.role') AS role)
) OPTIONS(PG PGQL)
```

Finally, you can guery the vertex and edge properties of the graph as shown:

```
SELECT *
FROM GRAPH_TABLE ( g
   MATCH (n IS emp_data)
   COLUMNS (n.name, n.department, n.role) )
```

The query produces the following output:

13.2 Pattern Matching with PGQL

Pattern matching is done by specifying one or more path patterns in the MATCH clause. A single path pattern matches a linear path of vertices and edges, while more complex patterns can be matched by combining multiple path patterns, separated by comma. Value expressions (similar to their SQL equivalents) are specified in the WHERE clause and let you filter out matches, typically by specifying constraints on the properties of the vertices and edges

For example, assume a graph of TCP/IP connections on a computer network, and you want to detect cases where someone logged into one machine, from there into another, and from there into yet another. You would query for that pattern like this:

```
SELECT id(host1) AS id1, id(host2) AS id2, id(host3) AS id3
                                                                     /* choose
what to return */
FROM MATCH
                                                                     /* single
    (host1) -[connection1]-> (host2) -[connection2]-> (host3)
linear path pattern to match */
WHERE
    connection1.toPort = 22 AND connection1.opened = true AND
    connection2.toPort = 22 AND connection2.opened = true AND
    connection1.bytes > 300 AND
meaningful amount of data was exchanged */
    connection2.bytes > 300 AND
                                                                     /* second
    connection1.start < connection2.start AND</pre>
connection within time-frame of first */
    connection2.start + connection2.duration < connection1.start +</pre>
connection1.duration
                                                                     /*
GROUP BY id1, id2, id3
aggregate multiple matching connections */
```

For more examples of pattern matching, see the Writing simple queries section in the PGQL specification.

13.3 Edge Patterns Have a Direction with PGQL

An edge pattern has a direction, as edges in graphs do. Thus, (a) <-[]- (b) specifies a case where *b* has an edge pointing at *a*, whereas (a) -[]-> (b) looks for an edge in the opposite direction.

The following example finds common friends of April and Chris who are older than both of them.

For more examples of edge patterns, see the Edge Patterns section in the PGQL specification.

13.4 Vertex and Edge Labels with PGQL

Labels are a way of attaching type information to edges and nodes in a graph, and can be used in constraints in graphs where not all nodes represent the same thing. For example:

The example queries a graph which contains a set of vertices with the label person, a set of vertices with the label movie, and a set of edges with the label likes. A label expression can start with either a colon (:) or the keyword IS followed by one or more labels. If more than one label is used, then the labels are separated by a vertical bar (|).

The following query shows the preceding example query with the keyword IS for the label expression:

See Also:

Label Expression section in the PGQL specification



13.5 Variable-Length Paths with PGQL

Variable-length path patterns have a quantifier like * to match a variable number of vertices and edges. Using a PATH macro, you can specify a named path pattern at the start of a query that can be embedded into the MATCH clause any number of times, by referencing its name. The following example finds all of the common ancestors of Mario and Luigi.

```
PATH has_parent AS () -[:has_father|has_mother]-> ()
SELECT ancestor.name
FROM MATCH (p1:Person) -/:has_parent*/-> (ancestor:Person)
   , MATCH (p2:Person) -/:has_parent*/-> (ancestor)
WHERE
   p1.name = 'Mario' AND
   p2.name = 'Luigi'
```

The preceding path specification also shows the use of anonymous constraints, because there is no need to define names for intermediate edges or nodes that will not be used in additional constraints or query results. Anonymous elements can have constraints, such as [:has_father|has_mother] -- the edge does not get a variable name (because it will not be referenced elsewhere), but it is constrained.

For more examples of variable-length path pattern matching, see the Variable-Length Paths section in the PGQL specification.

13.6 Aggregation and Sorting with PGQL

Like SQL, PGQL has support for the following:

- · GROUP BY to create groups of solutions
- MIN, MAX, SUM, and AVG aggregations
- ORDER BY to sort results

And for many other familiar SQL constructs.

See Also:


- See Grouping and Aggregation for more information on GROUP BY
- See Sorting and Row Limiting for more information on ORDER BY

13.7 Executing PGQL Queries Against PGQL Property Graphs

This topic explains how you can execute PGQL queries directly against PGQL property graphs on Oracle Database tables.

The PGQL query execution flow is shown in the following figure.

Figure 13-4 PGQL on PGQL Property Graphs in Oracle Database

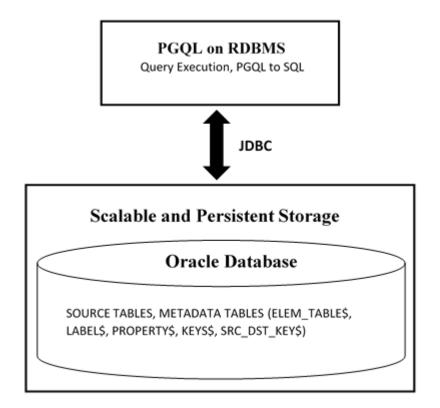

The basic execution flow is:

- 1. The PGQL guery is submitted to PGQL on RDBMS through a Java API.
- The PGQL query is translated into SQL statements using the internal metadata tables for PGQL property graphs.
- 3. The translated SQL is submitted to Oracle Database by JDBC.
- 4. The SQL result set is wrapped as a PGQL result set and returned to the caller.
- Supported PGQL Features and Limitations for PGQL Property Graphs
 Learn about the supported PGQL features and limitations for PGQL property graphs.
- SQL Translation for a PGQL Query
 You can obtain the SQL translation for a PGQL query through the translateQuery() and
 getSqlTranslation() methods in PgqlStatement and PgqlPreparedStatement.
- Performance Considerations for PGQL Queries
- Using the Java and Python APIs to Run PGQL Queries

13.7.1 Supported PGQL Features and Limitations for PGQL Property Graphs

Learn about the supported PGQL features and limitations for PGQL property graphs.

The following table describes the complete list of supported and unsupported PGQL features for PGQL property graphs:

Table 13-2 Supported PGQL Functionalities and Limitations for PGQL Property Graphs

Feature	PGQL on PGQL Property Graphs			
CREATE PROPERTY GRAPH	Supported			
DROP PROPERTY GRAPH	Supported			
Fixed-length pattern matching	Supported			
Variable-length pattern matching goals	Supported: Reachability Path search prefixes: ANY ANY SHORTEST SHORTEST k ALL			
	 Path modes: WALK TRAIL SIMPLE ACYCLIC Limitations: Path search prefixes: ALL SHORTEST ANY CHEAPEST 			
	- CHEAPEST k			
Variable-length pattern matching quantifiers	Supported:			
Variable-length path unnesting	Supported: ONE ROW PER STEP Limitation: Quantifier * not supported Not supported: ONE ROW PER VERTEX			
GROUP BY	Supported			
HAVING	Supported			
Aggregations	Supported: COUNT MIN, MAX, AVG, SUM LISTAGG JSON_ARRAYAGG Limitations: ARRAY_AGG			
DISTINCT SELECT DISTINCT Aggregation with DISTINCT (such	Supported			
as, COUNT (DISTINCT e.prop))				
SELECT v.*	Supported			



Table 13-2 (Cont.) Supported PGQL Functionalities and Limitations for PGQL Property Graphs

Feature	PGQL on PGQL Property Graphs			
ORDER BY (+ASC/DESC), LIMIT, OFFSET	Supported			
Data Types	All available Oracle RDBMS data types supported			
JSON	Supported: JSON storage: JSON strings (VARCHAR2) JSON objects JSON functions: Any JSON function call that follows the syntax, json_function_name (arg1, arg2,). For example: json_value (department_data, '\$.department') Limitations: Simple Dot Notation Any optional clause in a JSON function call (such as RETURNING, ERROR, and so on) is not supported. For example:			
	<pre>json_value(department_data, '\$.employees[1].hireDate' RETURNING DATE)</pre>			
Operators	 Supported: Relational: +, -, *, /, %, - (unary minus) Arithmetic: =, <>, <, >, <=, >= Logical: AND, OR, NOT String: (concat) 			
Functions and predicates	Supported are all available functions in the Oracle RDBMS that take the form function_name (arg1, arg2,) with optional schema and package qualifiers. Supported PGQL functions/predicates: IS NULL, IS NOT NULL JAVA_REGEXP_LIKE (based on CONTAINS) LOWER, UPPER SUBSTRING ABS, CEIL/CEILLING, FLOOR, ROUND EXTRACT ID, VERTEX_ID, EDGE_ID LABEL, IS [NOT] LABELED ALL_DIFFERENT CAST CASE IN and NOT IN IS [NOT] SOURCE [OF], IS [NOT] DESTINATION [OF] (Only supported with Oracle Database 23ai) VERTEX_EQUAL, EDGE_EQUAL Limitations: LABELS			

Table 13-2 (Cont.) Supported PGQL Functionalities and Limitations for PGQL Property Graphs

Feature	PGQL on PGQL Property Graphs				
User-defined functions	Supported: PL/SQL functions Functions created via the Oracle Database Multilingual Engine (MLE) Supported: EXISTS and NOT EXISTS subqueries Scalar subqueries LATERAL subquery				
Subqueries: Scalar subqueries EXISTS and NOT EXISTS subqueries LATERAL subquery					
GRAPH_TABLE operator	Supported Extension: BASE GRAPHS clause in CREATE PROPERTY GRAPH for creating graphs based on metadata of other graphs				
INSERT/UPDATE/DELETE	Supported for Oracle Database 19c and later				
INTERVAL literals and operations	Not supported				

Additional Information on Supported PGQL Features with Examples

13.7.1.1 Additional Information on Supported PGQL Features with Examples

The following PGQL features are supported in PGQL property graphs:

- Recursive queries are supported for the following variable-length path finding goals:
 - Reachability
 - ANY
 - ANY SHORTEST
 - TOP k SHORTEST
- Recursive queries are supported for the following horizontal aggregations:
 - LISTAGG

```
SELECT LISTAGG(src.first_name || ' ' || src.last_name, ',')
FROM MATCH TOP 2 SHORTEST ( (n:Person) ((src)-[e:knows]->)* (m:Person) )
WHERE n.id = 1234
```

SUM

```
SELECT SUM(e.weight + 3)
FROM MATCH TOP 2 SHORTEST ( (n:Person) -[e:knows]->* (m:Person) )
WHERE n.id = 1234
```

COUNT

```
SELECT COUNT(e)
FROM MATCH TOP 2 SHORTEST ( (n:Person) -[e:knows]->* (m:Person) )
WHERE n.id = 1234
```

AVG

```
SELECT AVG(dst.age) FROM MATCH TOP 2 SHORTEST ( (n:Person) (-[e:knows]->(dst))* (m:Person) ) WHERE n.id = 1234
```

MIN (Only for property value or CAST expressions)

```
SELECT MIN(CAST(dst.age + 5 AS INTEGER))
FROM MATCH TOP 2 SHORTEST ( (n:Person) (-[e:knows]->(dst))* (m:Person) )
WHERE n.id = 1234
```

MAX (Only for property value or CAST expressions)

```
SELECT MAX(dst.birthday)
FROM MATCH TOP 2 SHORTEST ( (n:Person) (-[e:knows]->(dst))* (m:Person) )
WHERE n.id = 1234
```

The following quantifiers are supported in recursive queries:

Table 13-3 Supported Quantifiers in PGQL SELECT Queries

Syntax	Description
*	zero or more
+	one or more
?	zero or one
{n}	exactly n
{n,}	n or more
{n,m}	between <i>n</i> and <i>m</i> (inclusive)
{ , m}	between zero and m (inclusive)

Data type casting with precision and scale is supported:

```
SELECT CAST(v.id AS VARCHAR2(10)) || '\rightarrow' || CAST(w.id AS VARCHAR2(10)) AS friendOf FROM MATCH (v) -[:friendOf] \rightarrow (w) SELECT CAST(e.mval AS NUMBER(5,2)) AS mval FROM MATCH () -[e:knows] \rightarrow () WHERE e.mval = '342.5'
```

- Both built-in Oracle Database functions and user defined functions (UDFs) are supported.
 For example:
 - Assuming a table has a JSON column with values such as, {"name":"John", "age": 43}:

```
SELECT JSON_VALUE(p.attributes, '$.name') AS name
FROM MATCH (p:Person)
WHERE JSON VALUE(p.attributes, '$.age') > 35
```

Assuming an Oracle Text index exists on a text column in a table:

```
SELECT n.text
FROM MATCH (n)
WHERE CONTAINS(n.text, 'cat', 1) > 0
```

Assuming a UDF updated id is registered with the graph server (PGX):

```
SELECT my.updated id(n.ID) FROM MATCH(n) LIMIT 10
```

• Selecting all properties of vertices or edges is supported through SELECT v.* clause, where v is the variable whose properties are selected. The following example retrieves all the edge properties of a graph:

```
SELECT label(e), e.* FROM MATCH (n)-[e]->(m) ON bank graph LIMIT 3
```

On execution, the preceding query retrieves all the properties that are bound to the variable ${\tt e}$ as shown:

label(e)		AMOUNT		DESCRIPTION		FROM_ACCT_ID		TO_ACCT_ID	+
TRANSFERS TRANSFERS TRANSFERS	İ	1000		transfer transfer transfer	İ	178 178 179	i	921 462 688	

A PREFIX can be specified to avoid duplicate column names in cases where you select all properties using multiple variables. For example:

```
SELECT n.* PREFIX 'n_', e.* PREFIX 'e_', m.* PREFIX 'm_' FROM MATCH (n:Accounts) -[e:transfers]-> (m:Accounts)

ON bank graph LIMIT 3
```

The guery output is as follows:



Label expressions can be used such that only properties that belong to the specified vertex or edge labels are selected:

```
SELECT LABEL(n), n.* FROM MATCH (n:Accounts) ON bank graph LIMIT 3
```

The preceding query output is as shown:

- Support for ALL path finding goal to return all the paths between a pair of vertices. However, to avoid endless cycling, only the following quantifiers are supported:
 - ?
 - {n}
 - {n.m}
 - {,m}

For example, the following PGQL query finds all the transaction paths from account 284 to account 616:

```
SELECT LISTAGG(e.amount, ' + ') || ' = ', SUM(e.amount) AS total_amount
FROM MATCH ALL (a:Accounts) -[e:Transfers]->{1,4}(b:Accounts)
WHERE a.id = 284 AND b.id = 616
ORDER BY total amount
```

On execution, the query produces the following result:

Scalar subqueries which return exactly one column and one row is supported.
 For example:

```
SELECT p.name AS name , (
   SELECT SUM(t.amount)
   FROM MATCH (a) <-[t:transaction]- (:Account)
) AS sum_incoming , (
   SELECT SUM(t.amount)
   FROM MATCH (a) -[t:transaction]-> (:Account)
) AS sum_outgoing , (
   SELECT COUNT(DISTINCT p2)
   FROM MATCH (a) -[t:transaction]- (:Account) -[:owner]-> (p2:Person)
```

```
WHERE p2 <> p
) AS num_persons_transacted_with , (
    SELECT COUNT(DISTINCT c)
    FROM MATCH (a) -[t:transaction]- (:Account) -[:owner]-> (c:Company)
) AS num_companies_transacted_with
FROM MATCH (p:Person) <-[:owner]- (a:Account)
ORDER BY sum_outgoing + sum_incoming DESC</pre>
```

EXISTS and NOT EXISTS subqueries are supported. Such queries yield TRUE or FALSE
depending on whether the query produces at least one results given the bindings of the
outer query.

For example:

```
SELECT fof.name, COUNT(friend) AS num_common_friends
FROM MATCH (p:Person) -[:knows]-> (friend:Person) -[:knows]-> (fof:Person)
WHERE NOT EXISTS (
    SELECT * FROM MATCH (p) -[:knows]-> (fof)
)
```

PGQL LATERAL subqueries are supported. For example:

PGQL GRAPH TABLE operator is supported. For example:

```
SELECT * FROM GRAPH_TABLE ( bank_graph
  MATCH (a IS accounts) -[e IS transfers]-> (b IS accounts)
  COLUMNS ( a.id as from_ac, e.amount as amount, b.id as to_ac )
) FETCH FIRST FIVE ROWS ONLY
```

The source (IS [NOT] SOURCE OF) and destination (IS [NOT] DESTINATION OF) predicates to verify if a vertex is a source or destination of an edge are supported. This is useful when an edge is matched through an any directed edge pattern (-[e]-). Note that this PGQL feature is supported only in Oracle Database 23ai. For example:

```
SELECT e.amount, CASE WHEN n IS SOURCE OF e THEN 'Outgoing transaction' ELSE 'Incoming transaction' END AS type FROM MATCH (n:Accounts) -[e:transfers]- (m:Accounts) WHERE n.id = 284 ORDER BY type, e.amount
```

The preceding guery produces the following result:

```
+-----+
| AMOUNT | TYPE | |
+-----+
| 1000 | Incoming transaction |
```



 JSON_ARRAYAGG function (see JSON_ARRAYAGG in Oracle Database SQL Language Reference) to aggregate values into a JSON array is supported.

```
SELECT JSON_ARRAY_AGG(n.id) AS txn_from
FROM MATCH (n:Accounts) -[e:transfers]- (m:Accounts)
WHERE m.id = 616
```

On execution, the guery produces the following result:

• Built-in graph validation function pg.validate() to check if vertex and edge keys are unique, and if the sources and destinations of edges exist.

```
pgqlStmt.execute("CALL pg.validate('BANK_TXN_GRAPH')")
$1 ==> false
```

Exceptions are raised for invalid keys or edges having missing vertices as shown:

```
pgqlStmt.execute("CALL pg.validate('COUNTRIES')")
opg4j> pgqlStmt.execute("CALL pg.validate('COUNTRIES')")
| Exception oracle.pg.rdbms.pgql.PgqlToSqlException: Invalid vertex key
60 for edge NO in edge table CTY_REG with destination key column(s)
"REGION_ID" referencing REGIONS ( "REGION_ID" )
```

 Unnesting of paths using the ONE ROW PER STEP clause is supported in the PGQL GRAPH TABLE operator query.



As seen in the preceding example, the ONE ROW PER STEP clause declares an iterator vertex variable, an iterator edge variable, and another iterator vertex variable. The query produces one row per step (a step is a vertex-edge-vertex triple) as shown:

0	+	matchnum	 	elemnum		account1		account2	 	amount	
1	+	0 0 0 1 1		4 6 8 2 4 6		8021 1001 2090 10039 8021 1001		1001 2090 10039 8021 1001 2090		1500.3 9999.5 9900.0 1000.0 3000.7 9999.5	

The preceding output shows two paths, each having 4 edges.

The following are a few PGQL features which are not supported:

- The following PGQL SELECT features are not supported:
 - Use of bind variables in path expressions.
 If you attempt to use a bind variable, it will result in an error as shown:

in_degree and out_degree functions.

Note:

- See Supported PGQL Features and Limitations for PGQL Property Graphs for a complete list of supported and unsupported PGQL features for PGQL property graphs.
- See Performance Considerations for PGQL Queries for details on recommended practices to enhance query performance for recursive queries.



13.7.2 SQL Translation for a PGQL Query

You can obtain the SQL translation for a PGQL query through the translateQuery() and getSqlTranslation() methods in PgqlStatement and PgqlPreparedStatement.

Using the raw SQL for a PGQL query you can:

- Run the SQL directly against the database with other SQL-based tools or interfaces (for example, SQL*Plus or SQL Developer).
- Customize and tune the generated SQL to optimize performance or to satisfy a particular requirement of your application.
- Build a larger SQL query that joins a PGQL subquery with other data stored in Oracle Database (such as relational tables, spatial data, and JSON data).

Several options are available to influence PGQL query translation and execution. The following are the main ways to set query options:

- Through explicit arguments to executeQuery, translateQuery, and PgqlConnection.prepareStatement methods
- Through flags in the options string argument of executeQuery and translateQuery
- Through Java JVM arguments.

The following table summarizes the available query arguments for PGQL translation and execution.

Table 13-4 PGQL Translation and Execution Options

Option	Def aul t		Options Flag	JVM Argument
Degree of parallelism	0	par allel	none	none
Timeout	Unli mit ed	tim eou t	none	none
Dynamic sampling	2	dyn ami cSa mpl ing	none	none
Maximum number of results	Unli mit ed	ma xRe sult s	none	none
Reverse path optimization	Tru e	No ne	REVERSE_PAT H=F	oracle.pg.rdbms.pgql.reversePath=false
Pushing source filter optimization	Tru e	No ne	PUSH_SRC_HO PS=F	oracle.pg.rdbms.pgql.pushSrcHops=false



Table 13-4 (Cont.) PGQL Translation and Execution Options

Option	Def aul t	Ex pli cit Ar gu me nt	Options Flag	JVM Argument
Pushing destination filter optimization	Fal se	No ne	PUSH_DST_HO PS=T	oracle.pg.rdbms.pgql.pushDstHops=true
Creation of views in shortest path translation	Fal se	No ne	SP_CREATE_V IEW=T	oracle.pg.rdbms.pgql.spCreateView=true
Creation of tables in shortest path translation	Tru e	No ne	SP_CREATE_T ABLE=F	oracle.pg.rdbms.pgql.spCreateTable=false

13.7.3 Performance Considerations for PGQL Queries

The following sections explain a few recommended practices for query performance.

- Recursive Queries
- Using Query Optimizer Hints
- Speed Up Query Translation Using Graph Metadata Cache and Translation Cache

13.7.3.1 Recursive Queries

The following indexes are recommended in order to speed up execution of recursive queries:

- For underlying VERTEX tables of the recursive pattern, an index on the key column
- For underlying EDGE tables of the recursive pattern, an index on the source key column



You can also create index on (source key, destination key).

For example, consider the following CREATE PROPERTY GRAPH statement:

```
CREATE PROPERTY GRAPH people

VERTEX TABLES(

person

KEY ( id )

LABEL person

PROPERTIES( name, age )
)

EDGE TABLES(

knows

key (person1, person2)

SOURCE KEY ( person1 ) REFERENCES person (id)

DESTINATION KEY ( person2 ) REFERENCES person (id)

NO PROPERTIES
```

```
OPTIONS ( PG PGQL )
```

And also consider the following query:

```
SELECT COUNT(*)
FROM MATCH ANY SHORTEST ( (n:Person) -[e:knows]->* (m:Person) )
WHERE n.id = 1234
```

In order to improve performance of the recursive part of the preceding query, the following indexes must exist:

```
    CREATE INDEX <INDEX_NAME> ON PERSON(ID)
    CREATE INDEX <INDEX_NAME> ON KNOWS(PERSON1) Or
CREATE INDEX <INDEX NAME> ON KNOWS(PERSON1, PERSON2)
```

Composite Vertex Keys

For composite vertex keys, query execution can be optimized with the creation of functionbase indexes on the key columns:

- For underlying VERTEX tables of the recursive pattern, a function-based index on the comma-separated concatenation of key columns
- For underlying EDGE tables of the recursive pattern, a function-based index on the comma-separated concatenation of source key columns



You can also create index on (source key columns, destination key columns).

For example, consider the following CREATE PROPERTY GRAPH statement:

```
CREATE PROPERTY GRAPH people
  VERTEX TABLES(
    person
        KEY ( id1, id2 )
        LABEL person
        PROPERTIES( name, age )
)
EDGE TABLES(
    knows
        key (id)
        SOURCE KEY ( id1person1, id2person1 ) REFERENCES person (id1,id2)
        DESTINATION KEY ( id1person2, id2person2 ) REFERENCES person (id1,id2)
        NO PROPERTIES
)
OPTIONS ( PG_PGQL )
```

And also consider the following query:

```
SELECT COUNT(*)
FROM MATCH ANY SHORTEST ( (n:Person) -[e:knows]->* (m:Person) )
WHERE n.id = 1234
```



In order to improve performance of the recursive part of the preceding query, the following indexes must exist:

```
    CREATE INDEX <INDEX NAME> ON PERSON (ID1 || ',' || ID2)
```

```
    CREATE INDEX <INDEX_NAME> ON KNOWS (ID1PERSON1 || ',' || ID2PERSON1) OR
CREATE INDEX <INDEX_NAME> ON KNOWS (ID1PERSON1 || ',' || ID2PERSON1,
ID1PERSON2 || ',' || ID2PERSON2)
```

If some of the columns in a composite vertex key is a string column, the column needs to be comma-escaped in the function-base index creation.

For example, if column ID1 in table PERSON of the preceding example is of type VARCHAR2 (10), you need to escape the comma for the column as follows:

```
replace(ID1, ',', '\,')
```

So, the indexes to improve performance will result as shown:

```
• CREATE INDEX <INDEX NAME> ON PERSON (replace(ID1, ',', '\,') || ',' || ID2)
```

```
    CREATE INDEX_NAME> ON KNOWS (replace(ID1PERSON1, ',', '\,') || ',' || ID2PERSON1)
```

13.7.3.2 Using Query Optimizer Hints

The following hints can be used to influence translation of PGQL variable-length path patterns to SQL:

- REVERSE_PATH: Switches on or off the reverse path optimization (ON by default). If ON, it automatically determines if the pattern can best be evaluated from source to destination or from destination to source, based on specified filter predicates.
- PUSH_SRC_HOPS: Switches on or off pushing source filter optimization (ON by default). If ON, then filter predicates are used to limit the number of source vertices (or destination vertices if path evaluation is reversed) and thereby the search space of variable-length path pattern evaluations.
- PUSH_DST_HOPS: Switches on or off pushing destination filter optimization (OFF by default). If ON, then filter predicates are used to limit the number of destination vertices (or source vertices if path evaluation is reversed) and thereby the search space of variable-length path pattern evaluations.

The preceding hints can be configured as options parameter in the following Java API methods:

- executeQuery(String pgql, String options)
- translateQuery(String pgql, String options)
- execute(String pgql, String matchOptions, String options)

For example, consider the following PGQL query:

```
SELECT v1.name AS v1, v2.name AS v2, v3.name As v3 FROM MATCH (v1:Person)-[e1:friendOf]->(v2:Person), MATCH ANY (v2:Person)-[e2:friendOf]->*(v3:Person) WHERE v1.name= 'Bob'
```



When the preceding query is executed using the default option for PUSH_SRC_HOPS, the output for start nodes translation displays the filter expression as shown:

```
System.out.println(pgqlStatement.translateQuery(pgql).getSqlTranslation())
...
...
start_nodes_translation => (to_clob('SELECT ''PERSONS'' AS "src_table",
el.person_b AS "src_key"
FROM "GRAPHUSER"."PERSONS" "V1", "GRAPHUSER"."FRIENDSHIPS" "E1"
WHERE (((el.person_a = vl.person_id) AND NOT(el.person_b IS NULL)) AND
(vl.name = ''Bob''))')),
    end_nodes_translation => (to_clob('SELECT ''PERSONS'' AS "dst_table",
v3.person_id AS "dst_key"
FROM "GRAPHUSER"."PERSONS" "V3"')),
...
...
```

If the preceding query is executed with the hint $PUSH_SRC_HOPS=F$, then the query is translated into SQL as shown:

```
System.out.println(pgqlStatement.translateQuery(pgql,"PUSH_SRC_HOPS=F").getSql
Translation())
...
...start_nodes_translation => (to_clob('SELECT ''PERSONS'' AS "src_table",
v2.person_id AS "src_key"
FROM "GRAPHUSER"."PERSONS" "V2"')),
        end_nodes_translation => (to_clob('SELECT ''PERSONS'' AS "dst_table",
v3.person_id AS "dst_key"
FROM "GRAPHUSER"."PERSONS" "V3"')),
...
...
```

13.7.3.3 Speed Up Query Translation Using Graph Metadata Cache and Translation Cache

The following global caches help to speed up PGQL query translation:

- **Graph Metadata Cache:** Stores graph metadata such as tables, labels, properties, and so on.
- Translation Cache: Stores PGQL to SQL translation.

You can configure the caches using the following Java APIs:

- clearTranslationCache()
- disableTranslationCache()
- enableTranslationCache()
- setTranslationCacheMaxCapacity(int maxCapacity)
- clearGraphMetadataCache()
- disableGraphMetadataCache()
- enableGraphMetadataCache()



- setGraphMetadataCacheMaxCapacity(int maxCapacity)
- setGraphMetadataRefreshInterval(long interval)

These preceding methods are part of the PgqlConnection class. Separate caches are maintained for each database user such that cached objects are shared between different PgqlConnection objects if they have the same connection URL and user underneath.

By default, both the metadata and translation caches are refreshed every 1000ms (default value) if they are enabled. This makes it easy to sync the metadata cache in case you are modifying one graph through multiple JVMs. Also, you can increase the time (in milliseconds) taken for refreshing the cache by calling the setGraphMetadataRefreshInterval (long interval) function.

13.7.4 Using the Java and Python APIs to Run PGQL Queries

You can run PGQL queries on PGQL property graphs using the Java API in the oracle.pg.rdbms.pgql package. Also, you can use the Python OPG4Py package for executing PGQL queries against the graph data in the Oracle Database. This package contains a sub-package Pgql with one or more modules that wraps around the Java API in the oracle.pg.rdbms.pgql package.

- Creating a PGQL Property Graph
- Executing PGQL SELECT Queries
- Executing PGQL Queries to Modify PGQL Property Graphs
- Dropping A PGQL Property Graph

13.7.4.1 Creating a PGQL Property Graph

You can create a PGQL property graph using the CREATE PROPERTY GRAPH statement.

Example 13-1 Creating a PGQL Property Graph

The following example describes the creation of a PGQL property graph.

- JShell
- Java
- Python

JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host_name>:<port>/<db_service>"
opg4j> var conn =
DriverManager.getConnection(jdbcUrl,"<username>","<password>");
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
opg4j> var pgqlStmt = pgqlConn.createStatement() //create a PGQL Statement
opg4j> conn.setAutoCommit(false)
opg4j> var pgql =
...> "CREATE PROPERTY GRAPH bank_graph "
...> + "VERTEX TABLES ( bank_accounts AS Accounts "
...> + "KEY (id) "
```

```
...> + "LABEL Accounts "
...> + "PROPERTIES (id, name) "
...> + ") "
...> + "EDGE TABLES ( bank txns AS Transfers "
...> + "KEY (txn_id) "
...> + "SOURCE KEY (from_acct_id) REFERENCES Accounts (id) "
...> + "DESTINATION KEY (to acct id) REFERENCES Accounts (id) "
...> + "LABEL Transfers "
...> + "PROPERTIES (from_acct_id, to_acct_id, amount, description) "
...> + ") OPTIONS (PG PGQL) "
opg4j> pgqlStmt.execute(pgql)
Java
import java.sql.Connection;
import java.sql.Statement;
import java.sql.DriverManager;
import oracle.pg.rdbms.pggl.jdbc.PgglJdbcRdbmsDriver;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlStatement;
/*
 * This example shows how to create a PGQL property graph.
*/
public class PgqlCreate
{
 public static void main(String[] args) throws Exception
   int idx=0;
   String jdbcUrl
                            = args[idx++];
   String username
                            = args[idx++];
   String password
                            = args[idx++];
   String graph
                             = args[idx++];
    Connection conn = null;
    PgqlStatement pgqlStmt = null;
   try {
     //Get a jdbc connection
     DriverManager.registerDriver(new PgqlJdbcRdbmsDriver());
     conn = DriverManager.getConnection(jdbcUrl, username, password);
     conn.setAutoCommit(false);
     // Get a PGQL connection
     PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
     // Create a PGQL Statement
     pgqlStmt = pgqlConn.createStatement();
      // Execute PGQL Query
     String pgql =
        "CREATE PROPERTY GRAPH " + graph + " " +
```

```
"VERTEX TABLES ( bank accounts as Accounts " +
    "KEY (id) " +
   "LABEL \"Accounts\"" +
    "PROPERTIES (id, name)" +
    ") " +
    "EDGE TABLES ( bank txns as Transfers " +
   "KEY (txn id) " +
    "SOURCE KEY (from_acct_id) REFERENCES Accounts (id) " +
    "DESTINATION KEY (to_acct_id) REFERENCES Accounts (id) " +
   "LABEL \"Transfers\"" +
    "PROPERTIES (from acct id, to acct id, amount, description)" +
    ") OPTIONS (PG PGQL) ";
  // Print the results
 pgqlStmt.execute(pgql);
finally {
 // close the statement
 if (pgqlStmt != null) {
    pgqlStmt.close();
    }
  // close the connection
 if (conn != null) {
    conn.close();
 }
```

Python

```
>>> pgql_conn = opg4py.pgql.get connection("<username>","<password>",
"jdbc:oracle:thin:@localhost:1521/orclpdb")
>>> pgql statement = pgql conn.create statement()
>>> pgql = """
            CREATE PROPERTY GRAPH bank graph
            VERTEX TABLES (
              bank accounts as Accounts
. . .
                LABEL Accounts
                PROPERTIES (id, name)
. . .
            EDGE TABLES (
              bank txns as Transfers
                KEY (txn id)
                SOURCE KEY (from acct id) REFERENCES Accounts(id)
                DESTINATION KEY (to acct id) REFERENCES Accounts (id)
. . .
                LABEL TRANSFERS
                PROPERTIES (from acct id, to acct id, amount, description)
            ) OPTIONS (PG PGQL)
>>> pgql statement.execute(pgql)
False
```

You can verify the PGQL property graph creation by checking the metadata tables that get created in the database.

13.7.4.2 Executing PGQL SELECT Queries

You can run PGQL SELECT queries as described in the following examples.

Example 13-2 Running a Simple SELECT Query Using PgqlStatement and PgqlResultSet

In the following example, PgqlConnection is used to obtain a PgqlStatement. Then, it calls the executeQuery method of PgqlStatement, which returns a PgqlResultSet object.

PgqlResultSet provides a print() method, which displays results in a tabular mode.

- JShell
- Java
- Python

JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host name>:<port>/<db service>"
opg4j> var conn =
DriverManager.getConnection(jdbcUrl, "<username>", "<password>");
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
opg4j> pgglConn.setGraph("BANK GRAPH")
opg4j> var pgqlStmt = pgqlConn.createStatement() //create a PGQL Statement
opg4j> String s = "SELECT n.* FROM MATCH (n:Accounts) LIMIT 3"
opg4j> var resultSet = pgqlStmt.executeQuery(s)
opg4j> resultSet.print() //Prints the query result set
+----+
| ID | NAME
+----+
| 1 | Account1 |
| 2 | Account2 |
| 3 | Account3 |
+----+
```

Java

```
import java.sql.Connection;
import java.sql.DriverManager;
import oracle.pg.rdbms.pgql.jdbc.PgqlJdbcRdbmsDriver;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlResultSet;
import oracle.pg.rdbms.pgql.PgqlStatement;

/*
    * This example shows how to execute a SELECT query on a PGQL property graph.
    */
public class PgqlExample1
{
```



```
public static void main(String[] args) throws Exception
  int idx=0;
 String jdbcUrl
                           = args[idx++];
 String username
                           = args[idx++];
 String password
                          = args[idx++];
  String graph
                          = args[idx++];
  Connection conn = null;
  PgqlStatement pgqlStmt = null;
  PgqlResultSet rs = null;
  try {
   //Get a jdbc connection
   DriverManager.registerDriver(new PgqlJdbcRdbmsDriver());
   conn = DriverManager.getConnection(jdbcUrl, username, password);
    conn.setAutoCommit(false);
    // Get a PGQL connection
    PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
    pgqlConn.setGraph(graph);
    // Create a PGOL Statement
    pgqlStmt = pgqlConn.createStatement();
    // Execute PGQL Query
   String query = "SELECT n.* FROM MATCH (n:Accounts) LIMIT 5";
    rs = pgqlStmt.executeQuery(query);
    // Print the results
   rs.print();
  finally {
   // close the result set
   if (rs != null) {
      rs.close();
    // close the statement
    if (pgqlStmt != null) {
      pgqlStmt.close();
    // close the connection
    if (conn != null) {
      conn.close();
    }
}
```



}

Python

```
>>> pgql conn = opg4py.pgql.get connection("<username>","<password>",
"<idbcUrl>")
>>> pgql statement = pgql conn.create statement()
>>> pgql conn.set graph("BANK GRAPH")
>>> s = "SELECT n.* FROM MATCH (n:Accounts) LIMIT 3"
>>> pgql statement.execute query(s)
>>> pgql result set = pgql statement.execute query(s)
>>> pggl result set.print()
+----+
| ID | NAME
+----+
| 1 | Account1 |
| 2 | Account2 |
| 3 | Account3 |
+----+
>>> pgql result set
PgqlResultSet(java pgql result set: oracle.pg.rdbms.pgql.PgqlResultSet, # of
results: 3)
```

Also, you can convert the PGQL result set obtained in the preceding code to a Pandas dataframe using the to pandas() method.

Note:

The pandas package must be installed in your system to successfully execute the call to to_pandas(). This package is automatically installed at the time of the Python client installation for versions Python 3.8 and Python 3.9. However, if your call to to_pandas() fails, verify if the pandas module is installed in your system. In case the module is found missing or your Python version differs from the earlier mentioned versions, then install the pandas package manually.

Example 13-3 Running a SELECT Query Using PgqlPreparedStatement

- JShell
- Java
- Python

JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host_name>:<port>/<db_service>"
opg4j> var conn =
DriverManager.getConnection(jdbcUrl,"<username>","<password>");
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
opg4j> pgqlConn.setGraph("BANK_GRAPH");
opg4j> String s = "SELECT n.* FROM MATCH (n:Accounts) LIMIT ?"
```



Java

```
import java.sql.Statement;
import java.sql.DriverManager;
import oracle.pg.rdbms.pgql.jdbc.PgqlJdbcRdbmsDriver;
import oracle.pg.rdbms.pgql.*;
public class PgqlExample2
  public static void main(String[] args) throws Exception
   int idx=0;
   String jdbcUrl
                         = args[idx++];
                            = args[idx++];
   String username
   String password
                            = args[idx++];
   String graph
                            = args[idx++];
    Connection conn = null;
    PgqlStatement pgqlStmt = null;
    PgglResultSet rs = null;
    try {
     //Get a jdbc connection
     DriverManager.registerDriver(new PgqlJdbcRdbmsDriver());
     conn = DriverManager.getConnection(jdbcUrl, username, password);
     conn.setAutoCommit(false);
      // Get a PGQL connection
      PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
      pgqlConn.setGraph(graph);
      // Execute PGQL Query
      String s = "SELECT n.* FROM MATCH (n:Accounts) LIMIT ?";
      PgqlPreparedStatement pStmt = pgqlConn.prepareStatement(s, 0, 4 , 2 ,
-1 , null , null);
      pStmt.setInt(1,3);
      rs = pStmt.executeQuery();
```

```
// Print the results
     rs.print();
    finally {
     // close the result set
      if (rs != null) {
         rs.close();
      // close the statement
      if (pgqlStmt != null) {
         pgqlStmt.close();
         }
      // close the connection
      if (conn != null) {
         conn.close();
      }
 }
}
```

Python

```
>>> pgql conn = opg4py.pgql.get connection("<username>","<password>",
"<idbcUrl>")
>>> pgql statement = pgql conn.create statement()
>>> pgql_conn.set_graph("BANK GRAPH")
>>> s = "SELECT n.* FROM MATCH (n:Accounts) LIMIT ?"
>>> ps = pgql conn.prepare statement(s, timeout=0, parallel=4,
dynamicSampling=2, maxResults=-1, matchOptions=None, options=None)
>>> ps.set int(1,3)
>>> ps.execute query().print()
+----+
| ID | NAME
+----+
| 2 | Account2 |
| 3 | Account3 |
+----+
```

Example 13-4 Running a SELECT Query with Grouping and Aggregation

- JShell
- Java
- Python



JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host name>:<port>/<db service>"
opg4j> var conn =
DriverManager.getConnection(jdbcUrl, "<username>", "<password>");
opg4j> var pgglConn = PgglConnection.getConnection(conn)
opg4j> pgqlConn.setGraph("BANK GRAPH")
opg4j> var pgqlStmt = pgqlConn.createStatement() //create a PGQL Statement
opg4j> String query = "SELECT v1.id, COUNT(v2) AS numTxns "+
...>
           "FROM MATCH (v1)-[e IS Transfers]->(v2) "+
           "GROUP BY v1 "+
...>
           "ORDER BY numTxns DESC "+
...>
           "LIMIT 3"
opg4j> var resultSet = pgqlStmt.executeQuery(query)
opg4j> resultSet.print() //Prints the query result set
+----+
| ID | NUMTXNS |
+----+
| 687 | 6
| 195 | 5
| 192 | 5
+----+
```

Java

```
import java.sql.Connection;
import java.sql.Statement;
import java.sql.DriverManager;
import oracle.pg.rdbms.pgql.jdbc.PgqlJdbcRdbmsDriver;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlResultSet;
import oracle.pg.rdbms.pgql.PgqlStatement;
 ^{\star} This example shows how to execute a SELECT query with aggregation .^{\star}/
public class PgglExample3
  public static void main(String[] args) throws Exception
   int idx=0;
   String jdbcUrl
                            = args[idx++];
   String username
                             = args[idx++];
   String password
                            = args[idx++];
   String graph
                             = args[idx++];
    Connection conn = null;
    PgqlStatement pgqlStmt = null;
    PgqlResultSet rs = null;
    try {
     //Get a jdbc connection
      DriverManager.registerDriver(new PgglJdbcRdbmsDriver());
```

```
conn = DriverManager.getConnection(jdbcUrl, username, password);
      conn.setAutoCommit(false);
      // Get a PGQL connection
      PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
      pgqlConn.setGraph(graph);
      // Create a PGQL Statement
      pgqlStmt = pgqlConn.createStatement();
      // Execute PGQL Query
      String query =
        "SELECT v1.id, COUNT(v2) AS numTxns "+
        "FROM MATCH (v1)-[e IS Transfers]->(v2) "+
        "GROUP BY v1 "+
        "ORDER BY numTxns DESC";
      rs = pgqlStmt.executeQuery(query);
      // Print the results
      rs.print();
    finally {
     // close the result set
     if (rs != null) {
         rs.close();
      // close the statement
      if (pgqlStmt != null) {
        pgqlStmt.close();
      // close the connection
      if (conn != null) {
         conn.close();
      }
 }
}
```

Python

```
>>> pgql conn = opg4py.pgql.get connection("<username>","<password>",
"<idbcUrl>")
>>> pgql statement = pgql conn.create statement()
>>> pgql conn.set graph("BANK GRAPH")
>>> query = """
. . .
            SELECT v1.id, COUNT(v2) AS numtxns
            FROM MATCH (v1)-[e IS Transfers]->(v2)
            GROUP BY v1
            ORDER BY numtxns DESC
            LIMIT 3
. . .
            11 11 11
>>> pgql_statement.execute_query(query).print()
+----+
| ID | NUMTXNS |
```

Example 13-5 Showing a PGQL Path Query

- JShell
- Java
- Python

JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host name>:<port>/<db service>"
opq4j> var conn =
DriverManager.getConnection(jdbcUrl, "<username>", "<password>");
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
opg4j> pgqlConn.setGraph("BANK GRAPH")
opg4j> var pgqlStmt = pgqlConn.createStatement() //create a PGQL Statement
opg4j> String query = "PATH onehop AS ()-[IS transfers]->() "+
             "SELECT v1.id FROM MATCH (v1)-/:onehop/->(v2) "+
...>
             "WHERE v2.id = 365"
...>
opg4j> var resultSet = pgqlStmt.executeQuery(query)
opg4j> resultSet.print() //Prints the query result set
+----+
| ID |
+----+
| 132 |
| 435 |
| 296 |
| 327 |
| 328 |
| 399 |
| 684 |
| 919 |
| 923 |
| 771 |
+----+
```

Java

```
import java.sql.Connection;
import java.sql.Statement;
import java.sql.DriverManager;
import oracle.pg.rdbms.pgql.jdbc.PgqlJdbcRdbmsDriver;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlResultSet;
```



```
import oracle.pg.rdbms.pggl.PgglStatement;
/*
 * This example shows how to execute a PGQL PATH query.*/
public class PgqlExample4
  public static void main(String[] args) throws Exception
    int idx=0;
   String jdbcUrl
                            = args[idx++];
   String username
                             = args[idx++];
   String password
                            = args[idx++];
    String graph
                            = args[idx++];
    Connection conn = null;
    PgqlStatement pgqlStmt = null;
    PgqlResultSet rs = null;
    try {
     //Get a jdbc connection
     DriverManager.registerDriver(new PgqlJdbcRdbmsDriver());
      conn = DriverManager.getConnection(jdbcUrl, username, password);
      conn.setAutoCommit(false);
      // Get a PGQL connection
      PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
      pgqlConn.setGraph(graph);
      // Create a PGQL Statement
      pgqlStmt = pgqlConn.createStatement();
     // Execute PGQL Query
      String query =
                 "PATH onehop AS ()-[IS transfers]->() "+
                 "SELECT v1.id FROM MATCH (v1)-/:onehop/->(v2) "+
                 "WHERE v2.id = 365";
     rs = pgqlStmt.executeQuery(query);
     // Print the results
     rs.print();
    finally {
      // close the result set
      if (rs != null) {
         rs.close();
      // close the statement
      if (pgqlStmt != null) {
        pgqlStmt.close();
      // close the connection
      if (conn != null) {
```

```
conn.close();
}
}
}
```

Python

```
>>> pgql conn = opg4py.pgql.get connection("<username>","<password>",
"<jdbcUrl>")
>>> pgql statement = pgql conn.create statement()
>>> pgql conn.set graph("BANK GRAPH")
>>> query = """
                     PATH onehop AS ()-[IS transfers]->()
                     SELECT v1.id FROM MATCH (v1)-/:onehop/->(v2)
                     WHERE v2.id = 365
. . .
            11 11 11
>>> pgql statement.execute query(query).print()
| ID |
+----+
| 132 |
| 435 |
1 296 1
| 327 |
| 328 |
| 399 |
| 684 |
I 919 I
| 923 |
| 771 |
+---+
```

13.7.4.3 Executing PGQL Queries to Modify PGQL Property Graphs

You can execute PGQL INSERT, UPDATE and DELETE queries against PGQL property graphs using the OPG4J Java shell, OPG4Py Python shell or through a Java or Python application.

It is important to note that unique IDs are not auto generated when inserting vertices or edges in a graph. Therefore, you must ensure that the key column values are either present in the graph properties or they are auto generated by the database (through SEQUENCE and TRIGGERS or implemented with auto increment functionality using IDENTITY column).

The following example inserts two new vertices and also adds an edge relationship between the two vertices.

- JShell
- Java



Python

JShell

```
opg4j> String pgql =
     "INSERT VERTEX v1 LABELS (Person) PROPERTIES (v1.name= 'ABC',
v1.height=1.6, v1.birthdate = to date('13/06/1963', 'DD/MM/YYYY')) "+
...> " , VERTEX v2 LABELS (Person) PROPERTIES (v2.name= 'XYZ',
v2.height=1.75, v2.birthdate = to date('19/06/1963', 'DD/MM/YYYY')) "+
     " , EDGE e BETWEEN v1 AND v2 LABELS (friendof) PROPERTIES
( e.meeting date = to date('19/06/2021', 'DD/MM/YYYY')) "
pgql ==> "INSERT VERTEX v1 LABELS (Person) PROPERTIES (v1.name= 'ABC',
v1.height=1.6, v1.birthdate = to date('13/06/1963', 'DD/MM/YYYY'))
VERTEX v2 LABELS (Person) PROPERTIES (v2.name= 'XYZ', v2.height=1.75,
v2.birthdate = to date('19/06/1963', 'DD/MM/YYYY'))
                                                     , EDGE e BETWEEN v1
AND v2 LABELS (friendof) PROPERTIES ( e.meeting date = to date('19/06/2021',
'DD/MM/YYYY')) "
opg4j> pgqlStmt.execute(pgql)
$14 ==> false
```

Java

```
String pgql =
...> "INSERT VERTEX v1 LABELS (Person) PROPERTIES (v1.name= 'ABC',
v1.height=1.6, v1.birthdate = to_date('13/06/1963', 'DD/MM/YYYY')) "+
...> " , VERTEX v2 LABELS (Person) PROPERTIES (v2.name= 'XYZ',
v2.height=1.75, v2.birthdate = to_date('19/06/1963', 'DD/MM/YYYY')) "+
...> " , EDGE e BETWEEN v1 AND v2 LABELS (friendof) PROPERTIES
( e.meeting_date = to_date('19/06/2021', 'DD/MM/YYYY')) ";
pqqlStmt.execute(pqql);
```

Python

```
>>> pgql = """
... INSERT VERTEX v1 LABELS (Person) PROPERTIES (v1.name= 'ABC',
v1.height=1.6, v1.birthdate = to_date('13/06/1963', 'DD/MM/YYYY'))
... , VERTEX v2 LABELS (Person) PROPERTIES (v2.name= 'XYZ',
v2.height=1.75, v2.birthdate = to_date('19/06/1963', 'DD/MM/YYYY'))
... , EDGE e BETWEEN v1 AND v2 LABELS (friendof) PROPERTIES
( e.meeting_date = to_date('19/06/2021', 'DD/MM/YYYY'))
... """
>>> pgql_statement.execute(pgql)
False
```

The following example executes an UPDATE query to modify the edge property that was inserted in the preceding example and subsequently verifies the update operation through a SELECT query.

JShell



- Java
- Python

JShell

```
opg4j> String pgql = "UPDATE e SET (e.meeting_date = to_date('12/02/2022',
'DD/MM/YYYY')) "+
...>
        "FROM MATCH (v1:Person) - [e:friendof] -> (v2:Person) "+
        "WHERE v1.person id = 27 AND v2.person id = 28"
pgql ==> "UPDATE e SET (e.meeting date = to date('12/02/2022', 'DD/MM/YYYY'))
FROM MATCH (v1:Person)-[e:friendof]->(v2:Person) WHERE v1.person id = 27 AND
v2.person id = 28"
opg4j> pgqlStmt.execute(pgql)
$40 ==> false
opg4j>pgqlStmt.executeQuery("SELECT e.meeting date FROM MATCH (v1:Person)-
[e:friendof]->(v2:Person) WHERE v1.person id = 27").print()
| MEETING DATE
+----+
| 2022-02-12 00:00:00.0 |
+----+
```

Java

```
String pgql ="UPDATE e SET (e.meeting_date = to_date('12/02/2022', 'DD/MM/
YYYY')) "+

"FROM MATCH (v1:Person)-[e:friendof]->(v2:Person) "+

"WHERE v1.person_id = 27 AND v2.person_id = 28";
pgqlStmt.execute(pgql);
```

Python

A DELETE query allows deleting of vertices and edges in a graph. The following example executes a DELETE query to delete an edge in the graph.

- JShell
- Java
- Python

JShell

```
opg4j> pgqlStmt.execute("DELETE e FROM MATCH (v1:Person)-[e:friendof]-
>(v2:Person) WHERE v.person_id=27")
$14 ==> false
```

Java

```
pgqlStmt.execute("DELETE e FROM MATCH (v1:Person)-[e:friendof]->(v2:Person)
WHERE v.person id=27");
```

Python

```
>>> pgql_statement.execute("DELETE e FROM MATCH (v1:Person)-[e:friendof]-
>(v2:Person) WHERE v1.person_id=27")
False
```

13.7.4.4 Dropping A PGQL Property Graph

You can use the PGQL DROP PROPERTY GRAPH statement to drop a PGQL property graph. Note that all the metadata tables for the PGQL property graph are dropped.

Example 13-6 Dropping a PGQL Property Graph

- JShell
- Java
- Python

JShell

```
opg4j> var jdbcUrl="jdbc:oracle:thin:@<host_name>:<port>/<db_service>"
opg4j> var conn =
DriverManager.getConnection(jdbcUrl,"<username>","<password>")
opg4j> var pgqlConn = PgqlConnection.getConnection(conn)
opg4j> var pgqlStmt = pgqlConn.createStatement() //create a PGQL Statement
opg4j> pgqlStmt.execute("DROP PROPERTY GRAPH <graph>")
$9 ==> false
```



Java

```
import java.sql.Connection;
import java.sql.Statement;
import java.sql.DriverManager;
import oracle.pg.rdbms.pgql.jdbc.PgqlJdbcRdbmsDriver;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlStatement;
* This example shows how to drop a PGQL property graph.
* /
public class DropPgqlGraph
 public static void main(String[] args) throws Exception
   int idx=0;
   String jdbcUrl
                             = args[idx++];
   String username
                              = args[idx++];
   String password
                            = args[idx++];
   String graph
                             = args[idx++];
   Connection conn = null;
    PgqlStatement pgqlStmt = null;
    try {
     //Get a jdbc connection
     DriverManager.registerDriver(new PgglJdbcRdbmsDriver());
     conn = DriverManager.getConnection(jdbcUrl, username, password);
     conn.setAutoCommit(false);
     // Get a PGQL connection
     PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
     // Create PGQL Statement
     pgqlStmt = pgqlConn.createStatement();
     String query = "DROP PROPERTY GRAPH " +graph;
     pgqlStmt.execute(query);
    finally {
     // close the statement
     if (pgqlStmt != null) {
         pgqlStmt.close();
     // close the connection
     if (conn != null) {
         conn.close();
     }
```



Python

```
>>> pgql_conn = opg4py.pgql.get_connection("<username>","<password>",
"jdbc:oracle:thin:@localhost:1521/orclpdb")
>>> pgql_statement = pgql_conn.create_statement()
>>> pgql = "DROP PROPERTY GRAPH <graph>"
>>> pgql_statement.execute(pgql)
False
```



Part IV

Installing Oracle Graph Server (PGX) and Client

Get started on the installation of the Oracle Graph Server (PGX) and the graph clients.

- Oracle Graph Server and Client Installation
 This chapter describes the steps for installing the graph server and the graph clients.
- Getting Started with the Graph Server (PGX)
 Once you have installed the graph server (PGX), you can start and connect to a graph server instance.



Oracle Graph Server and Client Installation

This chapter describes the steps for installing the graph server and the graph clients.

· Before You Begin

Before you begin to work with Oracle Property Graphs, you must understand the workflow for installing Oracle Graph Server and Client.

Oracle Graph Server Installation

You must install the Oracle Graph Server to run graph queries and analytics in the graph server (PGX).

Oracle Graph Client Installation

You can interact with the various graph features using the client CLIs and the graph visualization web client.

Setting Up Transport Layer Security

The graph server (PGX), by default, allows only encrypted connections using Transport Layer Security (TLS). TLS requires the server to present a server certificate to the client and the client must be configured to trust the issuer of that certificate.

14.1 Before You Begin

Before you begin to work with Oracle Property Graphs, you must understand the workflow for installing Oracle Graph Server and Client.

Table 14-1 Workflow for Installing Oracle Graph Server and Client

Sequen ce	Task	Description	More Information
1	Verify Oracle Database Requirements	Ensure that your Oracle Database version is 12.2 and higher.	Verifying Database Compatibility
2	Download Oracle Graph Server and Client	Download Oracle Graph Server and Client from Oracle Software Delivery Cloud or from Oracle Technology Network.	Downloading Oracle Graph Server and Client
4	Install Oracle Graph Server	Install Oracle Graph server, which is available as a separate downloadable package.	Installing Oracle Graph Server For Linux x86-64
5	Install Oracle Graph Clients	Install the graph clients (such as the graph shell CLIs and graph visualization application) to work with property graphs.	Oracle Graph Client Installation
6	Set up transport layer security	Configure the graph server and client to trust the self-signed keystore.	Setting Up Transport Layer Security

Table 14-1 (Cont.) Workflow for Installing Oracle Graph Server and Client

Sequen ce	Task	Description	More Information
7	Add permissions to publish the graph	Grant permissions to publish graphs.	Adding Permissions to Publish the Graph

- Verifying Database Compatibility
- Downloading Oracle Graph Server and Client

14.1.1 Verifying Database Compatibility

Oracle Graph Server and Client works with Oracle Database 12.2 onwards on both onpremises and cloud environments. The cloud environment includes working with all versions of Oracle Autonomous Database Serverless and Oracle Autonomous Database Dedicated.

However, modifying a property graph using a PGQL INSERT, UPDATE, or DELETE query is not supported for Oracle Database 12.2.

14.1.2 Downloading Oracle Graph Server and Client

You can download **Oracle Graph Server and Client** from Oracle Software Delivery Cloud or from Oracle Technology Network.

Table 14-2 summarizes all the files contained in the Oracle Graph Server and Client deployment.

<ver> denoted in the file name in the Table 14-2 reflects the downloaded Oracle Graph Server
and Client version.

Table 14-2 Components in the Oracle Graph Server and Client Deployment

File	Component	Description
oracle-graph- <ver>.rpm</ver>	Oracle Graph Server	An rpm file to deploy Oracle Graph Server.
oracle-graph-client- <ver>.zip</ver>	Oracle Graph Client	A zip file containing Oracle Graph Client.
oracle-graph-sqlcl-plugin- <ver>.zip</ver>	Oracle Graph PGQL Plugin for SQLcl	A plugin for SQLcl to run PGQL queries in SQLcl.
oracle-graph-webapps- <ver>.zip</ver>	Oracle Graph Web Applications	A zip file containing .war files for deploying graph servers in an application server.
oracle-graph-visualization-library- <pre><ver>.zip</ver></pre>	Oracle Graph Visualization Library	A zip file containing a Java Script library for the Graph Visualization application.

14.2 Oracle Graph Server Installation

You must install the Oracle Graph Server to run graph queries and analytics in the graph server (PGX).

You also require the graph server to visualize graphs loaded into the graph server (PGX) and the graphs in the database.

The following sections explain the steps to install the Oracle Graph Server in a standalone mode or deploy the server as a web application using Oracle WebLogic Server or Apache Tomcat.

- System Requirements for Installing Oracle Graph Server
 Varify the transport of the state of the stat
 - Verify that you meet a few system requirements when installing the Oracle Graph Server in a standalone mode or when deploying to Oracle WebLogic Server or Apache Tomcat.
- Using the RPM Installation
 - You can run the downloaded RPM file to install the Oracle Graph Server.
- Deploying Oracle Graph Server to a Web Server
 You can deploy Oracle Graph Server to Apache Tomcat or Oracle WebLogic Server.
- User Authentication and Authorization
 The Oracle Graph server (PGX) uses an Oracle Database as identity manager. Both username and password based as well as Kerberos based authentication is supported.

Related Topics

Learn About the Graph Server (PGX)
 The in-memory graph server layer enables you to analyze property graphs using parallel in-memory execution.

14.2.1 System Requirements for Installing Oracle Graph Server

Verify that you meet a few system requirements when installing the Oracle Graph Server in a standalone mode or when deploying to Oracle WebLogic Server or Apache Tomcat.

Table 14-3 System Requirements

Requirement Type	Supported Version
Operating System	Oracle Linux 7 or 8 x64
	 Oracle Linux 7 or 8 for Linux 64-bit ARM
	 Red Hat Enterprise Linux (RHEL) 7 or 8
JDK version	Oracle JDK 11 or JDK 17
	OpenJDK JDK 11 or JDK 17



Due to a bug in Oracle JDK and OpenJDK, it is recommended to avoid the following JDK versions:

- JDK 11.0.9
- JDK 11.0.10
- JDK 11.0.11
- JDK 11.0.12

See this note for more details.



14.2.2 Using the RPM Installation

You can run the downloaded RPM file to install the Oracle Graph Server.

- Prerequisites for Installing Oracle Graph Server
- Installing Oracle Graph Server For Linux x86-64
- Installing Oracle Graph Server for Linux ARM
- · Uninstalling Oracle Graph Server
- Upgrading Oracle Graph Server

14.2.2.1 Prerequisites for Installing Oracle Graph Server

Before installing the graph server using the RPM file, ensure you perform the following prerequisite steps:

- Ensure that you meet the system prerequisites as explained in System Requirements for Installing Oracle Graph Server.
- 2. Verify if you already have an installed version of the graph server by running the following command:

```
sudo rpm -q oracle-graph
[sudo] password for oracle:
oracle-graph-24.2.0-0.x86_64
```

Graph server installation may throw an error if an installation already exists. In that case, see Upgrading Oracle Graph Server to upgrade to a newer version.

14.2.2.2 Installing Oracle Graph Server For Linux x86-64

The installation steps for installing Oracle Graph Server in standalone mode are as shown:

1. As a root user or using sudo, install the RPM file using the rpm command line utility:

```
sudo rpm -i oracle-graph-<version>.rpm
```

Where version> reflects the version that you downloaded. (For example: oracle-graph-24.2.0.x86 64.rpm)

The .rpm file is the graph server.

The following post-installation steps are carried out at the time of the RPM file installation:

- Creation of a working directory in /opt/oracle/graph/pgx/tmp data
- Creation of a log directory in /var/log/oracle/graph
- Automatic generation of self-signed TLS certificates in /etc/oracle/graph



Note:

- You can also choose to configure and set up transport layer security (TLS) in graph server. See Setting Up Transport Layer Security for more details.
- For demonstration purposes, if you wish to disable transport layer security (TLS) in graph server, see Disabling Transport Layer Security (TLS) in Graph Server for more details.
- 2. As root or using sudo, add operating system users allowed to use the server installation to the operating system group oraclegraph. For example:

```
usermod -a -G oraclegraph < graphuser>
```

This adds the specified graph user to the group <code>oraclegraph</code>. Note that <code><graphuser></code> must log out and log in again for this to take effect.

- **3.** As *<graphuser>*, configure the server by modifying the files under */etc/oracle/graph* by following the steps under Prepare the Graph Server for Database Authentication.
- **4.** Ensure that authentication is enabled for database users that will connect to the graph server, as explained in User Authentication and Authorization.
- 5. As a root user or using sudo, start the graph server (PGX) by executing the following command:

```
sudo systemctl start pgx
```

You can verify if the graph server has started by executing the following command:

```
systemctl status pgx
```

If the graph server has successfully started, the response may appear as:

The graph server is now ready to accept requests.

• If the graph server has not started, then you must check the log files in /var/log/oracle/ graph for errors. Additionally, you can also run the following command to view any systemd errors:

```
sudo journalctl -u pgx.service
```

For instructions to deploy the graph server in Oracle WebLogic Server or Apache Tomcat, see:

- Deploying to Oracle WebLogic Server
- Deploying to Apache Tomcat

You can also deploy the graph server behind a load balancer. See Deploying Oracle Graph Server Behind a Load Balancer for more information.

14.2.2.3 Installing Oracle Graph Server for Linux ARM

The installation steps for installing Oracle Graph Server in standalone mode for Linux ARM are as shown:

1. As a root user or using sudo, install the RPM file using the rpm command line utility:

```
sudo rpm -i oracle-graph-<version>.rpm --ignorearch
```

Where <version> reflects the version that you downloaded. (For example: oracle-graph-24.2.0.x86 64.rpm)

The .rpm file is the graph server.

The following post-installation steps are carried out at the time of the RPM file installation:

- Creation of a working directory in /opt/oracle/graph/pgx/tmp data
- Creation of a log directory in /var/log/oracle/graph
- Automatic generation of self-signed TLS certificates in /etc/oracle/graph

Note:

- You can also choose to configure and set up transport layer security (TLS) in graph server. See Setting Up Transport Layer Security for more details.
- For demonstration purposes, if you wish to disable transport layer security (TLS) in graph server, see Disabling Transport Layer Security (TLS) in Graph Server for more details.
- 2. As root or using sudo, add operating system users allowed to use the server installation to the operating system group oraclegraph. For example:

```
usermod -a -G oraclegraph <graphuser>
```

This adds the specified graph user to the group oraclegraph.

Note that *<qraphuser>* must log out and log in again for this to take effect.

- 3. As <graphuser>, configure the server by modifying the files under /etc/oracle/graph by following the steps under Prepare the Graph Server for Database Authentication.
- 4. As <graphuser>, edit the /etc/oracle/graph/pgx.conf file to add and set the scheduler parameter to use the basic scheduler as shown:

```
"scheduler": "basic scheduler"
```



- 5. Ensure that authentication is enabled for database users that will connect to the graph server, as explained in User Authentication and Authorization.
- 6. As a root user or using sudo, start the graph server (PGX) by executing the following command:

```
sudo systemctl start pgx
```

You can verify if the graph server has started by executing the following command:

```
systemctl status pgx
```

If the graph server has not started, then you must check the log files in /var/log/oracle/graph for errors. Additionally, you can also run the following command to view any systemd errors:

```
sudo journalctl -u pgx.service
```

14.2.2.4 Uninstalling Oracle Graph Server

To uninstall the graph server, make sure the graph server is shut down.

• Run the following command as a root user or with sudo:

```
sudo rpm -e oracle-graph
```

• During uninstall /opt/oracle/graph/pgx/tmp_data/ and /etc/oracle/graph/ server keystore.jks are removed.

14.2.2.5 Upgrading Oracle Graph Server

To upgrade the graph server, ensure that you first shut down the existing graph server version. You can then run the following command with the newer RPM file as an argument.

Verify the version of your current graph server installation.

```
sudo rpm -q oracle-graph
```

2. Stop the graph server if it is already running.

```
sudo systemctl stop pgx
```

3. Upgrade the graph server by running the following command as a root user or with sudo.

```
sudo rpm -U oracle-graph-24.2.0.x86_64.rpm
```

Also, note the following:

The upgrade process automatically preserves the previous PGX (pgx.conf), server (server.conf), and the logging (logback-server.xml, logback.xml) configurations files. However, if the new version contains changes, then the upgrade process will create the newest versions of these files with the .rpmnew extension. You can them



compare the two files (to verify if there are any changes in the default parameter values or if a new parameter is added) and pick up the latest changes.

- Any manual configuration changes in the systemd configuration file for the PGX service (/etc/systemd/system/pgx.service) is lost. However, if you are using a dropin file, then all customizations in the drop-in file are maintained.
- Existing log files in /var/log/oracle/graph are preserved.
- Existing server keystore file (/etc/oracle/graph/server keystore.jks) is preserved.



Caution:

If you are upgrading the graph server from version 22.3.0 or earlier to 24.2.0, then note that the RPM file installation in Graph Server and Client Release 24.2.0 will generate a self-signed server keystore file by default. If you are using a self-signed server certificate, then note that the server configuration fields, server_cert and server_private_key are deprecated and will be desupported in a future release. See Setting Up Transport Layer Security for more information.

4. Verify if the tmp data folder exists in the /opt/oracle/graph/pgx/ directory path.

If it does not exist, then create one and assign ownership and permission as shown:

```
mkdir -p /opt/oracle/graph/pgx/tmp_data
chown -R :oraclegraph /opt/oracle/graph/pgx/tmp_data
chmod 0770 /opt/oracle/graph/pgx/tmp data
```

5. Restart the graph server.

```
sudo systemctl daemon-reload
sudo systemctl start pgx
```

14.2.3 Deploying Oracle Graph Server to a Web Server

You can deploy Oracle Graph Server to Apache Tomcat or Oracle WebLogic Server.

However, before deploying the graph server on any one of these web servers, ensure that your system meets the prerequisites explained in System Requirements for Installing Oracle Graph Server.

The following explains the deployment instructions to a web server:

- Deploying to Apache Tomcat
 The example in this topic shows how to deploy the graph server as a web application with Apache Tomcat.
- Deploying to Oracle WebLogic Server
 The example in this topic shows how to deploy the graph server as a web application with Oracle WebLogic Server version 14.1.1.

14.2.3.1 Deploying to Apache Tomcat

The example in this topic shows how to deploy the graph server as a web application with Apache Tomcat.

The graph server will work with Apache Tomcat 9.0.x.

- 1. Download the Oracle Graph Webapps zip file from Oracle Software Delivery Cloud. This file contains ready-to-deploy Java web application archives (.war files). The file name will be similar to this: oracle-graph-webapps-<version>.zip.
- 2. Unzip the file into a directory of your choice.
- 3. Locate the .war file that follows the naming pattern: graph-server-webapp-<version>.war.
- Configure the graph server.
 - a. Modify authentication and other server settings by modifying the WEB-INF/classes/ pgx.conf file inside the web application archive. See User Authentication and Authorization section for more information.
 - b. Optionally, change logging settings by modifying the WEB-INF/classes/logback.xml file inside the web application archive.
 - c. Optionally, change other servlet specific deployment descriptors by modifying the WEB-INF/web.xml file inside the web application archive.
- 5. Copy the .war file into the Tomcat webapps directory. For example:

```
cp graph-server-webapp-<version>.war $CATALINA HOME/webapps/pgx.war
```



The name you give the war file in the Tomcat webapps directory determines the context path of the graph server application. It is recommended naming the war file as pgx.war.

- 6. Configure Tomcat specific settings, like the correct use of TLS/encryption.
- 7. Ensure that port 8080 is not already in use.
- 8. Start Tomcat:

```
cd $CATALINA_HOME
./bin/startup.sh
```

The graph server will now listen on localhost:8080/pgx.

You can connect to the server from JShell by running the following command:

\$ <client_install_dir>/bin/opg4j --base_url https://localhost:8080/pgx -u
<graphuser>



Related Topics

The Tomcat documentation (select desired version)

14.2.3.2 Deploying to Oracle WebLogic Server

The example in this topic shows how to deploy the graph server as a web application with Oracle WebLogic Server version 14.1.1.

- 1. Download the Oracle Graph Webapps zip file from Oracle Software Delivery Cloud. This file contains ready-to-deploy Java web application archives (.war files). The file name will be similar to this: oracle-graph-webapps-<version>.zip.
- 2. Unzip the file into a directory of your choice.
- Locate the .war file that follows the naming pattern: graph-server-webapp-<version>.war.
- 4. Configure the graph server.
 - **a.** Modify authentication and other server settings by modifying the WEB-INF/classes/pgx.conf file inside the web application archive.
 - **b.** Optionally, change logging settings by modifying the WEB-INF/classes/logback.xml file inside the web application archive.
 - c. Edit the WEB-INF/web.xml file inside the web application archive and remove the following <session-config> element:

- **d.** Optionally, change other servlet specific deployment descriptors by modifying the WEB-INF/web.xml file inside the web application archive.
- e. Optionally, change WebLogic Server-specific deployment descriptors by modifying the WEB-INF/weblogic.xml file inside the web application archive.
- Configure WebLogic specific settings, like the correct use of TLS/encryption.
- 6. Deploy the .war file to WebLogic Server. The following example shows how to do this from the command line:

```
. $MW_HOME/user_projects/domains/mydomain/bin/setDomainEnv.sh
. $MW_HOME/wlserver/server/bin/setWLSEnv.sh
java weblogic.Deployer -adminurl http://localhost:7001 -username
<username> -password <password> -deploy -source <path-to-war-file>
```

Installing Oracle WebLogic Server

14.2.3.2.1 Installing Oracle WebLogic Server

To download and install the latest version of Oracle WebLogic Server, see

http://www.oracle.com/technetwork/middleware/weblogic/documentation/index.html

14.2.4 User Authentication and Authorization

The Oracle Graph server (PGX) uses an Oracle Database as identity manager. Both username and password based as well as Kerberos based authentication is supported.

The actions that you are allowed to do on the graph server are determined by the privileges enabled by roles that have been granted to you in the Oracle Database.

- Basic Steps for Using an Oracle Database for Authentication
 You can follow the steps explained in this section to authenticate users to the graph server
 (PGX).
- Prepare the Graph Server for Database Authentication Locate the pgx.conf file of your installation.
- Store the Database Password in a Keystore
- Adding Permissions to Publish the Graph
 There are two ways by which you can view any graph in your graph server (PGX) session in the graph visualization application.
- Token Expiration
 By default, tokens are valid for 1 hour.
- Customizing Roles and Permissions
 You can fully customize the permissions to roles mapping by adding and removing roles
 and specifying permissions for a role. You can also authorize individual users instead of
 roles.
- Revoking Access to the Graph Server
 To revoke a user's ability to access the graph server, either drop the user from the database or revoke the corresponding roles from the user, depending on how you defined the access rules in your pgx.conf file.
- Examples of Custom Authorization Rules
 You can define custom authorization rules for developers.
- Kerberos Enabled Authentication for the Graph Server (PGX)
 The graph server (PGX) can authenticate users using an Oracle Database with Kerberos enabled as identity provider.

14.2.4.1 Basic Steps for Using an Oracle Database for Authentication

You can follow the steps explained in this section to authenticate users to the graph server (PGX).

- Use an Oracle Database version that is supported by Oracle Graph Server and Client: version 12.2 or later, including Autonomous Database.
- Ensure that you have SYSDBA access for your database (or ADMIN access for autonomous databases) to grant and revoke users access to the graph server (PGX).
- 3. Ensure that all existing users to which you plan to grant access to the graph server have at least the following privileges granted.

```
CREATE SESSION, CREATE TABLE
```

Ensure that the database is accessible through JDBC from the host where the graph server runs. **5.** As SYSDBA (or ADMIN on autonomous databases), run the following procedure to create the roles required by the graph server.



If you are using an Autonomous Database Serverless instance, or if your onpremises Oracle Database version is 23ai, then you can skip this step as these roles are pre-installed.

```
-- This procedure creates a list of roles needed for graph.
 DECLARE
    PRAGMA AUTONOMOUS TRANSACTION;
    role exists EXCEPTION;
    PRAGMA EXCEPTION INIT (role exists, -01921);
    TYPE graph roles table IS TABLE OF VARCHAR2(50);
    graph roles graph roles table;
  BEGIN
    graph roles := graph roles table(
      'GRAPH DEVELOPER',
      'GRAPH ADMINISTRATOR',
      'GRAPH USER',
      'PGX SESSION CREATE',
      'PGX SERVER GET INFO',
      'PGX SERVER MANAGE',
      'PGX SESSION READ MODEL',
      'PGX SESSION MODIFY MODEL',
      'PGX SESSION NEW GRAPH',
      'PGX SESSION GET PUBLISHED GRAPH',
      'PGX SESSION COMPILE ALGORITHM',
      'PGX SESSION ADD PUBLISHED GRAPH');
    FOR elem IN 1 .. graph roles.count LOOP
      BEGIN
        dbms output.put line('create graph roles: ' || elem || ': CREATE
ROLE ' || graph roles(elem));
        EXECUTE IMMEDIATE 'CREATE ROLE ' || graph roles(elem);
      EXCEPTION
        WHEN role exists THEN
          dbms output.put line('create graph roles: role already exists.
continue');
        WHEN OTHERS THEN
          RAISE;
      END;
    END LOOP;
  EXCEPTION
    when others then
      dbms output.put line('create graph roles: hit error ');
  END;
```

Optionally, this procedure is also available in /opt/oracle/graph/scripts/create graph roles.sql.

See Table 14-4 for more information on the roles.

6. Assign default permissions to the roles GRAPH_DEVELOPER, GRAPH_USER and GRAPH ADMINISTRATOR to group multiple permissions together.



If you are using an Autonomous Database serverless instance, or if your onpremises Oracle Database version is 23ai, then you can skip this step as these privileges are available by default.

```
-- This procedure add some grants to the graph roles.
  DECLARE
    PRAGMA AUTONOMOUS TRANSACTION;
 BEGIN
    EXECUTE IMMEDIATE 'GRANT PGX SESSION CREATE TO GRAPH ADMINISTRATOR';
   EXECUTE IMMEDIATE 'GRANT PGX SERVER GET INFO TO GRAPH ADMINISTRATOR';
    EXECUTE IMMEDIATE 'GRANT PGX SERVER MANAGE TO GRAPH ADMINISTRATOR';
   EXECUTE IMMEDIATE 'GRANT PGX SESSION CREATE TO GRAPH DEVELOPER';
    EXECUTE IMMEDIATE 'GRANT PGX SESSION NEW GRAPH TO GRAPH DEVELOPER';
    EXECUTE IMMEDIATE 'GRANT PGX SESSION GET PUBLISHED GRAPH TO
GRAPH DEVELOPER';
    EXECUTE IMMEDIATE 'GRANT PGX SESSION MODIFY MODEL TO GRAPH DEVELOPER';
    EXECUTE IMMEDIATE 'GRANT PGX SESSION READ MODEL TO GRAPH DEVELOPER';
    EXECUTE IMMEDIATE 'GRANT PGX SESSION CREATE TO GRAPH USER';
    EXECUTE IMMEDIATE 'GRANT PGX SESSION GET PUBLISHED GRAPH TO
GRAPH USER';
   BEGIN
     EXECUTE IMMEDIATE 'GRANT CREATE PROPERTY GRAPH TO GRAPH DEVELOPER';
    EXCEPTION WHEN others then
      if sqlcode = -990 then
        mdsys.opg log.debug('grant create property graph to
graph developer: missing privilege, continue');
       raise;
     end if;
    END;
  EXCEPTION
    when others then
     dbms output.put line('add graph roles grants: hit error ');
      raise;
 END;
```

Optionally, this procedure is also available in /opt/oracle/graph/scripts/create graph roles.sql.

7. Assign roles to all the database developers who should have access to the graph server (PGX). For example:

```
GRANT GRAPH DEVELOPER TO <graphuser>
```

where <graphuser> is a user in the database. You can also assign individual permissions (roles prefixed with PGX_) to users directly.

8. Assign the administrator role to users who should have administrative access. For example:

GRANT GRAPH_ADMINISTRATOR to <administratoruser>

where <administratoruser> is a user in the database.

Privileges and Roles in Oracle Database
 This section describes the database roles and privileges that are required only if you are using the graph server (PGX).

14.2.4.1.1 Privileges and Roles in Oracle Database

This section describes the database roles and privileges that are required only if you are using the graph server (PGX).

Table 14-4 Oracle Database Privileges and Roles Required for Using the Graph Server (PGX)

Role	Operations enabled by this role	Used By
PGX_SESSION_CREATE	Create a new PGX session using the ServerInstance.createSession API.	Graph developers and graph users
PGX_SERVER_GET_INFO	Get status information on the PGX instance using the Admin API.	Users who administer PGX
PGX_SERVER_MANAGE (includes PGX_SERVER_GET_INFO)	Manage the PGX instance using the Admin API to stop or restart PGX.	Users who administer PGX
PGX_SESSION_NEW_GRAPH	Create a new graph in PGX by loading from the database using a config file, using the CREATE PROPERTY GRAPH statement in PGQL, creating a sub-graph from another graph, or using the GraphBuilder.	Graph developers and graph users
PGX_SESSION_GET_PUBLISH ED_GRAPH	Query and view graphs published by another user to the public namespace.	Graph developers and graph users
PGX_SESSION_ADD_PUBLISH ED_GRAPH (includes PGX_SESSION_GET_PUBLISH ED_GRAPH)	Publish a graph to the public namespace.	Graph developers
PGX_SESSION_COMPILE_ALG	Compile an algorithm using the PGX Algorithm API.	Graph developers
PGX_SESSION_READ_MODEL	Load and use an ML model using PgxML.	Graph developers
PGX_SESSION_MODIFY_MODE L	Create, train, and store an ML model using PgxML.	Graph developers

Few additional roles are also created to group multiple roles together. They provide a convenient way to grant multiple roles to database users. See Mapping Graph Server Roles to Default Privileges for more information on these additional roles.

You can create additional groups that are useful for your application, as described in Adding and Removing Roles and Defining Permissions for Individual Users.

14.2.4.2 Prepare the Graph Server for Database Authentication

Locate the pgx.conf file of your installation.

If you installed the graph server via RPM, the file is located at: /etc/oracle/graph/pgx.conf

If you use the webapps package to deploy into Tomcat or WebLogic Server, the pgx.conf file is located inside the web application archive file (WAR file) at: WEB-INF/classes/pgx.conf

Tip: On Linux, you can use vim to edit the file directly inside the WAR file without unzipping it first. For example:

```
vim graph-server-webapp-<version>.war
```

Inside the pgx.conf file, locate the jdbc url line of the realm options:

```
"pgx_realm": {
   "implementation": "oracle.pg.identity.DatabaseRealm",
   "options": {
      "jdbc_url": "<REPLACE-WITH-DATABASE-URL-TO-USE-FOR-AUTHENTICATION>",
      "token_expiration_seconds": 3600,
```

Replace the text with the JDBC URL pointing to your database that you configured in the previous step. For example:

```
"pgx_realm": {
   "implementation": "oracle.pg.identity.DatabaseRealm",
   "options": {
     "jdbc_url": "jdbc:oracle:thin:@myhost:1521/myservice",
     "token_expiration_seconds": 3600,
```

Then, start the graph server by running the following command as a root user or with sudo:

```
sudo systemctl start pgx
```

Preparing the Graph Server (PGX) to Connect to Autonomous Database

You can configure your graph server(PGX) to connect to an Autonomous Database instance.

Irrespective of whether your graph server (PGX) instance is running on premises or on Oracle Cloud Infrastructure (OCI), you can perform the following steps to determine the service name to connect to your Autonomous Database instance and update the JDBC URL in /etc/oracle/graph/pgx.conf file.

 Download and save the wallet for your Autonomous Database instance from the Oracle Cloud Infrastructure (OCI) Console. See Download Client Credentials (Wallets) for more information. 2. Unzip the wallet to a new subdirectory in /etc/oracle/graph/wallets/<dbname>, and change the group permission as shown:

```
sudo unzip Wallet_<dbname>.zip -d /etc/oracle/graph/wallets/<dbname>
sudo chgrp -R oraclegraph /etc/oracle/graph/wallets/<dbname>
```

3. Determine the connect identifier from the tnsnames.ora file in /etc/oracle/graph/wallets/<dbname> directory. For example, the entry must be similar to:

In the preceding example, graphdb low is the connect identifier.

4. Update the JDBC URL in /etc/oracle/graph/pgx.conf file with the connect identifier determined in the preceding step along with the directory path to the unzipped wallet file. For example:

```
"pgx_realm": {
   "implementation": "oracle.pg.identity.DatabaseRealm",
   "options": {
      "jdbc_url": "jdbc:oracle:thin:@graphdb_low?TNS_ADMIN=/etc/oracle/graph/
wallets/<dbname>",
      "token_expiration_seconds": 3600,
```

5. Finally, restart the graph server as shown:

```
sudo systemctl restart pgx
```

14.2.4.3 Store the Database Password in a Keystore

PGX requires a database account to read data from the database into memory. The account should be a low-privilege account (see Security Best Practices with Graph Data).

As described in Reading Graphs from Oracle Database into the Graph Server (PGX), you can read data from the database into the graph server without specifying additional authentication as long as the token is valid for that database user. But if you want to access a graph from a different user, you can do so, as long as that user's password is stored in a Java Keystore file for protection.

You can use the keytool command that is bundled together with the JDK to generate such a keystore file on the command line. See the following script as an example:

```
# Add a password for the 'database1' connection
keytool -importpass -alias database1 -keystore keystore.p12
# 1. Enter the password for the keystore
# 2. Enter the password for the database
# Add another password (for the 'database2' connection)
keytool -importpass -alias database2 -keystore keystore.p12
# List what's in the keystore using the keytool
keytool -list -keystore keystore.p12
```

If you are using Java version 8 or lower, you should pass the additional parameter -storetype pkcs12 to the keytool commands in the preceding example.

You can store more than one password into a single keystore file. Each password can be referenced using the alias name provided.

- Write the PGX graph configuration file to load a graph directly from relational tables
- Read the data
- Secure coding tips for graph client applications

Write the PGX graph configuration file to load a graph directly from relational tables

The following example loads a subset of the HR sample data from relational tables directly into PGX as a graph. The configuration file specifies a mapping from relational to graph format by using the concept of vertex and edge providers.

Note:

Specifying the <code>vertex_providers</code> and edge_providers properties loads the data into an optimized representation of the graph.

```
{
                 "name": "LAST NAME",
                 "type": "string"
            },
                 "name": "EMAIL",
                 "type": "string"
            },
                 "name": "SALARY",
                 "type": "long"
        ]
    },
        "name": "Jobs",
        "format": "rdbms",
        "database_table_name":"JOBS",
        "key column": "JOB ID",
        "key_type": "string",
        "props":[
                 "name":"JOB TITLE",
                 "type": "string"
        ]
    },
        "name": "Departments",
        "format": "rdbms",
        "database_table_name":"DEPARTMENTS",
        "key column": "DEPARTMENT ID",
        "key type": "string",
        "props":[
                 "name": "DEPARTMENT NAME",
                 "type": "string"
"edge_providers":[
        "name":"WorksFor",
        "format": "rdbms",
        "database table name": "EMPLOYEES",
        "key_column":"EMPLOYEE_ID",
        "source column": "EMPLOYEE ID",
        "destination column": "EMPLOYEE ID",
        "source vertex_provider":"Employees",
        "destination_vertex_provider":"Employees"
    },
        "name": "WorksAs",
        "format": "rdbms",
```

],

```
"database table name": "EMPLOYEES",
             "key column": "EMPLOYEE ID",
             "source column": "EMPLOYEE ID",
             "destination column": "JOB ID",
             "source vertex provider": "Employees",
             "destination vertex provider": "Jobs"
        },
            "name": "WorkedAt",
            "format": "rdbms",
             "database table name": "JOB HISTORY",
             "key column": "EMPLOYEE ID",
             "source column": "EMPLOYEE ID",
             "destination column": "DEPARTMENT ID",
             "source vertex provider": "Employees",
             "destination vertex provider": "Departments",
             "props":[
                     "name": "START DATE",
                     "type": "local date"
                 },
                     "name": "END DATE",
                     "type": "local date"
            1
        }
    ]
}
```

Read the data

Now you can instruct PGX to connect to the database and read the data by passing in both the keystore and the configuration file to PGX, using one of the following approaches:

Interactively in the graph shell

If you are using the graph shell, start it with the <code>--secret_store</code> option. It will prompt you for the keystore password and then attach the keystore to your current session. For example:

```
cd /opt/oracle/graph
./bin/opg4j --secret_store /etc/my-secrets/keystore.p12
enter password for keystore /etc/my-secrets/keystore.p12:
```

Inside the shell, you can then use normal PGX APIs to read the graph into memory by passing the JSON file you just wrote into the readGraphWithProperties API:

```
opg4j> var graph = session.readGraphWithProperties("config.json")
graph ==> PgxGraph[name=hr, N=215, E=415, created=1576882388130]
```

As a PGX preloaded graph

As a server administrator, you can instruct PGX to load graphs into memory upon server startup. To do so, modify the PGX configuration file at /etc/oracle/graph/pgx.conf and add the path the graph configuration file to the preload graphs section. For example:

```
{
    ...
    "preload_graphs": [{
        "name": "hr",
        "path": "/path/to/config.json"
}],
    "authorization": [{
        "pgx_role": "GRAPH_DEVELOPER",
        "pgx_permissions": [{
            "preloaded_graph": "hr",
            "grant": "read"
        }]
    },
    ....
]
```

As root user, edit the service file at /etc/systemd/system/pgx.service and change the <code>ExecStart</code> command to specify the location of the keystore containing the password:

ExecStart=/bin/bash start-server --secret-store /etc/keystore.p12



Please note that /etc/keystore.p12 must not be password protected for this to work. Instead protect the file via file system permission that is only readable by oraclegraph user.

After the file is edited, reload the changes using:

```
sudo systemctl daemon-reload
```

Finally start the server:

```
sudo systemctl start pgx
```

In a Java application

To register a keystore in a Java application, use the registerKeystore() API on the regist

```
import oracle.pgx.api.*;
class Main {
  public static void main(String[] args) throws Exception {
    String baseUrl = args[0];
```



```
String keystorePath = "/etc/my-secrets/keystore.p12";
  char[] keystorePassword = args[1].toCharArray();
  String graphConfigPath = args[2];
  ServerInstance instance = Pgx.getInstance(baseUrl);
  try (PgxSession session = instance.createSession("my-session")) {
    session.registerKeystore(keystorePath, keystorePassword);
    PgxGraph graph = session.readGraphWithProperties(graphConfigPath);
    System.out.println("N = " + graph.getNumVertices() + " E = " +
    graph.getNumEdges());
    }
}
```

You can compile and run the preceding sample program using the Oracle Graph Client package. For example:

```
cd $GRAPH_CLIENT
// create Main.java with above contents
javac -cp 'lib/*' Main.java
java -cp '.:conf:lib/*' Main http://myhost:7007 MyKeystorePassword path/to/
config.json
```

Secure coding tips for graph client applications

When writing graph client applications, make sure to never store any passwords or other secrets in clear text in any files or in any of your code.

Do not accept passwords or other secrets through command line arguments either. Instead, use Console.html#readPassword() from the JDK.

14.2.4.4 Adding Permissions to Publish the Graph

or

There are two ways by which you can view any graph in your graph server (PGX) session in the graph visualization application.

When you log into the graph visualization tool in your browser, that will be a different session from your JShell session or application session. To visualize the graph you are working on in your JShell session or application session in your graph visualization session, you can perform one of the following two steps:

1. Get the session id of your working session using the PgxSession API, and use that session id when you log into the graph visualization application. This is the recommended option.

```
opg4j> session.getId();
$2 ==> "898bdbc3-af80-49b7-9a5e-10ace6c9071c" //session id
```

- Grant PGX SESSION ADD PUBLISHED GRAPH permission and then publish the graph as
- shown:
 - a. Grant PGX_SESSION_ADD_PUBLISHED_GRAPH role in the database to the user visualizing the graph as shown in the following statement:

```
GRANT PGX SESSION ADD PUBLISHED GRAPH TO <graphuser>
```

b. Publish the graph when you are ready to visualize the graph using the publish API.



- See User Authentication and Authorization for more information on authorization rules for Graph Server (PGX) and Client 21.1.
- See Upgrading From Graph Server and Client 20.4.x to 21.x for more information if you are migrating to Graph Server (PGX) and Client 24.2 from an earlier version.

14.2.4.5 Token Expiration

By default, tokens are valid for 1 hour.

Internally, the graph client automatically renews tokens which are about to expire in less than 30 minutes. This is also configurable by re-authenticating your credentials with the database. By default, tokens can only be automatically renewed for up to 24 times, then you need to login again.

If the maximum amount of auto-renewals is reached, you can log in again without losing any of your session data by using the GraphServer#reauthenticate (instance, "<user>", "<password>") API.



If a session time out occurs before you re-authenticate, then you may lose your session data.

For example:

14.2.4.6 Customizing Roles and Permissions

You can fully customize the permissions to roles mapping by adding and removing roles and specifying permissions for a role. You can also authorize individual users instead of roles.

This topic includes examples of how to customize the permission mapping.

Checking Graph Permissions Using API

Adding and Removing Roles

You can add new role permission mappings or remove existing mappings by modifying the authorization list.

- Defining Permissions for Individual Users
 In addition to defining permissions for roles, you can define permissions for individual users.
- Defining Permissions to Use Custom Graph Algorithms
 You can define permissions to allow developers to compile custom graph algorithms.

14.2.4.6.1 Checking Graph Permissions Using API

You can view your roles and graph permissions using the following PGX API methods:

Table 14-5 API for Checking Graph Permissions

Class	Method	Description
ServerInstance	<pre>getPgxUsername()</pre>	Name of the current user
ServerInstance	getPgxUserRoles()	Role names of the current user
ServerInstance	<pre>getPgxGenericPermissions()</pre>	Non-graph (system) permissions of the current user: Pgx system permissions File-location permissions
PgxGraph	getPermission()	Permission on the graph instance for a current user

You can get all permission-related information using the API in JShell as shown:

- JShell
- Java

JShell

```
/bin/opg4j -b "https://<host>:<port>" -u "<graphuser>"
opq4j> instance
instance ==> ServerInstance[embedded=false,baseUrl=https://
<host>:<port>, serverVersion=null]
opg4j> instance.getPgxUsername()
$2 ==> "ORACLE"
opg4j> instance.getPgxUserRoles()
$3 ==> [GRAPH DEVELOPER]
opg4j> instance.getPgxGenericPermissions()
$4 ==> [PGX SESSION CREATE, PGX SESSION READ MODEL,
PGX SESSION ADD PUBLISHED GRAPH, PGX SESSION NEW GRAPH,
PGX SESSION GET PUBLISHED GRAPH, PGX SESSION MODIFY MODEL]
opq4j> var q = session.readGraphByName("BANK GRAPH VIEW", GraphSource.PG PGQL)
g ==> PgxGraph[name=BANK_GRAPH VIEW, N=999, E=4993, created=1688558374973]
opg4j> g.getPermission() // To get graph permissions
$9 ==> MANAGE
```

Java

```
import oracle.pg.rdbms.*;
import java.sql.Connection;
import java.sql.Statement;
import oracle.pg.rdbms.pggl.PgglConnection;
import oracle.pg.rdbms.pgql.PgqlStatement;
import oracle.pgx.api.*;
import oracle.ucp.jdbc.PoolDataSourceFactory;
import oracle.ucp.jdbc.PoolDataSource;
import java.nio.file.Files;
import java.nio.file.Path;
/**
 * This example shows how to get all permissions.
public class GetPermissions
  public static void main(String[] args) throws Exception
    int idx=0;
                              = args[idx++];
    String host
   String port
                            = args[idx++];
   String sid
                            = args[idx++];
    String user
                              = args[idx++];
                            = args[idx++];
    String password
    String graph
                              = args[idx++];
    Connection conn = null;
    PgxPreparedStatement stmt = null;
    try {
      // Get a jdbc connection
      PoolDataSource pds = PoolDataSourceFactory.getPoolDataSource();
      pds.setConnectionFactoryClassName("oracle.jdbc.pool.OracleDataSource");
      pds.setURL("jdbc:oracle:thin:@"+host+":"+port +"/"+sid);
      pds.setUser(user);
     pds.setPassword(password);
      conn = pds.getConnection();
      conn.setAutoCommit(false);
      ServerInstance instance = GraphServer.getInstance("http://
localhost:7007", user, password.toCharArray());
      PgxSession session = instance.createSession("my-session");
      var statement = Files.readString(Path.of("/media/sf Linux/Java/create-
pg.pgql"));
      stmt = session.preparePgql(statement);
      stmt.execute();
      PgxGraph g = session.getGraph(graph);
      System.out.println("Graph: "+ q);
      String userName = instance.getPgxUsername();
```

```
var userRoles = instance.getPgxUserRoles();
var genericPermissions = instance.getPgxGenericPermissions();
String graphPermission = g.getPermission().toString();

System.out.println("Username is " + userName);
System.out.println("User Roles are " + userRoles);
System.out.println("Generic permissions are " + genericPermissions);
System.out.println("Graph permission is " + graphPermission);

}

finally {
   // close the sql statment
   if (stmt != null) {
        stmt.close();
   }
   // close the connection
   if (conn != null) {
        conn.close();
   }
}
}
```

On execution, the code gives the following output:

```
Graph: PgxGraph[name=BANK_GRAPH_PG,N=1000,E=5001,created=1625731370402]
Username is ORACLE
User Roles are [GRAPH_DEVELOPER]
Generic permissions are [PGX_SESSION_MODIFY_MODEL, PGX_SESSION_CREATE,
PGX_SESSION_NEW_GRAPH, PGX_SESSION_READ_MODEL,
PGX_SESSION_ADD_PUBLISHED_GRAPH, PGX_SESSION_GET_PUBLISHED_GRAPH]
Graph permission is MANAGE
```

14.2.4.6.2 Adding and Removing Roles

You can add new role permission mappings or remove existing mappings by modifying the authorization list.

For example:

```
CREATE ROLE MY_CUSTOM_ROLE_1
GRANT PGX_SESSION_CREATE TO MY_CUSTOM_ROLE1
GRANT PGX_SERVER_GET_INFO TO MY_CUSTOM_ROLE1
GRANT MY_CUSTOM_ROLE1 TO SCOTT
```

14.2.4.6.3 Defining Permissions for Individual Users

In addition to defining permissions for roles, you can define permissions for individual users.

For example:

```
GRANT PGX_SESSION_CREATE TO SCOTT GRANT PGX_SERVER_GET_INFO TO SCOTT
```

14.2.4.6.4 Defining Permissions to Use Custom Graph Algorithms

You can define permissions to allow developers to compile custom graph algorithms.

For example,

Add the following static permission to the list of permissions:

```
GRANT PGX SESSION COMPILE ALGORITHM TO GRAPH DEVELOPER
```

14.2.4.7 Revoking Access to the Graph Server

To revoke a user's ability to access the graph server, either drop the user from the database or revoke the corresponding roles from the user, depending on how you defined the access rules in your pgx.conf file.

For example:

```
REVOKE graph developer FROM scott
```

Revoking Graph Permissions

If you have the MANAGE permission on a graph, you can revoke graph access from users or roles using the PqxGraph#revokePermission API. For example:

```
PgxGraph g = ...
g.revokePermission(new PgxRole("GRAPH_DEVELOPER")) // revokes previously
granted role access
g.revokePermission(new PgxUser("SCOTT")) // revokes previously granted user
access
```

14.2.4.8 Examples of Custom Authorization Rules

You can define custom authorization rules for developers.

- Example 14-1
- Example 14-2
- Example 14-3
- Example 14-4

Example 14-1 Allowing Developers to Publish Graphs

Sharing of graphs with other users should be done in Oracle Database where possible. Use GRANT statements on the database tables so that other users can create graphs from the tables.

In the graph server (PGX) you can use the following permissions to share a graph that is already in memory, with other users connected to the graph server.

Table 14-6 Allowed Permissions

Permission	Actions Enabled by this Permission
READ	READ the graph via the PGX API or in PGQL queries in PGX, create a subgraph, or clone the graph
MANAGE	Publish the graph or snapshot
	 Includes READ and EXPORT
	 Grant or revoke READ and EXPORT permissions on the graph
EXPORT	Export the graph to a file.
	 Includes READ permission.

The creator of the graph automatically gets the MANAGE permission granted on the graph. If you have the MANAGE permission, you can grant other roles or users READ or EXPORT permission on the graph. You **cannot** grant MANAGE on a graph. The following describes an example of granting READ permission on a graph to the GRAPH DEVELOPER role by userA:

```
import oracle.pgx.api.*;
import oracle.pgx.common.auth.*;
...
PgxSession session = GraphServer.getInstance("<base-url>", "<userA>",
"<password-of-userA").createSession("userA");
PgxGraph g = session.readGraphByName("SAMPLE_GRAPH", GraphSource.PG_PGQL);
g.grantPermission(new PgxRole("GRAPH_DEVELOPER"), PgxResourcePermission.READ);
g.publish();</pre>
```

Now other users with the <code>GRAPH_DEVELOPER</code> role can access this graph and have <code>READ</code> access on it, as shown in the following example of userB:

```
PgxSession session = GraphServer.getInstance("<base-url>", "<userB>",
"<password-of-userB").createSession("userB")
PgxGraph g = session.getGraph("sample_graph")
q.queryPgql("select count(*) from match (v)").print().close()</pre>
```

Similarly, graphs can be shared with individual users instead of roles, as shown in the following example:

```
g.grantPermission(new PgxUser("OTHER USER"), PgxResourcePermission.EXPORT)
```

where OTHER_USER is the user name of the user that will receive the EXPORT permission on graph g.

Example 14-2 Allowing Developers to Access Preloaded Graphs

To allow developers to access preloaded graphs (graphs loaded during graph server startup), grant the read permission on the preloaded graph in the pgx.conf file. For example:

```
"preload_graphs": [{
    "path": "/data/my-graph.json",
    "name": "global graph"
```



```
}],
"authorization": [{
    "pgx_role": "GRAPH_DEVELOPER",
    "pgx_permissions": [{
        "preloaded_graph": "global_graph"
        "grant": "read"
    },
```

You can grant READ, EXPORT, or MANAGE permission.

Example 14-3 Allowing Developers Access to the Local File System

To allow developers access to the local file system (where the graph server runs), you must first declare a directory and then map it to a read or write permission. For example:

```
CREATE OR REPLACE DIRECTORY pgx_file_location AS '/opt/oracle/graph/data' GRANT READ ON DIRECTORY pgx file location TO GRAPH DEVELOPER
```

Similarly, you can add another permission with GRANT WRITE to allow write access. Such a write access is required in order to export graphs.

Note that in addition to the preceding configuration, the operating system user that runs the graph server process must have the corresponding directory privileges to actually read or write into those directories.

Example 14-4 Allowing Access to Directories on Autonomous Database

To allow developers to read and write from files in Oracle Autonomous Database, you must perform the following steps:

1. Connect to your Autonomous Database instance as an ADMIN user using any of the SQL based Oracle Database tools or using Database Actions, the built-in web-based interface.

See Also:

- Connect to Autonomous Database Using Oracle Database Tools
- Connect with Built-in Oracle Database Actions
- Create the directory by specifying the path to the directory using the graph: prefix as shown:

```
CREATE OR REPLACE DIRECTORY pgx_file_location AS 'graph:/opt/oracle/graph/data'
```

3. Grant read or write permissions to the directory for the desired role. For example:

```
GRANT READ ON DIRECTORY pgx file location TO GRAPH DEVELOPER
```

14.2.4.9 Kerberos Enabled Authentication for the Graph Server (PGX)

The graph server (PGX) can authenticate users using an Oracle Database with Kerberos enabled as identity provider.

You can log into the graph server using a Kerberos ticket and the actions which you are allowed to do on the graph server are determined by the roles that have been granted to you in the Oracle Database.

- Prerequisite Requirements
- Prepare the Graph Server for Kerberos Authentication
- · Login to the Graph Server Using Kerberos Ticket

14.2.4.9.1 Prerequisite Requirements

In order to enable Kerberos authentication on the graph server (PGX), the following system requirements must be met:

- The database needs to have Kerberos authentication enabled. See Configuring Kerberos Authentication for more information.
- Both the database and the Kerberos Authentication Server need to be reachable from the host where the graph server runs.
- The database is prepared for graph server authentication. That is, relevant graph roles have been granted to users who will log into the graph server.

14.2.4.9.2 Prepare the Graph Server for Kerberos Authentication

The following are the steps to enable Kerberos authentication on the graph server (PGX):

1. Locate the pgx.conf file of your installation.



If you installed the graph server via RPM, the file is located at: /etc/oracle/graph/pgx.conf

2. Locate the krb5 conf file line of the realm options, inside the pgx.conf file:

```
"pgx_realm": {
    "implementation": "oracle.pg.identity.DatabaseRealm",
    "options": {
        ...
        "krb5_conf_file": "<REPLACE-WITH-KRB5-CONF-FILE-PATH-TO-ENABLE-KERBEROS-AUTHENTICATION>",
        "krb5_ticket_cache_dir": "/dev/shm",
        "krb5_max_cache_size": 1024
    }
},
```

3. Replace the text with the krb5.conf file that you are using for the database and user authentication. For example:

```
"pgx_realm": {
   "implementation": "oracle.pg.identity.DatabaseRealm",
   "options": {
        ...
        "krb5_conf_file": "/etc/krb5.conf",
        "krb5 ticket cache dir": "/dev/shm",
```



```
"krb5_max_cache_size": 1024
}
```



The file provided for the $krb5_conf_file$ option needs to be valid and readable by the graph server. In case you don't replace the $krb5_conf_file$ value or the value is empty, then the graph server will not use Kerberos authentication.

Also, you can set the cache directory that will be used for the graph server to temporarily store Kerberos tickets given by clients as well as the maximum cache size after which new login attempts will be rejected. The cache size represents the maximum amount of concurrent Kerberos sessions active on the graph server.

14.2.4.9.3 Login to the Graph Server Using Kerberos Ticket

The following are the steps to login to the graph server (PGX) using Kerberos ticket:

Create a new Kerberos ticket using the okinit command:

```
$ okinit <username>
```

This will prompt for your password and then create a new Kerberos ticket.

2. Connect to a remote graph server with only the base URL parameter using JShell:

```
$ opg4j -b https://localhost:7007
```

Or using Python client:

```
$ opg4py -b https://localhost:7007
```

On Linux, JShell and Python interactive client shells automatically detect the Kerberos ticket on your local file system and use that to authenticate with the graph server.

3. In case the auto-detection is not working, you can also explicitly pass in the ticket to the shell. Run the oklist command, to find the location of the ticket on the local file system.

```
$ oklist

Kerberos Utilities for Linux: Version 19.0.0.0.0 - Production on 31-
MAR-2021 15:26:46

Copyright (c) 1996, 2019 Oracle. All rights reserved.

Configuration file : /etc/krb5.conf.
Ticket cache: FILE:/tmp/krb5cc_54321
Default principal: oracle@realm
```



4. Specify your Kerberos ticket path using the --kerberos_ticket parameter. For example, using JShell:

```
$ opg4j -b https://localhost:7007 --kerberos ticket /tmp/krb5cc 54321
```

Or using Python Client:

```
$ opg4py -b https://localhost:7007 --kerberos ticket /tmp/krb5cc 54321
```

If you are using a Java client program (or JShell on embedded mode), you can get a server instance using the following API:

```
...
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "/tmp/krb5cc_54321");
PgxSession session = instance.createSession("my-session");
...
```

If you are using a Python Client program (or opg4py on embedded mode), you can get a server instance using the following API

```
instance = graph_server.get_instance("https://localhost:7007", "/tmp/
krb5cc_54321")
session = instance.create_session("my-session")
...
```

If you are connecting to a remote graph server, all you need is the Oracle Graph Client to be installed. For example:

```
import sys
import pypgx as pgx

sys.path.append("/path/to/graph/client/oracle-graph-client-21.2.0/python/
pypgx/pg/rdbms")

import graph_server

base_url = "https://localhost:7007"
kerberos_ticket = "/tmp/krb5cc_54321"

instance = graph_server.get_instance(base_url, kerberos_ticket)
print(instance)
```

14.3 Oracle Graph Client Installation

You can interact with the various graph features using the client CLIs and the graph visualization web client.

The following sections explain the steps to install the various clients:

Graph Clients

The Oracle Graph client installation supports a Java and a Python client.

Running the Graph Visualization Web Client

You require a running graph server (PGX) to use the Graph Visualization web application.

Related Topics

Getting Started with the Client Tools

You can use multiple client tools to interact with the graph server (PGX) or directly with the graph data in the database.

14.3.1 Graph Clients

The Oracle Graph client installation supports a Java and a Python client.

The following sections explain the steps to install the clients:

Oracle Graph Java Client

You can install the Java client from the <code>oracle-graph-client-24.2.0.zip</code> file that is shipped with Oracle Graph Server and Client or you can use the Java client on Maven Central.

Oracle Graph Python Client

You can install the Python client by downloading the oracle-graph-client-24.2.0.zip file that is shipped with Oracle Graph Server and Client or from PyPI.

14.3.1.1 Oracle Graph Java Client

You can install the Java client from the <code>oracle-graph-client-24.2.0.zip</code> file that is shipped with Oracle Graph Server and Client or you can use the Java client on Maven Central.

- Installing the Java Client From the Graph Server and Client Downloads
 You can download the zip file for Oracle Graph Client 24.2.0 and install the Java client.
- Using Oracle Graph Java Client on Maven Central
 You can obtain the property graph Java client from Maven Central.

14.3.1.1.1 Installing the Java Client From the Graph Server and Client Downloads

You can download the zip file for Oracle Graph Client 24.2.0 and install the Java client.

The prerequisites for installing the Java client are:

- Supported Operating Systems: A Unix-based operation system (such as Linux), macOS, or Microsoft Windows
- Supported JDK versions:
 - Oracle JDK 11 or JDK 17
 - OpenJDK JDK 11 or JDK 17

Note:

Due to a bug in Oracle JDK and OpenJDK, which causes a deadlock when you attempt to copy and paste into a JShell session, it is recommended that you avoid the following JDK versions:

- JDK 11.0.9
- JDK 11.0.10
- JDK 11.0.11
- JDK 11.0.12
- 1. Download the Oracle Graph Client from Oracle Software Cloud.

For example, oracle-graph-client-24.2.0.zip.

- 2. Unzip the file into a directory of your choice.
- 3. Configure your client to trust the self-signed keystore. See Configuring a Client to Trust the Self-Signed Keystore for more information.
- 4. Start the OPG4J shell to connect to the graph server (PGX) as shown:

```
cd <CLIENT_INSTALL_DIR>
./bin/opg4j --base url https://<host>:7007 --username <graphuser>
```

In the preceding code:

- <CLIENT_INSTALL_DIR>: Directory where the shell executables are located.

 The shell executables are generally found in /opt/oracle/graph/bin after server installation, and <CLIENT_INSTALL_DIR>/bin after the client installation.
- <host>: Server host

Note:

The graph server (PGX), listens on port 7007 by default. If needed, you can configure the graph server to listen on a different port by changing the port value in the server configuration file (server.conf). See Configuring the Graph Server (PGX) for details.

<graphuser>: Database user

You will be prompted for the database password.

See Starting the OPG4J Shell for more information on the different ways you can start the OPG4J shell.

The OPG4J shell starts and the following command line prompt appears as shown:

```
For an introduction type: /help intro
Oracle Graph Server Shell 24.2.0
Variables instance, session, and analyst ready to use.
opg4j>
```



See Also:

Java API Reference for more information on the Java APIs

14.3.1.1.2 Using Oracle Graph Java Client on Maven Central

You can obtain the property graph Java client from Maven Central.

The Maven artifact for the graph Java client is described as follows:

Group Name: com.oracle.database.graph

Artifact Name: opg-client

Version: 24.2.0

You can perform the following steps to use the graph Java client from Maven Central:

Download and Install Apache Maven on your system.

See Apache Maven Project for more information.

- 2. Add the bin folder with the mvn command to the PATH variable.
- 3. Build your Maven project and navigate to the project directory.
- 4. Edit the pom.xml file on the following:
 - a. Add the graph Java client dependency as shown:



If you use Gradle as a build tool, then the equivalent dependency declaration for the Java client is:

```
implementation group: 'com.oracle.database.graph', name: 'opg-client', version: '24.2.0' \,
```

b. Add the following repository as the Java client depends on the Spoofax Language Workbench Library to compile PGQL queries:



5. Optionally, you can skip step 4 and copy the following minimal POM configuration in dir>/pom.xml file:

```
project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance"
         xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://
maven.apache.org/maven-v4 0 0.xsd">
  <modelVersion>4.0.0</modelVersion>
  <groupId>com.mycompany.app</groupId>
  <artifactId>my-app</artifactId>
  <packaging>jar</packaging>
  <version>1.0-SNAPSHOT</version>
  <name>my-app</name>
  <repositories>
    <repository>
      <id>spoofax</id>
      <url>https://artifacts.metaborg.org/content/repositories/releases/
url>
    </repository>
  </repositories>
  <dependencies>
    <dependency>
      <groupId>com.oracle.database.graph</groupId>
      <artifactId>opg-client</artifactId>
      <version>24.2.0
    </dependency>
  </dependencies>
</project>
```

6. Build your Java code in project_dir>/src/main/java/com/mycompany/app and compile
 with Maven.

For example, the following code is stored in a file cproject_dir>/src/main/java/com/
mycompany/app/App1.java:

```
package com.mycompany.app;
import java.sql.DriverManager;
import java.sql.Connection;
import java.sql.Statement;
import oracle.pg.rdbms.pgql.PgqlConnection;
import oracle.pg.rdbms.pgql.PgqlStatement;
import oracle.pg.rdbms.pgql.PgqlResultSet;
import oracle.pgx.api.*;
import oracle.pg.rdbms.GraphServer;
import oracle.pg.rdbms.pgql.jdbc.PgqlJdbcRdbmsDriver;
public class App1 {
  public static void main(String[] args) throws Exception {
    String dbConnectString = args[0];
    String username = args[1];
    String password = args[2];
    // Obtain a JDBC database connection
    DriverManager.registerDriver(new PgqlJdbcRdbmsDriver());
```

```
String jdbcUrl = "jdbc:oracle:pggl:@" + dbConnectString;
    System.out.println("connecting to " + jdbcUrl);
    try (Connection conn = DriverManager.getConnection(jdbcUrl, username,
password)) {
     conn.setAutoCommit(false);
      // Create PGOL connection
      PgqlConnection pgqlConn = PgqlConnection.getConnection(conn);
      // Create a PGQL statement to execute PGQL queries
      PgqlStatement pgqlStmt = pgqlConn.createStatement();
      // Create a PGQL property graph using the CREATE PROPERTY GRAPH
statement
      String pgPgqlName = "BANK GRAPH";
      String createPgPgglQuery =
          "CREATE PROPERTY GRAPH " + pgPgqlName + " " +
          "VERTEX TABLES ( BANK ACCOUNTS AS ACCOUNTS " +
          "KEY (ID) " +
          "LABEL ACCOUNTS " +
          "PROPERTIES (ID, NAME)" +
          ") " +
          "EDGE TABLES ( BANK TXNS AS TRANSFERS " +
          "KEY (FROM ACCT ID, TO ACCT ID, AMOUNT) " +
          "SOURCE KEY (FROM ACCT ID) REFERENCES ACCOUNTS (ID) " +
          "DESTINATION KEY (TO ACCT ID) REFERENCES ACCOUNTS (ID) " +
          "LABEL TRANSFERS " +
          "PROPERTIES (FROM ACCT ID, TO ACCT ID, AMOUNT, DESCRIPTION)" +
          ") OPTIONS (PG PGQL)";
      pgqlStmt.execute(createPgPgqlQuery);
      // Execute a query to retrieve the first 10 elements of the graph
      String pgqlQuery =
          "SELECT e.from acct id, e.to acct id, e.amount FROM " +
          "MATCH (n:ACCOUNTS) -[e:TRANSFERS]-> (m:ACCOUNTS) ON " +
          pgPgqlName + " LIMIT 10";
      PgqlResultSet rs = pgqlStmt.executeQuery(pgqlQuery);
      rs.print();
      // Drop the PGQL property graph using the DROP PROPERTY GRAPH
statement
      String dropPgPgglQuery = "DROP PROPERTY GRAPH " + pgPgglName;
      pgqlStmt.execute(dropPgPgglQuery);
    System.exit(0);
```

You can then compile and run the preceding code by navigating to your project directory and running the following command:

```
mvn compile exec:java -Dexec.mainClass="com.mycompany.app.App1"-
Dexec.arguments='<db-connect-string>,<username>,<password>'
```

On successful processing, the code may produce an output similar to the following. Note, your output may be different depending on your *<db-connect-string>*.

```
[INFO] --- exec-maven-plugin:3.1.0:java (default-cli) @ my-app --- connecting to jdbc:oracle:pgql:@myhost:1521/oradb name = Baz
```

14.3.1.2 Oracle Graph Python Client

You can install the Python client by downloading the oracle-graph-client-24.2.0.zip file that is shipped with Oracle Graph Server and Client or from PyPI.

Alternatively, you can also install the python client in embedded mode.

- Installing the Python Client from PyPI
 You can obtain the property graph Python client from PyPI.
- Upgrading the Python Client
 This section describes how to upgrade the Python client.
- Installing the Python Client From the Graph Server and Client Downloads
 You can download the zip file for oracle-graph-client-24.2.0 from the Graph Server and
 Client downloads and install the Python client.
- Installing the Python Client in Embedded Mode
 You can install and work with the Python client in embedded mode.
- Uninstalling the Python Client
 This section describes how to uninstall the Python client.

14.3.1.2.1 Installing the Python Client from PyPI

You can obtain the property graph Python client from PyPI.

You can install the oracle-graph-client-24.2.0.zip package from the PyPI repository using pip.

Before installing the Python client from PyPI, ensure that your system meets the following requirements:

- Supported operating systems: Linux, Windows, or macOS (M1 or M2 processor)
- Supported JDK versions:
 - Oracle JDK 11 or JDK 17
 - OpenJDK JDK 11 or JDK 17
- Python 3.8 or later
- Ensure that you set the JAVA HOME environment variable.
- If you are behind a proxy, then set the https_proxy environment variable to the proxy server.

You can install and verify the Python client installation as shown:

Install the client through pip.

For example,

```
pip install --user oracle-graph-client
```

This installs the Python client along with all the required dependencies.

2. Verify that your installation is successful.

```
$ python3
Python 3.8.12 (default, Apr 5 2022, 08:07:47)
[GCC 8.5.0 20210514 (Red Hat 8.5.0-10.0.1)] on linux
Type "help", "copyright", "credits" or "license" for more information.
>>> import opg4py
>>> import pypgx
```



Python API Reference for more information on the Python APIs

14.3.1.2.2 Upgrading the Python Client

This section describes how to upgrade the Python client.

1. Review the available Python client versions and the currently installed version.

```
pip3 index versions oracle-graph-client

WARNING: pip index is currently an experimental command. It may be removed/
changed in a future release without prior warning.
oracle-graph-client (23.3.0)

Available versions: 23.3.0, 23.2.0, 23.1.0
INSTALLED: 23.1.0
LATEST: 23.3.0
```

2. Run the following command to upgrade your Python client.

```
pip3 install oracle-graph-client --upgrade
```

14.3.1.2.3 Installing the Python Client From the Graph Server and Client Downloads

You can download the zip file for oracle-graph-client-24.2.0 from the Graph Server and Client downloads and install the Python client.

Before you install the Python client, ensure that you meet the following prerequisites.

- System requirements:
 - Supported operating system: Linux
 - Supported JDK versions:
 - Oracle JDK 11 or JDK 17
 - OpenJDK JDK 11 or JDK 17

Supported Python versions: Python 3.8 or 3.9

To verify that you are using the right version of the Python client, run the following command:

```
python3 --version
```

For more information on installing Python 3 on Oracle Linux, see Python for Oracle Linux.



If you are using any other operating system or Python version, then you can install the Python client from PyPI. See Installing the Python Client from PyPI for more information.

Ensure that python3-devel is installed in your system.
 sudo yum install python3-devel



See Python API Reference for more information on the Python APIs.

You can perform the following steps to install and connect using the Python client:

Download the Oracle Graph Client from Oracle Software Cloud.

For example, oracle-graph-client-24.2.0.zip.

2. Unzip the file into a directory of your choice.

The unzipped folder contains the <code>oracle-graph-python-client-24.2.0.zip</code> file for installing the Python client.

3. Install the Python client by running the following command.

```
python3 oracle-graph-python-client-24.2.0.zip --user
```

- 4. Configure your client to trust the self-signed keystore. See Configuring a Client to Trust the Self-Signed Keystore for more information.
- 5. Start the OPG4Py shell to connect to the graph server(PGX) by running the following command:

```
cd <CLIENT_INSTALL_DIR>
./bin/opg4py --base url https://<host>:7007
```

In the preceding code:

- <CLIENT_INSTALL_DIR>: Directory where the shell executables are located.
 The shell executables are found in <CLIENT_INSTALL_DIR>/bin after the client installation.
- <host>: Server host





The graph server (PGX), listens on port 7007 by default. If needed, you can configure the graph server to listen on a different port by changing the port value in the server configuration file (server.conf). See Configuring the Graph Server (PGX) for details.

You are prompted to enter your username and password.

See Starting the OPG4Py Shell for more information on the different ways you can start the OPG4Py shell.

The OPG4Py shell starts and the following command line prompt appears as shown:

```
Oracle Graph Server Shell 24.2.0 >>>
```



You can also install the python client library in Jupyter Notebook. Using the Python API, you can then connect to the graph server (PGX) to run PGQL queries and graph algorithms in a Jupyter Notebook environment. See Using the Jupyter Notebook Interface for more details.

14.3.1.2.4 Installing the Python Client in Embedded Mode

You can install and work with the Python client in embedded mode.

To install the embedded Python client:

1. Run the following command:

```
python3 /opt/oracle/graph/client/oracle-graph-python-embedded-24.2.0.zip
--user
```

2. Start the OPG4Py shell in embedded mode as shown:

```
cd /opt/oracle/graph
./bin/opg4py
```

Note that the shell executables are found in $\protect\operatorname{\foots}{pt/oracle/graph/bin}$ after the server installation.

The OPG4Py shell starts and the following command line prompt appears as shown:

```
Oracle Graph Server Shell 24.2.0
>>> instance
ServerInstance(embedded: True, version: 24.2.1)
>>>
```

14.3.1.2.5 Uninstalling the Python Client

This section describes how to uninstall the Python client.

To uninstall the Python client, run the following command:

pip uninstall oracle-graph-client

14.3.2 Running the Graph Visualization Web Client

You require a running graph server (PGX) to use the Graph Visualization web application.

In addition, ensure that you have provided the JDBC URL for your database in the jdbc_url parameter in the /etc/oracle/graph/pgx.conf file.

To launch the graph visualization application:

- Start the graph server on your installation.
 - See Installing Oracle Graph Server For Linux x86-64 for more information on using the rpm installation.
 - See Deploying Oracle Graph Server to a Web Server for more information on graph server deployment to a web server.
- 2. Connect to your browser for running the Graph Visualization application.
 - For rpm installation: https://localhost:7007/ui/
 - For Apache Tomcat Server: https://localhost:8080/ui
 - For Oracle WebLogic Server: https://<<fqdn-ip>>:<<port>>/ui

The Graph Visualization Login screen opens as shown:



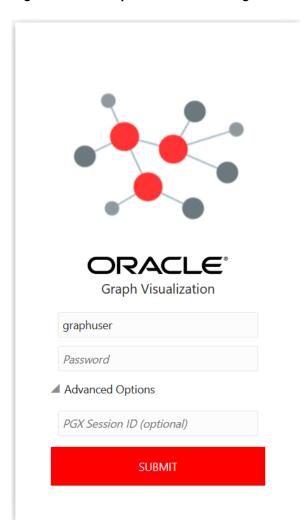


Figure 14-1 Graph Visualization Login

- 3. Enter your Username and Password.
- 4. Optionally, provide the PGX Session ID.
- Click Submit to sign in to the Graph Visualization application.
 See Using the Graph Visualization Application for more information on how to visualize graphs using the web application.

14.4 Setting Up Transport Layer Security

The graph server (PGX), by default, allows only encrypted connections using Transport Layer Security (TLS). TLS requires the server to present a server certificate to the client and the client must be configured to trust the issuer of that certificate.

In this release of Graph Server and Client, the RPM file installation, will generate a self-signed server keystore file by default. This <code>server_keystore.jks</code> file contains the server certificate and server private key and is generated into <code>/etc/oracle/graph</code>, for the server to enable TLS. Note that the default password for the generated keystore is <code>changeit</code> and this is configured

using an environment variable PGX_SERVER_KEYSTORE_PASSWORD in /etc/systemd/system/pgx.service file as shown:

```
[Service]
Environment="PGX_SERVER_KEYSTORE_PASSWORD=changeit"
```

If this default keystore configuration is sufficient for you to get started and if your connections are only to localhost, you can skip to Configuring a Client to Trust the Self-Signed Keystore.

If you prefer to use a self-signed server certificate, then refer to Using a Self-Signed Server Certificate for more information. However, it is important to note that the server configuration fields, server_cert and server_private_key are deprecated and will be desupported in a future release. After that, you will be required to use the server keystore to store the server certificate and the server private key.

- Using a Self-Signed Server Keystore
 This section describes the steps to generate a self-signed keystore into /etc/oracle/graph and configure the graph server (PGX) and client to use the keystore.
- Using a Self-Signed Server Certificate
 This section describes the steps to generate a self-signed certificate into /etc/oracle/
 graph and configure the graph server (PGX) to use this certificate.

14.4.1 Using a Self-Signed Server Keystore

This section describes the steps to generate a self-signed keystore into /etc/oracle/graph and configure the graph server (PGX) and client to use the keystore.

- Generating a Self-Signed Server Keystore
 You can create a server key store using the keytool command.
- Configuring the Graph Server (PGX) When Using a Server Keystore
 You must specify the path to the server keystore in the graph server (PGX) configuration
 file.
- Configuring a Client to Trust the Self-Signed Keystore
 You must configure your client application to accept the self-signed keystore.

14.4.1.1 Generating a Self-Signed Server Keystore

You can create a server key store using the keytool command.

The following steps show how to create a server keystore with a self-signed certificate:

1. Go to the following directory:

```
cd /etc/oracle/graph
```

Run the following command:

```
keytool -genkey -alias pgx -keyalg RSA -keystore server keystore.jks
```

3. Provide the requested details. For example:

```
Enter keystore password:
Re-enter new password:
What is your first and last name?
```

```
[Unknown]: localhost
What is the name of your organizational unit?
  [Unknown]: OU
What is the name of your organization?
  [Unknown]: MyOrganization
What is the name of your City or Locality?
  [Unknown]: MyTown
What is the name of your State or Province?
  [Unknown]: MyState
What is the two-letter country code for this unit?
  [Unknown]: US
Is CN=localhost, OU=OU, O=MyOrganization, L=MyTown, ST=MyState, C=US correct?
  [no]: yes
```

The server keystore.jks is created successfully in cd /etc/oracle/graph.

14.4.1.2 Configuring the Graph Server (PGX) When Using a Server Keystore

You must specify the path to the server keystore in the graph server (PGX) configuration file.

Note:

If you deploy the graph server into your web server using the web applications download package, then this section does not apply. Please refer to the manual of your web server for instructions on how to configure TLS.

Edit the file at /etc/oracle/graph/server.conf to specify server keystore alias, server keystore provider, server keystore type and the path to the server keystore as shown:

```
"port": 7007,
"enable_tls": true,
"enable_client_authentication": false,
"server_keystore": "/etc/oracle/graph/server_keystore.jks",
"server_keystore_alias": "pgx",
"server_keystore_type": "PKCS12",
"server_keystore_provider": "SUN",
"ca_certs": [],
"working_dir": "/opt/oracle/graph/pgx/tmp_data"
```

 Set the keystore password using an OS environment variable called PGX_SERVER_KEYSTORE_PASSWORD or with a java property called pgx.SERVER_KEYSTORE_PASSWORD.

For example, to set the keystore password in PGX_SERVER_KEYSTORE_PASSWORD, edit the file at /etc/systemd/system/pgx.service as shown:

```
[Service]
Environment="PGX SERVER KEYSTORE PASSWORD=<keystore password>"
```

3. Reload the systemd configuration by running the following command:

sudo systemctl daemon-reload

4. Restart the graph server.



Caution:

- Always use a valid certificate issued by a certificate authority (CA) which is trusted by your organization. If you do not have a CA certificate, you can temporarily create a self-signed certificate and get started. However, it is not recommended to use self-signed certificates for production environments.
- The steps to generate a self-signed server certificate can modify the Java installation on your client-system. Only perform these steps if you are fully aware of the implications of accepting the self-signed certificates systemwide.
- Consider carefully when using commands with sudo.

14.4.1.3 Configuring a Client to Trust the Self-Signed Keystore

You must configure your client application to accept the self-signed keystore.

To configure a client to trust the self-signed keystore, the root certificate must be imported to your Java installation local trust store.

• For a Java or a Python client, you must import the root certificate to all the Java installations used by all the clients.



Note:

The JShell client requires Java 11 or later.

• For the Graph Visualization application, you must import the root certificate to the system Java installation of the environment running the graph server (PGX) or the web server serving the graph visualization application. That is, the JDK installation which is used by the OS user running the server that serves the Graph Visualization application.

You can import the root certificate as shown in the following step:

Ensure JAVA HOME is set and run the following command as a root user or with sudo.

```
sudo keytool -importkeystore -srckeystore /etc/oracle/graph/
server_keystore.jks -destkeystore $JAVA_HOME/lib/security/cacerts -
deststorepass changeit -srcstorepass changeit -noprompt
```

where changeit is the sample keystore password. You can change this password to a password of your choice. Be sure to remember this password as you will need it to modify the certificate.



If you are upgrading the graph server from a previous release, then you must first delete the existing certificate before importing the new certificate. Run the following command using sudo or as a root user to delete the certificate:

sudo keytool -delete -alias pgx -keystore \$JAVA_HOME/lib/security/cacerts storepass changeit

14.4.2 Using a Self-Signed Server Certificate

This section describes the steps to generate a self-signed certificate into /etc/oracle/graph and configure the graph server (PGX) to use this certificate.

- Generating a Self-Signed Server Certificate
 You can create a self-signed server certificate using the openss1 command.
- Configuring the Graph Server (PGX)
 You must specify the path to the server certificate and the server's private key in PEM format in the graph server (PGX) configuration file.
- Configuring a Client to Trust the Self-Signed Certificate
 You must configure your client application to accept the self-signed graph server (PGX)
 certificate.

14.4.2.1 Generating a Self-Signed Server Certificate

You can create a self-signed server certificate using the openss1 command.

The following steps show how to generate a self-signed server certificate.

1. Go to the following directory:

```
cd /etc/oracle/graph
```

2. Execute the following commands:

```
openssl req -new -newkey rsa:2048 -days 365 -nodes -x509 -subj "/C=US/ST=MyState/L=MyTown/O=MyOrganization/CN=ROOT" -keyout ca_key.pem -out ca_certificate.pem openssl genrsa -out server_key_traditional.pem 2048 openssl pkcs8 -topk8 -in server_key_traditional.pem -inform pem -out server_key.pem -outform pem -nocrypt openssl req -new -subj "/C=US/ST=MyState/L=MyTown/O=MyOrganization/CN=localhost" -key server_key.pem -out server.csr chmod 600 server_key.pem openssl x509 -req -CA ca_certificate.pem -CAkey ca_key.pem -in server.csr -out server_certificate.pem -days 365 -CAcreateserial chown oraclegraph:oraclegraph server key.pem
```

Note:

- The certificate mentioned in the above example will only work for the host localhost. If you have a different domain, you must replace localhost with your domain name.
- The above self-signed certificate is valid only for 365 days.

14.4.2.2 Configuring the Graph Server (PGX)

You must specify the path to the server certificate and the server's private key in PEM format in the graph server (PGX) configuration file.

Note:

If you deploy the graph server into your web server using the web applications download package, then this section does not apply. Please refer to the manual of your web server for instructions on how to configure TLS.

1. Edit the file at /etc/oracle/graph/server.conf, and specify the paths to the server certificate and the server's private key in PEM format, as shown:

```
"port": 7007,
"enable_tls": true,
"server_private_key": "/etc/oracle/graph/server_key.pem",
"server_cert": "/etc/oracle/graph/server_certificate.pem",
"enable_client_authentication": false,
"working_dir": "/opt/oracle/graph/pgx/tmp_data"
```

2. Restart the graph server.

lack

Caution:

- Always use a valid certificate issued by a certificate authority (CA) which is trusted by your organization. If you do not have a CA certificate, you can temporarily create a self-signed certificate and get started. However, it is not recommended to use self-signed certificates for production environments.
- The steps to generate a self-signed server certificate can modify the Java installation on your client-system. Only perform these steps if you are fully aware of the implications of accepting the self-signed certificates systemwide.
- Consider carefully when using commands with sudo.

14.4.2.3 Configuring a Client to Trust the Self-Signed Certificate

You must configure your client application to accept the self-signed graph server (PGX) certificate.

To configure a client to trust the self-signed certificate, the root certificate must be imported to your Java installation local trust store.

 For a Java or a Python client, you must import the root certificate to all the Java installations used by all the clients.



The JShell client requires Java 11 or later.

For the Graph Visualization application, you must import the root certificate to the system
Java installation of the environment running the graph server (PGX) or the web server
serving the graph visualization application. That is, the JDK installation which is used by
the OS user running the server that serves the Graph Visualization application.

You can import the root certificate as shown in the following step:

• Ensure JAVA HOME is set and run the following command as a root user or with sudo:

```
sudo keytool -import -trustcacerts -keystore $JAVA_HOME/lib/security/
cacerts -storepass changeit -alias pgx -file /etc/oracle/graph/
ca certificate.pem -noprompt
```

where <code>changeit</code> is the sample keystore password. You can change this password to a password of your choice. Be sure to remember this password as you will need it to modify the certificate.

If you are upgrading the graph server from a previous release, then you must first delete the existing certificate before importing the new certificate. Run the command using sudo or as a root user:

sudo keytool -delete -alias pgx -keystore \$JAVA_HOME/lib/security/cacerts storepass changeit



Getting Started with the Graph Server (PGX)

Once you have installed the graph server (PGX), you can start and connect to a graph server instance.

- Starting the Graph Server (PGX)
 This section describes the commands to start and stop the graph server (PGX).
- Connecting to the Graph Server (PGX)
 This section explains how to connect to the graph server (PGX) running in remote mode or when deployed as a web application on Apache Tomcat or Oracle WebLogic Server.

15.1 Starting the Graph Server (PGX)

This section describes the commands to start and stop the graph server (PGX).

A preconfigured version of Apache Tomcat is bundled, which allows you to start the graph server (PGX) by running a script.

As a prerequisite to start the graph server in remote mode, you must ensure that Oracle graph server is installed in your system. See Installing Oracle Graph Server For Linux x86-64 for instructions to install the graph server (PGX).



See Usage Modes of the Graph Server (PGX) for more information on the different graph server execution modes.

- Starting and Stopping the Graph Server (PGX) Using the Command Line
- Configuring the Graph Server (PGX)

15.1.1 Starting and Stopping the Graph Server (PGX) Using the Command Line

PGX is integrated with systemd to run it as a Linux service in the background.

If you need to configure the server before starting it, see Configuring the Graph Server (PGX) and Configuration Parameters for the Graph Server (PGX) Engine for more information on the configuration options.

The commands to start and stop the graph server (PGX) and the PGX engine are as follows:

Note:

You can run the following commands without sudo if you are the root user.

To start the PGX server as a daemon process, run the following command:

sudo systemctl start pgx

To stop the server, run the following command:

sudo systemctl stop pgx

If the server does not start up, you can see if there are any errors by running:

sudo journalctl -u pgx.service

For more information about how to interact with systemd on Oracle Linux, see the Oracle Linux administrator's documentation.

15.1.2 Configuring the Graph Server (PGX)

You can configure the graph server (PGX) by modifying the /etc/oracle/graph/server.conf file. The following table shows the valid configuration options, which can be specified in JSON format.

Table 15-1 Configuration Parameters for the Graph Server (PGX)

Parameter	Туре	Description	Default
ca_certs	array of string	List of files storing trusted certificates (PEM format). If enable_tls is set to false, this field has no effect.	[]



Table 15-1 (Cont.) Configuration Parameters for the Graph Server (PGX)

Parameter	Туре	Description	Default
ciphers	array	List of cipher suites to be used by the server. For example, [cipher1, cipher2.]	["TLS_ECDHE_ECDSA_WITH_AES_128] GCM_SHA256",
	string		"TLS_ECDHE_ECDSA_WITH_AES_256_0
			CM_SHA384", "TLS_ECDHE_RSA_WITH_AES_128_GCN
			_SHA256", "TLS ECDHE RSA WITH AES 256 GCI
			SHA384", "TLS ECDHE ECDSA WITH AES 128
			BC_SHA256", "TLS ECDHE RSA WITH AES 128 CB
			SHA256", "TLS ECDHE ECDSA WITH AES 256
			BC_SHA384",
			"TLS_ECDHE_RSA_WITH_AES_256_CB _SHA384",
			"TLS_DHE_RSA_WITH_AES_128_GCM_ HA256",
			"TLS_DHE_DSS_WITH_AES_128_GCM_ HA256",
			"TLS_DHE_RSA_WITH_AES_128_CBC_HA256",
			"TLS_DHE_DSS_WITH_AES_128_CBC_HA256",
			"TLS_DHE_DSS_WITH_AES_256_GCM_
			HA384", "TLS_DHE_RSA_WITH_AES_256_CBC_
			HA256", "TLS_DHE_DSS_WITH_AES_256_CBC_
			HA256", "TLS ECDHE ECDSA WITH AES 128
			BC_SHA", "TLS_ECDHE_RSA_WITH_AES_256_CB
			_SHA", "TLS_ECDHE_ECDSA_WITH_AES_256_
			BC_SHA", "TLS DHE DSS WITH AES 128 CBC
			HA", "TLS DHE RSA WITH AES 128 CBC
			HA",
			"TLS_DHE_DSS_WITH_AES_256_CBC_ HA",
			"TLS_DHE_RSA_WITH_AES_256_CBC_ HA",
			"TLS_RSA_WITH_AES_128_GCM_SHA26",
			"TLS_DH_DSS_WITH_AES_128_GCM_S A256",
			"TLS_ECDH_ECDSA_WITH_AES_128_G M SHA256",
			"TLS_RSA_WITH_AES_256_GCM_SHA34",

Table 15-1 (Cont.) Configuration Parameters for the Graph Server (PGX)

Parameter	Туре	Description	Default
Parameter	Туре	Description	"TLS_DH_DSS_WITH_AES_256_GCM_SH A384", "TLS_ECDH_ECDSA_WITH_AES_256_GC M_SHA384", "TLS_RSA_WITH_AES_128_CBC_SHA25 6", "TLS_DH_DSS_WITH_AES_128_CBC_SH A256", "TLS_ECDH_ECDSA_WITH_AES_128_CB C_SHA256", "TLS_RSA_WITH_AES_256_CBC_SHA25 6", "TLS_DH_DSS_WITH_AES_256_CBC_SHA25 6", "TLS_DH_DSS_WITH_AES_256_CBC_SH A256", "TLS_ECDH_ECDSA_WITH_AES_256_CB C_SHA384", "TLS_ECDH_ECDSA_WITH_AES_256_CB C_SHA384", "TLS_DH_DSS_WITH_AES_128_CBC_SHA", "TLS_DH_DSS_WITH_AES_128_CBC_SHA", "TLS_ECDH_ECDSA_WITH_AES_128_CB C_SHA", "TLS_ECDH_ECDSA_WITH_AES_256_CBC_SHA", "TLS_DH_DSS_WITH_AES_256_CBC_SHA",
context_path	string	This can be used to change the context path. For example, if you specify port as 7007 and context path as /pgx, the server will listen on https://localhost:7007/pgx	C_SHA"] /
enable_tls	boolean	If true, the server enables transport layer security (TLS).	true
max_header_size	integer	Maximum valid header size in bytes. If null, use the default from Tomcat.	null
port	integer	Port the graph server (PGX) server should listen on.	7007



Table 15-1 (Cont.) Configuration Parameters for the Graph Server (PGX)

Parameter	Туре	Description	Default
server_cert	string	The path to the server certificate to be presented to TLS clients (PEM format). This file must only contain one certificate. If your certificate is a chain and contains a root certificate, add it to ca_certs instead. If enable_tls is set to false, this field has no effect Note: Starting from Graph Server and Client Release 22.3 onwards, this field is deprecated. Use server_keystore instead.	NULL
server_keystore	string	The path to the keystore to be used for server connections. If this field is present along with server_cert or server_private_key, then an error will be raised. If enable_tls is set to false, then this field has no effect.	NULL
server_keystore _alias	string	This is the server keystore alias of server_keystore.	NULL
server_keystore _provider	string	This is the server keystore provider of server_keystore.	SunJSSE
server_keystore _type	string	This is the server keystore type of server_keystore.	JKS
server_private_key	string	This is the path to the file storing the private key of the server (PEM format). For security reasons, the file must have only Read and Write permissions only for the owner (600 permissions in a POSIX filesystem), otherwise an error will be thrown. If enable_tls is set to false, this field has no effect. Note: Starting from Graph Server and Client Release 22.3 onwards, this field is deprecated. Use server_keystore instead.	NULL
tls_version	string	TLS version to be used by the server. For example, ${\tt TLSv1.2}$	TLSv1.2



Table 15-1 (Cont.) Configuration Parameters for the Graph Server (PGX)

Parameter	Туре	Description	Default
working_dir	string	The working directory used by the server to store temporary files. Needs to be writable by the process which started the server and should not be touched by any other process while the server is running.	

The graph server (PGX) enables two-way SSL/TLS (Transport Layer Security) by default. The server enforces TLS 1.2 and disables certain cipher suites known to be vulnerable to attacks. Upon a TLS handshake, both the server and the client present certificates to each other, which are used to validate the authenticity of the other party. Client certificates are also used to authorize client applications.

Example Configuration of server.conf File

```
"port": 7007,
"enable_tls": true,
"server_cert": "server_cert.pem",
"server_private_key": "server_key.pem",
"ca_certs": [
    "server_cert.pem"
]
}
```

Example Configuration of server.conf File Using a Keystore

```
"port": 7007,
"enable_tls": true,
"enable_client_authentication": true,
"server_keystore": "/pgx/cert/server_keystore.rsa",
"server_keystore_alias": "pgx",
"server_keystore_provider": "JsafeJCE",
"server_keystore_type": "PKCS12"
}
```

15.2 Connecting to the Graph Server (PGX)

This section explains how to connect to the graph server (PGX) running in remote mode or when deployed as a web application on Apache Tomcat or Oracle WebLogic Server.

The prerequisite requirement to connect to the graph server is to have the graph server (PGX) up and running. See Starting and Stopping the Graph Server (PGX) Using the Command Line for more information on the commands to start the graph server.

Note:

If you are using the graph server (PGX) as a library, see Using Graph Server (PGX) as a Library for more information.

- Connecting with the Graph Client CLIs
- Connecting with Java
- Connecting with Python

15.2.1 Connecting with the Graph Client CLIs

The simplest way to connect to a remote graph server (PGX) instance is to specify the base URL of the server along with the database user name required for the graph server (PGX) authentication as shown:

- JShell
- Python

JShell

```
cd /opt/oracle/graph
./bin/opg4j --base url https://<host>:<port> --username <graphuser>
```

Python

```
cd /opt/oracle/graph
./bin/opg4py --base_url https://<host>:<port> --username <graphuser>
```

where:

- <host>: is the server host name
- <port>: is the server port
- <graphuser>: is the database user
 You will be prompted for the database password.

See Also:

- User Authentication and Authorization
- Java API Reference for information on the Java APIs
- Python API Reference for information on the Python APIs



About Logging HTTP Requests

The graph shell suppresses all debugging messages by default. To see which HTTP requests are executed, set the log level for oracle.pgx to DEBUG, as shown in this example:



Enabling these logs can lead to sensitive information like passwords getting printed on the screen.

- JShell
- Python

JShell

```
opq4j> loglevel("oracle.pgx", "DEBUG")
===> Log level of oracle.pgx logger set to DEBUG
opq4j> var q = session.readGraphByName("BANK GRAPH VIEW", GraphSource.PG PGQL)
09:19:51,859+0000 DEBUG o.p.c.RemoteUtils - create session cookie (session ID
= 82f5cc30-358a-4002-a0bc-80a4ad690a94)
09:19:51,862+0000 DEBUG o.p.c.RemoteUtils - no value for the sticky cookie
given
09:19:51,862+0000 DEBUG o.p.c.RemoteUtils - create csrf token cookie (token =
d43a5de8-c81c-4361-ae15-81a1867cb2d6)
09:19:51,881+0000 DEBUG o.p.c.HttpRequestExecutor - Requesting POST https://
localhost:7007/core/v2/describe
09:19:51,902+0000 DEBUG o.p.c.HttpRequestExecutor - received HTTP status 202
09:19:51,904+0000 DEBUG o.p.c.HttpRequestExecutor -
{"futureId": "457025d4-3945-400a-95ed-a1897e6df9ac"}
09:19:51,911+0000 DEBUG o.p.c.PgxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/status
09:19:52,322+0000 DEBUG o.p.c.PgxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/value
09:19:52,337+0000 DEBUG o.p.c.RemoteUtils - received HTTP status 201
09:19:52,337+0000 DEBUG o.p.c.RemoteUtils -
{"source name": "BANK GRAPH VIEW", "optimized for": "UPDATES", "attributes":
{}, "vertex id type": "string", "edge id strategy": "PARTITIONED IDS", "vertex id s
trategy":"PARTITIONED IDS","error handling":
{"on missing vertex":"ERROR"}, "source type":"PG PGQL", "vertex providers":
[{"error handling":{},"format":"rdbms","key column":"ID","props":
[{"column":"ID", "type":"long", "name":"ID", "dimension":0},
{"column": "NAME", "type": "string", "name": "NAME", "dimension": 0}], "name": "ACCOUNT
S", "parallel hint degree":-1, "loading":
{"create key mapping":true}, "database table name": "BANK ACCOUNTS", "schema": "GR
APHUSER", "key type": "long", "label": "ACCOUNTS", "attributes":
{}}],"edge id type":"string","loading":
{"snapshots source": "CHANGE SET"}, "name": "BANK GRAPH VIEW", "edge providers":
[{"error handling":
{}, "format": "rdbms", "source column": "FROM ACCT ID", "destination vertex provide
r": "ACCOUNTS", "props":
```



```
[{"column":"FROM ACCT ID","type":"long","name":"FROM ACCT ID","dimension":0},
{"column": "TO ACCT ID", "type": "long", "name": "TO ACCT ID", "dimension": 0},
{"column": "AMOUNT", "type": "long", "name": "AMOUNT", "dimension": 0},
{"column": "DESCRIPTION", "type": "string", "name": "DESCRIPTION", "dimension": 0}], "
name":"TRANSFERS", "parallel hint degree":-1, "source vertex provider":"ACCOUNTS
","loading":
{"create key mapping":false}, "database table name": "BANK TXNS", "schema": "GRAPH
USER", "destination column": "TO ACCT ID", "key type": "long", "label": "TRANSFERS",
"attributes":{}}]}
09:19:52,545+0000 DEBUG o.p.c.RemoteUtils - create session cookie (session ID
= 82f5cc30-358a-4002-a0bc-80a4ad690a94)
09:19:52,547+0000 DEBUG o.p.c.RemoteUtils - no value for the sticky cookie
09:19:52,547+0000 DEBUG o.p.c.RemoteUtils - create csrf token cookie (token =
d43a5de8-c81c-4361-ae15-81a1867cb2d6)
09:19:52,673+0000 DEBUG o.p.c.HttpRequestExecutor - Requesting POST https://
localhost:7007/core/v1/loadGraph
09:19:52,692+0000 DEBUG o.p.c.HttpRequestExecutor - received HTTP status 202
09:19:52,695+0000 DEBUG o.p.c.HttpRequestExecutor -
{"futureId": "854bd093-8b80-437b-82ff-97f691436131"}
09:19:52,695+0000 DEBUG o.p.c.PgxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/status
09:19:53,313+0000 DEBUG o.p.c.PqxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/value
09:19:53,331+0000 DEBUG o.p.c.RemoteUtils - received HTTP status 201
09:19:53,332+0000 DEBUG o.p.c.RemoteUtils - {"id":"803F9E73-87BD-461E-A11A-
A54853E8A4A0", "links": [{"href": "core/v1/graphs/x-graph-
id", "rel": "self", "method": "GET", "interaction": ["async-polling"] },
{"href": "core/v1/graphs/x-graph-
id", "rel": "canonical", "method": "GET", "interaction": ["async-
polling"]}], "graphName": "BANK GRAPH VIEW", "vertexTables": { "ACCOUNTS":
{"name":"ACCOUNTS","metaData":{"name":"ACCOUNTS","idType":"long","labels":
["ACCOUNTS"], "properties":
[{"name":"ID","id":null,"propertyType":"long","dimension":0,"transient":true,"
links":null, "propertyId": "6997E486-C525-4C5B-8A1B-8044386CF379"},
{"name":"NAME","id":null,"propertyType":"string","dimension":0,"transient":tru
e, "links":null, "propertyId": "F5473583-61AE-4EB8-B397-
EF2E4E93DD8F"}],"edgeProviderNamesWhereSource":
["TRANSFERS"], "edgeProviderNamesWhereDestination":
["TRANSFERS"], "id":null, "links":null}, "providerLabels":
["ACCOUNTS"], "keyPropertyName": "ID", "entityKeyType": "long", "isIdentityKeyMappi
ng":false,"vertexProperties":{"05E515A7-CCF7-4A21-BC31-D4444D3B1CF0":
{"id":"05E515A7-CCF7-4A21-BC31-D4444D3B1CF0","links":[{"href":"core/v1/
graphs/x-graph-id/properties/x-property-
name", "rel": "self", "method": "GET", "interaction": ["async-polling"] },
{"href": "core/v1/graphs/x-graph-id/properties/x-property-
name", "rel": "canonical", "method": "GET", "interaction": ["async-
polling"]}], "dimension":0, "propertyId": "05E515A7-CCF7-4A21-BC31-
D4444D3B1CF0", "name": "ID", "entityType": "vertex", "type": "long", "namespace": "2C1
7C639-3771-3E30-88AE-34D6B380C5EC", "transient": false}, "0DCCD46B-
ED5A-4511-865E-65CDCE6C3DFC": { "id": "0DCCD46B-
ED5A-4511-865E-65CDCE6C3DFC", "links": [{"href":"core/v1/graphs/x-graph-id/
properties/x-property-name", "rel": "self", "method": "GET", "interaction": ["async-
polling"]}, {"href": "core/v1/graphs/x-graph-id/properties/x-property-
name", "rel": "canonical", "method": "GET", "interaction": ["async-
polling"]}], "dimension":0, "propertyId": "0DCCD46B-
```

```
ED5A-4511-865E-65CDCE6C3DFC", "name": "NAME", "entityType": "vertex", "type": "strin
g", "namespace": "2C17C639-3771-3E30-88AE-34D6B380C5EC", "transient": false}}, "ver
texLabels": {"id": "13FE312F-18C8-4AFF-A154-AEDC3C5E86FC", "links":
    [{"href": "core/v1/graphs/x-graph-id/properties/x-property-
    name", "rel": "self", "method": "GET", "interaction": ["async-polling"]},
    {"href": "core/v1/graphs/x-graph-id/properties/x-property-
    name", "rel": "canonical", "method": "GET", "interaction": ["async-
    polling"]}], "dimension": -1, "propertyId": "13FE312F-18C8-4AFF-A154-
    AEDC3C5E86FC", "name": "__vertex_labels__", "entityType": "vertex", "type": "ro_string_set", "namespace": "2C17C639-3771
    09:19:53, 457+0000 DEBUG o.p.a.PgxSession - ==> change sets as snapshot
    source. Returning graph loaded by the engine
    q ==> PgxGraph[name=BANK GRAPH VIEW, N=1000, E=4993, created=1704705593065]
```

Python

```
>>>setloglevel("oracle.pgx","DEBUG")
>>> graph = session.read graph by name('BANK GRAPH VIEW', 'pg pggl')
09:26:26,548+0000 DEBUG o.p.c.RemoteUtils - create session cookie (session ID
= 279f1676-9229-4c5d-bc71-473e5ce5afb9)
09:26:26,554+0000 DEBUG o.p.c.RemoteUtils - no value for the sticky cookie
given
09:26:26,555+0000 DEBUG o.p.c.RemoteUtils - create csrf token cookie (token =
354b9253-84fb-4689-8d29-79da8ec1e3cf)
09:26:26,617+0000 DEBUG o.p.c.HttpRequestExecutor - Requesting POST https://
localhost:7007/core/v2/describe
09:26:26,670+0000 DEBUG o.p.c.HttpRequestExecutor - received HTTP status 202
09:26:26,671+0000 DEBUG o.p.c.HttpRequestExecutor - {"futureId":"95a4da84-
ff08-4471-97ac-6a571c68a82f"}
09:26:26,675+0000 DEBUG o.p.c.PgxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/status
09:26:26,708+0000 DEBUG o.p.c.PgxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/value
09:26:26,716+0000 DEBUG o.p.c.RemoteUtils - received HTTP status 201
09:26:26,717+0000 DEBUG o.p.c.RemoteUtils -
{"source name": "BANK GRAPH VIEW", "optimized for": "UPDATES", "attributes":
{}, "vertex id type": "string", "edge id strategy": "PARTITIONED IDS", "vertex id s
trategy":"PARTITIONED IDS","error handling":
{"on missing vertex":"ERROR"}, "source type": "PG PGQL", "vertex providers":
[{"error handling":{}, "format":"rdbms", "key column":"ID", "props":
[{"column":"ID", "type":"long", "name":"ID", "dimension":0},
{"column": "NAME", "type": "string", "name": "NAME", "dimension": 0}], "name": "ACCOUNT
S","parallel hint degree":-1,"loading":
{"create key mapping":true}, "database table name": "BANK ACCOUNTS", "schema": "GR
APHUSER", "key type": "long", "label": "ACCOUNTS", "attributes":
{}}],"edge id type":"string","loading":
{"snapshots source": "CHANGE SET"}, "name": "BANK GRAPH VIEW", "edge providers":
[{"error handling":
{}, "format": "rdbms", "source column": "FROM ACCT ID", "destination vertex provide
r":"ACCOUNTS", "props":
[{"column":"FROM ACCT ID","type":"long","name":"FROM ACCT ID","dimension":0},
{"column":"TO ACCT ID", "type":"long", "name":"TO ACCT ID", "dimension":0},
{"column": "AMOUNT", "type": "long", "name": "AMOUNT", "dimension": 0},
{"column": "DESCRIPTION", "type": "string", "name": "DESCRIPTION", "dimension": 0}], "
name":"TRANSFERS", "parallel hint degree":-1, "source vertex provider":"ACCOUNTS
```

```
","loading":
{"create key mapping":false}, "database table name": "BANK TXNS", "schema": "GRAPH
USER", "destination column": "TO ACCT ID", "key type": "long", "label": "TRANSFERS",
"attributes":{}}}
09:26:26,862+0000 DEBUG o.p.c.RemoteUtils - create session cookie (session ID
= 279f1676-9229-4c5d-bc71-473e5ce5afb9
09:26:26,862+0000 DEBUG o.p.c.RemoteUtils - no value for the sticky cookie
given
09:26:26,862+0000 DEBUG o.p.c.RemoteUtils - create csrf token cookie (token =
354b9253-84fb-4689-8d29-79da8ec1e3cf)
09:26:26,930+0000 DEBUG o.p.c.HttpRequestExecutor - Requesting POST https://
localhost:7007/core/v1/loadGraph
09:26:26,963+0000 DEBUG o.p.c.HttpRequestExecutor - received HTTP status 202
09:26:26,964+0000 DEBUG o.p.c.HttpRequestExecutor -
{"futureId": "a6ec1f14-891d-470a-a20a-3e0a4a76c11d"}
09:26:26,965+0000 DEBUG o.p.c.PgxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/status
09:26:27,183+0000 DEBUG o.p.c.PgxRemoteFuture - Requesting GET https://
localhost:7007/core/v1/futures/x-future-id/value
09:26:27,202+0000 DEBUG o.p.c.RemoteUtils - received HTTP status 201
09:26:27,203+0000 DEBUG o.p.c.RemoteUtils - {"id":"CCA6B5D6-46DB-4DFE-
AC60-2FDFBD8631AC", "links": [{"href": "core/v1/graphs/x-graph-
id", "rel": "self", "method": "GET", "interaction": ["async-polling"] },
{"href": "core/v1/graphs/x-graph-
id", "rel": "canonical", "method": "GET", "interaction": ["async-
polling"]}],"graphName":"BANK GRAPH VIEW","vertexTables":{"ACCOUNTS":
{"name":"ACCOUNTS", "metaData":{"name":"ACCOUNTS", "idType":"long", "labels":
["ACCOUNTS"], "properties":
[{"name":"ID","id":null,"propertyType":"long","dimension":0,"transient":true,"
links":null, "propertyId": "5A6A679C-BBD8-4CA9-886C-19D7DA3041F5"},
{"name":"NAME","id":null,"propertyType":"string","dimension":0,"transient":tru
e, "links": null, "propertyId": "3B479E88-3441-49EA-95EE-
FC14EE0FD318"}], "edgeProviderNamesWhereSource":
["TRANSFERS"], "edgeProviderNamesWhereDestination":
["TRANSFERS"], "id":null, "links":null}, "providerLabels":
["ACCOUNTS"], "keyPropertyName": "ID", "entityKeyType": "long", "isIdentityKeyMappi
nq":false,"vertexProperties":{"9B32DB07-AD6A-47AA-AD7E-56FE417D0423":
{"id":"9B32DB07-AD6A-47AA-AD7E-56FE417D0423","links":[{"href":"core/v1/
graphs/x-graph-id/properties/x-property-
name", "rel": "self", "method": "GET", "interaction": ["async-polling"] },
{"href": "core/v1/graphs/x-graph-id/properties/x-property-
name", "rel": "canonical", "method": "GET", "interaction": ["async-
polling"]}],"dimension":0,"propertyId":"9B32DB07-AD6A-47AA-
AD7E-56FE417D0423", "name": "ID", "entityType": "vertex", "type": "long", "namespace"
:"2C17C639-3771-3E30-88AE-34D6B380C5EC","transient":false},"99C98B32-
FD2F-46B5-A89A-BBB043E38F7E":{"id":"99C98B32-FD2F-46B5-A89A-
BBB043E38F7E", "links": [{"href": "core/v1/graphs/x-graph-id/properties/x-
property-name", "rel": "self", "method": "GET", "interaction": ["async-polling"] },
{"href": "core/v1/graphs/x-graph-id/properties/x-property-
name", "rel": "canonical", "method": "GET", "interaction": ["async-
polling"]}],"dimension":0,"propertyId":"99C98B32-FD2F-46B5-A89A-
BBB043E38F7E", "name": "NAME", "entityType": "vertex", "type": "string", "namespace":
"2C17C639-3771-3E30-88AE-34D6B380C5EC","transient":false}},"vertexLabels":
{"id": "85CE5DC4-B2B3-4326-B970-F1A6EB5E0345", "links": [{"href": "core/v1/
graphs/x-graph-id/properties/x-property-
name", "rel": "self", "method": "GET", "interaction": ["async-polling"] },
```

```
{"href":"core/v1/graphs/x-graph-id/properties/x-property-
name","rel":"canonical","method":"GET","interaction":["async-
polling"]}],"dimension":-1,"propertyId":"85CE5DC4-B2B3-4326-B970-
F1A6EB5E0345","name":"__vertex_labels__","entityType":"vertex","type":"ro_stri
ng_set","namespace":"2C17C639-3771
09:26:27,357+0000 DEBUG o.p.a.PgxSession - ==> change sets as snapshot
source. Returning graph loaded by the engine
```

15.2.2 Connecting with Java

You can obtain a connection to a remote graph server (PGX) instance by simply passing the base URL of the remote PGX instance to the <code>getInstance()</code> method. By doing this, your application automatically uses the PGX client libraries to connect to a remotely-located graph server (PGX).

You can specify the base URL when you initialize the graph server (PGX) instance using Java. An example is as follows. A URL to an graph server (PGX) is provided to the <code>getInMemAnalyst</code> API call.

```
import oracle.pgx.api.*;
import oracle.pg.rdbms.*;
ServerInstance instance = GraphServer.getInstance("https://
<hostname>:<port>","<username>","<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
```

Note:

See Java API Reference for more information on the Java APIs.

Starting and Stopping the PGX Engine

15.2.2.1 Starting and Stopping the PGX Engine

You can start the graph server (PGX) from the application by making a call to instance.startEngine() which takes a JSON object as an argument for PGX configuration.

Note:

- See Connecting with Java for more information about connecting to a graph server (PGX) instance and obtaining a ServerInstance object.
- See Configuration Parameters for the Graph Server (PGX) Engine for the various configuration options for the graph server (PGX).

Stopping the PGX Engine

You can stop the PGX engine using one of the following APIs:

```
instance.shutdownEngineNow(); // cancels pending tasks, throws exception if
engine is not running
instance.shutdownEngineNowIfRunning(); // cancels pending tasks, only tries
to shut down if engine is running
if (instance.shutdownEngine(30, TimeUnit.SECONDS) == false) {
    // doesn't accept new tasks but finishes up remaining tasks
    // pending tasks didn't finish after 30 seconds
}
```

Note:

Shutting down the PGX engine keeps the Apache Tomcat server alive, but new sessions cannot be created. Also, all the current sessions and tasks will be cancelled and terminated.

15.2.3 Connecting with Python

You can connect to a remote graph server (PGX) instance in your Python program. You must first authenticate with the remote server before you can create a session as illustrated in the following example:

```
import pypqx
import opg4py
import opg4py.graph server as graph server
pgql conn = opg4py.pgql.get connection("<username>", "<password>",
"<jdbc url>")
pgql statement = pgql_conn.create_statement()
pggl = """
        CREATE PROPERTY GRAPH bank graph
        VERTEX TABLES (
          bank accounts
            LABEL ACCOUNTS
            PROPERTIES (ID, NAME)
        )
        EDGE TABLES (
          bank txns
            SOURCE KEY (from acct id) REFERENCES bank accounts (ID)
            DESTINATION KEY (to acct id) REFERENCES bank accounts (ID)
            LABEL TRANSFERS
            PROPERTIES (FROM ACCT ID, TO ACCT ID, AMOUNT, DESCRIPTION)
        ) OPTIONS (PG PGQL)
pgql statement.execute(pgql)
instance = graph server.get instance("<base url>", "<username>", "<password>")
session = instance.create session("my session")
graph = session.read graph by name('BANK GRAPH', 'pg pgql')
analyst = session.create analyst()
analyst.pagerank(graph)
```

```
rs = graph.query_pgql("SELECT id(x), x.pagerank FROM MATCH (x) LIMIT 5")
rs.print()
```

To execute, save the above program into a file named program.py and run the following command:

```
python3 program.py
```

You will see the following output:

Converting PGQL result set into pandas dataframe

Additionally, you can also convert the PGQL result set to a pandas. DataFrame object using the to_pandas() method. This makes it easier to perform various data filtering operations on the result set and it can also be used in Lambda functions. For example,

```
example_query = (
    "SELECT n.name AS name, n.age AS age "
    "WHERE (n)"
)
result_set = sample_graph.query_pgql(example_query)
result_df = result_set.to_pandas()

result_df['age_bin'] = result_df['age'].apply(lambda x: int(x)/20) # create
age bins based on age ranges
```

Note:

To view the complete set of available Python APIs, see OPG4PY Python API Reference.

Part V

Using the Graph Server (PGX)

The graph server (PGX) of Oracle Graph supports a set of analytical functions.

This part describes the following:

- Developing Applications with Graph Analytics
 In order to run graph algorithms, the graph application connects to the graph server (PGX) in the middle tier, which in turn connects to the Oracle Database.
- Using the Machine Learning Library (PgxML) for Graphs
 The graph server (PGX) provides a machine learning library oracle.pgx.api.mllib, which supports graph-empowered machine learning algorithms.
- Executing PGQL Queries Against the Graph Server (PGX)
 This section describes the Java APIs that are used to execute PGQL queries in the graph server (PGX).
- REST Endpoints for the Graph Server
 This chapter describes the graph server REST API endpoints.



Developing Applications with Graph Analytics

In order to run graph algorithms, the graph application connects to the graph server (PGX) in the middle tier, which in turn connects to the Oracle Database.

Using the Graph Server Administrator Dashboard

The graph server administrator can efficiently track and manage the memory usage of the graph server (PGX) using the Administrator Dashboard.

About Vertex and Edge IDs

The graph server (PGX) enforces by default the existence of a unique identifier for each vertex and edge in a graph.

Graph Management in the Graph Server (PGX)

You can load a graph into the graph server (PGX) and perform different actions such as publish, store, or delete a graph.

Keeping the Graph in Oracle Database Synchronized with the Graph Server

You can use the FlashbackSynchronizer API to automatically apply changes made to graph in the database to the corresponding PgxGraph object in memory, thus keeping both synchronized.

Optimizing Graphs for Read Versus Updates in the Graph Server (PGX)

The graph server (PGX) can store an optimized graph for other reads or updates. This is only relevant when the updates are made directly to a graph instance in the graph server.

Executing Built-in Algorithms

The graph server (PGX) contains a set of built-in algorithms that are available as Java APIs.

Using Custom PGX Graph Algorithms

A custom PGX graph algorithm allows you to write a graph algorithm in Java syntax and have it automatically compiled to an efficient parallel implementation.

Creating Subgraphs

You can create subgraphs based on a graph that has been loaded into memory. You can use filter expressions or create bipartite subgraphs based on a vertex (node) collection that specifies the left set of the bipartite graph.

User-Defined Functions (UDFs) in PGX

User-defined functions (UDFs) allow users of PGX to add custom logic to their PGQL queries or custom graph algorithms, to complement built-in functions with custom requirements.

Using Graph Server (PGX) as a Library

When you utilize PGX as a library in your application, the graph server (PGX) instance runs in the same JVM as the Java application and all requests are translated into direct function calls instead of remote procedure invocations.

16.1 Using the Graph Server Administrator Dashboard

The graph server administrator can efficiently track and manage the memory usage of the graph server (PGX) using the Administrator Dashboard.

You can access the Administrator Dashboard only if you are granted the <code>GRAPH_ADMINISTRATOR</code> role having the <code>PGX GET SERVER INFO</code> privilege.

The user-friendly interface of the Administrator Dashboard comprises the following components:

- Memory Usage: To view data charts on real-time memory usage, study the current memory consumption patterns and identify any potential issues.
- Sessions: To manage, monitor, and search active user sessions.
- Graphs: To track and monitor memory usage per graph for all the active users.



The Graph Visualization component that is available on the Graph Dashboard, supports only limited graph visualization features. If you wish to access the complete set of the graph visualization features, then you must use the Graph Visualization web client. See Running the Graph Visualization Web Client for more information.

Perform the following steps to access the Administrator Dashboard:

1. Open the following URL in your web browser.

https://<server host>:7007/dash/


The Graph Dashboard login screen opens.

- 2. Enter your Username and Password.
- 3. Click Submit.

The **Memory Usage** page of the Administrator Dashboard opens by default.

4. Optionally, click **Sessions** or **Graphs** to navigate to the respective pages.

Figure 16-1 Administrator Dashboard Menu

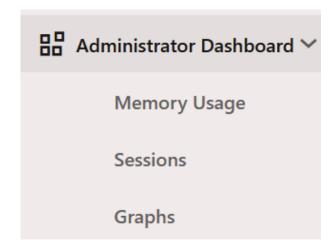



Memory Usage

The Memory Usage dashboard provides in-depth information on the amount of memory used by the graph server (PGX).

Sessions

The Sessions page displays all the active user sessions.

Graphs

The Graphs page lists the graphs for all the active users and provides the total memory usage for each graph.

16.1.1 Memory Usage

The Memory Usage dashboard provides in-depth information on the amount of memory used by the graph server (PGX).

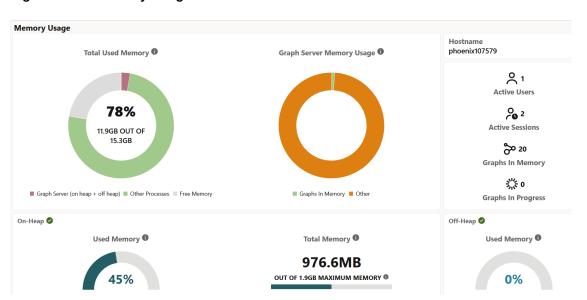


Figure 16-2 Memory Usage Dashboard

The dashboard comprises the following sections:

- Total Used Memory: This chart displays the total memory usage at the system level. It shows the memory consumption by the graph server (sum of on-heap and off-heap memory) and other processes. You can also view the available amount of free memory.
- **Graph Server Memory Usage:** This chart displays the memory consumed by graphs that are loaded into the graph server and also the memory usage for other graph operations such as loading graphs, running graph algorithms and so on.
- On-Heap: This section provides the following details:
 - Used Memory: This displays the on-heap memory used currently by the graph server out of the total heap size that is dynamically allocated by the JVM.
 - Total Memory: This displays the total (determined by the -Xms flag) and maximum heap size (determined by the -Xmx flag) allocated by the JVM.
- **Off-heap:** This displays the off-heap memory used currently by the graph server.
- Hostname: Graph server hostname




- Active Users: Number of active users
 - Active Sessions: Number of active sessions
 - Graphs In Memory: Number of graphs loaded in to memory
 - Graphs in Progress: Number of graphs that are being loaded into memory

16.1.2 Sessions

The Sessions page displays all the active user sessions.

You can view the number of graphs associated with each session as shown in the following figure. In addition, you can terminate one or more user sessions.

Figure 16-3 Sessions

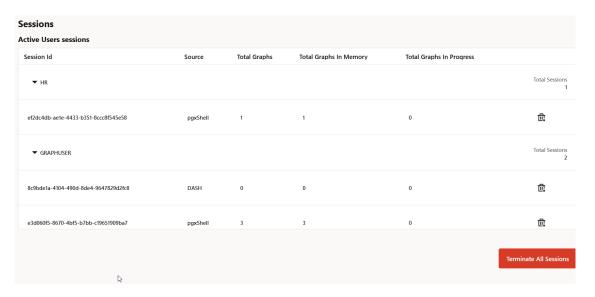

16.1.3 Graphs


The Graphs page lists the graphs for all the active users and provides the total memory usage for each graph.

This page comprises the following two tabs:

- Graphs In Memory (default): Displays graphs that are loaded into memory.
- · Graphs In Progress: Displays graphs that are being loaded into memory.

The following figure shows the Graphs page for the **Graphs In Memory** tab. You can inspect the memory usage for the graphs, or terminate one or more user sessions.

Figure 16-4 Graphs

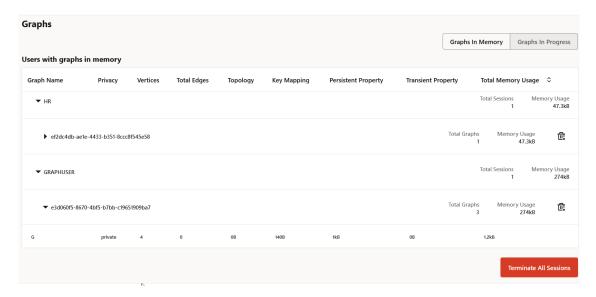

16.2 About Vertex and Edge IDs

The graph server (PGX) enforces by default the existence of a unique identifier for each vertex and edge in a graph.

When loading a graph into the graph server(PGX), you can retrieve these unique vertex and edge IDs using PgxGraph.getVertex(ID id) and PgxGraph.getEdge(ID id), or by PGQL queries using the built-in id() method.

The following supported ID generation strategies can be selected through the configuration parameters <code>vertex</code> id <code>strategy</code> and <code>edge</code> id <code>strategy</code>:

- keys as ids: This is the default strategy to generate vertex IDs.
- partitioned ids: This is the recommended strategy for partitioned graphs.
- unstable generated ids: This results in system generated vertex or edge IDs.
- no_ids: This strategy disables vertex or edge IDs and therefore prevents you from calling APIs using vertex or edge IDs.

Using keys to generate IDs

The default strategy to generate the vertex IDs is to use the keys provided during loading of the graph (keys_as_ids). In that case, each vertex should have a vertex key that is unique across all providers.

For edges, by default no keys are required in the edge data, and edge IDs will be automatically generated by PGX (unstable_generated_ids). This automatic ID generation can be applied for vertex IDs also. Note that the generation of vertex or edge IDs is not guaranteed to be deterministic. If required, it is also possible to load edge keys as IDs.



The partititioned_ids strategy can be set through the configuration fields vertex id strategy and edge id strategy. For example,

```
"name": "bank graph analytics",
"optimized for": "updates",
"vertex id strategy" : "partitioned ids",
"edge id strategy" : "partitioned ids",
"vertex providers": [
    "name": "Accounts",
   "format": "rdbms",
    "database table name": "BANK ACCOUNTS",
    "key column": "ID",
    "key type": "integer",
    "props": [
      {
        "name": "ID",
        "type": "integer"
      },
        "name": "NAME",
        "type": "string"
    ],
    "loading": {
      "create key mapping" : true
"edge providers": [
    "name": "Transfers",
    "format": "rdbms",
    "database table name": "BANK TXNS",
    "key column": "ID",
    "source column": "FROM ACCT ID",
    "destination column": "TO ACCT ID",
    "source vertex provider": "Accounts",
    "destination vertex provider": "Accounts",
    "props": [
       {
        "name": "ID",
        "type": "integer"
      },
        "name": "AMOUNT",
        "type": "double"
      }
    ],
    "loading": {
      "create key mapping" : true
    }
  }
```

}

Note:

All available key types are supported in combination with partitioned IDs.

After the graph is loaded, PGX maintains information about which property of a provider corresponds to the key of the provider. In the preceding example, the vertex property ${\tt ID}$ happens to correspond to the vertex key and also the edge property ${\tt ID}$ happens to correspond to the edge key. Each provider can have at most one such "key property" and the property can have any name.

Key properties are used for internal optimizations as well as for providing keys for the vertex or edge or both when inserting new entities. Key properties are currently non-updatable. Trying to update a key property will result in an error. For example,

vertex key property ID cannot be updated

Using an auto-incrementer to generate partitioned IDs

It is recommended to always set <code>create_key_mapping</code> to <code>true</code> to benefit from performance optimizations. But if there are no single-column keys for edges, <code>create_key_mapping</code> can be set to <code>false</code>. Similarly, <code>create_key_mapping</code> can be set to <code>false</code> for vertex providers also. IDs will be generated via an auto-incrementer, for example <code>Accounts(1)</code>, <code>Accounts(2)</code>, <code>Accounts(3)</code>.

See PGQL Queries with Partitioned IDs for more information on executing PGQL queries with partitioned IDs.

16.3 Graph Management in the Graph Server (PGX)

You can load a graph into the graph server (PGX) and perform different actions such as publish, store, or delete a graph.



Ensure that you drop the graph when it is no longer in use to release the graph server (PGX) memory. See Deleting a Graph for more information.

- Reading Graphs from Oracle Database into the Graph Server (PGX)
 Once logged into the graph server (PGX), you can read graphs from the database into the graph server.
- Storing a Graph Snapshot on Disk
 After reading a graph into memory, you can make any changes to the graph (such as running the PageRank algorithm and storing the values as vertex properties), and then store this snapshot of the graph on disk.



Publishing a Graph

You can publish a graph that is loaded into the graph server (PGX), so that it can be referenced by other sessions. Similarly, the snapshots of a graph can also be made available to other sessions.

Deleting a Graph

In order to reduce the memory usage of the graph server (PGX), the session must drop the unused graph objects created through the getGraph() method, by invoking the close() method.

• Graph Sharing Options and Validating Graph Permissions
The graph_sharing_option parameter in the pgx.conf file determines if and how a graph can be shared.

16.3.1 Reading Graphs from Oracle Database into the Graph Server (PGX)

Once logged into the graph server (PGX), you can read graphs from the database into the graph server.

Your database user must exist and have read access on the graph data in the database.

The following options are supported for loading a graph:

SQL Property Graphs

- Using the readGraphByName API see Loading a SQL Property Graph Using the readGraphByName API for more details.
- Using the PgSqlSubgraphReader API to create and load a subgraph see Loading a Subgraph Using PGQL Queries for more details.
- Using the PGQL CREATE PROPERTY GRAPH statement see Creating a SQL Property Graph Using PGQL for more details.

PGQL Property Graphs

- Using the readGraphByName API see Loading a PGQL Property Graph Using the readGraphByName API for more details.
- Using the PGQL CREATE PROPERTY GRAPH statement see Creating a Property Graph Using PGQL for more details.
- Using the PgViewSubgraphReader#fromPgPgql API to create and load a subgraph see Loading a Subgraph from a PGQL Property Graph for more details.
- Using a PGX graph configuration file in JSON format see Loading a Graph Using a JSON Configuration File for more details.
- Using the GraphConfigBuilder class to create Oracle RDBMS graph configurations programmatically through Java methods see Loading a Graph by Defining a Graph Configuration Object for more details.

Also, refer to the following sections for additional information:

- Reading Entity Providers at the Same SCN
 If you have a graph which consists of multiple vertex or edge tables or both, then you can read all the vertices and edges at the same System Change Number (SCN).
- Progress Reporting and Estimation for Graph Loading
 Loading a large graph into the graph server(PGX) can be a long running operation.
 However, if you load the graph using an asynchronous action, then you can monitor the progress of the graph loading operation.



- Graph Configuration Options
 Learn about the graph configuration options.
- Data Loading Security Best Practices
 Loading a graph from the database requires authentication and it is therefore important to adhere to certain security guidelines when configuring access to this kind of data source.
- Data Format Support Matrix
 Learn about the different data formats supported in the graph server (PGX).
- Immutability of Loaded Graphs
 Once the graph is loaded into the graph server (PGX), the graph and its properties are automatically marked as immutable.

16.3.1.1 Reading Entity Providers at the Same SCN

If you have a graph which consists of multiple vertex or edge tables or both, then you can read all the vertices and edges at the same System Change Number (SCN).

This helps to overcome issues such as reading edge providers at a later SCN than the SCN at which the vertices were read, as some edges may reference missing vertices.

Note that reading a graph from the database is still possible even if Flashback is not enabled on Oracle Database. In case of multiple databases, SCN can be used to maintain consistency for entity providers belonging to the same database only.

You can use the as_of flag in the graph configuration to specify at what SCN an entity provider must be read. The valid values for the as of flag are as follows:

Table 16-1 Valid values for "as_of" Key in Graph Configuration

Value	Description
A positive long value	This is a parseable SCN value.
" <current-scn>"</current-scn>	The current SCN is determined at the beginning of the graph loading.
" <no-scn>"</no-scn>	This is to disable SCN at the time of graph loading.
null	This defaults to " <current-scn>" behavior.</current-scn>

If "as_of" is omitted for a vertex or an edge provider in the graph configuration file, then this follows the same behavior as "as of": null.

Example 16-1 Graph Configuration Using "as_of" for Vertex and Edge Providers in the Same Database

The following example configuration has three vertex providers and one edge provider pointing to the same database.

```
"name": "DEPARTMENT NAME",
        "type": "string"
  },
    "name": "Location",
    "as_of": "28924323",
    "format": "rdbms",
    "database table name": "LOCATIONS",
    "key column": "LOCATION ID",
    "props": [
      {
        "name": "CITY",
        "type": "string"
    ]
  },
    "name": "Region",
    "as of": "<no-scn>",
    "format": "rdbms",
    "database_table_name": "REGIONS",
    "key column": "REGION ID",
    "props": [
        "name": "REGION NAME",
        "type": "string"
  }
],
"edge_providers": [
  {
    "name": "LocatedAt",
    "format": "rdbms",
    "database table name": "DEPARTMENTS",
    "key column": "DEPARTMENT ID",
    "source column": "DEPARTMENT ID",
    "destination column": "LOCATION ID",
    "source_vertex_provider": "Department",
    "destination_vertex_provider": "Location"
]
```

When reading the <code>employee_graph</code> using the preceding configuration file, the graph is read at the same SCN for the <code>Department</code> and <code>LocatedAt</code> entity providers. This is explained in the following table:

Table 16-2 Example Scenario Using "as_of"

Entity Provider	"as_of"	SCN Value
Department	" <current-scn>"</current-scn>	SCN determined automatically
Location	"28924323"	"28924323" used as SCN
Region	" <no-scn>"</no-scn>	No SCN used
LocatedAt	"as_of" flag is omitted	SCN determined automatically

The current SCN value of the database can be determined using one of the following options:

Querying V\$DATABASE view:

```
SELECT CURRENT_SCN FROM V$DATABASE;
```

Using DBMS FLASHBACK package:

```
SELECT DBMS FLASHBACK.GET SYSTEM CHANGE NUMBER FROM DUAL;
```

If you do not have the required privileges to perform either of the preceding operations, then you can use:

```
SELECT TIMESTAMP_TO_SCN(SYSDATE) FROM DUAL;
```

However, note that this option is less precise than the earlier two options.

You can then read the graph into the graph server using the JSON configuration file as shown:

- JShell
- Java
- Python

JShell

```
opg4j> var g = session.readGraphWithProperties("employee_graph.json")
```

Java

PgxGraph g = session.readGraphWithProperties("employee_graph.json");

Python

```
g = session.read_graph_with_properties("employee_graph.json")
```



16.3.1.2 Progress Reporting and Estimation for Graph Loading

Loading a large graph into the graph server(PGX) can be a long running operation. However, if you load the graph using an asynchronous action, then you can monitor the progress of the graph loading operation.

The following table shows the asynchronous graph loading APIs supported for the following formats:

Table 16-3 Asynchronous Graph Loading APIs

Data Format	API
PGQL Property Graph	session.readGraphByNameAsync()
CSV	session.readGraphFileAsync()

These supported APIs return a PgxFuture object.

You can then use the PgxFuture.getProgress() method to collect the following statistics:

- Report on the progress of the graph loading operation
- Estimate of the remaining vertices and edges that need to be loaded into memory

For example, the following code shows the steps to load a PGQL property graph graph asynchronously and subsequently obtain the <code>FutureProgress</code> object to report and estimate the loading progress. However, note that the graph loading estimate (for example, the number of loaded entities and providers or the number of total entities and providers) can be obtained only until the graph loading operation is in progress. Also, the system internally computes the graph loading progress for every 10000 entries of entities that are loaded into the graph server (PGX).

- JShell
- Java

JShell

```
opg4j> var graphLoadingFuture = session.readGraphByNameAsync("BANK GRAPH",
GraphSource.PG PGQL)
readGraphFuture ==> oracle.pgx.api.PgxFuture@6106dfb6[Not completed]
opg4j> while (!graphLoadingFuture.isDone()) {
     var progress = graphLoadingFuture.getProgress();
     var graphLoadingProgress = progress.asGraphLoadingProgress();
...>
      if (graphLoadingProgress.isPresent()) {
...>
        var numLoadedVertices =
...>
graphLoadingProgress.get().getNumLoadedVertices();
...>
      Thread.sleep(1000);
...>
...> }
```



```
opg4j> var graph = graphLoadingFuture.get();
graph ==> PgxGraph[name=BANK GRAPH 3,N=999,E=4993,created=1664289985985]
```

Java

```
PgxFuture<PgxGraph> graphLoadingFuture =
session.readGraphByNameAsync("BANK_GRAPH", GraphSource.PG_PGQL);
while (!graphLoadingFuture.isDone()) {
   FutureProgress progress = graphLoadingFuture.getProgress();
   Optional < GraphLoadingProgress > graphLoadingProgress =
progress.asGraphLoadingProgress();
   if (graphLoadingProgress.isPresent()) {
      long numLoadedVertices =
   graphLoadingProgress.get().getNumLoadedVertices();
   }
   Thread.sleep(1000);
}
PgxGraph graph = graphLoadingFuture.get();
```

It is recommended that you do not use the FutureProgress object in a chain of asynchronous operations.

16.3.1.3 Graph Configuration Options

Learn about the graph configuration options.

The following table lists the JSON fields that are common to all graph configurations:

Table 16-4 Graph Config JSON Fields

Field	Туре	Description	Def aul t
name	string	Name of the graph.	Re quir ed
array_compaction_thr eshold	number	[only relevant if the graph is optimized for updates] Threshold used to determined when to compact the delta-logs into a new array. If lower than the engine min_array_compaction_threshold value, min_array_compaction_threshold will be used instead	0.2
attributes	object	Additional attributes needed to read and write the graph data.	nul 1
data_source_id	string	Data source id to use to connect to an RDBMS instance.	nul 1



Table 16-4 (Cont.) Graph Config JSON Fields

Field	Туре	Description	Def aul t
edge_id_strategy	<pre>enum[no_ids, keys_as_ids, unstable_gene rated_ids]</pre>	Indicates what ID strategy should be used for the edges of this graph. If not specified (or set to null), the strategy will be determined during loading or using a default value.	nul 1
edge_id_type	enum[long]	Type of the edge ID. Setting it to long requires the IDs in the edge providers to be unique across the graphs; those IDs will be used as global IDs. Setting it to null (or omitting it) will allow repeated IDs across different edge providers and PGX will automatically generate globally-unique IDs for the edges.	nul 1
edge_providers	array of object	List of edge providers in this graph.	[]
error_handling	object	Error handling configuration.	nul 1
external_stores	array of object	Specification of the external stores where external string properties reside.	[]
jdbc_url	string	JDBC URL pointing to an RDBMS instance	nu 11
keystore_alias	string	Alias to the keystore to use when connecting to database.	nul 1
loading	object	Loading-specific configuration to use.	nul 1
local_date_format	array of string	array of local_date formats to use when loading and storing local_date properties. See DateTimeFormatter for more details of the format string	[]
max_prefetched_rows	integer	Maximum number of rows prefetched during each round trip resultset-database.	10 00 0
num_connections	integer	Number of connections to read and write data from or to the RDBMS table.	<n o- of - cp us ></n
optimized_for	enum[read, updates]	Indicates if the graph should use data- structures optimized for read-intensive scenarios or for fast updates.	rea d
password	string	Password to use when connecting to database.	nul 1
point2d	string	Longitude and latitude as floating point values separated by a space.	0.0



Table 16-4 (Cont.) Graph Config JSON Fields

Field	Туре	Description	Def aul t
prepared_queries	array of object	An additional list of prepared queries with arguments, working in the same way as 'queries'. Data matching at least one those queries will also be loaded.	[]
queries	array of string	A list of queries used to determine which data to load from the database. Data matching at least one of the queries will be loaded. Not setting any query will load the entire graph.	[]
redaction_rules	array of object	Array of redaction rules.	[]
rules_mapping	array of object	Mapping for redaction rules to users and roles.	[]
schema	string	Schema to use when reading or writing RDBMS objects	nu 11
source_name	string	Name of the database graph, if the graph is loaded from a database.	nul 1
source_type	enum[pg_pgql, pg_sql]	Source type for database graphs.	nul 1
time_format	array of string	The time format to use when loading and storing time properties. See DateTimeFormatter for a documentation of the format string.	[]
time_with_timezone_f ormat	array of string	The time with timezone format to use when loading and storing time with timezone properties. Please see DateTimeFormatter for more information of the format string.	[]
timestamp_format	array of string	The timestamp format to use when loading and storing timestamp properties. See DateTimeFormatter for more information of the format string.	[]
timestamp_with_timez one_format	array of string	The timestamp with timezone format to use when loading and storing timestamp with timezone properties. See DateTimeFormatter for more information of the format string.	[]
username	string	Username to use when connecting to an RDBMS instance.	nu 11
vector_component_del imiter	character	Delimiter for the different components of vector properties.	;
vertex_id_strategy	<pre>enum[no_ids, keys_as_ids, unstable_gene rated_ids]</pre>	Indicates what ID strategy should be used for the vertices of this graph. If not specified (or set to null), the strategy will be automatically detected.	nul 1
vertex_id_type	<pre>enum[int, integer, long, string]</pre>	Type of the vertex ID. For homogeneous graphs, if not specified (or set to null), it will default to a specific value (depending on the origin of the data).	nul 1



Table 16-4 (Cont.) Graph Config JSON Fields

Field	Туре	Description	Def aul t
vertex_providers	array of object	List of vertex providers in this graph.	[]

Note:

Database connection fields specified in the graph configuration will be used as default in case underlying data provider configuration does not specify them.

Provider Configuration JSON file Options

You can specify the meta-information about each provider's data using provider configurations. Provider configurations include the following information about the provider data:

- Location of the data: a file, multiple files or database providers
- Information about the properties: name and type of the property

Table 16-5 Provider Configuration JSON file Options

Field	Туре	Description	Default
format	enum[pgb, csv, rdbms]	Provider format.	Required
name	string	Entity provider name.	Required
attributes	object	Additional attributes needed to read and write the graph data.	null
<pre>destination_vert ex_provider</pre>	string	Name of the destination vertex provider to be used for this edge provider.	null
error_handling	object	Error handling configuration.	null
has_keys	boolean	Indicates if the provided entities data have keys.	true
key_type	<pre>enum[int, integer, long, string]</pre>	Type of the keys.	long
keystore_alias	string	Alias to the keystore to use when connecting to database.	null
label	string	label for the entities loaded from this provider.	null
loading	object	Loading-specific configuration.	null
<pre>local_date_forma t</pre>	array of string	Array of local_date formats to use when loading and storing local_date properties. See DateTimeFormatter for a documentation of the format string.	[]
password	string	Password to use when connecting to database.	null
point2d	string	Longitude and latitude as floating point values separated by a space.	0.0 0.0



Table 16-5 (Cont.) Provider Configuration JSON file Options

Field	Туре	Description	Default
props	array of object	Specification of the properties associated with this entity provider.	[]
<pre>source_vertex_pr ovider</pre>	string	Name of the source vertex provider to be used for this edge provider.	null
time_format	array of string	The time format to use when loading and storing time properties. See DateTimeFormatter for a documentation of the format string.	[]
<pre>time_with_timezo ne_format</pre>	array of string	The time with timezone format to use when loading and storing time with timezone properties. See DateTimeFormatter for a documentation of the format string.	[]
timestamp_format	array of string	The timestamp format to use when loading and storing timestamp properties. See DateTimeFormatter for a documentation of the format string.	[]
<pre>timestamp_with_t imezone_format</pre>	array of string	The timestamp with timezone format to use when loading and storing timestamp with timezone properties. See DateTimeFormatter for a documentation of the format string.	[]
<pre>vector_component _delimiter</pre>	character	Delimiter for the different components of vector properties.	;

Provider Labels

The label field in the provider configuration can be used to set a label for the entities loaded from the provider. If no label is specified, all entities from the provider are labeled with the name of the provider. It is only possible to set the same label for two different providers if they have exactly the same properties (same names and same types).

Property Configuration

The props entry in the Provider configuration is an object with the following JSON fields:

Table 16-6 Property Configuration

Field	Туре	Description	Default
name	string	Name of the property.	Required



Table 16-6 (Cont.) Property Configuration

Field	Туре	Description	Default
type	enum[boolean, integer, vertex, edge, float, long, double, string, date, local_date, time, timestamp, time_with_timezone, timestamp_with_timezone, point2d]	Type of the property . Note: date is deprecated, use one of local_date/ time/ timestamp/ time_with_t imezone/ timestamp_w ith_timezon e instead).	Required
		<pre>vertex/edge are place-holders for the type specified in vertex_id_type/ edge_id_type fields.</pre>	
aggregate	<pre>enum[identity , group_key, min, max, avg, sum, concat, count]</pre>	[currently unsupported] which aggregation function to use, aggregation always happens by vertex key.	null
column	value	Name or index (starting from 0) of the column holding the property data. If it is not specified, the loader will try to use the property name as column name (for CSV format only).	null
default	value	Default value to be assigned to this property if datasource does not provide it. In case of date type: string is expected to be formatted with yyyy-MM-dd HH:mm:ss. If no default is present (null), non-existent properties will contain default Java types (primitives) or empty string (string) or 01.01.1970 00:00 (date).	null
dimension	integer	Dimension of property.	0
<pre>drop_after_loadi ng</pre>	_	[currently unsupported] indicating helper properties only used for aggregation, which are dropped after loading	false
field	value	Name of the JSON field holding the property data. Nesting is denoted by dot - separation. Field names containing dots are possible, in this case the dots need to be escaped using backslashes to resolve ambiguities. Only the exactly specified object are loaded, if they are non existent, the default value is used.	null
format	array of string	Array of formats of property.	[]

Table 16-6 (Cont.) Property Configuration

Field	Туре	Description	Default
group_key	string	[currently unsupported] can only be used if the property / key is part of the grouping expression.	null
<pre>max_distinct_str ings_per_pool</pre>	integer	[only relevant if string_pooling_strategy is indexed] Amount of distinct strings per property after which to stop pooling. If the limit is reached an exception is thrown. If set to null, the default value from the global PGX configuration will be used.	null
stores	array of object	A list of storage identifiers that indicate where this property resides.	[]
string_pooling_s trategy	<pre>enum[indexed, on_heap, none]</pre>	Indicates which string pooling strategy to use. If set to null, the default value from the global PGX configuration will be used.	null

Loading Configuration

The loading entry is a JSON object with the following fields:

Table 16-7 Loading Configuration

Field	Туре	Description	Default
create_key_mappi	boolean	If true, a mapping between entity keys and internal IDs is prepared during loading.	true
filter	string	[currently unsupported] the filter expression	null
grouping_by	array of string	[currently unsupported] array of edge properties used for aggregator. For Vertices, only the ID can be used (default)	[]
load_labels	boolean	Whether or not to load the entity label if it is available.	false
strict_mode	boolean	If true, exceptions are thrown and logged with ERROR level whenever loader encounters problems with input file, such as invalid format, repeated keys, missing fields, mismatches and other potential errors. If false, loader may use less memory during loading phase, but behave unexpectedly with erratic input files.	true

Error Handling Configuration

The <code>error_handling</code> entry is a JSON object with the following fields:



Table 16-8 Error Handling Configuration

Field	Туре	Description	Default
on_missed_prop_k ey	<pre>enum[silent, log_warn, log_warn_once, error]</pre>	Error handling for a missing property key.	log_warn_ once
on_missing_verte x	<pre>enum[ignore_edge , ignore_edge_log, ignore_edge_log_ once, create_vertex, create_vertex_lo g, create_vertex_lo g_once, error]</pre>	Error handling for a missing source or destination vertex of an edge in a vertex data source.	error
on_parsing_issue	<pre>enum[silent, log_warn, log_warn_once, error]</pre>	Error handling for incorrect data parsing. If set to silent, log_warn or log_warn_once, will attempt to continue loading. Some parsing issues may not be recoverable and provoke the end of loading.	error
on_prop_conversi on	<pre>enum[silent, log_warn, log_warn_once, error]</pre>	Error handling when encountering a different property type other than the one specified, but coercion is possible.	log_warn_ once
on_type_mismatch	<pre>enum[silent, log_warn, log_warn_once, error]</pre>	Error handling when encountering a different property type other than the one specified, but coercion is <i>not</i> possible.	error
on_vector_length _mismatch	<pre>enum[silent, log_warn, log_warn_once, error]</pre>	Error handling for a vector property that does not have the correct dimension.	error

Note:

The only supported setting for the on_missing_vertex error handling configuration is ignore edge.

16.3.1.4 Data Loading Security Best Practices

Loading a graph from the database requires authentication and it is therefore important to adhere to certain security guidelines when configuring access to this kind of data source.

The following guidelines are recommended:

- The user or role used to access the data should be a read-only account that only has access to the required graph data.
- The graph data should be marked as read-only, for example, with non-updateable views in the case of the database.

16.3.1.5 Data Format Support Matrix

Learn about the different data formats supported in the graph server (PGX).

The following table illustrates how the different data formats differ in the way IDs, labels and vector properties are handled.



The table refers to limitations of the PGX implementation of the format and not necessarily to limitations of the format itself.

Table 16-9 Data Format Support Matrix

Format	Vertex	Edge IDs	Vertex	Edge Labels	Vector properties
	IDs	•	Labels	J	
PGB	<pre>int, long, string</pre>	long	multiple	single	<pre>supported (vectors can be of type integer, long, float or double)</pre>
CSV	int, long, string	long	multiple	single	supported (vectors can be of type integer, long, float or double)
ADJ_LIST	int, long, string	Not supported	Not supported	Not supported	supported (vectors can be of type integer, long, float or double)
EDGE_LIST	int, long, string	Not supported	multiple	single	supported (vectors can be of type integer, long, float or double)
GRAPHML	int, long, string	Not supported	Not supported	Not supported	Not supported

16.3.1.6 Immutability of Loaded Graphs

Once the graph is loaded into the graph server (PGX), the graph and its properties are automatically marked as immutable.

The immutability of loaded graphs is due to the following design choices:

- Typical graph analyses happen on a snapshot of a graph instance, and therefore they do not require mutations of the graph instance.
- Immutability allows PGX to use an internal graph representation optimized for fast analysis.
- In remote mode, the graph instance might be shared among multiple clients.

However, the graph server (PGX) also provides methods to customize and mutate graph instances for the purpose of analysis. See Graph Mutation and Subgraphs for more information.



16.3.2 Storing a Graph Snapshot on Disk

After reading a graph into memory, you can make any changes to the graph (such as running the PageRank algorithm and storing the values as vertex properties), and then store this snapshot of the graph on disk.

If you want to save the state of the graph in memory, then a snapshot of a graph can be saved as a file in binary format (PGB file).

In general, if you must shut down the graph server, then it is recommended that you store all the graph queries and analytics APIs that have been run on the graph. Once the graph server (PGX) is restarted, you can reload the graph and rerun the APIs.

However, if you must save the state of the graph, then the following example explains how to store the graph snapshot on disk.

As a prerequisite for storing the graph snapshot, you need to explicitly authorize access to the corresponding directories by defining a directory object pointing to the directory (on the graph server) that contains the files to read or write.

```
CREATE OR REPLACE DIRECTORY pgx_file_location AS '<path_to_dir>';
GRANT READ, WRITE ON directory pgx file location to GRAPH DEVELOPER;
```

Also, note the following:

- The directory in the CREATE DIRECTORY statement must exist on the graph server (PGX).
- The directory must be readable (and/or writable) at the OS level by the graph server (PGX).

The preceding code grants the privileges on the directory to the <code>GRAPH_DEVELOPER</code> role. However, you can also grant permissions to an individual user:

```
GRANT READ, WRITE ON DIRECTORY pgx file location TO <graph user>;
```

You can then run the following code to load a PGQL property graph into the graph server (PGX) and save the graph snapshot as a file. Note that multiple PGB files will be generated, one for each vertex and edge provider in the graph.

```
opg4j> var g = session.readGraphByName("BANK_GRAPH", GraphSource.PG_PGQL)
g ==> PgxGraph[name=BANK_GRAPH, N=999, E=4993, created=1676021791568]

opg4j> analyst.pagerank(graph)
$8 ==> VertexProperty[name=pagerank, type=double, graph=BANK_GRAPH]

// Now save the state of this graph
opg4j> var storedPgbConfig = graph.store(ProviderFormat.PGB, "<path_to_dir>")
```

In a three-tier deployment, the file is written on the server-side file system. You must also ensure that the file location to write is specified in the graph server (PGX). (As explained in Three-Tier Deployments of Oracle Graph with Autonomous Database, in a three-tier deployment, access to the PGX server file system requires a list of allowed locations to be specified.)



16.3.3 Publishing a Graph

You can publish a graph that is loaded into the graph server (PGX), so that it can be referenced by other sessions. Similarly, the snapshots of a graph can also be made available to other sessions.

Publishing a Graph with Snapshots

After loading a graph is loaded into the graph server, if you want to make all snapshots of the graph visible to other sessions (under the same user), then use the publishWithSnapshots() method. When a graph is published with snapshots, the GraphMetaData information of each snapshot is also made available to the other sessions, with the exception of the graph configuration, which is null.

When calling the publishWithSnapshots() method, all the persistent properties of all the snapshots are published and made visible to the other sessions. Transient properties are session-private and therefore they must be published explicitly. Once published, all properties become read-only. Hence, **transient properties are not published** when calling publishWithSnapshots() without arguments.

Publishing a graph with publishWithSnapshots() method, will move the graph name from the session-private namespace to the public namespace. If a graph with the same name has been already published, then the publishWithSnapshots() method will fail with an exception.

- JShell
- Java
- Python

JShell

```
opg4j> graph.publishWithSnapshots()
```

Java

```
graph.publishWithSnapshots();
```

Python

```
>>> graph.publish_with_snapshots()
```

If you want to publish specific transient properties, then you can list them within the publishWithSnapshots() call, as shown in the following example:

JShell



Java

JShell

```
opg4j> var prop1 = graph.createVertexProperty(PropertyType.INTEGER, "prop1")
opg4j> prop1.fill(0)
opg4j> var cost = graph.createEdgeProperty(PropertyType.DOUBLE, "cost")
opg4j> cost.fill(0d)
opg4j> graph.publishWithSnapshots(List.of(prop1), List.of(cost))
Java
```

```
VertexProperty<Integer, Integer> prop1 =
graph.createVertexProperty(PropertyType.INTEGER, "prop1");
prop1.fill(0);
EdgeProperty<Double> cost = graph.createEdgeProperty(PropertyType.DOUBLE,
"cost");
cost.fill(0d);
Collection<VertexProperty<?, ?>> vertexProps = Arrays.asList(prop1);
Collection<EdgeProperty<?>> edgeProps = Arrays.asList(cost);
graph.publishWithSnapshots(vertexProps,edgeProps);
```

Alternatively, all properties can be published at once by passing the built-in

VertexProperty.ALL and EdgeProperty.ALL to publishWithSnapshots(), as in the following example.

- JShell
- Java

JShell

```
opg4j> var prop1 = graph.createVertexProperty(PropertyType.INTEGER, "prop1")
opg4j> prop1.fill(0)
opg4j> var cost = graph.createEdgeProperty(PropertyType.DOUBLE, "cost")
opg4j> cost.fill(0d)
opg4j> graph.publishWithSnapshots(VertexProperty.ALL, EdgeProperty.ALL)
```

Java

```
VertexProperty<Integer, Integer> prop1 =
graph.createVertexProperty(PropertyType.INTEGER, "prop1");
prop1.fill(0);
EdgeProperty<Double> cost = graph.createEdgeProperty(PropertyType.DOUBLE,
"cost");
cost.fill(0d);
Collection<VertexProperty<?, ?>> vertexProps = Arrays.asList(prop);
```



```
Collection<EdgeProperty<?>> edgeProps = Arrays.asList(cost);
graph.publishWithSnapshots(VertexProperty.ALL, EdgeProperty.ALL);
```

After creating a snapshot, properties in the new snapshot will inherit the publishing state of properties in the old snapshot. This implies that if a property is published in the old snapshot, it will also be published in the new snapshot. Otherwise it will remain session private in the new snapshot. This behavior is configurable with

enable_snapshot_properties_publish_state_propagation flag (see Configuration Parameters for the Graph Server (PGX) Engine). By default, this flag is enabled. However, it can be disabled by setting its value to false, in which case, the publishing state of the properties will be ignored when creating new snapshots and the properties in new snapshots will be session-private.

Note:

By default, calling publishWithSnapshots() is allowed only on the latest snapshot. Calling publishWithSnapshots() on an old snapshot will result in an exception. To allow calling publishWithSnapshots() on any snapshot, set the enable_snapshot_properties_publish_state_propagation configuration field in the pgx.conf file to false.

- JShell
- Java

JShell

```
opg4j> var prop1 = graph.createVertexProperty(PropertyType.INTEGER, "prop1")
opg4j> prop1.fill(0)
opg4j> var prop2 = graph.createVertexProperty(PropertyType.INTEGER, "prop2")
opg4j> prop2.fill(0)
opg4j> var cost = graph.createEdgeProperty(PropertyType.DOUBLE, "cost")
opq4j> cost.fill(0d)
// the example intentionally avoids publishing prop2
opg4j> graph.publishWithSnapshots(List.of(prop1), List.of(cost))
opq4j> var snapshot = graph.createChangeSet().buildNewSnapshot()
opg4j> snapshot.getVertexProperty("prop1").isPublished()
=> true
opg4j> snapshot.getVertexProperty("prop2").isPublished()
=> false
opg4j> snapshot.getEdgeProperty("cost").isPublished()
=> true
// publish prop2 in snapshot, this will make it published in future snapshots
too
// but not in the previous snapshots
opg4j> snapshot.getVertexProperty("prop2").publish()
opg4j> var snapshot2 = snapshot.createChangeSet().buildNewSnapshot();
```

```
opg4j> snapshot2.getVertexProperty("prop1").isPublished()
=> true
opg4j> snapshot2.getVertexProperty("prop2").isPublished()
=> true
opg4j> snapshot2.getEdgeProperty("cost").isPublished()
=> true
```

Java

```
VertexProperty<Integer, Integer> prop1 =
graph.createVertexProperty(PropertyType.INTEGER, "prop1");
prop1.fill(0);
VertexProperty<Integer, Integer> prop2 =
graph.createVertexProperty(PropertyType.INTEGER, "prop2");
prop2.fill(0);
EdgeProperty<Double> cost = graph.createEdgeProperty(PropertyType.DOUBLE,
"cost");
cost.fill(0d);
// the example intentionally avoids publishing prop2
graph.publishWithSnapshots(List.of(prop1), List.of(cost));
PgxGraph snapshot = graph.createChangeSet().buildNewSnapshot();
System.out.println(snapshot.getVertexProperty("prop1").isPublished()); //
Returns true
System.out.println(snapshot.getVertexProperty("prop2").isPublished()); //
Returns false
System.out.println(snapshot.getEdgeProperty("cost").isPublished());
Returns true
// publish prop2 in snapshot, this will make it published in future snapshots
// but not in the previous snapshots.
snapshot.getVertexProperty("prop2").publish();
PgxGraph snapshot2 = snapshot.createChangeSet().buildNewSnapshot();
System.out.println(snapshot2.getVertexProperty("prop1").isPublished()); //
Returns true
System.out.println(snapshot2.getVertexProperty("prop2").isPublished()); //
Returns true
System.out.println(snapshot2.getEdgeProperty("cost").isPublished());
Returns true
```

Publishing a Single Graph Snapshot

The PgxGraph#publish() method can be used to publish the current selected snapshot of the graph. The publish operation will move the graph name from the session-private namespace to the public namespace. If a graph with the same name has been already published, then the publish() method will fail with an exception. Graphs published with snapshots and single published snapshots share the same namespace.

Table 14-6 describes the grants required to publish a graph.

Note that calling the publish() method without arguments publishes the snapshot with its persistent properties only. However, if you want to publish specific transient properties, then you must list them within the publish() call as shown:

- JShell
- Java
- Python

JShell

```
opg4j> var prop1 = graph.createVertexProperty(PropertyType.INTEGER, "prop1")
opg4j> prop1.fill(0)
opg4j> var cost = graph.createEdgeProperty(PropertyType.DOUBLE, "cost")
opg4j> cost.fill(0d)
opg4j> graph.publish(List.of(prop1), List.of(cost))
```

Java

```
VertexProperty<Integer, Integer> prop1 =
graph.createVertexProperty(PropertyType.INTEGER, "prop1");
prop1.fill(0);
EdgeProperty<Double> cost = graph.createEdgeProperty(PropertyType.DOUBLE,
"cost");
cost.fill(0d);
Collection<VertexProperty<?, ?>> vertexProps = Arrays.asList(prop);
Collection<EdgeProperty<?>> edgeProps = Arrays.asList(cost);
graph.publish(vertexProps, edgeProps);
```

Python

```
prop = graph.create_vertex_property("integer", "prop1")
prop1.fill(0)
cost = graph.create_edge_property("double", "cost")
cost.fill(float(0))
vertex_props = [prop]
edge_props = [cost]
graph.publish(vertex props, edge props)
```

Referencing a Published Graph from Another Session

You can reference a published graph by its name in another session, using the PgxSession#getGraph() method.

The following example references a published graph myGraph in a new session (session2):

- JShell
- Java
- Python

JShell

```
opg4j> var session2 = instance.createSession("session2")
opg4j> var graph2 = session2.getGraph(Namespace.PUBLIC, "myGraph")
```

Java

```
PgxSession session2 = instance.createSession("session2");
PgxGraph graph2 = session2.getGraph(Namespace.PUBLIC, "myGraph");
```

Python

```
session2 = pypgx.get_session("session2");
PgxGraph graph2 = session2.get graph("myGraph")
```

session2 can access only the published snapshot. If the graph has been published without snapshots, calling the getAvailableSnapshots() method will return an empty queue.

In case if the graph snapshots have been published, then the call to getGraph() returns the most recent available snapshot. session2 can see all the available snapshots through the getAvailableSnapshots() method. You can then set a specific snapshot using the PqxSession#setSnapshot() method.



If a referenced graph is not required anymore, then it is important that you release the graph. See Deleting a Graph for more information.

Publishing a Property

After publishing (a single snapshot or all of them), you can still publish transient properties individually. By default, the publishing state of the transient properties are associated to the specific snapshot on which they are created and thus they are visible only on that snapshot.

- JShell
- Java
- Python



JShell

```
opg4j> graph.getVertexProperty("prop1").publish()
opg4j> graph.getEdgeProperty("cost").publish()
```

Java

```
graph.getVertexProperty("prop1").publish();
graph.getEdgeProperty("cost").publish();
```

Python

```
graph.get_vertex_property("prop1").publish()
graph.get edge property("cost").publish()
```

Getting a Published Property in Another Session

Sessions referencing a published graph (with or without snapshots) can reference a published property through the PgxGraph#getVertexProperty and PgxGraph#getEdgeProperty.

- JShell
- Java
- Python

JShell

```
opg4j> var session2 = instance.createSession("session2")
opg4j> var graph2 = session2.getGraph(Namespace.PUBLIC, "myGraph")
opg4j> var vertexProperty = graph2.getVertexProperty("prop1")
opg4j> var edgeProperty = graph2.getEdgeProperty("cost")
```

Java

```
PgxSession session2 = instance.createSession("session2");
PgxGraph graph2 = session2.getGraph(Namespace.PUBLIC, "myGraph");
VertexProperty<Integer, Integer> vertexProperty =
graph2.getVertexProperty("prop1");
EdgeProperty<Double> edgeProperty = graph2.getEdgeProperty("cost");
```

Python

```
session2 = pypgx.get_session(session_name ="session2")
graph2 = session2.get_graph("myGraph")
vertex_property = graph2.get_vertex_property("prop1")
edge property = graph2.get edge property("cost")
```



Pinning a Published Graph

You can pin a published graph so that it remains published even if no session uses it.

- JShell
- Java
- Python

JShell

```
opg4j> graph.pin()
```

Java

```
graph.pin();
```

Python

```
>>> graph.pin()
```

Unpinning a Published Graph

You can unpin a published graph that was earlier pinned. By doing this, you can remove the graph and all its snapshots, if no other session is using a snapshot of the graph.

- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.getGraph("bank_graph_analytics")
graph ==>
PgxGraph[name=bank_graph_analytics, N=999, E=4993, created=1660217577201]
opg4j> graph.unpin()
```

Java

```
PgxGraph graph = session.getGraph("bank_graph_analytics");
graph.unpin();
```



Python

```
>>> graph = session.get_graph("bank_graph_analytics")
>>> graph.unpin()
```

Related Topics

Namespaces and Sharing

The graph server (PGX) supports separate namespaces that help you to organize your entities.

16.3.4 Deleting a Graph

In order to reduce the memory usage of the graph server (PGX), the session must drop the unused graph objects created through the getGraph() method, by invoking the close() method.

Calling the close () method not only destroys the specified graph, but all of its associated properties, including transient properties as well. In addition, all of the collections related to the graph instance (for example, a VertexSet) are also deleted automatically. If a session holds multiple PgxGraph objects referencing the same graph, invoking close () on any of them will invalidate all the PgxGraph objects referencing that graph, making any operation on those objects fail.

For example:

- JShell
- Java
- Python

JShell

Java

```
PgxGraph graph1 = session.getGraph("myGraphName");
// graph2 references the same graph of graph1
PgxGraph graph2 = session.getGraph("myGraphName");
// Delete graph2
```



```
graph2.close();

// Both the following calls throw an exception, as both references are not
valid anymore
Set<VertexProperty<?, ?>> properties = graph1.getVertexProperties();
properties = graph2.getVertexProperties();
```

Python

```
graph1 = session.get_graph("myGraphName")

# graph2 references the same graph of graph1
    graph2 = session.get_graph("myGraphName")

# Delete graph2
graph2.close()

# Both the following calls throw an exception, as both references are not valid anymore
properties = graph1.get_vertex_properties()
properties = graph2.get vertex properties()
```

The same behavior occurs when multiple PgxGraph objects reference the same snapshot. Since a snapshot is effectively a graph, closing a PgxGraph object referencing a certain snapshot invalidates all PgxGraph objects referencing the same snapshot, but does not invalidate those referencing other snapshots:

```
// Get a snapshot of "myGraphName"
PgxGraph graph1 = session.getGraph("myGraphName");

// graph2 and graph3 reference the same snapshot as graph1
PgxGraph graph2 = session.getGraph("myGraphName");
PgxGraph graph3 = session.getGraph("myGraphName");

// Assume another snapshot is created ...

// Make graph3 references the latest snapshot available session.setSnapshot(graph3, PgxSession.LATEST_SNAPSHOT);
graph2.close();

// Both the following calls throw an exception, as both references are not valid anymore
Set<VertexProperty<?, ?>> properties = graph1.getVertexProperties();
properties = graph2.getVertexProperties();

// graph3 is still valid, so the call succeeds
properties = graph3.getVertexProperties();
```

Note:

Even if a graph is closed by a session, the graph data may still remain in the server memory, if the graph is currently shared by other sessions. In such a case, the graph may still be visible among the available graphs through the PgxSession.getGraphs(<namespace>) method.

As a safe alternative to the manual removal of each graph, the PGX API supports some implicit resource management features which allow developers to safely omit the close() call. See Resource Management Considerations for more information.

16.3.5 Graph Sharing Options and Validating Graph Permissions

The graph_sharing_option parameter in the pgx.conf file determines if and how a graph can be shared.

It mainly depends on whether or not the graph is loaded from the database into the graph server (PGX). Graphs that are loaded directly from the database using the session.readGraphByName() API are known as *traceable graphs*. However, graphs which are created as a result of mutation (through graph alteration APIs) on a loaded graph instance are not *traceable graphs*.

The graph server (PGX) supports sharing of graphs within sessions of a single user (through the publish API) or across sessions of different users (through the publish and grant permission APIs). This is determined by the graph sharing option field in the pgx.conf file.

In addition, the graph server (PGX) will perform periodic checks on all traceable graphs to make sure that the user holding a reference to a traceable graph has all the permissions to access the source graph data in the database. If the permission check fails (for example, the user privileges on the original data source have been revoked) the user session will be destroyed and all sessions of the same user accessing the traceable graph data will be released from memory. The permission_checks_interval field in the pgx.conf file can be used to control the frequency at which the graph server must check the graph permissions.

The following table shows the three <code>graph_sharing_option</code> modes that are supported by the graph server (PGX). The table also provides information on the permission checks and the APIs that are supported on these modes.

Table 16-10 Graph Sharing Options

Graph Sharing Option	Description	Publish API Allowed	Grant Permiss ion API Allowed	Permiss ion Checks on Data Source
ALLOW_DATA_SHARING <default></default>	Indicates that all graph types (traceable or not) is allowed across sessions of a single user and across users	Yes	Yes	No
ALLOW_TRACEABLE_DATA_SHARIN G_WITHIN_SAME_USER	Allows only sharing of traceable graphs among sessions of a single user	Yes	No	Yes
DISALLOW_DATA_SHARING	Indicates graphs are always session private	No	No	No



For instance, consider the following example in which the <code>graph_sharing_option</code> is set as <code>ALLOW_TRACEABLE_DATA_SHARING_WITHIN_SAME_USER</code> and the <code>permission_checks_interval</code> parameter defaults to 60 seconds in the <code>pgx.conf</code> file. Assume that a graph user's permission to an underlying source table is revoked after the user publishes the graph. If the user attempts to access the graph data, in the current or in another session, the graph gets invalidated and the respective sessions are destroyed.

The following code shows the graph invalidation scenario in the current user session:

- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.readGraphByName("HR", "EMP_GRAPH",
GraphSource.PG_PGQL)
graph ==> PgxGraph[name=EMP_GRAPH, N=134, E=11, created=1696308375704]
opg4j> session.getGraph("EMP_GRAPH")
$2 ==> graph ==> PgxGraph[name=EMP_GRAPH, N=134, E=11, created=1696402820966]
opg4j> graph.publish()
// Source table permission revoked for the user
opg4j> session.getGraph("EMP_GRAPH") //throws exception and the current
session is explicitly destroyed
```

Java

```
PgxGraph graph = session.readGraphByName("HR", "EMP_GRAPH",
GraphSource.PG_PGQL);
session.getGraph("EMP_GRAPH");
graph.publish();
// Source table permission revoked for the user
session.getGraph("EMP_GRAPH"); //throws exception and the current session is
explicitly destroyed
```

Python

```
>>> graph = session.read_graph_by_name("EMP_GRAPH", "pg_pgql", schema="HR")
>>> session.get_graph("EMP_GRAPH")
PgxGraph(name: EMP_GRAPH, v: 134, e: 11, directed: True, memory(Mb): 0)
>>> graph.publish()
>>> # Source table permission revoked for the user
>>> session.get_graph("EMP_GRAPH") #throws exception and the current session is explicitly destroyed
```

The following code shows that the referenced graph also gets invalidated in another session of the given user after permission to the source data table is revoked for the user:

- JShell
- Java
- Python

JShell

```
opg4j> //throws exception in another session and the session gets explicitly destroyed opg4j> graph.queryPgql("SELECT n.* from MATCH (n:employees) LIMIT 5").print()
```

Java

```
//throws exception in another session and the session gets explicitly
destroyed
graph.queryPgql("SELECT n.* from MATCH (n:employees) LIMIT 5").print();
```

Python

```
>>> #throws exception in another session and the session gets explicitly
destroyed
>>> graph.query_pgql("SELECT n.* from MATCH (n:employees) LIMIT 5").print()
```

16.4 Keeping the Graph in Oracle Database Synchronized with the Graph Server

You can use the FlashbackSynchronizer API to automatically apply changes made to graph in the database to the corresponding PgxGraph object in memory, thus keeping both synchronized.

This API uses Oracle's Flashback Technology to fetch the changes in the database since the last fetch and then push those changes into the graph server using the ChangeSet API. After the changes are applied, the usual snapshot semantics of the graph server apply: each delta fetch application creates a new in-memory snapshot. Any queries or algorithms that are executing concurrently to snapshot creation are unaffected by the changes until the corresponding session refreshes its PgxGraph object to the latest state by calling the session.setSnapshot(graph, PgxSession.LATEST_SNAPSHOT) procedure.

Also, if the changes from the previous fetch operation no longer exist, then the synchronizer will throw an exception. This occurs if the previous fetch duration is longer than the <code>UNDO_RETENTION</code> parameter setting in the database. To avoid this exception, ensure to fetch the changes at intervals less than the <code>UNDO_RETENTION</code> parameter value. The default setting for the <code>UNDO_RETENTION</code> parameter is 900 seconds. See *Oracle Database Reference* for more information.



Prerequisites for Synchronizing

The Oracle database must have Flashback enabled and the database user that you use to perform synchronization must have:

- Read access to all tables which need to be kept synchronized.
- Permission to use flashback APIs. For example:

```
GRANT EXECUTE ON DBMS FLASHBACK TO <user>
```

The database must also be configured to retain changes for the amount of time needed by your use case.

Types of graphs that can be synchronized

Not all PgxGraph objects in PGX can be synchronized. The following limitations apply:

- Only the original creator of the graph can synchronize it. That is, the current user must have the MANAGE permission of the graph.
- Only graphs loaded from database tables (PGQL property graphs and SQL property graphs) can be synchronized. Graphs created from other formats or graphs created via the graph builder API or PGQL property graphs created from database views cannot be synchronized.
- Only the latest snapshot of a graph can be synchronized.

Types of changes that can be synchronized

The synchronizer supports keeping the in-memory graph snapshot in sync with the following database-side modifications:

- insertion of new vertices and edges
- removal of existing vertices and edges
- update of property values of any vertex or edge

The synchronizer does not support schema-level changes to the input graph, such as:

- alteration of the list of input vertex or edge tables
- alteration of any columns of any input tables (vertex or edge tables)

Furthermore, the synchronizer does not support updates to vertex and edge keys.

For a detailed example, see the following topic:

- Synchronizing a SQL Property Graph
 You can synchronize a SQL property graph that is loaded into the graph server (PGX) with the changes made to the graph data in the database.
- Synchronizing a PGQL Property Graph
 You can synchronize a PGQL property graph loaded into the graph server (PGX) with the changes made to the graph data in the database.
- Synchronizing a Published Graph
 You can synchronize a published graph by configuring the Flashback Synchronizer with a
 PartitionedGraphConfig object containing the graph schema along with the database
 connection details.



16.4.1 Synchronizing a SQL Property Graph

You can synchronize a SQL property graph that is loaded into the graph server (PGX) with the changes made to the graph data in the database.

The following example shows the steps for synchronizing a SQL property graph using the FlashbackSynchronizer API:

- 1. Load the SQL property graph into the graph server (PGX) using the readGraphByName() API as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var graph = session.readGraphByName("BANK_SQL_PG",
GraphSource.PG_SQL,
...>
ReadGraphOption.optimizeFor(GraphOptimizedFor.UPDATES),
...> ReadGraphOption.synchronizable())
graph ==> PgxGraph[name=BANK SQL PG 2,N=1000,E=5001,created=1697259571499
```

Java

Python

- 2. Open a new JDBC connection to the database and change the data in the underlying database tables for the SQL property graph. For example, the following code updates the database value for one of the edge properties:
 - JShell
 - Java
 - Python



JShell

```
opg4j> var conn =
DriverManager.getConnection(<jdbcUrl>, <username>, <password>)
conn ==> oracle.jdbc.driver.T4CConnection@738e79ec
opg4j> var stmt = conn.createStatement()
stmt ==> oracle.jdbc.driver.OracleStatementWrapper@71f056a
opg4j> stmt.executeQuery("UPDATE bank_txns SET amount=2000 WHERE txn_id=2")
$8 ==> oracle.jdbc.driver.ForwardOnlyResultSet@19b0a9f2
opg4j> conn.commit()
```

Java

```
Connection conn =
DriverManager.getConnection(<jdbcUrl>, <username>, <password>);
Statement stmt = conn.createStatement();
stmt.executeQuery("UPDATE bank_txns SET amount=2000 WHERE txn_id=2");
conn.commit();
```

Python

Committing the changes to the database causes the graph in the memory to go out of sync with the database source tables.

- 3. Synchronize the in-memory graph with the database by creating a new synchronizer object as shown in the following code:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var synchronizer =
graph.createSynchronizer(FlashbackSynchronizer.class, conn)
synchronizer ==> oracle.pgx.api.FlashbackSynchronizer@5f65e0c0
```



Java

```
Synchronizer synchronizer =
graph.createSynchronizer(FlashbackSynchronizer.class, conn);
```

Python

- **4.** Fetch and apply the database changes by calling the sync() function and create a new inmemory graph snapshot:
 - JShell
 - Java
 - Python

JShell

```
opg4j> graph=synchronizer.sync()
graph ==> PgxGraph[name=BANK SQL PG,N=1000,E=5001,created=1696332603804]
```

Java

```
graph=synchronizer.sync();
```

Python

```
graph=synchronizer.sync()
```

Note that the <code>Synchronizer</code> object needs to be created only once per session. Once created, you can perform the <code>synchronizer.sync()</code> operation multiple times to generate the latest graph snapshot that is consistent with the changes in the database.

- 5. Query the graph to verify the updates to the edge property.
 - JShell
 - Java



Python

JShell

```
opg4j> graph.queryPgql("SELECT e.amount FROM MATCH (v1:Account) -
[e:Transfer] -> (v2:Account) WHERE e.from_acct_id = 237 AND
e.to acct_id=777").print()
```

Java

```
graph.queryPgql("SELECT e.amount FROM MATCH (v1:Accounts)-[e:Transfers]-
>(v2:Accounts) WHERE e.from acct id = 237 AND e.to acct id=777").print();
```

Python

```
>>> graph.query_pgql("SELECT e.amount FROM MATCH (v1:Account)-[e:Transfer]-
>(v2:Account) WHERE v1.id = 237 AND v2.id=777").print()
```

On execution, the preceding example produces the following output:

```
+----+
| amount |
+----+
| 2000.0 |
```

16.4.2 Synchronizing a PGQL Property Graph

You can synchronize a PGQL property graph loaded into the graph server (PGX) with the changes made to the graph data in the database.

The following example shows the steps for synchronizing a PGQL property graph using the FlashbackSynchronizer API:

- 1. Load the PGQL property graph into the graph server (PGX) using the readGraphByName() API as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var graph =
session.readGraphByName("BANK GRAPH",GraphSource.PG PGQL,
```



```
ReadGraphOption.optimizeFor(GraphOptimizedFor.UPDATES),ReadGraphOption.sync
hronizable())
graph ==> PgxGraph[name=BANK GRAPH,N=999,E=4993,created=1660275936010]
```

Java

```
PgxGraph graph = session.readGraphByName("BANK_GRAPH", GraphSource.PG_PGQL,
ReadGraphOption.optimizeFor(GraphOptimizedFor.UPDATES), ReadGraphOption.sync
hronizable());
```

Python

```
>>> graph = session.read_graph_by_name('BANK_GRAPH','pg_pgql',
... options=['optimized for updates', 'synchronizable'])
```

- 2. Open a new JDBC connection to the database and change the data in the underlying database tables for the PGQL property graph. For example, the following code updates the database value for one of the edge properties:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var conn =
DriverManager.getConnection(<jdbcUrl>, <username>, <password>)
conn ==> oracle.jdbc.driver.T4CConnection@60f7261f
opg4j> var stmt = conn.createStatement()
stmt ==> oracle.jdbc.driver.OracleStatementWrapper@1a914a00
opg4j> stmt.executeQuery("UPDATE bank_txns SET amount=4000 WHERE txn_id=3")
$5 ==> oracle.jdbc.driver.ForwardOnlyResultSet@627d5f99
opg4j> conn.setAutoCommit(false)
opg4j> conn.commit()
```

Java

```
Connection conn =
DriverManager.getConnection(<jdbcUrl>, <username>, <password>);
Statement stmt = conn.createStatement();
stmt.executeQuery("UPDATE bank_txns SET amount=4000 WHERE txn_id=3");
conn.setAutoCommit(false);
conn.commit();
```



Python

Committing the changes to the database causes the graph in the memory to go out of sync with the database source tables.

3. Synchronize the in-memory graph with the database by creating a new synchronizer object as shown in the following code:

```
Synchronizer synchronizer = new
Synchronizer.Builder<FlashbackSynchronizer>()
    .setType(FlashbackSynchronizer.class)
    .setGraph(graph)
    .setConnection(conn)
    .setParallelHintDegree(4)
    .build();
```

Internally, the graph server keeps track of the Oracle system change number (SCN) to which the current graph snapshot belongs. The synchronizer is a client-side component which connects to the database, detects changes by comparing state of the original input tables using the current SCN via the flashback mechanism and then sends any changes to the graph server using the changeset API. In order to do so, the synchronizer needs to know how to connect to the database (conn parameter) as well as which graph to keep in sync (graph parameter).

You can specify the degree of parallelism in the Flashback Synchronizer builder using the setParallelHintDegree API. The specified parallel hint degree will be taken into account by the Flashback Synchronizer when executing the SQL queries.

Alternatively, you can use this equivalent shortcut as shown:

- JShell
- Java
- Python

JShell

```
opg4j> var synchronizer =
graph.createSynchronizer(FlashbackSynchronizer.class, conn)
synchronizer ==> oracle.pgx.api.FlashbackSynchronizer@4ac2b4c6
```



Java

```
Synchronizer synchronizer =
graph.createSynchronizer(FlashbackSynchronizer.class, conn);
```

Python

```
>>> synchronizer =
graph.create_synchronizer(synchronizer_class='oracle.pgx.api.FlashbackSynch
ronizer', jdbc_url=<jdbc_url>, username=<username>, password=<password>)
```

- **4.** Fetch and apply the database changes by calling the sync() function and create a new inmemory graph snapshot:
 - JShell
 - Java
 - Python

JShell

```
opg4j> graph=synchronizer.sync()
g ==> PgxGraph[name=BANK_GRAPH, N=999, E=4993, created=1660308128037]
```

Java

```
graph=synchronizer.sync();
```

Python

```
>>> graph = synchronizer.sync()
```

Note that the <code>Synchronizer</code> object needs to be created only once per session. Once created, you can perform the <code>synchronizer.sync()</code> operation multiple times to generate the latest graph snapshot that is consistent with the changes in the database.

Splitting the Fetching and Applying of Changes

The synchronizer.sync() invocation in the preceding code, fetches the changes and applies them in one call. However, you can encode a more complex update logic by splitting this process into separate fetch() and apply() invocations. For example:

```
synchronizer.fetch(); // fetches changes from the database
if (synchronizer.getGraphDelta().getTotalNumberOfChanges() > 100) { //
only create snapshot if there have been more than 100 changes
```

```
synchronizer.apply();
```

- **5.** Query the graph to verify the updates to the edge property.
 - JShell
 - Java
 - Python

JShell

```
opg4j> graph.queryPgq1("SELECT e.amount FROM MATCH (v1:Accounts) -
[e:Transfers] -> (v2:Accounts) WHERE e.from_acct_id = 179 AND
e.to_acct_id=688").print()
```

Java

```
graph.queryPgql("SELECT e.amount FROM MATCH (v1:Accounts)-[e:Transfers]-
>(v2:Accounts) WHERE e.from acct id = 179 AND e.to acct id=688").print();
```

Python

```
>>> graph.query_pgql("SELECT e.amount FROM MATCH (v1:Accounts) -
[e:Transfers] -> (v2:Accounts) WHERE e.from_acct_id = 179 AND
e.to acct id=688").print()
```

On execution, the preceding example produces the following output:

```
+----+
| amount |
+----+
| 4000.0 |
```

16.4.3 Synchronizing a Published Graph

You can synchronize a published graph by configuring the Flashback Synchronizer with a PartitionedGraphConfig object containing the graph schema along with the database connection details.

The PartitionedGraphConfig object can be created either through the PartitionedGraphConfigBuilder API or by reading the graph configuration from a JSON file. Though synchronization of graphs created via graph configuration objects is supported in general, the following few limitations apply:

 Only partitioned graph configurations with all providers being database tables are supported.

- Each edge or vertex provider or both must specify the owner of the table by setting the username field. For example, if user SCOTT owns the table, then set the user name accordingly for the providers.
- Snapshot source must be set to CHANGE SET.
- It is highly recommended to optimize the graph for update operations in order to avoid memory exhaustion when creating many snapshots.

The following example shows the sample configuration for creating the PartitionedGraphConfig object:

- JSON Configuration
- GraphConfigBuilder API

JSON Configuration

GraphConfigBuilder API

As a prerequisite requirement, you must have a graph that is published in an earlier session. For example:

- JShell
- Java
- Python

JShell

```
opg4j> var graph =
session.readGraphWithProperties("<path_to_json_config_file>")
graph ==>
PgxGraph[name=bank_graph_analytics_fb,N=999,E=4993,created=1664310157103]
opg4j> graph.publishWithSnapshots()
```

Java

```
PgxGraph graph =
session.readGraphWithProperties("<path_to_json_config_file>");
graph.publishWithSnapshots();
```

Python

```
>>> graph = session.read_graph_with_properties("<path_to_json_config_file>")
>>> graph.publish_with_snapshots()
```

You can now perform the following steps to synchronize the published graph using a graph configuration object which is built from a JSON file.

- 1. Get the published graph as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var graph = session.getGraph("bank_graph")
graph ==>
PgxGraph[name=bank_graph_analytics_fb,N=999,E=4993,created=1664310157103]
```

Java

```
PgxGraph graph = session.getGraph("bank graph");
```



Python

```
>>> graph = session.get graph("bank graph")
```

- 2. Build the graph configuration object using a JSON file path as shown:
 - JShell
 - Java
 - Python

JShell

```
opq4j> var cfq =
GraphConfigFactory.forPartitioned().fromFilePath("path to json config file"
cfg ==> {"edge providers":
[{"destination vertex provider":"Accounts", "database table name": "BANK TXNS
", "name": "Transfers", "key type": "long",
"props":[{"type":"float", "name": "AMOUNT"},
{"type":"string", "name": "DESCRIPTION"}], "format": "rdbms", "source vertex pro
vider": "Accounts",
"source column": "FROM ACCT ID", "key column": "TXN ID", "destination column": "
TO ACCT ID", "loading": {"create key mapping": true}}],
"loading":
{"snapshots source":"CHANGE SET"}, "name": "bank graph", "vertex providers":
[{"database table name": "BANK ACCOUNTS",
"key column": "ID", "name": "Accounts", "key type": "integer", "props":
[{"type":"integer", "name":"ID"}, {"type":"string", "name":"NAME"}],
"loading":{"create key mapping":true}, "format": "rdbms"}]}
```

Java

```
PartitionedGraphConfig cfg =
GraphConfigFactory.forPartitioned().fromFilePath("path_to_json_config_file"
);
```

Python

```
>>> from pypgx.api import GraphConfigFactory
>>> cfg =
GraphConfigFactory.for_partitioned().from_file_path("path_to_json_config_fi
le")
```



Alternatively, you can also build the graph configuration object using the GraphConfigBuilder API as shown in Loading a Graph by Defining a Graph Configuration Object.

- 3. Change the data in the database table using the JDBC connection:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var conn =
DriverManager.getConnection(<jdbcUrl>, <username>, <password>)
conn ==> oracle.jdbc.driver.T4CConnection@60f7261f
opg4j> var stmt = conn.createStatement()
stmt ==> oracle.jdbc.driver.OracleStatementWrapper@1a914a00
opg4j> stmt.executeQuery("UPDATE bank_txns SET amount=9000 WHERE txn_id=3")
$5 ==> oracle.jdbc.driver.ForwardOnlyResultSet@627d5f99
opg4j> conn.setAutoCommit(false)
opg4j> conn.commit()
```

Java

```
Connection conn =
DriverManager.getConnection(<jdbcUrl>, <username>, <password>);
Statement stmt = conn.createStatement();
stmt.executeQuery("UPDATE bank_txns SET amount=9000 WHERE txn_id=3");
conn.setAutoCommit(false);
conn.commit();
```

Python

```
>>> conn = opg4py.pgql.get_connection("graphuser", "graphuser",
"jdbc:oracle:thin:@localhost:1521/orclpdb").get_jdbc_connection()
>>> conn.prepareStatement("UPDATE bank_txns SET amount=9000 WHERE
txn_id=3").execute()
False
>>> conn.commit()
```

- 4. Configure the Flashback synchronizer using the graph configuration object and the connection details:
 - JShell
 - Java



Python

JShell

Java

```
Synchronizer synchronizer = new
Synchronizer.Builder<FlashbackSynchronizer>()
    .setType(FlashbackSynchronizer.class)
    .setGraph(graph)
    .setConnection(conn)
    .setGraphConfiguration(cfg)
    .build();
```

Python

- 5. Synchronize the published graph as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> graph=synchronizer.sync()
graph ==> PgxGraph[name=bank graph, N=999, E=4993, created=1664454171605]
```

Java

```
graph=synchronizer.sync();
```



Python

```
>>> graph = synchronizer.sync()
```

- 6. Query the graph to verify the updates to the edge property.
 - JShell
 - Java
 - Python

JShell

```
opg4j> graph.queryPgql("SELECT e.amount FROM MATCH (v1:Accounts)-
[e:Transfers]->(v2:Accounts) WHERE v1.ID=179 and v2.ID=688").print()
```

Java

```
graph.queryPgql("SELECT e.amount FROM MATCH (v1:Accounts)-[e:Transfers]-
>(v2:Accounts) WHERE v1.ID=179 and v2.ID=688").print();
```

Python

```
graph.query_pgql("SELECT e.amount FROM MATCH (v1:Accounts)-[e:Transfers]-
>(v2:Accounts) WHERE v1.ID=179 and v2.ID=688").print();
```

On execution, the preceding example produces the following output:

```
| amount |
|-----+
| 9000.0 |
```

16.5 Optimizing Graphs for Read Versus Updates in the Graph Server (PGX)

The graph server (PGX) can store an optimized graph for other reads or updates. This is only relevant when the updates are made directly to a graph instance in the graph server.

Graph Optimized for Reads

Graphs optimized for reads will provide the best performance for graph analytics and PGQL queries. In this case there could be potentially higher latencies to update the graph (adding or

removing vertex and edges or updating the property values of previously existing vertex or edges through <code>GraphChangeSet</code> API). There could also be higher memory consumption. When using graphs optimized for reads, each updated graph or graph snapshot consumes memory proportional to the size of the graph in terms of vertices and edges.

The optimized_for configuration property can be set to reads when loading the graph into the graph server (PGX) to create a graph instance that is optimized for reads.

Graph Optimized for Updates

Graphs optimized for updates use a representation enabling low-latency update of graphs. With this representation, the graph server can reach millisecond-scale latencies when updating graphs with millions of vertices and edges (this is indicative and will vary depending on the hardware configuration).

To achieve faster update operations, graph server avoids as much as possible doing a full duplication of the previous graph (snapshot) to create a new graph (snapshot). This also improves the memory consumption (in typical scenarios). New snapshots (or new graphs) will only consume additional memory proportional to the memory required for the changes applied.

In this representation, there could be lower performance of graph gueries and analytics.

The <code>optimized_for</code> configuration property can be set to <code>updates</code> when loading the graph into the graph server (PGX) to create a graph instance that is optimized for reads.

16.6 Executing Built-in Algorithms

The graph server (PGX) contains a set of built-in algorithms that are available as Java APIs.

The following table provides an overview of the available algorithms, grouped by category. Note that these algorithms can be invoked through the Analyst Class.



See the supported Built-In Algorithms on GitHub for more details.

Table 16-11 Overview of Built-In Algorithms

Category	Algorithms
Classic graph algorithms	Prim's Algorithm
Community detection	Conductance Minimization (Soman and Narang Algorithm), Infomap, Label Propagation, Louvain, LouvainDirected, Speaker Listener Label Propagation
Connected components	Strongly Connected Components, Weakly Connected Components (WCC)
Link predition	WTF (Whom To Follow) Algorithm
Matrix factorization	Matrix Factorization
Other	Graph Traversal Algorithms
Path finding	All Vertices and Edges on Filtered Path, Bellman-Ford Algorithms, Bidirectional Dijkstra Algorithms, Compute Distance Index, Compute High-Degree Vertices, Dijkstra Algorithms, Enumerate Simple Paths, Fast Path Finding, Fattest Path, Fattest Path (ignoring edge directions), Filtered Fast Path Finding, Hop Distance Algorithms

Table 16-11 (Cont.) Overview of Built-In Algorithms

Category	Algorithms
Ranking and walking	ArticleRank Algorithms, Closeness Centrality Algorithms, Degree Centrality Algorithms, Eigenvector Centrality, Harmonic Centrality, Hyperlink-Induced Topic Search (HITS), PageRank Algorithms, Random Walk with Restart, Stochastic Approach for Link-Structure Analysis (SALSA) Algorithms, Vertex Betweenness Centrality Algorithms
Structure evaluation	Adamic-Adar algorithms, Bipartite Check, Clustering Coefficient Algorithms, Conductance, Cycle Detection Algorithms, Degree Distribution Algorithms, Eccentricity Algorithms, K-Core, Modularity, Partition Conductance, Reachability Algorithms, Topological Ordering Algorithms, Triangle Counting Algorithms

This following topics describe the use of the graph server (PGX) using Triangle Counting and PageRank analytics as examples.

- About Built-In Algorithms in the Graph Server (PGX)
- Running the Triangle Counting Algorithm
- Running the PageRank Algorithm
- Getting the Progress of a Running Algorithm

16.6.1 About Built-In Algorithms in the Graph Server (PGX)

The graph server (PGX) contains a set of built-in algorithms that are available as Java APIs. The details of the APIs are documented in the Javadoc that is included in the product documentation library. Specifically, see the <code>BuiltinAlgorithms</code> interface Method Summary for a list of the supported in-memory analyst methods.

For example, this is the PageRank procedure signature:

16.6.2 Running the Triangle Counting Algorithm

For triangle counting, the <code>sortByDegree</code> boolean parameter of <code>countTriangles()</code> allows you to control whether the graph should first be sorted by degree (<code>true</code>) or not (<code>false</code>). If <code>true</code>, more memory will be used, but the algorithm will run faster; however, if your graph is very large, you might want to turn this optimization off to avoid running out of memory.

- JShell
- Java

JShell

```
opg4j> analyst.countTriangles(graph, true)
==> 1
```

Java

```
import oracle.pgx.api.*;
Analyst analyst = session.createAnalyst();
long triangles = analyst.countTriangles(graph, true);
```

The algorithm finds one triangle in the sample graph.



Tip:

When using the graph shell, you can increase the amount of log output during execution by changing the logging level. See information about the :loglevel command with :h :loglevel.

16.6.3 Running the PageRank Algorithm

PageRank computes a rank value between 0 and 1 for each vertex (node) in the graph and stores the values in a double property. The algorithm therefore creates a *vertex property* of type double for the output.

In the graph server (PGX), there are two types of vertex and edge properties:

- Persistent Properties: Properties that are loaded with the graph from a data source are
 fixed, in-memory copies of the data on disk, and are therefore persistent. Persistent
 properties are read-only, immutable and shared between sessions.
- Transient Properties: Values can only be written to transient properties, which are private
 to a session. You can create transient properties by calling createVertexProperty and
 createEdgeProperty on PgxGraph objects, or by copying existing properties using clone()
 on Property objects.

Transient properties hold the results of computation by algorithms. For example, the PageRank algorithm computes a rank value between 0 and 1 for each vertex in the graph

and stores these values in a transient property named pg_rank. Transient properties are destroyed when the Analyst object is destroyed.

This example obtains the top three vertices with the highest PageRank values. It uses a transient vertex property of type double to hold the computed PageRank values. The PageRank algorithm uses the following default values for the input parameters: error (tolerance = 0.001), damping factor = 0.85, and maximum number of iterations = 100.

- JShell
- Java

JShell

```
opg4j> rank = analyst.pagerank(graph, 0.001, 0.85, 100);
==> ...
opg4j> rank.getTopKValues(3)
==> 128=0.1402019732468347
==> 333=0.12002296283541904
==> 99=0.09708583862990475
```

Java

```
import java.util.Map.Entry;
import oracle.pgx.api.*;

Analyst analyst = session.createAnalyst();
VertexProperty<Integer, Double> rank = analyst.pagerank(graph, 0.001, 0.85, 100);
for (Entry<Integer, Double> entry : rank.getTopKValues(3)) {
   System.out.println(entry.getKey() + "=" + entry.getValue());
}
```

16.6.4 Getting the Progress of a Running Algorithm

The progress of a graph algorithm is based on the value of a monotonically increasing counter that gets incremented periodically during algorithm executions. You can track the progress of the algorithms using the AlgorithmProgress Java API and review the progress by comparing the counter value at various points in time to an estimate of the final value of the counter.

The AlgorithmProgress object represents the progress of an algorithm execution at a certain time. It contains the following two attributes:

- numberOfStepsCompleted: This counter represents the current number of steps executed.
- numberOfStepsEstimatedForCompletion: This value is an estimation of the total number of steps needed for completion.

A default positive value is provided for numberOfStepsEstimatedForCompletion for the following list of built-in algorithms:

PageRank

- Approximate PageRank
- Personalized PageRank
- Personalized PageRank (for a set of vertices)
- Personalized Weighted PageRank
- Personalized Weighted PageRank (for a set of vertices)
- Weighted PageRank
- Degree Centrality
- In-Degree Centrality
- Out-Degree Centrality

You cannot estimate the progress as a percentage for algorithms that do not provide a value for numberOfStepsEstimatedForCompletion. In such a case, you can only access the value of the counter (numberOfStepsCompleted).

However, you can set the numberOfStepsEstimatedForCompletion value for a custom PGX graph algorithm. See Tracking the Progress of a Running Custom PGX Graph Algorithm for more information.

The following example uses the in-built PageRank algorithm and describes the steps to get the progress of the running built-in algorithm using the AlgorithmProgress Java API:

- JShell
- Java

JShell

```
opg4j> var graph = session.readGraphByName("BANK_TXN_GRAPH",
GraphSource.PG_PGQL)
g ==> PgxGraph[name=BANK_TXN_GRAPH, N=1000, E=4993, created=1712307339271]
opg4j> var future = analyst.pagerankAsync(graph)
future ==> oracle.pgx.api.PgxFuture@ldfe5dd1[Not completed]
opg4j> var futureProgress = future.getProgress()
futureProgress ==> oracle.pgx.api.DefaultFutureProgress@6d7bb5cc
opg4j> var algorithmProgress = futureProgress.asAlgorithmExecutionProgress()
```

Java

```
PgxGraph graph = session.readGraphByName("BANK_TXN_GRAPH",
GraphSource.PG_PGQL);
PgxFuture<?> future = analyst.pagerank.runAsync(graph);
FutureProgress futureProgress = future.getProgress();
Optional<AlgorithmProgress> algorithmProgress =
futureProgress.asAlgorithmExecutionProgress();
```

The following code shows how you can estimate the progress as a percentage for the running algorithm:

- JShell
- Java

JShell

```
opg4j> if (algorithmProgress.isPresent()) {
    ...> var progress = algorithmProgress.get();
    ...> var completedSteps = progress.getNumberOfStepsCompleted();
    ...> var numberOfStepsEstimatedForCompletion =
    progress.getNumberOfStepsEstimatedForCompletion();
    ...> var progressPercentage = completedSteps * 100 /
    numberOfStepsEstimatedForCompletion;
    ...> System.out.println(completedSteps);
    ...> System.out.println(numberOfStepsEstimatedForCompletion);
    ...> System.out.println(progressPercentage);
    ...> }
```

Java

```
if (algorithmProgress.isPresent()) {
   AlgorithmProgress progress = algorithmProgress.get();
   long completedSteps = progress.getNumberOfStepsCompleted();
   Long numberOfStepsEstimatedForCompletion =
   progress.getNumberOfStepsEstimatedForCompletion();
   long progressPercentage = completedSteps * 100 /
   numberOfStepsEstimatedForCompletion;
   System.out.println(completedSteps);
   System.out.println(numberOfStepsEstimatedForCompletion);
   System.out.println(progressPercentage);
};
```

The preceding code shows the progress at that current moment. If you try to get the progress of the running algorithm after a while (for example, lmin), then you should get a larger value for progressPercentage.

16.7 Using Custom PGX Graph Algorithms

A custom PGX graph algorithm allows you to write a graph algorithm in Java syntax and have it automatically compiled to an efficient parallel implementation.

- Writing a Custom PGX Algorithm
- · Compiling and Running a Custom PGX Algorithm
- Example Custom PGX Algorithm: PageRank
- Tracking the Progress of a Running Custom PGX Graph Algorithm

16.7.1 Writing a Custom PGX Algorithm

A PGX algorithm is a regular .java file with a single class definition that is annotated with @GraphAlgorithm. For example:

```
import oracle.pgx.algorithm.annotations.GraphAlgorithm;
@GraphAlgorithm
public class MyAlgorithm {
    ...
}
```

A PGX algorithm class must contain exactly one public method which will be used as entry point. The class may contain any number of private methods.

For example:

```
import oracle.pgx.algorithm.PgxGraph;
import oracle.pgx.algorithm.VertexProperty;
import oracle.pgx.algorithm.annotations.GraphAlgorithm;
import oracle.pgx.algorithm.annotations.Out;

@GraphAlgorithm
public class MyAlgorithm {
    public int myAlgorithm(PgxGraph g, @Out VertexProperty<Integer> distance)
    {
        System.out.println("My first PGX Algorithm program!");
        return 42;
     }
}
```

As with normal Java methods, a PGX algorithm method only supports primitive data types as return values (an integer in this example). More interesting is the <code>@Out</code> annotation, which marks the vertex property <code>distance</code> as output parameter. The caller passes output parameters by reference. This way, the caller has a reference to the modified property after the algorithm terminates.

- Collections
- Iteration
- Reductions

16.7.1.1 Collections

To create a collection you call the .create() function. For example, a VertexProperty<Integer> is created as follows:

```
VertexProperty<Integer> distance = VertexProperty.create();
```

To get the value of a property at a certain vertex v:

```
distance.get(v);
```

Similarly, to set the property of a certain vertex v to a value e:

```
distance.set(v, e);
```

You can even create properties of collections:

```
VertexProperty<VertexSequence> path = VertexProperty.create();
```

However, PGX Algorithm assignments are always by value (as opposed to by reference). To make this explicit, you must call .clone() when assigning a collection:

```
VertexSequence sequence = path.get(v).clone();
```

Another consequence of values being passed *by value* is that you can check for equality using the == operator instead of the Java method .equals(). For example:

```
PgxVertex v1 = G.getRandomVertex();
PgxVertex v2 = G.getRandomVertex();
System.out.println(v1 == v2);
```

16.7.1.2 Iteration

The most common operations in PGX algorithms are iterations (such as looping over all vertices, and looping over a vertex's neighbors) and graph traversal (such as breath-first/depth-first). All collections expose a forEach and forSequential method by which you can iterate over the collection in parallel and in sequence, respectively.

For example:

To iterate over a graph's vertices in parallel:

```
G.getVertices().forEach(v -> {
          ...
});
```

To iterate over a graph's vertices in sequence:

To traverse a graph's vertices from r in breadth-first order:

```
import oracle.pgx.algorithm.Traversal;
Traversal.inBFS(G, r).forward(n -> {
          ...
});
```



Inside the forward (or backward) lambda you can access the current level of the BFS (or DFS) traversal by calling currentLevel().

16.7.1.3 Reductions

Within these parallel blocks it is common to atomically update, or reduce to, a variable defined outside the lambda. These atomic reductions are available as methods on Scalar<T>: reduceAdd, reduceMul, reduceAnd, and so on. For example, to count the number of vertices in a graph:

```
public int countVertices() {
    Scalar<Integer> count = Scalar.create(0);

    G.getVertices().forEach(n -> {
        count.reduceAdd(1);
    });

    return count.get();
}
```

Sometimes you want to update multiple values atomically. For example, you might want to find the smallest property value as well as the vertex whose property value attains this smallest value. Due to the parallel execution, two separate reduction statements might get you in an inconsistent state.

To solve this problem the Reductions class provides argMin and argMax functions. The first argument to argMin is the current value and the second argument is the potential new minimum. Additionally, you can chain andUpdate calls on the ArgMinMax object to indicate other variables and the values that they should be updated to (atomically). For example:

16.7.2 Compiling and Running a Custom PGX Algorithm

To be able to compile and run a custom PGX algorithm, you must perform the following actions:

- 1. Set the following two configuration parameters in the conf/pgx.conf file:
 - Set the graph_algorithm_language option to JAVA.
 - Set the java_home_dir option to the path to your Java home (use <system-java-home-dir> to have PGX infer Java home from the system properties).

```
{
   "graph_algorithm_language": "JAVA",
   "java_home_dir": "<system-java-home-dir>"
}
```

2. Create a session.

- JShell
- Java
- Python

JShell

```
cd /opt/oracle/graph
./bin/opg4j
```

Java

```
import oracle.pgx.algorithm.*;
PgxSession session = Pgx.createSession("my-session");
```

Python

```
session = instance.create session("my-session")
```

3. Compile a PGX Algorithm. For example:

- JShell
- Java
- Python

JShell

```
opg4j> var myAlgorithm = session.compileProgram("/path/to/
MyAlgorithm.java")
myAlgorithm ==> CompiledProgram[name=MyAlgorithm]
```

Java

```
import oracle.pgx.algorithm.CompiledProgram;
CompiledProgram myAlgorithm = session.compileProgram("/path/to/
MyAlgorithm.java");
```

Python

```
my algorithm = session.compile program("/path/to/MyAlgorithm.java")
```

4. Run the algorithm. For example:

- JShell
- Java
- Python

JShell

```
opg4j> var graph =
session.readGraphByName("BANK_GRAPH",GraphSource.PG_PGQL)
g ==> PgxGraph[name=BANK_GRAPH_2,N=999,E=4993,created=1689325558251]
opg4j> var property = graph.createVertexProperty(PropertyType.INTEGER)
property ==>
VertexProperty[name=vertex_prop_integer_9,type=integer,graph=bank_graph_analytics]
opg4j> myAlgorithm.run(graph, property)
$6 ==> {
    "success" : true,
    "canceled" : false,
    "exception" : null,
    "returnValue" : 42,
    "executionTimeMs" : 0
}
```

Java

```
import oracle.pgx.algorithm.VertexProperty;
PgxGraph graph =
session.readGraphByName("BANK_GRAPH",GraphSource.PG_PGQL);
VertexProperty property = graph.createVertexProperty(PropertyType.INTEGER);
myAlgorithm.run(graph, property);
```

Python

```
graph = session.read_graph_by_name('BANK_GRAPH', 'pg_pgql')
property = graph.create_vertex_property("integer")
my_algorithm.run(graph, property)
{'success': True, 'canceled': False, 'exception': None, 'return_value':
42, 'execution time(ms)': 1}
```



16.7.3 Example Custom PGX Algorithm: PageRank

The following is an implementation of pagerank as a PGX algorithm:

```
import oracle.pgx.algorithm.PgxGraph;
import oracle.pgx.algorithm.Scalar;
import oracle.pgx.algorithm.VertexProperty;
import oracle.pgx.algorithm.annotations.GraphAlgorithm;
import oracle.pgx.algorithm.annotations.Out;
@GraphAlgorithm
public class Pagerank {
  public void pagerank (PgxGraph G, double tol, double damp, int max iter,
boolean norm, @Out VertexProperty<Double> rank) {
    Scalar<Double> diff = Scalar.create();
    int cnt = 0;
    double N = G.getNumVertices();
    rank.setAll(1 / N);
    do {
      diff.set(0.0);
      Scalar<Double> dangling factor = Scalar.create(0d);
      if (norm) {
        dangling factor.set(damp / N * G.getVertices().filter(v ->
v.getOutDegree() == 0).sum(rank::get));
      G.getVertices().forEach(t -> {
        double in sum = t.getInNeighbors().sum(w -> rank.get(w) /
w.getOutDegree());
        double val = (1 - damp) / N + damp * in sum + dangling factor.get();
        diff.reduceAdd(Math.abs(val - rank.get(t)));
        rank.setDeferred(t, val);
      });
    } while (diff.get() > tol && cnt < max iter);</pre>
```

16.7.4 Tracking the Progress of a Running Custom PGX Graph Algorithm

You can track the progress of a running custom graph algorithm using the AlgorithmProgress Java API.

The AlgorithmProgress object, which comprises the numberOfStepsCompleted and numberOfStepsEstimatedForCompletion attributes, is used to calculate the progress of the algorithm as a percentage.

In case of custom algorithms, the value of numberOfStepsEstimatedForCompletion is not automatically provided. You are therefore expected to provide the value by calling ControlFlow.setNumberOfStepsEstimatedForCompletion while implementing your algorithms. If no value is provided, or the provided value is negative, then number of steps estimated for completion uses the default null value.

The following example describes the steps for setting the

numberOfStepsEstimatedForCompletion value in a custom graph algorithm followed by tracking and estimating the progress as a percentage of a running custom graph algorithm using the AlgorithmProgress Java API.

1. Set the value for numberOfStepsEstimatedForCompletion in your custom graph algorithm.

Note that you cannot estimate the progress as a percentage for algorithms that do not provide a value for numberOfStepsEstimatedForCompletion. However you can still access the value of the counter (numberOfStepsCompleted).

The value of numberOfStepsEstimatedForCompletion should ideally be equal to the total number of execution steps that an algorithm will perform. An execution step is simply a loop iteration. If the exact value cannot be specified, you should provide an upper bound estimate of that value.

Consider the following outDegreeCentrality algorithm:

The algorithm just iterates over all vertices of the graph and updates a property. Therefore, the total number of execution steps in this case is equal to the number of vertices of the graph:

```
@GraphAlgorithm
public class OutdegreeCentrality {
   public void outdegreeCentrality(PgxGraph g, @Out VertexProperty<Integer>
outdegreeCentrality) {
   long totNbOfSteps = g.getNumVertices();
   ControlFlow.setNumberOfStepsEstimatedForCompletion(totNbOfSteps);

   g.getVertices().forEach(n ->
        outdegreeCentrality.set(n, (int) n.getOutDegree())
   );
   }
}
```

2. Run and track the progress of the custom Out-Degree Centrality algorithm as shown:

- JShell
- Java

JShell

```
opg4j> var myAlgorithm = session.compileProgram("/path/to/
OutdegreeCentrality.java")
myAlgorithm ==> CompiledProgram[name=outdegreeCentrality]
opg4j> var graph = session.readGraphByName("BANK_TXN_GRAPH",
GraphSource.PG_PGQL)
graph ==> PgxGraph[name=BANK_TXN_GRAPH,N=1000,E=4993,created=1712307339271]
opg4j> var future = analyst.outDegreeCentralityAsync(graph)
future ==> oracle.pgx.api.PgxFuture@55fe9c2f[Not completed]
opg4j> var futureProgress = future.getProgress()
futureProgress ==> oracle.pgx.api.DefaultFutureProgress@637506d8
opg4j> var algorithmProgress =
futureProgress.asAlgorithmExecutionProgress()
```

Java

```
import oracle.pgx.algorithm.CompiledProgram;

CompiledProgram myAlgorithm = session.compileProgram("/path/to/
OutdegreeCentrality.java");

PgxGraph graph = session.readGraphByName("BANK_TXN_GRAPH",
GraphSource.PG_PGQL);

PgxFuture<?> future = analyst.pagerankAsync(graph);
FutureProgress futureProgress = future.getProgress();
Optional<AlgorithmProgress> algorithmProgress =
futureProgress.asAlgorithmExecutionProgress();
```

3. Estimate the progress of the running algorithm as a percentage.

```
if (algorithmProgress.isPresent()) {
   AlgorithmProgress progress = algorithmProgress.get();
   long completedSteps = progress.getNumberOfStepsCompleted();
   Long numberOfStepsEstimatedForCompletion =
 progress.getNumberOfStepsEstimatedForCompletion();
   long progressPercentage = completedSteps * 100 /
 numberOfStepsEstimatedForCompletion;
   System.out.println(completedSteps); // 153
   System.out.println(numberOfStepsEstimatedForCompletion); // 2343
   System.out.println(progressPercentage); // 6.53
if (algorithmProgress.isPresent()) {
   AlgorithmProgress progress = algorithmProgress.get();
   long completedSteps = progress.getNumberOfStepsCompleted();
   Long numberOfStepsEstimatedForCompletion =
 progress.getNumberOfStepsEstimatedForCompletion();
   long progressPercentage = completedSteps * 100 /
```

```
numberOfStepsEstimatedForCompletion;
  System.out.println(completedSteps); // 153
  System.out.println(numberOfStepsEstimatedForCompletion); // 2343
  System.out.println(progressPercentage); // 6.53
};
```

The preceding code shows the progress as 6.53 % at that current moment. If you try to get the progress of the running algorithm after a while (for example, 1min), then you should get a larger value.



Getting the Progress of a Running Algorithm

16.8 Creating Subgraphs

You can create subgraphs based on a graph that has been loaded into memory. You can use filter expressions or create bipartite subgraphs based on a vertex (node) collection that specifies the left set of the bipartite graph.



Starting from Graph Server and Client Release 22.3, creating subgraphs using filter expressions is deprecated. It is recommended that you load a subgraph from PGQL property graphs. See Loading a Subgraph from a PGQL Property Graph for more information.

For information about reading a graph into memory, see Reading Graphs from Oracle Database into the Graph Server (PGX) for the various methods to load a graph into the graph server (PGX).

- About Filter Expressions
- Using a Simple Filter to Create a Subgraph
- Using a Complex Filter to Create a Subgraph
- Using a Vertex Set to Create a Bipartite Subgraph

16.8.1 About Filter Expressions

Filter expressions are expressions that are evaluated for each vertex or edge. The expression can define predicates that a vertex or an edge must fulfil in order to be contained in the result, in this case a subgraph.

Consider an example graph that consists of four vertices (nodes) and four edges. For an edge to match the filter expression src.prop == 10, the source vertex prop property must equal 10. Two edges match that filter expression, as shown in the following figure.



id: 128 prop: 10 cost: 8.51 cost: 51.09 id: 99 prop: 2 id: 333 prop: 6

Figure 16-5 Edges Matching src.prop == 10

The following figure shows the graph that results when the filter is applied.

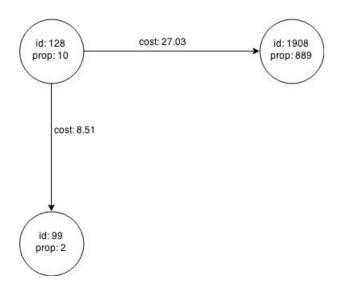


Figure 16-6 Graph Created by the Simple Filter

The vertex filter src.prop == 10 filters out the edges associated with vertex 333 and the vertex itself.

16.8.2 Using a Simple Filter to Create a Subgraph

The following examples create the subgraph described in About Filter Expressions.

JShell

Java

JShell

```
var subgraph = graph.filter(new VertexFilter("vertex.prop == 10"))
Java
```

```
import oracle.pgx.api.*;
import oracle.pgx.api.filter.*;

PgxGraph graph = session.readGraphWithProperties(...);
PgxGraph subgraph = graph.filter(new VertexFilter("vertex.prop == 10"));
```

16.8.3 Using a Complex Filter to Create a Subgraph

This example uses a slightly more complex filter. It uses the <code>outDegree</code> function, which calculates the number of outgoing edges for an identifier (source <code>src</code> or destination <code>dst</code>). The following filter expression matches all edges with a <code>cost</code> property value greater than 50 and a destination vertex (node) with an <code>outDegree</code> greater than 1.

```
dst.outDegree() > 1 && edge.cost > 50
```

One edge in the sample graph matches this filter expression, as shown in the following figure.

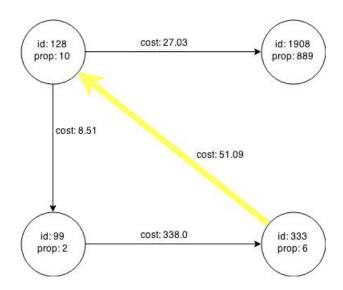


Figure 16-7 Edges Matching the outDegree Filter

The following figure shows the graph that results when the filter is applied. The filter excludes the edges associated with the vertices 99 and 1908, and so excludes those vertices also.


id: 128 prop: 10 cost: 51.09 id: 333 prop: 6

Figure 16-8 Graph Created by the outDegree Filter

16.8.4 Using a Vertex Set to Create a Bipartite Subgraph

You can create a bipartite subgraph by specifying a set of vertices (nodes), which are used as the left side. A bipartite subgraph has edges only between the left set of vertices and the right set of vertices. There are no edges within those sets, such as between two nodes on the left side. In the graph server (PGX), vertices that are isolated because all incoming and outgoing edges were deleted are not part of the bipartite subgraph.

The following figure shows a bipartite subgraph. No properties are shown.

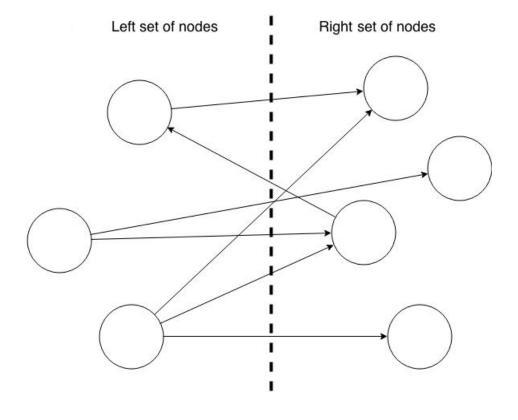



The following examples create a bipartite subgraph from a simple graph consisting of four vertices and four edges. The vertex ID values for the four vertices are 99, 128, 1908 and 333 respectively. See Figure 16-5 in About Filter Expressions for more information on the vertex and edge property values including the edge direction between the vertices.

You must first create a vertex collection and fill it with the vertices for the left side. In the example shown, vertices with vertex ID values 333 and 99 are added to the left side of the vertex collection.

Using the Shell to Create a Bipartite Subgraph

```
opg4j> s = graph.createVertexSet()
==> ...
opg4j> s.addAll([graph.getVertex(333), graph.getVertex(99)])
==> ...
opg4j> s.size()
==> 2
opg4j> bGraph = graph.bipartiteSubGraphFromLeftSet(s)
==> PGX Bipartite Graph named sample-sub-graph-4
```


Using Java to Create a Bipartite Subgraph

```
import oracle.pgx.api.*;

VertexSet<Integer> s = graph.createVertexSet();
s.addAll(graph.getVertex(333), graph.getVertex(99));
BipartiteGraph bGraph = graph.bipartiteSubGraphFromLeftSet(s);
```

When you create a subgraph, the graph server (PGX) automatically creates a Boolean vertex (node) property that indicates whether the vertex is on the left side. You can specify a unique name for the property.

The resulting bipartite subgraph looks like this:

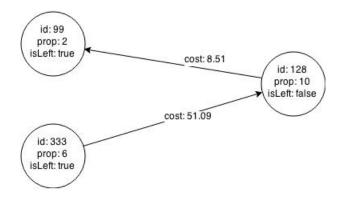

Vertex with ID 1908 is excluded from the bipartite subgraph. The only edge that connected that vertex extended from 128 to 1908. The edge was removed, because it violated the bipartite properties of the subgraph. Vertex 1908 had no other edges, and so was removed as well. Moreover, the edge from the vertex with the ID 128 to the vertex with ID 99 is not present in the bipartite subgraph, because edges are only allowed to go from left to right (and not from right to left).



16.9 User-Defined Functions (UDFs) in PGX

User-defined functions (UDFs) allow users of PGX to add custom logic to their PGQL queries or custom graph algorithms, to complement built-in functions with custom requirements.



Caution:

UDFs enable running arbitrary code in the PGX server, possibly accessing sensitive data. Additionally, any PGX session can invoke any of the UDFs that are enabled on the PGX server. The application administrator who enables UDFs is responsible for checking the following:

- All the UDF code can be trusted.
- The UDFs are stored in a secure location that cannot be tampered with.

Furthermore, PGX assumes UDFs to be state-less and side-effect free.

PGX supports two types of UDFs:

- Java UDFs
- JavaScript UDFs

How to Use Java UDFs

The following simple example shows how to register a Java UDF at the PGX server and invoke it.

Create a class with a public static method. For example:

```
package my.udfs;
public class MyUdfs {
 public static String concat(String a, String b) {
    return a + b;
```

Compile the class and compress into a JAR file. For example:

```
mkdir ./target
javac -d ./target *.java
cd target
jar cvf MyUdfs.jar *
```

- 3. Copy the JAR file into /opt/oracle/graph/pgx/server/lib.
- 4. Create a UDF JSON configuration file. For example, assume that /path/to/my/udfs/dir/ my udfs.json contains the following:

```
"user defined functions": [
```

5. Point to the directory containing the UDF configuration file in /etc/oracle/graph/ pgx.conf. For example:

```
"udf config directory": "/path/to/my/udfs/dir/"
```

6. Restart the PGX server. For example:

```
sudo systemctl restart pgx
```

7. Try to invoke the UDF from within a PGQL query. For example:

```
graph.queryPgql("SELECT my.concat(my.concat(n.firstName, ' '), n.lastName)
FROM MATCH (n:Person)")
```

8. Try to invoke the UDF from within a PGX algorithm. For example:

Note:

For each UDF you want to use, you need to create an abstract method with the same schema that gets annotated with the ${\tt @Udf}$ annotation.

```
import oracle.pgx.algorithm.annotations.Udf;
....

@GraphAlgorithm
public class MyAlogrithm {
   public void bomAlgorithm(PgxGraph g, VertexProperty<String> firstName,
VertexProperty<String> lastName, @Out VertexProperty<String> fullName) {
    ... fullName.set(v, concat(firstName.get(v), lastName.get(v))); ...
}
```

```
@Udf(namespace = "my")
  abstract String concat(String a, String b);
}
```

JavaScript UDFs

The requirements for a JavaScript UDF is as follows:

- The JavaScript source must contain all dependencies.
- The source must contain at least one valid export.
- The language parameter must be set to javascript in the UDF configuration file.

For example, consider a JavaScript source file format.js as shown:

```
//format.js
const fun = function(name, country) {
  if (country == null) return name;
  else return name + " (" + country + ")";
}
module.exports = {stringFormat: fun};
```

In order to load the UDF from format.js, the UDF configuration file will appear as follows:

```
{
  "namespace": "my",
  "function_name": "format",
  "language": "javascript",
  "source_location": "format.js",
  "source_function_name": "stringFormat",
  "return_type": "string",
  "arguments": [
      {
            "name": "name",
            "type": "string"
      },
      {
            "name": "country",
            "type": "string"
      }
      ]
}
```

Note:

In this case, since the name of the UDF and the implementing method differ, you need to set the name of the UDF in the <code>source_function_name</code> field. Also, you can provide the path of the source code file in the <code>source_location</code> field.



UDF Configuration File Information

A UDF configuration file is a JSON file containing an array of user_defined_functions. (An example of such a file is in the step to "Create a UDF JSON configuration file" in the preceding How to Use Java UDFs subsection.)

Each user-defined function supports the fields shown in the following table.

Table 16-12 Fields for Each UDF

Field	Data Type	Description	Required?
function_name	string	Name of the function used as identifier in PGX	Required
language	enum[java, javascript]	Source language for he function (java or javascript)	Required
return_type	enum[boolean, integer, long, float, double, string]	Return type of the function	Required
arguments	array of object	Array of arguments. For each argument: type, argument name, required?	0
implementation_reference	string	Reference to the function name on the classpath	null
namespace	string	Namespace of the function in PGX	null
source_code	string	Source code of the function provided inline	null
source_function_name	string	Name of the function in the source language	null
source_location	string	Local file path to the function's source code	null

All configured UDFs must be unique with regard to the combination of the following fields:

- namespace
- function name
- arguments

16.10 Using Graph Server (PGX) as a Library

When you utilize PGX as a library in your application, the graph server (PGX) instance runs in the same JVM as the Java application and all requests are translated into direct function calls instead of remote procedure invocations.

In this case, you must install the graph server (PGX) using \mathbb{RPM} in the same machine as the client applications. The shell executables provided by the graph server installation helps you to launch the Java or the Python shell in an embedded server mode. See Installing Oracle Graph Server For Linux x86-64 for more information.

You can now start the Java shell without any parameters as shown:

cd /opt/oracle/graph
./bin/opg4j



The local PGX instance will try to load a PGX configuration file from:

```
/etc/oracle/graph/pgx.conf
```

You can change the location of the configuration file by passing the --pgx_conf command-line option followed by the path to the configuration file:

```
# start local PGX instance with custom config
./bin/opg4j --pgx conf <path to pgx.conf>
```

You can also start the Python shell without any parameters as shown:

```
cd /opt/oracle/graph/
./bin/opg4py
```

When using Java, you can obtain a reference to the local PGX instance as shown:

```
import oracle.pg.rdbms.*;
import oracle.pgx.api.*;
...
ServerInstance instance = GraphServer.getEmbeddedInstance();
```

In a Python application, you can obtain a reference to the local PGX instance as shown:

```
import os
os.environ["PGX_CLASSPATH"] = "/opt/oracle/graph/lib/*"
import opg4py.graph_server as graph_server
...
instance = graph server.get embedded instance()
```

Starting the PGX Engine

PGX provides a convenience mechanism to start the PGX Engine when using the graph server (PGX) as a library. That is, the graph server (PGX) is automatically initialized and starts up automatically when <code>ServerInstance.createSession()</code> is called the first time. This is provided that the engine is not already running at that time.

For this implicit initialization, PGX will configure itself with the PGX configuration file at the default locations. If the PGX configuration file is not found, PGX will configure itself using default parameter values as shown in Configuration Parameters for the Graph Server (PGX) Engine.

Stopping the PGX Engine

When using the graph server (PGX) as a library, the <code>shutdownEngine()</code> method will be called automatically via a JVM shutdown hook on exit. Specifically, the shutdown hook is invoked once all the non-daemon threads of the application exit.

It is recommended that you do not terminate your PGX application forcibly with kill -9, as it will not clear the temp directory. See tmp_dir in Configuration Parameters for the Graph Server (PGX) Engine.

• Using the PGX JDBC Driver when Graph Server (PGX) is Utilized as a Library When using the graph server (PGX) as a library, you can use the PGX JDBC driver to query graphs that are loaded from files.

16.10.1 Using the PGX JDBC Driver when Graph Server (PGX) is Utilized as a Library

When using the graph server (PGX) as a library, you can use the PGX JDBC driver to query graphs that are loaded from files.

Note the following to use the PGX JDBC driver:

Register the PGX JDBC driver with the DriverManager:

```
import java.sql.DriverManager;
import oracle.pgx.jdbc.PgxJdbcDriver;
DriverManager.registerDriver(new PgxJdbcDriver());
```

 The JDBC URL to obtain a connection object is as shown: jdbc:oracle:pgx:embedded

The following example uses the PGX JDBC driver to query a graph loaded from .CSV files.

```
opg4j> import oracle.pgx.jdbc.*
opg4j> DriverManager.registerDriver(new PgxJdbcDriver())
opq4j> var conn = DriverManager.getConnection("jdbc:oracle:pgx:embedded")
conn ==> oracle.pqx.jdbc.PqxConnection@1b96d447
opg4j> PgxSession session = conn.unwrap(PgxSession.class)
session ==> PgxSession[ID=738da6ff-81a5-4d6f-9bdc-a912f2193b44,source=PGX-
JDBC]
opq4j> session.readGraphFiles("/scratch/PG/Data/accounts.csv", "/scratch/PG/
Data/transfers.csv", "bank graph")
$5 ==> PgxGraph[name=bank graph, N=1000, E=5001, created=1705401162835]
opg4j> var stmt = conn.createStatement()
stmt ==> oracle.pgx.jdbc.StatementWrapper@48dc9950
opg4j> var rs = stmt.executeQuery("SELECT e.AMOUNT as AMOUNT FROM MATCH (a) -
[e]-> (b) ON bank graph LIMIT 5")
rs ==> oracle.pgx.jdbc.ResultSetWrapper@16a89351
opg4j> while(rs.next()){
...> System.out.println("AMOUNT = " + rs.getDouble("amount"));
...> }
AMOUNT = 1000.0
AMOUNT = 1000.0
AMOUNT = 1000.0
AMOUNT = 1000.0
AMOUNT = 1000.0
```

Related Topics

Executing PGQL Queries Using the PGX JDBC Driver
 Starting from Graph Server and Client Release 24.1.0, you can use the PGX JDBC driver to access a PGX session and query graphs that are loaded in to the graph server (PGX).

Using the Machine Learning Library (PgxML) for Graphs

The graph server (PGX) provides a machine learning library <code>oracle.pgx.api.mllib</code>, which supports graph-empowered machine learning algorithms.

The following machine learning algorithms are currently supported:

- Using the DeepWalk Algorithm
 DeepWalk is a widely employed vertex representation learning algorithm used in industry.
- Using the Supervised GraphWise Algorithm (Vertex Embeddings and Classification)
 Supervised GraphWise is an inductive vertex representation learning algorithm which is able to leverage vertex feature information. It can be applied to a wide variety of tasks, including vertex classification and link prediction.
- Using the Supervised EdgeWise Algorithm (Edge Embeddings and Classification)
 SupervisedEdgeWise is an inductive edge representation learning algorithm which is able to leverage vertex and edge feature information. It can be applied to a wide variety of tasks, including edge classification and link prediction.
- Using the Unsupervised GraphWise Algorithm (Vertex Embeddings)
 Unsupervised GraphWise is an unsupervised inductive vertex representation learning algorithm which is able to leverage vertex information. The learned embeddings can be used in various downstream tasks including vertex classification, vertex clustering and similar vertex search.
- Using the Unsupervised EdgeWise Algorithm

 UnsupervisedEdgeWise is an inductive edge representation learning algorithm which is able to leverage vertex and edge feature information. It can be applied to a wide variety of tasks, including unsupervised learning edge embeddings for edge classification.
- Using the Unsupervised Anomaly Detection GraphWise Algorithm (Vertex Embeddings and Anomaly Scores)
 UnsupervisedAnomalyDetectionGraphWise is an inductive vertex representation learning and anomaly detection algorithm which is able to leverage vertex and edge feature information. Although it can be applied to a wide variety of tasks, it is particularly suitable for unsupervised learning of vertex embeddings for anomaly detection. After training this model, it is possible to infer anomaly scores or labels for unseen nodes.
- Using the Pg2vec Algorithm
 Pg2vec learns representations of graphlets (partitions inside a graph) by employing edges as the principal learning units and thereby packing more information in each learning unit (as compared to employing vertices as learning units) for the representation learning task.
- Model Repository and Model Stores
 A model store can be used to persist the trained graph server (PGX) machine learning models along with a model name (a unique identifier of the model in a particular model store) and a description.



Model Repository and Model Stores for information on model store management and how models can be persisted in a model store.

17.1 Using the DeepWalk Algorithm

DeepWalk is a widely employed vertex representation learning algorithm used in industry.

It consists of two main steps:

- 1. First, the random walk generation step computes random walks for each vertex (with a predefined walk length and a pre-defined number of walks per vertex).
- 2. Second, these generated walks are fed to a **Word2vec** algorithm to generate the vector representation for each vertex (which is the word in the input provided to the Word2vec algorithm). See KDD paper for more details on DeepWalk algorithm.

DeepWalk creates vertex embeddings for a specific graph and cannot be updated to incorporate modifications on the graph. Instead, a new DeepWalk model should be trained on this modified graph. Lastly, it is important to note that the memory consumption of the DeepWalk model is O(2n*d) where n is the number of vertices in the graph and d is the embedding length.

The following describes the usage of the main functionalities of DeepWalk in PGX using DBpedia graph as an example with 8,637,721 vertices and 165,049,964 edges:

- Loading a Graph
- Building a Minimal DeepWalk Model
- Building a Customized DeepWalk Model
- Training a DeepWalk Model
- Getting the Loss Value For a DeepWalk Model
- Computing Similar Vertices for a Given Vertex
- Computing Similar Vertices for a Vertex Batch
- Getting All Trained Vertex Vectors
- Storing a Trained DeepWalk Model
- Loading a Pre-Trained DeepWalk Model
- Destroying a DeepWalk Model

17.1.1 Loading a Graph

The following describes the steps for loading a graph:

- Create a Session and an Analyst.
 - JShell
 - Java



JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.mllib.DeepWalkModel;
import oracle.pgx.api.frames.*;
```

Python

starting the Python shell will create an implicit session and analyst

2. Load the graph.



Though the DeepWalk algorithm implementation can be applied to directed or undirected graphs, currently only undirected random walks are considered.

- JShell
- Java
- Python

JShell

```
opg4j> var instance = GraphServer.getInstance("https://localhost:7007",
"<username>", "<password>".toCharArray())
opg4j> var session=instance.createSession("mySession")
opg4j> var graph =
session.readGraphByName("<graph_name>",GraphSource.PG_PGQL)
```

```
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "<username>", "<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
PgxGraph graph =
session.readGraphByName("<graph name>",GraphSource.PG PGQL);
```



```
instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
session = instance.create_session("my_session")
graph = session.read_graph_by_name("<graph_name>", "pg_pgql")
```

17.1.2 Building a Minimal DeepWalk Model

You can build a DeepWalk model using the minimal configuration and default hyperparameters as described in the following code:

- JShell
- Java
- Python

JShell

Java

```
DeepWalkModel model = analyst.deepWalkModelBuilder()
    .setWindowSize(3)
    .setWalksPerVertex(6)
    .setWalkLength(4)
    .build();
```

Python

```
model =
analyst.deepwalk builder(window size=3,walks per vertex=6,walk length=4)
```

17.1.3 Building a Customized DeepWalk Model

You can build a DeepWalk model using customized hyper-parameters as described in the following code:

- JShell
- Java
- Python

JShell

Java

```
DeepWalkModel model= analyst.deepWalkModelBuilder()
    .setMinWordFrequency(1)
    .setBatchSize(512)
    .setNumEpochs(1)
    .setLayerSize(100)
    .setLearningRate(0.05)
    .setMinLearningRate(0.0001)
    .setWindowSize(3)
    .setWalksPerVertex(6)
    .setWalkLength(4)
    .setSampleRate(0.00001)
    .setSampleRate(0.00001)
    .setNegativeSample(2)
    .build();
```

Python

See DeepWalkModelBuilder in Javadoc for more explanation for each builder operation along with the default values.

17.1.4 Training a DeepWalk Model

You can train a DeepWalk model with the specified default or customized settings as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(graph)
```

Java

model.fit(graph);

Python

model.fit(graph)

17.1.5 Getting the Loss Value For a DeepWalk Model

You can fetch the loss value on a specified fraction of training data, that is set in builder using setValidationFraction as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var loss = model.getLoss()
```

Java

```
double loss = model.getLoss();
```

Python

loss = model.loss

17.1.6 Computing Similar Vertices for a Given Vertex

You can fetch the k most similar vertices for a given vertex as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var similars = model.computeSimilars("Albert_Einstein", 10)
opg4j> similars.print()
```

Java

```
PgxFrame similars = model.computeSimilars("Albert_Einstein", 10);
similars.print();
```

Python

```
similars = model.compute_similars("Albert_Einstein",10)
similars.print()
```

Searching for similar vertices for Albert_Einstein using the trained model, will result in the following output:



17.1.7 Computing Similar Vertices for a Vertex Batch

You can fetch the ${\tt k}$ most similar vertices for a list of input vertices as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var vertices = new ArrayList()
opg4j> vertices.add("Machine_learning")
opg4j> vertices.add("Albert_Einstein")
opg4j> batchedSimilars = model.computeSimilars(vertices, 10)
opg4j> batchedSimilars.print()
```

Java

```
List vertices = Arrays.asList("Machine_learning", "Albert_Einstein");
PgxFrame batchedSimilars = model.computeSimilars(vertices, 10);
batchedSimilars.print();
```

Python

```
vertices = ["Machine_learning","Albert_Einstein"]
batched_similars = model.compute_similars(vertices,10)
batched_similars.print()
```

The following describes the output result:



```
| Machine_learning | Artificial_neural_network | 0.8773092031478882 |
| Machine_learning | Data_analysis | 0.8758628368377686 |
| Machine_learning | List_of_algorithms | 0.8737979531288147 |
| Machine_learning | K-means_clustering | 0.8715602159500122 |
| Albert_Einstein | Albert_Einstein | 1.0000001192092896 |
| Albert_Einstein | Physics | 0.8664291501045227 |
| Albert_Einstein | Werner_Heisenberg | 0.8625140190124512 |
| Albert_Einstein | Richard_Feynman | 0.8496938943862915 |
| Albert_Einstein | List_of_physicists | 0.8415523767471313 |
| Albert_Einstein | Physicist | 0.8384397625923157 |
| Albert_Einstein | Max_Planck | 0.8370327353477478 |
| Albert_Einstein | Niels_Bohr | 0.8340970873832703 |
| Albert_Einstein | Quantum_mechanics | 0.8331197500228882 |
| Albert_Einstein | Special_relativity | 0.8280861973762512 |
```

17.1.8 Getting All Trained Vertex Vectors

You can retrieve the trained vertex vectors for the current DeepWalk model and store it in the database as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexVectors = model.getTrainedVertexVectors().flattenAll()
opg4j> vertexVectors.write().db().name("vertex
vectors").tablename("vertexVectors").overwrite(true).store()
```

Java

```
PgxFrame vertexVectors = model.getTrainedVertexVectors().flattenAll();
vertexVectors.write()
   .db()
   .name("vertex vectors")
   .tablename("vertexVectors")
   .overwrite(true)
   .store();
```

Python

```
vertex_vectors = model.trained_vectors.flatten_all()
vertex_vectors.write().db().table_name("table_name").name("vertex_vectors").ov
erwrite(True).store()
```

17.1.9 Storing a Trained DeepWalk Model

You can store models in database. The models get stored as a row inside a model store table.

The following code shows how to store a trained DeepWalk model in database in a specific model store table:

- JShell
- Java
- Python

JShell

Java

Python





All the preceding examples assume that you are storing the model in the current logged in database. If you must store the model in a different database then refer to the examples in Storing a Trained Model in Another Database.

Storing a Trained Model in Another Database

17.1.9.1 Storing a Trained Model in Another Database

You can store models in a different database other than the one used for login.

The following code shows how to store a trained model in a different database:

- JShell
- Java
- Python

JShell

```
opg4j> model.export().db().
             username("user").
                                                 // DB user to use for
storing the model
              password("password").
                                                  // password of the DB user
              jdbcUrl("jdbcUrl").
                                                 // jdbc url to the DB
             modelstore("modelstoretablename"). // name of the model store
table
             modelname("model").
                                                  // model name (primary key
of model store table)
              description("a model description"). // description to store
alongside the model
              store()
```



```
model.export().db(username="user",
                                                            # DB user to use
for storing the model
                                                           # password of the
                  password="password",
DB user
                  jdbc url="jdbc url",
                                                           # jdbc url to the
DB
                  model store="modelstoretablename",
                                                           # name of the
model store table
                                                           # model name
                  model name="model",
(primary key of model store table)
                  model description="a model description") # description to
store alongside the model
```

17.1.10 Loading a Pre-Trained DeepWalk Model

You can load models from a database.

You can load a pre-trained DeepWalk model from a model store table in database as described in the following code:

Loading a Pre-Trained DeepWalk Model Using JShell

Loading a Pre-Trained DeepWalk Model Using Java

```
DeepWalkModelmodel = analyst.loadDeepWalkModel().db()
    .modelstore("modeltablename") // name of the model store table
    .modelname("model") // model name (primary key of model store table)
    .load();
```

Loading a Pre-Trained DeepWalk Model Using Python





All the preceding examples assume that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the examples in Loading a Pre-Trained Model From Another Database.

Loading a Pre-Trained Model From Another Database

17.1.10.1 Loading a Pre-Trained Model From Another Database

You can load models from a different database other than the one used for login.

You can load a pre-trained model from a model store table in database as described in the following code:

- JShell
- Java
- Python

JShell

where <modelLoader> applies as follows:

- loadDeepWalkModel(): Loads a Deepwalk model
- loadSupervisedGraphWiseModel(): Loads a Supervised GraphWise model
- loadUnsupervisedGraphWiseModel(): Loads an Unsupervised GraphWise model
- loadSupervisedEdgeWiseModel(): Loads a Supervised EdgeWise model
- loadUnsupervisedEdgeWiseModel(): Loads an Unsupervised EdgeWise model
- loadUnsupervisedAnomalyDetectionGraphWiseModel(): Loads an Unsupervised Anomaly Detection GraphWise model
- loadPg2vecModel(): Loads a Pg2vec model

where <modeltype> can have the following values based on the model to be loaded:

- DeepWalkModel: represents a Deepwalk model
- SupervisedGraphWiseModel: represents a Supervised GraphWise model
- UnsupervisedGraphWiseModel: represents an Unsupervised GraphWise model
- SupervisedEdgeWiseModel: represents a Supervised EdgeWise model
- UnsupervisedEdgeWiseModel: represents an Unsupervised EdgeWise model
- UnsupervisedAnomalyDetectionGraphWiseModel: represents an Unsupervised Anomaly Detection GraphWise model
- Pg2vecModel: represents a Pg2vec model

where <modelLoader> applies as follows:

- loadDeepWalkModel(): Loads a Deepwalk model
- loadSupervisedGraphWiseModel(): Loads a Supervised GraphWise model
- loadUnsupervisedGraphWiseModel(): Loads an Unsupervised GraphWise model
- loadSupervisedEdgeWiseModel(): Loads a Supervised EdgeWise model
- loadUnsupervisedEdgeWiseModel(): Loads an Unsupervised EdgeWise model
- loadUnsupervisedAnomalyDetectionGraphWiseModel(): Loads an Unsupervised Anomaly Detection GraphWise model
- loadPg2vecModel(): Loads a Pg2vec model

Python

where <modelLoader> applies as follows:

- get deepwalk model loader(): Loads a Deepwalk model
- get supervised graphwise model loader(): Loads a Supervised GraphWise model
- get_unsupervised_graphwise_model_loader(): Loads an Unsupervised GraphWise model
- get supervised edgewise model loader(): Loads a Supervised EdgeWise model

- get_unsupervised_edgewise_model_loader(): Loads an Unsupervised EdgeWise model
- get_unsupervised_anomaly_detection_graphwise_model_loader(): Loads an Unsupervised Anomaly Detection GraphWise model
- get pg2vec model loader(): Loads a Pg2vec model

17.1.11 Destroying a DeepWalk Model

You can destroy a DeepWalk model as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.destroy()
```

Java

model.destroy();

Python

model.destroy()

17.2 Using the Supervised GraphWise Algorithm (Vertex Embeddings and Classification)

Supervised GraphWise is an inductive vertex representation learning algorithm which is able to leverage vertex feature information. It can be applied to a wide variety of tasks, including vertex classification and link prediction.

Supervised GraphWise is based on GraphSAGE by Hamilton et al.

Model Structure

A Supervised GraphWise model consists of graph convolutional layers followed by several prediction layers.

The forward pass through a convolutional layer for a vertex proceeds as follows:

A set of neighbors of the vertex is sampled.

- 2. The previous layer representations of the neighbors are mean-aggregated, and the aggregated features are concatenated with the previous layer representation of the vertex.
- This concatenated vector is multiplied with weights, and a bias vector is added.
- 4. The result is normalized to such that the layer output has unit norm.

The prediction layers are standard neural network layers.

The following describes the usage of the main functionalities of the implementation of **GraphSAGE** in PGX using the Cora graph as an example:

- Loading a Graph
- Building a Minimal GraphWise Model
- Advanced Hyperparameter Customization
- Building a GraphWise Model Using Partitioned Graphs
- Supported Property Types for Supervised GraphWise Model
- Classification Versus Regression Models on Supervised GraphWise Models
- Setting a Custom Loss Function and Batch Generator (for Anomaly Detection)
- Training a Supervised GraphWise Model
- Getting the Loss Value For a Supervised GraphWise Model
- Getting the Training Log for a Supervised GraphWise Model
- Inferring the Vertex Labels for a Supervised GraphWise Model
- Evaluating the Supervised GraphWise Model Performance
- Inferring Embeddings for a Supervised GraphWise Model
- Storing a Trained Supervised GraphWise Model
- Loading a Pre-Trained Supervised GraphWise Model
- Destroying a Supervised GraphWise Model
- Explaining a Prediction of a Supervised GraphWise Model

17.2.1 Loading a Graph

The following describes the steps for loading a graph:

- Create a Session and an Analyst.
 - JShell
 - Java
 - Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
```

```
opg4j> import oracle.pgx.config.mllib.ActivationFunction
opg4j> import oracle.pgx.config.mllib.WeightInitScheme
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.mllib.SupervisedGraphWiseModel;
import oracle.pgx.api.filter.VertexFilter;
import oracle.pgx.api.frames.*;
import oracle.pgx.config.mllib.ActivationFunction;
import oracle.pgx.config.mllib.GraphWiseConvLayerConfig;
import oracle.pgx.config.mllib.GraphWisePredictionLayerConfig;
import oracle.pgx.config.mllib.SupervisedGraphWiseModelConfig;
import oracle.pgx.config.mllib.WeightInitScheme;
```

Python

starting the Python shell will create an implicit session and analyst

2. Load the graph.

- JShell
- Java
- Python

JShell

```
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "<username>", "<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
PgxGraph fullGraph =
```



```
from pypgx.api.filters import VertexFilter
instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
session = instance.create_session("my_session")
full_graph = session.read_graph_by_name("<cora_graph>", "pg_pgql")
vertex_filter =
VertexFilter.from_pgql_result_set(session.query_pgql("SELECT v FROM cora
MATCH (v) WHERE ID(v) % 4 > 0"),"v")
train_graph = full_graph.filter(vertex_filter)
test_vertices = []
train_vertices = train_graph.get_vertices()
for v in full_graph.get_vertices():
    if(not train_vertices.contains(v)):
        test vertices.append(v)
```

17.2.2 Building a Minimal GraphWise Model

You can build a GraphWise model using the minimal configuration and default hyperparameters as described in the following code. You can create a model with one of the following options:

- only vertex properties
- only edge properties
- both vertex and edge properties
- JShell
- Java
- Python

JShell



```
setEdgeInputPropertyNames("cost").
build()
```

Java

```
SupervisedGraphWiseModel model = analyst.supervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("features")
    .setVertexTargetPropertyName("labels")
    .setEdgeInputPropertyNames("cost")
    .build();
```

Python

Note:

Even though only one vertex and one edge property is specified in the preceding example, you can specify a list of vertex or edge properties.

17.2.3 Advanced Hyperparameter Customization

You can build a GraphWise model using rich hyperparameter customization. Internally for each node, GraphWise applies an aggregation of the representation of neighbors. You can configure this operation through one of the following sub-config classes:

- GraphWiseConvLayerConfig: GraphWiseConvLayer is based on Inductive Representation Learning on Large GraphS (GraphSage) by Hamilton et al.
- GraphWiseAttentionLayerConfig: GraphWiseAttentionLayer is based on Graph Attention Neworks (GAT) by Velickovic et al. which makes the aggregation smarter but comes with larger computation cost.

The GraphWisePredictionLayerConfig class implements the prediction layer config.

Also, you can enable or disable a graphics processing unit (GPU) by using the <code>enable_ml_accelerators</code> graph server (PGX) configuration parameter (see Configuration Parameters for the Graph Server (PGX) Engine for more information). In addition, ensure that your system meets the following prerequisites to use the GPU support:

- You must have a GPU device with the CUDA (Compute Unified Device Architecture) toolkit installed.
- The following list of CUDA libraries are expected:
 - libcuda.so.1
 - libnvrtc.so.12



```
- libnvToolsExt.so.1
- libcudart.so.12
```

Note that the <code>enable_ml_accelerators</code> option is enabled by default. But if a GPU device is not detected and the CUDA toolkit is not installed, then this feature gets disabled and the CPU will be used for all the PgxML library operations.

The following code examples uses the <code>GraphWiseConvLayerConfig</code> class for the convolutional layer configuration. The examples specifies a weight decay parameter of 0.001 and dropout with dropping probability 0.5 for the GraphWise model to counteract overfitting. Also, note that the <code>setEnableAccelerator</code> method is enabled to use any available GPU.

- JShell
- Java
- Python

JShell

```
opg4j> var weightProperty = analyst.pagerank(trainGraph).getName();
opg4j> var convLayerConfig = analyst.graphWiseConvLayerConfigBuilder().
         setNumSampledNeighbors (25).
         setActivationFunction(ActivationFunction.TANH).
         setWeightInitScheme(WeightInitScheme.XAVIER).
         setWeightedAggregationProperty(weightProperty).
         setDropoutRate(0.5).
         build()
opg4j> var predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder().
         setHiddenDimension(32).
         setActivationFunction(ActivationFunction.RELU).
         setWeightInitScheme(WeightInitScheme.HE).
         setDropoutRate(0.5).
         build()
opg4j> var model = analyst.supervisedGraphWiseModelBuilder().
         setVertexInputPropertyNames("vertex features").
         setEdgeInputPropertyNames("edge features").
         setVertexTargetPropertyName("labels").
         setConvLayerConfigs(convLayerConfig).
         setPredictionLayerConfigs(predictionLayerConfig).
         setWeightDecay(0.001).
         setNormalize(false).
         setEmbeddingDim(256).
         setLearningRate(0.05).
         setNumEpochs(30).
         setSeed(42).
         setShuffle(false).
         setStandardize(true).
         setBatchSize(64).
         setEnableAccelerator(true). // Enable or disable GPU
         build()
```



Java

```
String weightProperty = analyst.pagerank(trainGraph).getName();
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors (25)
    .setActivationFunction(ActivationFunction.TANH)
    .setWeightInitScheme (WeightInitScheme.XAVIER)
    .setWeightedAggregationProperty(weightProperty)
    .setDropoutRate(0.5)
    .build();
GraphWisePredictionLayerConfig predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder()
    .setHiddenDimension(32)
    .setActivationFunction(ActivationFunction.RELU)
    .setWeightInitScheme(WeightInitScheme.HE)
    .setDropoutRate(0.5)
    .build();
SupervisedGraphWiseModel model = analyst.supervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex features")
    .setEdgeInputPropertyNames("edge features")
    .setVertexTargetPropertyName("labels")
    .setConvLayerConfigs(convLayerConfig)
    .setPredictionLayerConfigs (predictionLayerConfig)
    .setWeightDecay(0.001)
    .setNormalize(false)
    .setEmbeddingDim(256)
    .setLearningRate(0.05)
    .setNumEpochs(30)
    .setSeed(42)
    .setShuffle(false)
    .setStandardize(true)
    .setBatchSize(64)
    .setEnableAccelerator(true) // Enable or disable GPU
    .build();
```

Python

```
pred layer = analyst.graphwise pred layer config(**pred layer config)
params = dict(vertex target property name="labels",
              conv layer config=[conv layer],
              pred layer config=[pred layer],
              vertex_input_property names=["vertex features"],
              edge input property names=["edge features"],
              seed=17,
              weight decay=0.001,
              normalize=false,
              layer size=256,
              learning rate=0.05,
              num epochs=30,
              seed=42,
              standardize=true,
              batch size=64,
              enable accelerator=True # Enable or disable GPU
)
model = analyst.supervised graphwise builder(**params)
```

In the preceding example, you can replace <code>GraphWiseConvLayerConfig</code> with the <code>GraphWiseAttentionLayerConfig</code> class to build a graph attention network model. Also, note that if the number of sampled neighbors is set to -1 using <code>setNumSampledNeighbors</code>, then all the neighboring nodes will be sampled.

- JShell
- Java
- Python

JShell

```
GraphWiseAttentionLayerConfig convLayerConfig =
analyst.graphWiseAttentionLayerConfigBuilder()
    .setNumSampledNeighbors(25)
    .setActivationFunction(ActivationFunction.LEAKY_RELU)
    .setWeightInitScheme(WeightInitScheme.XAVIER UNIFORM)
```



```
.setHeadAggregation(AggregationOperation.MEAN)
.setNumHeads(4)
.setDropoutRate(0.5)
.build();
```

See the Javadoc for more information.

17.2.4 Building a GraphWise Model Using Partitioned Graphs

You can build a GraphWise model using partitioned graphs which have different providers and features.

- JShell
- Java
- Python

JShell



Also, you can select the providers as shown:

- JShell
- Java
- Python

JShell

Java

```
SupervisedGraphWiseModel model = analyst.supervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider1_features",
"vertex_provider2_features")
    .setEdgeInputPropertyNames("edge_provider_features")
    .setVertexTargetPropertyName("target_property")
    .setTargetVertexLabels("provider1")
    .build();
```

Python



If you wish to control the flow of the embeddings at each layer, you can enable or disable the required connections. By default, all the connections are enabled.

- JShell
- Java
- Python

JShell

Java

```
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(10)
    .useVertexToVertexConnection(true)
    .useEdgeToVertexConnection(true)
    .useEdgeToEdgeConnection(false)
    .useVertexToEdgeConnection(false)
    .build();
SupervisedGraphWiseModel model = analyst.supervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex provider1 features",
"vertex provider2 features")
    .setEdgeInputPropertyNames("edge provider features")
    .setVertexTargetPropertyName("target property")
    .setTargetVertexLabels("provider1")
    .setConvLayerConfigs(convLayerConfig)
    .build();
```

Python

17.2.5 Supported Property Types for Supervised GraphWise Model

The model supports two types of properties for both vertices and edges:

- continuous properties (boolean, double, float, integer, long)
- categorical properties (string)

For categorical properties, two categorical configurations are possible:

- One-hot-encoding: Each category is mapped to a vector, that is concatenated to other features (default)
- **Embedding table:** Each category is mapped to an embedding that is concatenated to other features and is trained along with the model

One-hot-encoding converts each category into an independent vector. This is useful if you want each category to be interpreted as an equally independent group. For instance, if there are categories ranging from A to E, where each alphabet has no specific meaning, then one-hot-encoding can be a good fit.

Embedding table is recommended if the semantics of the properties matter, and you want certain categories to be closer to each other than the others. For example, assume there is a day property with values ranging from *Monday* to *Sunday*. If you wish to preserve the idea that *Tuesday* is closer to *Wednesday* than *Saturday*, then by choosing the embedding table configuration, you can let the vectors that represent the categories to be learned during training, so that the vector that is mapped to *Tuesday* becomes close to that of *Wednesday*.

One advantage that the embedding table approach has over one-hot-encoding is that you can learn more suitable vectors to represent each category. However, this also means that a good amount of data is required to train the embedding table properly. The one-hot-encoding approach might be better for use-cases with limited training data.

When using the embedding table, users are allowed to set the out-of-vocabulary probability. With the given probability, the embedding will be set to the out-of-vocabulary embedding randomly during training, in order to make the model more robust to unseen categories during inference.

- JShell
- Java
- Python

JShell

```
opg4j> import oracle.pgx.config.mllib.inputconfig.CategoricalPropertyConfig;
opg4j> var prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1").
    oneHotEncoding().
    setMaxVocabularySize(100).
   build()
opq4j> var prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2").
    embeddingTable().
    setShared(false). // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    setEmbeddingDimension(32).
    setOutOfVocabularyProbability(0.001). // probability to set the word
embedding to the out-of-vocabulary embedding
   build()
opg4j> var model = analyst.supervisedGraphWiseModelBuilder().
    setVertexInputPropertyNames(
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3" // string feature using one-hot-encoding
(default)
    setVertexTargetPropertyName("label").
    setVertexInputPropertyConfigs(prop1config, prop2config).
    build()
```

```
import oracle.pgx.config.mllib.inputconfig.CategoricalPropertyConfig;
import oracle.pgx.config.mllib.inputconfig.InputPropertyConfig;
InputPropertyConfig prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1")
    .oneHotEncoding()
    .setMaxVocabularySize(100)
    .build();
InputPropertyConfig prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2")
    .embeddingTable()
    .setShared(false) // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    .setEmbeddingDimension(32)
    .setOutOfVocabularyProbability(0.001) // probability to set the word
embedding to the out-of-vocabulary embedding
    .build();
SupervisedGraphWiseModelBuilder model =
```



```
analyst.supervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames(
        "vertex_int_feature_1", // continuous feature
        "vertex_str_feature_1", // string feature using one-hot-encoding
        "vertex_str_feature_2", // string feature using embedding table
        "vertex_str_feature_3" // string feature using one-hot-encoding
(default)
    )
    .setVertexInputPropertyConfigs(proplconfig, prop2config)
    .setVertexTargetPropertyName("label")
    .build();
```

```
vertex input property configs = [
    analyst.one hot encoding categorical property config(
        property name="vertex str feature 1",
        max vocabulary size=100,
    analyst.learned embedding categorical property config(
        property name="vertex str feature 2",
        embedding dim=4,
        shared=False, // set whether to share the vocabulary or not when
several types have a property with the same name
        oov probability=0.001 // probability to set the word embedding to the
out-of-vocabulary embedding
model params = dict(
    vertex input property names=[
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3", // string feature using one-hot-encoding
(default)
    vertex input property configs=vertex input property configs,
    vertex target property name="label"
model = analyst.supervised graphwise builder(**model params)
```

17.2.6 Classification Versus Regression Models on Supervised GraphWise Models

When predicting a property, the loss function defines if the model will perform classification tasks or regression tasks.

For classification tasks, the Supervised GraphWise model will infer labels. Even if the property is a number, the model will assign one label for each value found and classify on it. The

possible losses for classification tasks are softmax cross entropy, sigmoid cross entropy, and DevNet loss.

For regression tasks, the Supervised GraphWise model will infer values for the property. The loss for regression tasks is the ${\tt MSE}$ loss.

- JShell
- Java
- Python

JShell

```
opg4j> import oracle.pgx.config.mllib.loss.LossFunctions
opg4j> var model = analyst.supervisedGraphWiseModelBuilder().
    setVertexInputPropertyNames("vertex_features").
    setEdgeInputPropertyNames("edge_features").
    setVertexTargetPropertyName("scores").
    setConvLayerConfigs(convLayerConfig).
    setPredictionLayerConfigs(predictionLayerConfig).
    setLossFunction(LossFunctions.MSELoss()).
    setBatchGenerator(BatchGenerators.STRATIFIED_OVERSAMPLING).
    build()
```

Java

Python

17.2.7 Setting a Custom Loss Function and Batch Generator (for Anomaly Detection)

It is possible to select different loss functions for the supervised model by providing a LossFunction object, and different batch generators by providing a BatchGenerator object. This is useful for applications such as Anomaly Detection, which can be cast into the standard supervised framework but require different loss functions and batch generators.

SupervisedGraphWise model can use the DevNetLoss and the StratifiedOversamplingBatchGenerator. The DevNetLoss takes confidence margin and the value the anomaly takes in the target property as the two parameters.

The following example assumes that the convLayerConfig has already been defined:

- JShell
- Java
- Python

JShell

```
opg4j> import oracle.pgx.config.mllib.loss.LossFunctions
opg4j> import oracle.pgx.config.mllib.batchgenerator.BatchGenerators
opg4j> var predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder().
         setHiddenDimension(32).
         setActivationFunction(ActivationFunction.LINEAR).
         build()
opg4j> var model = analyst.supervisedGraphWiseModelBuilder().
         setVertexInputPropertyNames("vertex features").
         setEdgeInputPropertyNames("edge features").
         setVertexTargetPropertyName("labels").
         setConvLayerConfigs(convLayerConfig).
         setPredictionLayerConfigs (predictionLayerConfig).
         setLossFunction(LossFunctions.devNetLoss(5.0, true)).
         setBatchGenerator (BatchGenerators.STRATIFIED OVERSAMPLING).
         build()
```



```
SupervisedGraphWiseModel model = analyst.supervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_features")
    .setEdgeInputPropertyNames("edge_features")
    .setVertexTargetPropertyName("labels")
    .setConvLayerConfigs(convLayerConfig)
    .setPredictionLayerConfigs(predictionLayerConfig)
    .setLossFunction(LossFunctions.devNetLoss(5.0, true))
    .setBatchGenerator(BatchGenerators.STRATIFIED_OVERSAMPLING)
    .build();
```

17.2.8 Training a Supervised GraphWise Model

You can train a Supervised GraphWise model on a graph as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(trainGraph)
```

```
model.fit(trainGraph);
```

```
model.fit(train graph)
```

You can also add a validation step to the training. When training a model, the optimal number of training epochs is not known in advance and it is one of the key parameters that determines the model quality. Being able to monitor the training and validation losses helps you to identify a good value for the model parameters and gain visibility in the training process. The evaluation frequency can be specified in terms of epoch or step. To configure a validation step, create a GraphWiseValidationConfig and pass it to the model builder as shown:

- JShell
- Java
- Python

JShell



```
.setValidationConfig(validationConfig) // configuring the validation to
be executed every 2 epochs
.build();
```

After configuring a validation step, you can then pass a graph for validation to the fit method together with the graph for training:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(trainGraph, valGraph)
```

Java

```
model.fit(trainGraph, valGraph);
```

Python

model.fit(train graph, valGraph)

17.2.9 Getting the Loss Value For a Supervised GraphWise Model

You can fetch the training loss value as described in the following code:

- JShell
- Java
- Python

```
opg4j> var loss = model.getTrainingLoss()
```

Java

```
double loss = model.getTrainingLoss();
```

Python

```
loss = model.get training loss()
```

17.2.10 Getting the Training Log for a Supervised GraphWise Model

If you configured a validation step (see Training a Supervised GraphWise Model) earlier, then you can fetch the training log that contains the training and validation loss information.

- JShell
- Java
- Python

JShell

```
opg4j> var trainingLog = model.getTrainingLog()
```

Java

PgxFrame trainingLog = model.getTrainingLog();

Python

```
training log = model.get training log()
```



The output frame will be similar to the following example output:

++									
	epoch		training_loss		validation_loss				
+						+			
	2		1.5059218406677246		0.41696539521217346				
	4		0.5052874088287354		0.3255307078361511				
	6		0.3264007568359375		0.44015955924987793				
+.						. +			

Also, note the following:

- The first column will be named according to the evaluation frequency scale that was set in the validation configuration ("epoch" or "step").
- The validation loss is the average of the losses evaluated on all batches of the validation graph, while the training loss is the loss value logged at that epoch or step (that is, the loss evaluated on the last batch).
- The training log will be overwritten if the fit method is called multiple times.

17.2.11 Inferring the Vertex Labels for a Supervised GraphWise Model

You can infer the labels for vertices on any graph (including vertices or graphs that were not seen during training) as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var labels = model.inferLabels(fullGraph, testVertices)
opg4j> labels.head().print()
```

Java

```
PgxFrame labels = model.inferLabels(fullGraph,testVertices);
labels.head().print();
```

Python

```
labels = model.infer_labels(full_graph, test_vertices)
labels.print()
```



The output will be similar to the following example output:

+-		 +
	vertexId	label
+-		 +
	2	Neural Networks
	6	Theory
	7	Case Based
	22	Rule Learning
	30	Theory
	34	Neural Networks
	47	Case Based
	48	Probabalistic Methods
	50	Theory
	52	Theory
+-		 +

Similarly, you can also get the model confidence for each class by inferring the prediction logits as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var logits = model.inferLogits(fullGraph, testVertices)
opg4j> labels.head().print()
```

Java

```
PgxFrame logits = model.inferLogits(fullGraph,testVertices);
logits.head().print();
```

Python

```
logits = model.infer_logits(full_graph, test_vertices)
logits.print()
```

17.2.12 Evaluating the Supervised GraphWise Model Performance

You can evaluate various classification metrics for the model using the evaluateLabels method as described in the following code:

- JShell
- Java
- Python

```
opg4j> model.evaluateLabels(fullGraph, testVertices).print()
```

Java

```
model.evaluateLabels(fullGraph, testVertices).print();
```

Python

```
model.evaluate_labels(full_graph, test_vertices).print()
```

The output will be similar to the following example output:

17.2.13 Inferring Embeddings for a Supervised GraphWise Model

You can use a trained model to infer embeddings for unseen nodes and store in the database as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexVectors = model.inferEmbeddings(fullGraph,
testVertices).flattenAll()
opg4j> vertexVectors.write().
   db().
   name("vertex vectors").
   tablename("vertexVectors").
   overwrite(true).
   store()
```



Java

```
PgxFrame vertexVectors =
model.inferEmbeddings(fullGraph, testVertices).flattenAll();
vertexVectors.write()
    .db()
    .name("vertex vectors")
    .tablename("vertexVectors")
    .overwrite(true)
    .store();
```

Python

```
vertex_vectors = model.infer_embeddings(full_graph,
test_vertices).flatten_all()
vertex_vectors.write().db().table_name("table_name").name("vertex_vectors").ov
erwrite(True).store()
```

The schema for the vertexVectors will be as follows without flattening (flattenAll splits the vector column into separate double-valued columns):

Note:

All the preceding examples assume that you are inferring the embeddings for a model in the current logged in database. If you must infer embeddings for the model in a different database then refer to the examples in Inferring Embeddings for a Model in Another Database.

Inferring Embeddings for a Model in Another Database

17.2.13.1 Inferring Embeddings for a Model in Another Database

You can infer embeddings on a trained model and store in a different database other than the one used for login.

The following code shows how to infer embeddings and store in a different database:

- JShell
- Java
- Python



```
opg-jshell> var vertexVectors = model.inferEmbeddings(fullGraph,
testVertices).flattenAll()
opg-jshell> vertexVectors.write().
     db().
     username("user").
                                        // DB user to use for storing the
model
    password("password").
                                         // password of the DB user
     jdbcUrl("jdbcUrl").
                                         // jdbc url to the DB
    name("vertex vectors").
                                         // indicates the name of the table
     tablename("vertexVectors").
in which the data should be stored
    overwrite(true).
    store()
```

Java

```
PgxFrame vertexVectors =
model.inferEmbeddings(fullGraph, testVertices).flattenAll();
vertexVectors.write()
    .db()
    .username("user")
                                        // DB user to use for storing the
model
    .password("password")
                                        // password of the DB user
    .jdbcUrl("jdbcUrl")
                                        // jdbc url to the DB
    .name("vertex vectors")
                                        // indicates the name of the table in
    .tablename("vertexVectors")
which the data should be stored
    .overwrite(true)
    .store();
```

Python

17.2.14 Storing a Trained Supervised GraphWise Model

You can store models in database. The models get stored as a row inside a model store table.

The following code shows how to store a trained Supervised GraphWise model in database in a specific model store table:

- JShell
- Java
- Python

Java

Python



All the preceding examples assume that you are storing the model in the current logged in database. If you must store the model in a different database then refer to the examples in Storing a Trained Model in Another Database.

17.2.15 Loading a Pre-Trained Supervised GraphWise Model

You can load models from a database.

You can load a pre-trained Supervised GraphWise model from a model store table in database as described in the following code:



- JShell
- Java
- Python

Java

```
SupervisedGraphWiseModel model = analyst.loadSupervisedGraphWiseModel().db()
    .modelstore("modeltablename") // name of the model store table
    .modelname("model") // model name (primary key of model store table)
    .load();
```

Python

Note:

All the preceding examples assume that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the examples in Loading a Pre-Trained Model From Another Database.

17.2.16 Destroying a Supervised GraphWise Model

You can destroy a GraphWise model as described in the following code:

- JShell
- Java
- Python



```
opg4j> model.destroy()
```

Java

model.destroy();

Python

model.destroy()

17.2.17 Explaining a Prediction of a Supervised GraphWise Model

In order to understand which features and vertices are important for a prediction of the Supervised GraphWise model, you can generate a SupervisedGnnExplanation using a technique similar to the GNNExplainer by Ying et al.

The explanation holds information related to:

- Graph structure: An importance score for each vertex
- Features: An importance score for each graph property



The vertex being explained is always assigned importance 1. Further, the feature importances are scaled such that the most important feature has importance 1.

Additionally, an <code>SupervisedGnnExplanation</code> contains the inferred embeddings, logits, and label. You can get explanations for a model's predictions by using the <code>SupervisedGnnExplainer</code> object. The object can be obtained using the <code>gnnExplainer</code> method. After obtaining the <code>SupervisedGnnExplainer</code> object, you can use the <code>inferAndExplain</code> method to request an explanation for a vertex.

The parameters of the explainer can be configured while the explainer is being created or afterwards using the relevant setter functions. The configurable parameters for the <code>SupervisedGnnExplainer</code> are as follows:

- numOptimizationSteps: Number of optimization steps used by the explainer.
- learningRate: Learning rate of the explainer.
- marginalize: Determines if the explainer loss is marginalized over features. This can help in cases where there are important features that take values close to zero. Without marginalization the explainer can learn to mask such features out even if they are important. Marginalization solves this by learning a mask for the deviation from the estimated input distribution.

Note that, in order to achieve best results, the features should be centered around 0.



For example, assume a simple graph that contains a feature that correlates with the label and another feature that does not. It is therefore expected that the importance of the features to differ significantly (with the feature correlating with the label being more important), while structural importance does not play a big role. In this case, you can generate an explanation as shown:

- JShell
- Java
- Python

JShell

```
opg4j> var simpleGraph = session.createGraphBuilder().
                          addVertex(0).setProperty("label feature",
0.5).setProperty("const feature", 0.5).
                          setProperty("label", true).
                          addVertex(1).setProperty("label feature",
-0.5).setProperty("const feature", 0.5).
                          setProperty("label", false).
                          addEdge(0, 1).build()
// build and train a Supervised GraphWise model as explained in Advanced
Hyperparameter Customization
// obtain and configure GnnExplainer
var explainer = model.gnnExplainer().learningRate(0.05)
explainer.numOptimizationSteps (200)
// explain prediction of vertex 0
opg4j> var explanation = explainer.inferAndExplain(simpleGraph,
simpleGraph.getVertex(0))
// if you used the devNet loss, you can add the decision threshold as an
extra parameter:
// var explanation = explainer.inferAndExplain(simpleGraph,
simpleGraph.getVertex(0), 6f)
opq4j> var constProperty = simpleGraph.getVertexProperty("const feature")
opq4j> var labelProperty = simpleGraph.getVertexProperty("label feature")
// retrieve feature importances
opg4j> var featureImportances = explanation.getVertexFeatureImportance()
opg4j> var importanceConstProp = featureImportances.get(constProperty) //
small as unimportant
opg4j> var importanceLabelProp = featureImportances.get(labelProperty) //
large (1) as important
// retrieve computation graph with importances
opg4j> var importanceGraph = explanation.getImportanceGraph()
// retrieve importance of vertices
opg4j> var importanceProperty = explanation.getVertexImportanceProperty()
opg4j> var importanceVertex0 = importanceProperty.get(0) // has importance 1
```



```
opg4j> var importanceVertex1 = importanceProperty.get(1) // available if
vertex 1 part of computation
```

```
PgxGraph simpleGraph = session.createGraphBuilder()
    .addVertex(0).setProperty("label feature",
0.5).setProperty("const feature", 0.5)
    .setProperty("label", true)
    .addVertex(1).setProperty("label feature",
-0.5).setProperty("const feature", 0.5)
    .setProperty("label", false)
    .addEdge(0, 1).build();
// build and train a Supervised GraphWise model as explained in Advanced
Hyperparameter Customization
// obtain and configure the explainer
SupervisedGnnExplainerexplainer=model.gnnExplainer().learningRate(0.05);
explainer.numOptimizationSteps(200);
// explain prediction of vertex 0
SupervisedGnnExplanation<Integer> explanation =
explainer.inferAndExplain(simpleGraph,
    simpleGraph.getVertex(0));
// if we used the devNet loss, we can add the decision threshold as an extra
parameter:
// SupervisedGnnExplanation<Integer> explanation =
explainer.inferAndExplain(simpleGraph, simpleGraph.getVertex(0), 6f);
VertexProperty<Integer, Float> constProperty =
simpleGraph.getVertexProperty("const feature");
VertexProperty<Integer, Float> labelProperty =
simpleGraph.getVertexProperty("label feature");
// retrieve feature importances
Map<VertexProperty<Integer, ?>, Float> featureImportances =
explanation.getVertexFeatureImportance();
float importanceConstProp = featureImportances.get(constProperty); // small
as unimportant
float importanceLabelProp = featureImportances.get(labelProperty); // large
(1) as important
// retrieve computation graph with importances
PgxGraph importanceGraph = explanation.getImportanceGraph();
// retrieve importance of vertices
VertexProperty<Integer, Float> importanceProperty =
explanation.getVertexImportanceProperty();
float importanceVertex0 = importanceProperty.get(0); // has importance 1
float importanceVertex1 = importanceProperty.get(1); // available if vertex 1
part of computation
```

```
simple graph = session.create graph builder()
    .add vertex(0).set property("label feature",
0.5).set property("const feature", 0.5)
    .set property("label", true)
    .add vertex(1).set property("label feature",
-0.5).set property("const feature", 0.5)
    .set property("label", false)
    .add edge(0, 1).build()
# build and train a Supervised GraphWise model as explained in Advanced
Hyperparameter Customization
# obtain the explainer
explainer = model.gnn explainer(learning rate=0.05)
explainer.num optimization steps=200
# explain prediction of vertex 0
explanation =
explainer.inferAndExplain(simple graph, simple graph.get vertex(0))
# if we used the devNet loss, we can add the decision threshold as an extra
parameter:
# explanation = explainer.inferAndExplain(simple graph,
simple graph.get vertex(0), 6)
const property = simple graph.get vertex property("const feature")
label property = simple graph.get vertex property("label feature")
# retrieve feature importances
feature importances = explanation.get vertex feature importance()
importance const prop = feature importances[const property]
importance label prop = feature importances[label property]
# retrieve computation graph with importances
importance graph = explanation.get importance graph()
# retrieve importance of vertices
importance property = explanation.get vertex importance property()
importance vertex 0 = importance property[0]
importance vertex 1 = importance property[1]
```

See Also:

- Building a Minimal GraphWise Model
- Training a Supervised GraphWise Model



17.3 Using the Supervised EdgeWise Algorithm (Edge Embeddings and Classification)

SupervisedEdgeWise is an inductive edge representation learning algorithm which is able to leverage vertex and edge feature information. It can be applied to a wide variety of tasks, including edge classification and link prediction.

Supervised EdgeWise is based on top of the <code>GraphWise</code> model, leveraging the source vertex embedding and the destination vertex embedding generated by the <code>GraphWise</code> model to generate inductive edge embeddings.

Model Structure

A SupervisedEdgeWise model consists of graph convolutional layers followed by several prediction layers.

First, the source and destination vertices of the target edge are processed through the convolutional layers. The forward pass through a convolutional layer for a vertex proceeds as follows:

- A set of neighbors of the vertex is sampled.
- 2. The previous layer representations of the neighbors are mean-aggregated, and the aggregated features are concatenated with the previous layer representation of the vertex.
- 3. This concatenated vector is multiplied with weights, and a bias vector is added.
- 4. The result is normalized such that the layer output has unit norm.

The edge embedding layer concatenates the source vertex embedding, the edge features and the destination vertex embedding, and then forwards it through a linear layer to get the edge embedding.

The prediction layers are standard neural network layers.

- Loading a Graph
- Building a Minimal Supervised EdgeWise Model
- Advanced Hyperparameter Customization
- · Applying EdgeWise for Partitioned Graphs
- Supported Property Types for Supervised EdgeWise Model
- Classification Versus Regression on Supervised EdgeWise Models
- Setting a Custom Loss Function and Batch Generator (for Anomaly Detection)
- Setting the Edge Embedding Production Method
- Training a Supervised EdgeWise Model
- Getting the Loss Value for a Supervised EdgeWise Model
- Getting the Training Log for a Supervised EdgeWise Model
- Inferring Edge Labels for a Supervised EdgeWise Model
- Evaluating Model Performance
- Inferring Embeddings for a Supervised EdgeWise Model
- Storing a Supervised EdgeWise Model



- Loading a Pre-Trained Supervised EdgeWise Model
- Destroying a Supervised EdgeWise Model
- Example: Predicting Ratings on the Movielens Dataset

17.3.1 Loading a Graph

The following describes the steps for loading a graph:

- Create a Session and an Analyst.
 - JShell
 - Java
 - Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
opg4j> import oracle.pgx.config.mllib.ActivationFunction
opg4j> import oracle.pgx.config.mllib.WeightInitScheme
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.mllib.SupervisedEdgeWiseModel;
import oracle.pgx.api.filter.EdgeFilter;
import oracle.pgx.api.frames.*;
import oracle.pgx.config.mllib.ActivationFunction;
import oracle.pgx.config.mllib.GraphWiseConvLayerConfig;
import oracle.pgx.config.mllib.GraphWisePredictionLayerConfig;
import oracle.pgx.config.mllib.SupervisedEdgeWiseModelConfig;
import oracle.pgx.config.mllib.WeightInitScheme;
```

Python

starting the Python shell will create an implicit session and analyst

- 2. Load the graph.
 - JShell
 - Java
 - Python



Java

Python

```
from pypgx.api.filters import EdgeFilter
instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
session = instance.create_session("my_session")
full_graph = session.read_graph_by_name("<movielens_graph>", "pg_pgql")
edge_filter = EdgeFilter.from_pgql_result_set(
    session.query_pgql("SELECT e FROM movielens MATCH (v1) -[e]-> (v2)
WHERE ID(e) % 4 > 0"), "e"
)
train_graph = full_graph.filter(edge_filter)
test_edges = []
train_edges = train_graph.get_edges()
for e in full_graph.get_edges():
    if(not train_edges.contains(e)):
        test vertices.append(e)
```



17.3.2 Building a Minimal Supervised EdgeWise Model

You can build an EdgeWise model using the minimal configuration and default hyperparameters as described in the following code. Note that even though only one feature property is needed (either on vertices with setVertexInputPropertyNames or edges with setEdgeInputPropertyNames) for the model to work, you can specify as many as required.

- JShell
- Java
- Python

JShell

Java

```
SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_features")
    .setEdgeInputPropertyNames("edge_features")
    .setEdgeTargetPropertyName("labels")
    .build();
```

Python

17.3.3 Advanced Hyperparameter Customization

You can build a Supervised EdgeWise model using rich hyperparameter customization. Internally for each node, GraphWise applies an aggregation of the representation of neighbors. You can configure this operation through one of the following sub-config classes:

GraphWiseConvLayerConfig: GraphWiseConvLayer is based on Inductive Representation Learning on Large Graphs (GraphSage) by Hamilton et al. GraphWiseAttentionLayerConfig: GraphWiseAttentionLayer is based on Graph Attention Networks (GAT) by Velickovic et al. which makes the aggregation smarter but comes with larger computation cost.

Also, you can enable or disable a graphics processing unit (GPU) by using the <code>enable_ml_accelerators</code> graph server (PGX) configuration parameter (see Configuration Parameters for the Graph Server (PGX) Engine for more information). In addition, ensure that your system meets the following prerequisites to use the GPU support:

- You must have a GPU device with the CUDA (Compute Unified Device Architecture) toolkit installed.
- The following list of CUDA libraries are expected:

```
- libcuda.so.1
- libnvrtc.so.12
- libnvToolsExt.so.1
- libcudart.so.12
```

Note that the <code>enable_ml_accelerators</code> option is enabled by default. But if a GPU device is not detected and the CUDA toolkit is not installed, then this feature gets disabled and the CPU will be used for all the PgxML library operations.

The following code examples uses the <code>GraphWiseConvLayerConfig</code> class for the convolutional layer configuration. The examples specifies a weight decay parameter of 0.001 and dropout with dropping probability 0.5 for the GraphWise model to counteract overfitting. Also, note that the <code>setEnableAccelerator</code> method is enabled to use any available GPU.

- JShell
- Java
- Python

JShell

```
opg4j> var weightProperty = analyst.pagerank(trainGraph).getName()
opg4j> var convLayerConfig = analyst.graphWiseConvLayerConfigBuilder().
         setNumSampledNeighbors(25).
         setActivationFunction(ActivationFunction.TANH).
         setWeightInitScheme(WeightInitScheme.XAVIER).
         setWeightedAggregationProperty(weightProperty).
         setDropoutRate(0.5).
         build()
opg4j> var predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder().
         setHiddenDimension(32).
         setActivationFunction(ActivationFunction.RELU).
         setWeightInitScheme(WeightInitScheme.HE).
         setDropoutRate(0.5).
         build()
opg4j> var model = analyst.supervisedEdgeWiseModelBuilder().
         setVertexInputPropertyNames("vertex features").
         setEdgeInputPropertyNames("edge features").
```



```
setEdgeTargetPropertyName("labels").
setConvLayerConfigs(convLayerConfig).
setPredictionLayerConfigs(predictionLayerConfig).
setWeightDecay(0.001).
setEnableAccelerator(true). // Enable or disable GPU
build()
```

Java

```
String weightProperty = analyst.pagerank(trainGraph).getName();
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(25)
    .setActivationFunction(ActivationFunction.TANH)
    .setWeightInitScheme(WeightInitScheme.XAVIER)
    .setWeightedAggregationProperty(weightProperty)
    .setDropoutRate(0.5)
    .build();
GraphWisePredictionLayerConfig predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder()
    .setHiddenDimension(32)
    .setActivationFunction(ActivationFunction.RELU)
    .setWeightInitScheme(WeightInitScheme.HE)
    .setDropoutRate(0.5)
    .build();
SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex features")
    .setEdgeInputPropertyNames("edge features")
    .setEdgeTargetPropertyName("labels")
    .setConvLayerConfigs(convLayerConfig)
    .setPredictionLayerConfigs (predictionLayerConfig)
    .setWeightDecay(0.001)
    .setEnableAccelerator(true) // Enable or disable GPU
    .build();
```

Python



In the preceding example, you can replace <code>GraphWiseConvLayerConfig</code> with the <code>GraphWiseAttentionLayerConfig</code> class to build a graph attention network model. Also, note that if the number of sampled neighbors is set to -1 using <code>setNumSampledNeighbors</code>, then all the neighboring nodes will be sampled.

- JShell
- Java
- Python

JShell

```
GraphWiseAttentionLayerConfig convLayerConfig =
analyst.graphWiseAttentionLayerConfigBuilder()
    .setNumSampledNeighbors(25)
    .setActivationFunction(ActivationFunction.LEAKY_RELU)
    .setWeightInitScheme(WeightInitScheme.XAVIER_UNIFORM)
    .setHeadAggregation(AggregationOperation.MEAN)
    .setNumHeads(4)
    .setDropoutRate(0.5)
    .build();
```



See the Javadoc for more information.

17.3.4 Applying EdgeWise for Partitioned Graphs

You can apply EdgeWise on partitioned graphs, where you have different providers and different features.

- JShell
- Java
- Python

JShell

Java

```
SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider_features")
    .setEdgeInputPropertyNames("edge_provider1_features",
"edge_provider2_features")
    .setEdgeTargetPropertyName("target_property")
    .build();
```

Python



You can select which providers you want to train or infer on:

- JShell
- Java
- Python

JShell

Java

```
SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider_features")
    .setEdgeInputPropertyNames("edge_provider1_features",
"edge_provider2_features")
    .setEdgeTargetPropertyName("target_property")
    .setTargetEdgeLabels("provider1")
    .build();
```

Python

If you wish to control the flow of the embeddings at each graph convolutional layer of the underlying Graphwise model, then you can enable or disable the connections of interest. By default, all the connections are enabled.

- JShell
- Java



JShell

Java

```
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(10)
    .useVertexToVertexConnection(true)
    .useEdgeToVertexConnection(true)
    .useEdgeToEdgeConnection(false)
    .useVertexToEdgeConnection(false)
    .build();
SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex provider1 features",
"vertex provider2 features")
    .setEdgeInputPropertyNames("edge provider features")
    .setEdgeTargetPropertyName("target property")
    .setTargetEdgeLabels("provider1")
    .setConvLayerConfigs(convLayerConfig)
    .build();
```

Python



17.3.5 Supported Property Types for Supervised EdgeWise Model

The model supports two types of properties for both vertices and edges:

- continuous properties (boolean, double, float, integer, long)
- categorical properties (string)

For categorical properties, two categorical configurations are possible:

- One-hot-encoding: Each category is mapped to a vector, that is concatenated to other features (default).
- **Embedding table:** Each category is mapped to an embedding that is concatenated to other features and is trained along with the model.

One-hot-encoding converts each category into an independent vector. This is useful if you want each category to be interpreted as an equally independent group. For instance, if there are categories ranging from A to E, where each alphabet has no specific meaning, then one-hot-encoding can be a good fit.

Embedding table is recommended if the semantics of the properties matter, and you want certain categories to be closer to each other than the others. For example, assume there is a day property with values ranging from *Monday* to *Sunday*. If you wish to preserve the idea that *Tuesday* is closer to *Wednesday* than *Saturday*, then by choosing the embedding table configuration, you can let the vectors that represent the categories to be learned during training, so that the vector that is mapped to *Tuesday* becomes close to that of *Wednesday*.

One advantage that the embedding table approach has over one-hot-encoding is that you can learn more suitable vectors to represent each category. However, this also means that a good amount of data is required to train the embedding table properly. The one-hot-encoding approach might be better for use-cases with limited training data.

When using the embedding table, users are allowed to set the out-of-vocabulary probability. With the given probability, the embedding will be set to the out-of-vocabulary embedding randomly during training, in order to make the model more robust to unseen categories during inference.

- JShell
- Java
- Python



```
opg4j> import oracle.pgx.config.mllib.inputconfig.CategoricalPropertyConfig;
opg4j> var prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1").
    oneHotEncoding().
    setMaxVocabularySize(100).
    build()
opg4j> var prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2").
    embeddingTable().
    setShared(false). // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    setEmbeddingDimension(32).
    setOutOfVocabularyProbability(0.001). // probability to set the word
embedding to the out-of-vocabulary embedding
   build()
opg4j> var model = analyst.supervisedEdgeWiseModelBuilder().
    setVertexInputPropertyNames(
        "vertex_int_feature_1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3" // string feature using one-hot-encoding
(default)
   ) .
    setVertexInputPropertyConfigs(prop1config, prop2config).
    setEdgeTargetPropertyName("label").
   build()
```

```
import oracle.pgx.config.mllib.inputconfig.CategoricalPropertyConfig;
import oracle.pqx.config.mllib.inputconfig.InputPropertyConfig;
InputPropertyConfig prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1")
    .oneHotEncoding()
    .setMaxVocabularySize(100)
    .build();
InputPropertyConfig prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2")
    .embeddingTable()
    .setShared(false) // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    .setEmbeddingDimension(32)
    .setOutOfVocabularyProbability(0.001) // probability to set the word
embedding to the out-of-vocabulary embedding
    .build();
SupervisedGraphWiseModelBuilder model =
analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames(
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3" // string feature using one-hot-encoding
```

```
(default)
    )
    .setVertexInputPropertyConfigs(prop1config, prop2config)
    .setEdgeTargetPropertyName("label")
    .build();
```

```
vertex input property configs = [
    analyst.one hot encoding categorical property config(
        property name="vertex str feature 1",
        max vocabulary size=100,
    ),
    analyst.learned embedding categorical property config(
        property name="vertex str feature 2",
        embedding dim=4,
        shared=False, // set whether to share the vocabulary or not when
several types have a property with the same name
        oov probability=0.001 // probability to set the word embedding to the
out-of-vocabulary embedding
model params = dict(
    vertex input property names=[
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3", // string feature using one-hot-encoding
(default)
    1,
    vertex input property configs=vertex input property configs,
    edge target property name="labels"
model = analyst.supervised edgewise builder(**model params)
```

17.3.6 Classification Versus Regression on Supervised EdgeWise Models

When predicting a property, the loss function defines if the model will perform classification tasks or regression tasks.

For classification tasks, the Supervised EdgeWise model will infer labels. Even if this property is a number, the model will assign one label for each value found and classify on it. The possible losses for classification tasks are softmax cross entropy, sigmoid cross entropy, and DevNet loss.

For regression tasks, the Supervised EdgeWise model will infer values for the property. The loss for regression tasks is the ${\tt MSE}$ loss.

It is possible to select different loss functions for the supervised model by providing a LossFunction object.

- JShell
- Java
- Python

Java

```
import oracle.pgx.config.mllib.loss.LossFunctions;

SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_features")
    .setEdgeInputPropertyNames("edge_features")
    .setEdgeTargetPropertyName("labels")
    .setLossFunction(LossFunctions.MSE_LOSS)
    .build();
```

Python

17.3.7 Setting a Custom Loss Function and Batch Generator (for Anomaly Detection)

In addition to different loss functions, it is also possible to select different batch generators by providing a batch generator type. This is useful for applications such as Anomaly Detection, which can be cast into the standard supervised framework but require different loss functions and batch generators.

SupervisedEdgeWise model can use the DevNetLoss and the

StratifiedOversamplingBatchGenerator. DevNetLoss takes confidence margin and the value the anomaly takes in the target property as the two parameters.

The following example assumes that the convLayerConfig has already been defined:

- JShell
- Java
- Python

JShell

```
opg4j> import oracle.pgx.config.mllib.loss.LossFunctions
opq4j> import oracle.pgx.config.mllib.batchgenerator.BatchGenerators
opg4j> var predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder().
         setHiddenDimension(32).
         setActivationFunction(ActivationFunction.LINEAR).
         build()
opg4j> var model = analyst.supervisedEdgeWiseModelBuilder().
         setVertexInputPropertyNames("vertex features").
         setEdgeInputPropertyNames("edge features").
         setEdgeTargetPropertyName("labels").
         setConvLayerConfigs(convLayerConfig).
         setPredictionLayerConfigs (predictionLayerConfig).
         setLossFunction(LossFunctions.devNetLoss(5.0, true)).
         setBatchGenerator(BatchGenerators.STRATIFIED OVERSAMPLING).
         build()
```

```
import oracle.pgx.config.mllib.loss.LossFunctions;
import oracle.pgx.config.mllib.batchgenerator.BatchGenerators;
GraphWisePredictionLayerConfig predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder()
    .setHiddenDimension(32)
    .setActivationFunction(ActivationFunction.LINEAR)
    .build();
SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex features")
    .setEdgeInputPropertyNames("edge features")
    .setEdgeTargetPropertyName("labels")
    .setConvLayerConfigs(convLayerConfig)
    .setPredictionLayerConfigs(predictionLayerConfig)
    .setLossFunction(LossFunctions.devNetLoss(5.0, true))
    .setBatchGenerator(BatchGenerators.STRATIFIED OVERSAMPLING)
    .build();
```



17.3.8 Setting the Edge Embedding Production Method

By default, the edge embedding is computed by combining the source vertex embedding, the destination vertex embedding and the edge features. You can manually set these by setting the EdgeCombinationMethod with booleans parameters:

- JShell
- Java
- Python

JShell



Java

```
import oracle.pgx.config.mllib.edgecombination.EdgeCombinationMethod;
import oracle.pgx.config.mllib.edgecombination.EdgeCombinationMethods;

EdgeCombinationMethod method =
   EdgeCombinationMethods.concatEdgeCombinationMethod(useSourceVertex,
   useDestinationVertex, useEdge);

SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
        .setVertexInputPropertyNames("vertex_features")
        .setEdgeInputPropertyNames("edge_features")
        .setEdgeTargetPropertyName("labels")
        .setEdgeCombinationMethod(method)
        .build();
```

Python

17.3.9 Training a Supervised EdgeWise Model

You can train a SupervisedEdgeWiseModel on a graph as shown:

- JShell
- Java
- Python

JShell

opg4j> model.fit(trainGraph)

Java

```
model.fit(trainGraph);
```

Python

```
model.fit(train graph)
```

You can also add a validation step to the training. When training a model, the optimal number of training epochs is not known in advance and it is one of the key parameters that determines the model quality. Being able to monitor the training and validation losses helps you to identify a good value for the model parameters and gain visibility in the training process. The evaluation frequency can be specified in terms of epoch or step. To configure a validation step, create a GraphWiseValidationConfig and pass it to the model builder as shown:

- JShell
- Java
- Python

JShell



```
.setEvaluationFrequencyScale(EvaluationFrequencyScale.EPOCH) //
available options: EPOCH, STEP (default: EPOCH)
    .build();

SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_features")
    .setEdgeInputPropertyNames("edge_features")
    .setEdgeTargetPropertyName("labels")
    .setValidationConfig(validationConfig) // configuring the validation to
be executed every 2 epochs
    .build();
```

After configuring a validation step, you can then pass a graph for validation to the fit method together with the graph for training:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(trainGraph, valGraph)
```

```
model.fit(trainGraph, valGraph);
```



model.fit(train graph, valGraph)

17.3.10 Getting the Loss Value for a Supervised EdgeWise Model

You can fetch the training loss value for a Supervised EdgeWise Model as shown in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var loss = model.getTrainingLoss()
```

Java

```
double loss = model.getTrainingLoss();
```

Python

```
loss = model.get training loss()
```

17.3.11 Getting the Training Log for a Supervised EdgeWise Model

If you configured a validation step (see Training a Supervised EdgeWise Model) earlier, then you can fetch the training log that contains the training and validation loss information.

- JShell
- Java
- Python

JShell

```
opg4j> var trainingLog = model.getTrainingLog()
```



Java

```
PgxFrame trainingLog = model.getTrainingLog();
```

Python

```
training log = model.get training log()
```

The output frame will be similar to the following example output:

Also, note the following:

- The first column will be named according to the evaluation frequency scale that was set in the validation configuration ("epoch" or "step").
- The validation loss is the average of the losses evaluated on all batches of the validation graph, while the training loss is the loss value logged at that epoch or step (that is, the loss evaluated on the last batch).
- The training log will be overwritten if the fit method is called multiple times.

17.3.12 Inferring Edge Labels for a Supervised EdgeWise Model

You can infer the edge labels on any graph (including edges or graphs that were not seen during training):

- JShell
- Java
- Python

JShell

```
opg4j> var labels = model.infer(fullGraph, testEdges)
opg4j> labels.head().print()
```

```
PgxFrame labels = model.infer(fullGraph, testEdges);
labels.head().print();
```



```
labels = model.infer(full_graph,test_edges)
labels.print()
```

If the loss is SigmoidCrossEntropy or DevNetLoss, then it is also possible to set the decision threshold applied to the logits by adding it as an extra parameter, which is by default 0:

- JShell
- Java
- Python

JShell

```
opg4j> var labels = model.infer(fullGraph, testEdges, 6f)
opg4j> labels.head().print()
```

Java

```
PgxFrame labels = model.infer(fullGraph,testEdges,6f);
labels.head().print();
```

Python

```
labels = model.infer(full_graph, full_graph.get_edges(), 6)
labels.print()
```

The output will be similar to the following example output:



Similarly, if the task is a classification task, you can get the model confidence for each class by inferring the prediction logits:

- JShell
- Java
- Python

JShell

```
opg4j> var logits = model.inferLogits(fullGraph, testEdges)
opg4j> logits.head().print()
```

Java

```
PgxFrame logits = model.inferLogits(fullGraph,testEdges);
logits.head().print();
```

Python

```
logits = model.infer_logits(full_graph, test_edges)
logits.print()
```

If the model is a classification model, the <code>inferLabels</code> method is also available and it is equivalent to the <code>infer</code> methoid.

17.3.13 Evaluating Model Performance

You can use the evaluate convenience method to evaluate various metrics for the model:

- JShell
- Java
- Python

JShell

```
opg4j> model.evaluate(fullGraph, testEdges).print()
```

```
model.evaluate(fullGraph, testEdges).print();
```

```
model.evaluate(full graph, test edges).print()
```

Similar to inferring labels, if the task is a classification task, you can add the decision threshold as an extra parameter:

- JShell
- Java
- Python

JShell

```
opg4j> model.evaluate(fullGraph, testEdges, 6f).print()
```

Java

```
model.evaluate(fullGraph,testEdges, 6f).print();
```

Python

```
model.evaluate(full graph, test edges, 6).print()
```

For a classification model, the output will be similar to the following:

For a regression model, the output will be similar to the following:

Note that for a classification model, the <code>evaluateLabels</code> method is also available and this is equivalent to the <code>evaluate</code> method.



17.3.14 Inferring Embeddings for a Supervised EdgeWise Model

You can use a trained model to infer embeddings for unseen nodes and store them in the database as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var edgeVectors = model.inferEmbeddings(fullGraph,
testEdges).flattenAll()
opg4j> edgeVectors.write().
         db().
         name("edge vectors").
         tablename("edgeVectors").
         overwrite(true).
         store()
```

Java

```
PgxFrame edgeVectors = model.inferEmbeddings(fullGraph,
testEdges).flattenAll();
edgeVectors.write()
   .db()
   .name("edge vectors")
   .tablename("edgeVectors")
   .overwrite(true)
   .store();
```

Python

```
edge_vectors = model.infer_embeddings(full_Graph, test_edges).flatten_all()
edge_vectors.write().db().table_name("table_name").name("edge_vectors").overwr
ite(True).store()
```

The schema for the <code>edgeVectors</code> will be as follows without flattening (<code>flattenAll</code> splits the vector column into separate double-valued columns):

```
| edgeId | embedding |
```



All the preceding examples assume that you are inferring the embeddings for a model in the current logged in database. If you must infer embeddings for the model in a different database, then you must additionally provide the database credentials such as username, password and JDBC URL to the inferEmbeddings method. Refer to Inferring Embeddings for a Model in Another Database for an example.

17.3.15 Storing a Supervised EdgeWise Model

You can store models in the database. The models get stored as a row inside a model store table.

The following shows how to store a trained SupervisedEdgeWise model in the database in a specific model store table:

- JShell
- Java
- Python

JShell

Java





All the preceding examples assume that you are storing the model in the current logged in database. If you must store the model in a different database then refer to the examples in Storing a Trained Model in Another Database.

17.3.16 Loading a Pre-Trained Supervised EdgeWise Model

You can load a pre-trained SupervisedEdgeWise model from a model store table in the database as shown:

- JShell
- Java
- Python

JShell

Java

```
SupervisedEdgeWiseModel model = analyst.loadSupervisedEdgeWiseModel().db()
    .modelstore("modeltablename") // name of the model store table
    .modelname("model") // model name (primary key of model store table)
    .load();
```





All the preceding examples assume that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the examples in Loading a Pre-Trained Model From Another Database.

17.3.17 Destroying a Supervised EdgeWise Model

You can destroy a Supervised EdgeWise model as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.destroy()
```

Java

model.destroy();

Python

model.destroy()

17.3.18 Example: Predicting Ratings on the Movielens Dataset

This section describes the usage of SupervisedEdgeWise in the graph server (PGX) using the Movielens graph as an example.

This data set consists of 100,000 ratings (1-5) from 943 users on 1682 movies, with simple demographic information for the users (age, gender, occupation) and movies (year, aggravating, genre). Users and movies are vertices, while ratings of users to movies are edges with a rating feature.

The following example predicts the ratings using the <code>SupervisedEdgeWise</code> model. The model is first built and it is then fit on the <code>trainGraph</code>.

- JShell
- Java
- Python



JShell

```
opg4j> import oracle.pgx.config.mllib.loss.LossFunctions
opg4j> var convLayer = analyst.graphWiseConvLayerConfigBuilder().
        setNumSampledNeighbors(10).
opg4j> var predictionLayer = analyst.graphWisePredictionLayerConfigBuilder().
        setHiddenDimension(16).
        build()
opg4j> var model = analyst.supervisedEdgeWiseModelBuilder().
        setVertexInputPropertyNames("movie year", "avg rating",
"movie_genres", // Movies features
            "user occupation label", "user gender", "raw user age"). // Users
features
        setEdgeTargetPropertyName("user rating").
        setConvLayerConfigs(convLayer).
        setPredictionLayerConfigs(predictionLayer).
        setNumEpochs(10).
        setEmbeddingDim(32).
        setLearningRate(0.003).
        setStandardize(true).
        setNormalize(true).
        setSeed(0).
        setLossFunction(LossFunctions.MSE LOSS).
        build()
opg4j> model.fit(trainGraph)
Java
import oracle.pgx.config.mllib.loss.LossFunctions;
GraphWiseConvLayerConfig convLayer = analyst.graphWiseConvLayerConfigBuilder()
        .setNumSampledNeighbors(10)
        .build();
GraphWisePredictionLayerConfig predictionLayer =
analyst.graphWisePredictionLayerConfigBuilder()
      .setHiddenDimension(16)
      .build();
SupervisedEdgeWiseModel model = analyst.supervisedEdgeWiseModelBuilder()
        .setVertexInputPropertyNames("movie year", "avg rating",
"movie genres", // Movies features
            "user occupation label", "user gender", "raw user age") // Users
features
        .setEdgeTargetPropertyName("user rating")
        .setConvLayerConfigs(convLayer)
        .setPredictionLayerConfigs(predictionLayer)
        .setNumEpochs(10)
        .setEmbeddingDim(32)
        .setLearningRate(0.003)
        .setStandardize(true)
        .setNormalize(true)
        .setSeed(0)
        .setLossFunction(LossFunctions.MSE LOSS)
        .build();
```

```
model.fit(trainGraph);
```

```
from pypgx.api.mllib import MSELoss
conv layer config = dict(num sampled neighbors=10)
conv layer = analyst.graphwise conv layer config(**conv layer config)
pred layer config = dict(hidden dim=16)
pred layer = analyst.graphwise pred layer config(**pred layer config)
params = dict(edge target property name="labels",
              conv layer config=[conv layer],
              pred layer config=[pred layer],
              vertex input property names=["movie year", "avg rating",
"movie genres",
                "user occupation label", "user gender", "raw_user_age"],
              edge input property names=["user rating"],
              num epochs=10,
              layer size=32,
              learning rate=0.003,
              normalize=true,
              loss fn=MSELoss(),
              seed=0)
model = analyst.supervised edgewise builder(**params)
model.fit(train graph)
```

Since EdgeWise is inductive, you can infer the ratings for unseen edges:

- JShell
- Java
- Python

JShell

```
opg4j> var labels = model.infer(fullGraph, testEdges)
opg4j> labels.head().print()
```

```
PgxFrame labels = model.infer(fullGraph, testEdges);
labels.head().print();
```



```
labels = model.infer(full_graph, test_edges)
labels.print()
```

This returns the rating prediction for any edge as:

You can also evaluate the performance of the model:

- JShell
- Java
- Python

JShell

```
opg4j> model.evaluate(fullGraph, testEdges).print()
```

Java

```
model.evaluate(fullGraph,testEdges).print();
```

```
model.evaluate(full graph, test edges).print()
```



This returns the following output:

+-		+
	MSE	
+-		+
	0.9573243436116953	
+-		+

17.4 Using the Unsupervised GraphWise Algorithm (Vertex Embeddings)

Unsupervised GraphWise is an unsupervised inductive vertex representation learning algorithm which is able to leverage vertex information. The learned embeddings can be used in various downstream tasks including vertex classification, vertex clustering and similar vertex search.

Unsupervised GraphWise is based on Deep Graph Infomax (DGI) by Velickovic et al.

Model Structure

A Unsupervised GraphWise model consists of graph convolutional layers followed by an embedding layer which defaults to a DGI Layer.

The forward pass through a convolutional layer for a vertex proceeds as follows:

- 1. A set of neighbors of the vertex is sampled.
- 2. The previous layer representations of the neighbors are mean-aggregated, and the aggregated features are concatenated with the previous layer representation of the vertex.
- This concatenated vector is multiplied with weights, and a bias vector is added.
- 4. The result is normalized to such that the layer output has unit norm.

The DGI Layer consists of three parts enabling unsupervised learning using embeddings produced by the convolution layers.

- 1. **Corruption function:** Shuffles the node features while preserving the graph structure to produce negative embedding samples using the convolution layers.
- 2. Readout function: Sigmoid activated mean of embeddings, used as summary of a graph.
- Discriminator: Measures the similarity of positive (unshuffled) embeddings with the summary as well as the similarity of negative samples with the summary from which the loss function is computed.

Since none of these contains mutable hyperparameters, the default DGI layer is always used and cannot be adjusted.

The second embedding layer available is the Dominant Layer, based on Deep Anomaly Detection on Attributed Networks (Dominant) by Ding, Kaize, et al.

Dominant is a model that detects anomalies based on the features and the neighbors' structure. Using GCNs to reconstruct the features in an autoencoder's settings, and the mask with the dot products of the embeddings.

The loss function is computed from the feature reconstruction loss and the structure reconstruction loss. The importance given to features or to the structure can be tuned with the alpha hyperparameter.



The following describes the usage of the main functionalities of the implementation of **DGI** in PGX using the Cora graph as an example.

- Loading a Graph
- Building a Minimal Unsupervised GraphWise Model
- Advanced Hyperparameter Customization
- Supported Property Types for Unsupervised GraphWise Model
- Building an Unsupervised GraphWise Model Using Partitioned Graphs
- Training an Unsupervised GraphWise Model
- · Getting the Loss Value for an Unsupervised GraphWise Model
- Getting the Training Log for an Unsupervised GraphWise Model
- Inferring Embeddings for an Unsupervised GraphWise Model
- Classifying the Vertices Using the Obtained Embeddings
- Storing an Unsupervised GraphWise Model
- Loading a Pre-Trained Unsupervised GraphWise Model
- Destroying an Unsupervised GraphWise Model
- Explaining a Prediction for an Unsupervised GraphWise Model

17.4.1 Loading a Graph

The following describes the steps for loading a graph:

- Create a Session and an Analyst.
 - JShell
 - Java
 - Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
opg4j> import oracle.pgx.config.mllib.ActivationFunction
opg4j> import oracle.pgx.config.mllib.WeightInitScheme
```

```
import oracle.pgx.api.*;
import oracle.pgx.api.mllib.UnsupervisedGraphWiseModel;
import oracle.pgx.api.frames.*;
import oracle.pgx.config.mllib.ActivationFunction;
import oracle.pgx.config.mllib.GraphWiseConvLayerConfig;
```



```
import oracle.pgx.config.mllib.UnsupervisedGraphWiseModelConfig;
import oracle.pgx.config.mllib.WeightInitScheme;
```

starting the Python shell will create an implicit session and analyst

2. Load the graph.

- JShell
- Java
- Python

JShell

```
opg4j> var instance = GraphServer.getInstance("https://localhost:7007",
"<username>", "<password>".toCharArray())
opg4j> var session=instance.createSession("mySession")
opg4j> var graph =
session.readGraphByName("<graph name>",GraphSource.PG PGQL)
```

Java

```
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "<username>", "<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
PgxGraph graph =
session.readGraphByName("<graph name>",GraphSource.PG PGQL);
```

Python

```
instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
session = instance.create_session("my_session")
graph = session.read_graph_by_name("<graph_name>", "pg_pgql")
```

You do not need to use a test graph or test vertices, since the model is trained to be unsupervised.

17.4.2 Building a Minimal Unsupervised GraphWise Model

You can build an Unsupervised GraphWise model with only vertex properties, or only edge properties or both using the minimal configuration and default hyper-parameters.

- JShell
- Java
- Python

JShell

Java

Python

```
model =
analyst.unsupervised_graphwise_builder(vertex_input_property_names=["features"
])
```

17.4.3 Advanced Hyperparameter Customization

You can build an Unsupervised GraphWise model using rich hyperparameter customization. Internally for each node, GraphWise applies an aggregation of the representation of neighbors. You can configure this operation through one of the following sub-config classes:

- GraphWiseConvLayerConfig: GraphWiseConvLayer is based on Inductive Representation Learning on Large GraphS (GraphSage) by Hamilton et al.
- GraphWiseAttentionLayerConfig: GraphWiseAttentionLayer is based on Graph Attention Networks (GAT) by Velickovic et al. which makes the aggregation smarter but comes with larger computation cost.

Also, you can enable or disable a graphics processing unit (GPU) by using the <code>enable_ml_accelerators</code> graph server (PGX) configuration parameter (see Configuration Parameters for the Graph Server (PGX) Engine for more information). In addition, ensure that your system meets the following prerequisites to use the GPU support:

- You must have a GPU device with the CUDA (Compute Unified Device Architecture) toolkit installed.
- The following list of CUDA libraries are expected:
 - libcuda.so.1
 - libnvrtc.so.12
 - libnvToolsExt.so.1



```
libcudart.so.12
```

Note that the <code>enable_ml_accelerators</code> option is enabled by default. But if a GPU device is not detected and the CUDA toolkit is not installed, then this feature gets disabled and the CPU will be used for all the PgxML library operations.

The following code examples uses the <code>GraphWiseConvLayerConfig</code> class for the convolutional layer configuration. The examples specifies a weight decay parameter of 0.001 and dropout with dropping probability 0.5 for the GraphWise model to counteract overfitting. Also, it is recommended to disable normalization of embeddings when you intend to use them in downstream classfication tasks. Note that the <code>setEnableAccelerator</code> method is enabled to use any available GPU.

- JShell
- Java
- Python

JShell

```
opq4j> var weightProperty = analyst.pagerank(trainGraph).getName()
opg4j> var convLayerConfig = analyst.graphWiseConvLayerConfigBuilder().
         setNumSampledNeighbors (25).
         setActivationFunction(ActivationFunction.TANH).
         setWeightInitScheme(WeightInitScheme.XAVIER).
         setWeightedAggregationProperty(weightProperty).
         setDropoutRate(0.5).
         build()
opg4j> var dgiLayerConfig = analyst.graphWiseDgiLayerConfigBuilder().
         setCorruptionFunction(new PermutationCorruption()).
         setDiscriminator(GraphWiseDgiLayerConfig.Discriminator.BILINEAR).
         setReadoutFunction(GraphWiseDgiLayerConfig.ReadoutFunction.MEAN).
         build()
opq4j> var model = analyst.unsupervisedGraphWiseModelBuilder().
         setVertexInputPropertyNames("vertex features").
         setEdgeInputPropertyNames("edge features").
         setConvLayerConfigs(convLayerConfig).
         setDgiLayerConfig(dgiLayerConfig).
setLossFunction(UnsupervisedGraphWiseModelConfig.LossFunction.SIGMOID CROSS EN
TROPY).
         setEmbeddingDim(256).
         setLearningRate(0.05).
         setNumEpochs(30).
         setSeed(42).
         setShuffle(false).
         setStandardize(true).
         setNormalize(false). // recommended
         setBatchSize(64).
         setEnableAccelerator(true). // Enable or disable GPU
         build()
```



Java

```
String weightProperty = analyst.pagerank(trainGraph).getName();
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors (25)
    .setActivationFunction(ActivationFunction.TANH)
    .setWeightInitScheme (WeightInitScheme.XAVIER)
    .setWeightedAggregationProperty(weightProperty)
    .setDropoutRate(0.5)
    .build();
GraphWiseDgiLayerConfig dgiLayerConfig =
analyst.graphWiseDgiLayerConfigBuilder()
    .setCorruptionFunction(new PermutationCorruption())
    .setDiscriminator(GraphWiseDgiLayerConfig.Discriminator.BILINEAR)
    .setReadoutFunction(GraphWiseDgiLayerConfig.ReadoutFunction.MEAN)
    .build();
UnsupervisedGraphWiseModel model = analyst.unsupervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex features")
    .setEdgeInputPropertyNames("edge features")
    .setDgiLayerConfig(dgiLayerConfig)
    .setLossFunction(UnsupervisedGraphWiseModelConfig.LossFunction.SIGMOID CRO
SS ENTROPY)
    .setConvLayerConfigs(convLayerConfig)
    .setWeightDecay(0.001)
    .setEmbeddingDim(256)
    .setLearningRate(0.05)
    .setNumEpochs(30)
    .setSeed(42)
    .setShuffle(false)
    .setStandardize(true)
    .setNormalize(false) // recommended
    .setBatchSize(64)
    .setEnableAccelerator(true) // Enable or disable GPU
    .build();
```

```
dgi_layer_config=dgi_layer,
    loss_fn="sigmoid_cross_entropy",
    vertex_input_property_names=["vertex_features"],
    edge_input_property_names=["edge_features"],
    weight_decay=0.001,
    layer_size=256,
    learning_rate=0.05,
    num_epochs=30,
    seed=42,
    standardize=True,
    normalize=False, # recommended
    batch_size=64,
    enable_accelerator=True # Enable or disable GPU
)

model = analyst.unsupervised_graphwise_builder(**params)
```

In the preceding example, you can replace <code>GraphWiseConvLayerConfig</code> with the <code>GraphWiseAttentionLayerConfig</code> class to build a graph attention network model. Also, note that if the number of sampled neighbors is set to -1 using <code>setNumSampledNeighbors</code>, then all the neighboring nodes will be sampled.

- JShell
- Java
- Python

JShell

```
GraphWiseAttentionLayerConfig convLayerConfig =
analyst.graphWiseAttentionLayerConfigBuilder()
    .setNumSampledNeighbors(25)
    .setActivationFunction(ActivationFunction.LEAKY_RELU)
    .setWeightInitScheme(WeightInitScheme.XAVIER_UNIFORM)
    .setHeadAggregation(AggregationOperation.MEAN)
    .setNumHeads(4)
```



```
.setDropoutRate(0.5)
.build();
```

See the Javadoc for more information.

17.4.4 Supported Property Types for Unsupervised GraphWise Model

The model supports two types of properties for both vertices and edges:

- continuous properties (boolean, double, float, integer, long)
- categorical properties (string)

For categorical properties, two categorical configurations are possible:

- One-hot-encoding: Each category is mapped to a vector, that is concatenated to other features (default)
- **Embedding table:** Each category is mapped to an embedding that is concatenated to other features and is trained along with the model

One-hot-encoding converts each category into an independent vector. This is useful if you want each category to be interpreted as an equally independent group. For instance, if there are categories ranging from A to E, where each alphabet has no specific meaning, then one-hot-encoding can be a good fit.

Embedding table is recommended if the semantics of the properties matter, and you want certain categories to be closer to each other than the others. For example, assume there is a day property with values ranging from *Monday* to *Sunday*. If you wish to preserve the idea that *Tuesday* is closer to *Wednesday* than *Saturday*, then by choosing the embedding table configuration, you can let the vectors that represent the categories to be learned during training, so that the vector that is mapped to *Tuesday* becomes close to that of *Wednesday*.

One advantage that the embedding table approach has over one-hot-encoding is that you can learn more suitable vectors to represent each category. However, this also means that a good amount of data is required to train the embedding table properly. The one-hot-encoding approach might be better for use-cases with limited training data.

When using the embedding table, users are allowed to set the out-of-vocabulary probability. With the given probability, the embedding will be set to the out-of-vocabulary embedding randomly during training, in order to make the model more robust to unseen categories during inference.

JShell

- Java
- Python

JShell

```
opg4j> import oracle.pgx.config.mllib.inputconfig.CategoricalPropertyConfig;
opq4j> var prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1").
    oneHotEncoding().
    setMaxVocabularySize(100).
   build()
opq4j> var prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2").
    embeddingTable().
    setShared(false). // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    setEmbeddingDimension(32).
    setOutOfVocabularyProbability(0.001). // probability to set the word
embedding to the out-of-vocabulary embedding
   build()
opq4j> var model = analyst.unsupervisedGraphWiseModelBuilder().
    setVertexInputPropertyNames(
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3" // string feature using one-hot-encoding
(default)
    setVertexInputPropertyConfigs(prop1config, prop2config).
    build()
```

```
import oracle.pqx.confiq.mllib.inputconfiq.CategoricalPropertyConfiq;
import oracle.pgx.config.mllib.inputconfig.InputPropertyConfig;
InputPropertyConfig prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1")
    .oneHotEncoding()
    .setMaxVocabularySize(100)
    .build();
InputPropertyConfig prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2")
    .embeddingTable()
    .setShared(false) // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    .setEmbeddingDimension(32)
    .setOutOfVocabularyProbability(0.001) // probability to set the word
embedding to the out-of-vocabulary embedding
    .build();
SupervisedGraphWiseModelBuilder model =
analyst.unsupervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames(
        "vertex int feature 1", // continuous feature
```

```
"vertex_str_feature_1", // string feature using one-hot-encoding
"vertex_str_feature_2", // string feature using embedding table
    "vertex_str_feature_3" // string feature using one-hot-encoding
(default)
    )
    .setVertexInputPropertyConfigs(proplconfig, prop2config)
    .build();
```

```
vertex input property configs = [
    analyst.one hot encoding categorical property config(
        property name="vertex str feature 1",
        max vocabulary size=100,
    ),
    analyst.learned embedding categorical property config(
        property name="vertex str feature 2",
        embedding dim=4,
        shared=False, // set whether to share the vocabulary or not when
several types have a property with the same name
        oov probability=0.001 // probability to set the word embedding to the
out-of-vocabulary embedding
model params = dict(
    vertex input property names=[
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3", // string feature using one-hot-encoding
(default)
    ],
    vertex input property configs=vertex input property configs
model = analyst.supervised graphwise builder(**model params)
```

17.4.5 Building an Unsupervised GraphWise Model Using Partitioned Graphs

You can build an Unsupervised GraphWise model using partitioned graphs which have different providers and features.

- JShell
- Java
- Python

JShell

Java

Python

Also, you can select specific providers as shown:

- JShell
- Java
- Python

JShell

```
UnsupervisedGraphWiseModel model = analyst.unsupervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider1_features",
"vertex_provider2_features")
    .setEdgeInputPropertyNames("edge_provider_features")
```

```
.setTargetVertexLabels("provider1")
.build();
```

If you wish to control the flow of the embeddings at each layer, you can enable or disable the required connections. By default, all the connections are enabled.

- JShell
- Java
- Python

JShell

```
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(10)
    .useVertexToVertexConnection(true)
    .useEdgeToVertexConnection(true)
    .useEdgeToEdgeConnection(false)
    .useVertexToEdgeConnection(false)
    .build();

UnsupervisedGraphWiseModel model = analyst.unsupervisedGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex provider1 features",
```



```
"vertex_provider2_features")
    .setEdgeInputPropertyNames("edge_provider_features")
    .setTargetVertexLabels("provider1")
    .setConvLayerConfigs(convLayerConfig)
    .build();
```

17.4.6 Training an Unsupervised GraphWise Model

You can train an Unsupervised GraphWise model on a graph as shown:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(trainGraph)
```

Java

model.fit(trainGraph);

model.fit(train graph)

You can also add a validation step to the training. When training a model, the optimal number of training epochs is not known in advance and it is one of the key parameters that determines the model quality. Being able to monitor the training and validation losses helps you to identify a good value for the model parameters and gain visibility in the training process. The evaluation frequency can be specified in terms of epoch or step. To configure a validation step, create a GraphWiseValidationConfig and pass it to the model builder as shown:

- JShell
- Java
- Python

JShell



```
be executed every 100 steps
   .build();
```

After configuring a validation step, you can then pass a graph for validation to the fit method together with the graph for training:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(trainGraph, valGraph)
```

Java

```
model.fit(trainGraph, valGraph);
```

Python

```
model.fit(train graph, valGraph)
```

17.4.7 Getting the Loss Value for an Unsupervised GraphWise Model

You can fetch the training loss value for an Unsupervised GraphWise Model as shown in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var loss = model.getTrainingLoss()
```

Java

```
double loss = model.getTrainingLoss();
```

Python

```
loss = model.get training loss()
```

17.4.8 Getting the Training Log for an Unsupervised GraphWise Model

If you configured a validation step (see Training an Unsupervised GraphWise Model) earlier, then you can fetch the training log that contains the training and validation loss information.

- JShell
- Java
- Python

JShell

```
opg4j> var trainingLog = model.getTrainingLog()
```

Java

PgxFrame trainingLog = model.getTrainingLog();

```
training log = model.get training log()
```



The output frame will be similar to the following example output:

Also, note the following:

- The first column will be named according to the evaluation frequency scale that was set in the validation configuration ("epoch" or "step").
- The validation loss is the average of the losses evaluated on all batches of the validation graph, while the training loss is the loss value logged at that epoch or step (that is, the loss evaluated on the last batch).
- The training log will be overwritten if the fit method is called multiple times.

17.4.9 Inferring Embeddings for an Unsupervised GraphWise Model

You can use a trained model to infer embeddings for unseen nodes and store them in the database as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexVectors = model.inferEmbeddings(fullGraph,
fullGraph.getVertices()).flattenAll()
opg4j> vertexVectors.write().
   db().
   name("vertex vectors").
   tablename("vertexVectors").
   overwrite(true).
   store()
```

```
PgxFrame vertexVectors =
model.inferEmbeddings(fullGraph, fullGraph.getVertices()).flattenAll();
vertexVectors.write()
   .db()
   .name("vertex vectors")
   .tablename("vertexVectors")
   .overwrite(true)
   .store();
```

```
vertex_vectors =
model.infer_embeddings(full_Graph,full_Graph.get_vertices()).flatten_all()
vertex_vectors.write().db().table_name("table_name").name("vertex_vectors").ov
erwrite(True).store()
```

The schema for the vertexVectors will be as follows without flattening (flattenAll splits the vector column into separate double-valued columns):



All the preceding examples assume that you are inferring the embeddings for a model in the current logged in database. If you must infer embeddings for the model in a different database then refer to the examples in Inferring Embeddings for a Model in Another Database.

17.4.10 Classifying the Vertices Using the Obtained Embeddings

You can use the obtained embeddings in downstream vertex classification tasks.

The following code shows how you can train a multi-layer perceptron (MLP) classifier, which takes the embeddings as input. It is assumed that the vertex label information is stored under the vertex property labels.

Python

```
vertex vectors with labels df = vertex vectors df.merge(vertex labels df,
on="vertexId")
feature_columns = [c for c in vertex_vectors_df.columns if
c.startswith("embedding")]
x = vertex vectors with labels df[feature columns].to numpy()
y = vertex_vectors_with labels df["labels"].to numpy()
scaler = StandardScaler()
x = scaler.fit transform(x)
# define an MLP classifier
model = MLPClassifier(
   hidden layer sizes=(6,),
   learning_rate_init=0.05,
   max iter=2000,
    random state=42,
# define a metric and evaluate with cross-validation
cv = RepeatedStratifiedKFold(n_splits=5, n_repeats=3, random_state=42)
scorer = make scorer(accuracy score, greater is better=True)
scores = cross val score(model, x, y, scoring=scorer, cv=cv, n jobs=-1)
```

17.4.11 Storing an Unsupervised GraphWise Model

You can store models in database. The models get stored as a row inside a model store table.

- JShell
- Java
- Python

JShell

```
store table)
   .description("a model description") // description to store alongside the
model
   .store();
```



All the preceding examples assume that you are storing the model in the current logged in database. If you must store the model in a different database then refer to the examples in Storing a Trained Model in Another Database.

17.4.12 Loading a Pre-Trained Unsupervised GraphWise Model

You can load models from a database.

- JShell
- Java
- Python

JShell

```
UnsupervisedGraphWiseModel model =
analyst.loadUnsupervisedGraphWiseModel().db()
    .modelstore("modeltablename") // name of the model store table
    .modelname("model") // model name (primary key of model store table)
    .load();
```





All the preceding examples assume that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the examples in Loading a Pre-Trained Model From Another Database.

17.4.13 Destroying an Unsupervised GraphWise Model

You can destroy an Unsupervised GraphWise model as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.destroy()
```

Java

model.destroy();

Python

model.destroy()

17.4.14 Explaining a Prediction for an Unsupervised GraphWise Model

In order to understand which features and vertices are important for a prediction of the Unsupervised GraphWise model, you can generate an UnsupervisedGnnExplanation using a technique similar to the GNNExplainer by Ying et al.

The explanation holds information related to:

- Graph structure: An importance score for each vertex
- **Features**: An importance score for each graph property

Note:

The vertex being explained is always assigned importance 1. Further, the feature importances are scaled such that the most important feature has importance 1.

Additionally, an UnsupervisedGnnExplanation contains the inferred embedding. You can get explanations for a model's predictions by using the UnsupervisedGnnExplainer object. The object can be obtained using the gnnExplainer method. After obtaining the UnsupervisedGnnExplainer object, you can use the inferAndExplain method to request an explanation for a vertex.

The parameters of the explainer can be configured while the explainer is being created or afterwards using the relevant setter functions. The configurable parameters for the <code>UnsupervisedGnnExplainer</code> are as follows:

- numOptimizationSteps: Number of optimization steps used by the explainer.
- learningRate: Learning rate of the explainer.
- marginalize: Determines if the explainer loss is marginalized over features. This can help
 in cases where there are important features that take values close to zero. Without
 marginalization the explainer can learn to mask such features out even if they are
 important. Marginalization solves this by learning a mask for the deviation from the
 estimated input distribution.
- numClusters: Number of clusters to use in the explainer loss. The unsupervised explainer
 uses k-means clustering to compute the explainer loss that is optimized. If the approximate
 number of components in the graph is known, it is a good idea to set the number of
 clusters to this number.
- numSamples: Number of vertex samples to use to optimize the explainer. For the sake of
 performance, the explainer computes the loss on this number of randomly sampled
 vertices. Using more samples will be more accurate but will take longer and use more
 resources.

Note that, in order to achieve best results, the features should be centered around 0.

For example, assume a simple graph, <code>componentGraph</code> which contains k densely connect <code>components</code>, that is, there are many edges between vertices of the same component and few edges between any two components. By training an Unsupervised GraphWise model on this graph, you can expect a model that produces similar embeddings for vertices in a densely connected component.

The following example shows how to generate an explanation on an inference component Graph. It is expected that vertices from the same component to have a higher importance than vertices from a different component. Note that the feature importances are not relevant in this example.

- JShell
- Java



JShell

```
opg4j> var componentGraph =
session.readGraphByName("<graph>",GraphSource.PG PGQL)
// explain prediction of vertex 0
opq4j> var feat1Property = componentGraph.getVertexProperty("feat1")
opg4j> var feat2Property = componentGraph.getVertexProperty("feat2")
// build and train an Unsupervised GraphWise model as explained in Advanced
Hyperparameter Customization
// obtain and configure the explainer
// setting the numClusters argument to the expected number of clusters may
// explanation results as the explainer optimization will try to cluster
samples into
// this number of clusters
opg4j> var explainer = model.gnnExplainer().numClusters(50)
// set the number of samples to compute the loss over during explainer
optimization
opg4j> explainer.numSamples(10000)
// explain prediction of vertex 0
opg4j> var explanation = explainer.inferAndExplain(componentGraph,
componentGraph.getVertex(0), 10)
// retrieve computation graph with importance
opg4j> var importanceGraph = explanation.getImportanceGraph()
// retrieve importance of vertices
// vertex 1 is in the same densely connected component as vertex 0
// vertex 2 is in a different component
opg4j> var importanceProperty = explanation.getVertexImportanceProperty()
opq4j> var importanceVertex0 = importanceProperty.qet(0) // has importance 1
opg4j> var importanceVertex1 = importanceProperty.get(1) // high importance
opg4j> var importanceVertex2 = importanceProperty.get(2) // low importance
opg4j> var featureImportances = explanation.getVertexFeatureImportance()
opg4j> var importanceConstProp = featureImportances.get(constProperty) //
small as unimportant
opg4j> var importanceLabelProp = featureImportances.get(labelProperty) //
large (1) as important
// optionally retrieve feature importance
opg4j> var featureImportances = explanation.getVertexFeatureImportance()
opg4j> var importanceFeat1Prop = featureImportances.get(feat1Property)
opg4j> var importanceFeat2Prop = featureImportances.get(feat2Property)
Java
```

```
PgxGraph componentGraph =
session.readGraphByName("<graph>",GraphSource.PG PGQL); // load graph
```

```
VertexProperty<Integer, Float> feat1Property =
componentGraph.getVertexProperty("feat1");
VertexProperty<Integer, Float> feat2Property =
componentGraph.getVertexProperty("feat2");
// build and train an Unsupervised GraphWise model as explained in Advanced
Hyperparameter Customization
// obtain and configure the explainer
// setting the numClusters argument to the expected number of clusters may
improve
// explanation results as the explainer optimization will try to cluster
samples into
// this number of clusters
UnsupervisedGnnExplainer explainer = model.gnnExplainer().numClusters(50);
// set the number of samples to compute the loss over during explainer
optimization
explainer.numSamples(10000);
// explain prediction of vertex 0
UnsupervisedGnnExplanation<Integer> explanation =
explainer.inferAndExplain(componentGraph, componentGraph.getVertex(0));
// retrieve computation graph with importances
PgxGraph importanceGraph = explanation.getImportanceGraph();
// retrieve importance of vertices
// vertex 1 is in the same densely connected component as vertex 0
// vertex 2 is in a different component
VertexProperty<Integer, Float> importanceProperty =
explanation.getVertexImportanceProperty();
float importanceVertex0 = importanceProperty.get(0); // has importance 1
float importanceVertex1 = importanceProperty.qet(1); // high importance
float importanceVertex2 = importanceProperty.get(2); // low importance
// retrieve feature importance (not relevant for this example)
Map<VertexProperty<Integer, ?>, Float> featureImportances =
explanation.getVertexFeatureImportance();
float importanceFeat1Prop = featureImportances.get(feat1Property);
float importanceFeat2Prop = featureImportances.get(feat2Property);
Python
# load 'component graph' with vertex features 'feat1' and 'feat2'
feat1 property = component graph.get vertex property("feat1")
feat2 property = component graph.get vertex property("feat2")
# build and train an Unsupervised GraphWise model as explained in Advanced
Hyperparameter Customization
# obtain and configure the explainer
# setting the num clusters argument to the expected number of clusters may
improve
# explanation results as the explainer optimization will try to cluster
samples into
```

```
# this number of clusters
explainer = model.gnn explainer(num clusters=50)
# set the number of samples to compute the loss over during explainer
optimization
explainer.num samples = 10000
# explain prediction of vertex 0
explanation = explainer.infer and explain(
    graph=component graph,
   vertex=component graph.get vertex(0)
# retrieve computation graph with importances
importance graph = explanation.get importance graph()
# retrieve importance of vertices
# vertex 1 is in the same densely connected component as vertex 0
# vertex 2 is in a different component
importance property = explanation.get vertex importance property()
importance vertex 0 = importance property[0] # has importance 1
importance vertex 1 = importance property[1] # high importance
importance vertex 2 = importance property[2] # low importance
# retrieve feature importance (not relevant for this example)
feature importances = explanation.get vertex feature importance()
importance feat1 prop = feature importances[feat1 property]
importance feat2 prop = feature importances[feat2 property]
```

See Also:

- Building a Minimal Unsupervised GraphWise Model
- Training an Unsupervised GraphWise Model

17.5 Using the Unsupervised EdgeWise Algorithm

UnsupervisedEdgeWise is an inductive edge representation learning algorithm which is able to leverage vertex and edge feature information. It can be applied to a wide variety of tasks, including unsupervised learning edge embeddings for edge classification.

Unsupervised EdgeWise is based on top of the <code>GraphWise</code> model, leveraging the source vertex embedding and the destination vertex embedding generated by the <code>GraphWise</code> model to generate inductive edge embeddings.

The training is based on Deep Graph Infomax (DGI) by Velickovic et al.

Model Structure

An UnsupervisedEdgeWise model consists of graph convolutional layers followed by an embedding layer which defaults to a DGI layer.

First, the source and destination vertices of the target edge are processed through the convolutional layers. The forward pass through a convolutional layer for a vertex proceeds as follows:

- 1. A set of neighbors of the vertex is sampled.
- 2. The previous layer representations of the neighbors are mean-aggregated, and the aggregated features are concatenated with the previous layer representation of the vertex.
- 3. This concatenated vector is multiplied with weights, and a bias vector is added.
- 4. The result is normalized such that the layer output has unit norm.

The edge embedding layer concatenates the source vertex embedding, the edge features and the destination vertex embedding, and then forwards it through a linear layer to get the edge embedding.

The DGI Layer consists of three parts enabling unsupervised learning using embeddings produced by the convolution layers.

- 1. **Corruption function:** Shuffles the node features while preserving the graph structure to produce negative embedding samples using the convolution layers.
- 2. Readout function: Sigmoid activated mean of embeddings, used as summary of a graph.
- 3. **Discriminator:** Measures the similarity of positive (unshuffled) embeddings with the summary as well as the similarity of negative samples with the summary from which the loss function is computed.

Since none of these contains mutable hyperparameters, the default DGI layer is always used and cannot be adjusted.

The second embedding layer available is the Dominant Layer, based on Deep Anomaly Detection on Attributed Networks (Dominant) by Ding, Kaize, et al.

Dominant is a model that detects anomalies based on the features and the neighbors' structure. Using GCNs to reconstruct the features in an autoencoder's settings, and the mask with the dot products of the embeddings.

The loss function is computed from the feature reconstruction loss and the structure reconstruction loss. The importance given to features or to the structure can be tuned with the alpha hyperparameter.

The following describes the usage of the main functionalities of UnsupervisedEdgeWise in PGX using the Movielens graph as an example.

- Loading a Graph
- Building a Minimal Unsupervised EdgeWise Model
- Advanced Hyperparameter Customization
- Supported Property Types for Unsupervised EdgeWise Model
- Applying Unsupervised EdgeWise for Partitioned Graphs
- Setting the Edge Combination Production Method
- Training an Unsupervised EdgeWise Model
- Getting the Loss Value for an Unsupervised EdgeWise Model
- Getting the Training Log for an Unsupervised EdgeWise Model
- Inferring Embeddings for an Unsupervised EdgeWise Model
- Classifying the Edges Using the Obtained Embeddings



- Storing an Unsupervised EdgeWise Model
- Loading a Pre-Trained Unsupervised EdgeWise Model
- · Destroying an Unsupervised Anomaly Detection GraphWise Model
- Example: Computing Edge Embeddings on the Movielens Dataset

17.5.1 Loading a Graph

The following describes the steps for loading a graph:

- Create a Session and an Analyst.
 - JShell
 - Java
 - Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
opg4j> import oracle.pgx.config.mllib.ActivationFunction
opg4j> import oracle.pgx.config.mllib.WeightInitScheme
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.mllib.UnsupervisedEdgeWiseModel;
import oracle.pgx.api.filter.EdgeFilter;
import oracle.pgx.api.frames.*;
import oracle.pgx.config.mllib.ActivationFunction;
import oracle.pgx.config.mllib.GraphWiseConvLayerConfig;
import oracle.pgx.config.mllib.GraphWiseDgiLayerConfig;
import oracle.pgx.config.mllib.corruption.PermutationCorruption;
import oracle.pgx.config.mllib.UnsupervisedEdgeWiseModelConfig;
import oracle.pgx.config.mllib.WeightInitScheme;
```

Python

starting the Python shell will create an implicit session and analyst

- 2. Load the graph.
 - JShell

- Java
- Python

JShell

Java

17.5.2 Building a Minimal Unsupervised EdgeWise Model

You can build an EdgeWise model using the minimal configuration and default hyper-parameters as described in the following code. Note that even though only one feature property is needed (either on vertices with setVertexInputPropertyNames or edges with setEdgeInputPropertyNames) for the model to work, you can specify as many as required.

- JShell
- Java
- Python

JShell

Java

```
UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_features")
    .setEdgeInputPropertyNames("edge_features")
    .build();
```

Python

17.5.3 Advanced Hyperparameter Customization

You can build an Unsupervised EdgeWise model using rich hyperparameter customization. Internally for each node, GraphWise applies an aggregation of the representation of neighbors. You can configure this operation through one of the following sub-config classes:

- GraphWiseConvLayerConfig: GraphWiseConvLayer is based on Inductive Representation Learning on Large GraphS (GraphSage) by Hamilton et al.
- GraphWiseAttentionLayerConfig: GraphWiseAttentionLayer is based on Graph Attention
 Networks (GAT) by Velickovic et al. which makes the aggregation smarter but comes with
 larger computation cost.

Also, you can enable or disable a graphics processing unit (GPU) by using the enable_ml_accelerators graph server (PGX) configuration parameter (see Configuration Parameters for the Graph Server (PGX) Engine for more information). In addition, ensure that your system meets the following prerequisites to use the GPU support:

- You must have a GPU device with the CUDA (Compute Unified Device Architecture) toolkit installed.
- The following list of CUDA libraries are expected:

```
libcuda.so.1libnvrtc.so.12libnvToolsExt.so.1libcudart.so.12
```

Note that the <code>enable_ml_accelerators</code> option is enabled by default. But if a GPU device is not detected and the CUDA toolkit is not installed, then this feature gets disabled and the CPU will be used for all the PgxML library operations.

The following code examples uses the <code>GraphWiseConvLayerConfig</code> class for the convolutional layer configuration. The examples also specifies a weight decay parameter of 0.001 and dropout with dropping probability 0.5 for the GraphWise model to counteract overfitting. Also, it is recommended to disable normalization of embeddings when you intend to use them in downstream classfication tasks. Note that the <code>setEnableAccelerator</code> method is enabled to use any available GPU.

- JShell
- Java
- Python

```
opq4j> var weightProperty = analyst.pagerank(trainGraph).getName()
opg4j> var convLayerConfig = analyst.graphWiseConvLayerConfigBuilder().
         setNumSampledNeighbors (25).
         setActivationFunction(ActivationFunction.TANH).
         setWeightInitScheme(WeightInitScheme.XAVIER).
         setWeightedAggregationProperty(weightProperty).
         setDropoutRate(0.5).
         build()
opg4j> var dgiLayerConfig = analyst.graphWiseDgiLayerConfigBuilder().
         setCorruptionFunction(new PermutationCorruption()).
         setDiscriminator(GraphWiseDgiLayerConfig.Discriminator.BILINEAR).
         setReadoutFunction(GraphWiseDgiLayerConfig.ReadoutFunction.MEAN).
         build()
opg4j> var model = analyst.unsupervisedEdgeWiseModelBuilder().
         setVertexInputPropertyNames("vertex features").
         setEdgeInputPropertyNames("edge features").
         setConvLayerConfigs(convLayerConfig).
         setDgiLayerConfig(dgiLayerConfig).
         setWeightDecay(0.001).
         setNormalize(false). // recommended
```

```
setEnableAccelerator(true). // Enable or disable GPU
build()
```

Java

```
String weightProperty = analyst.pagerank(trainGraph).getName();
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(25)
    .setActivationFunction(ActivationFunction.TANH)
    .setWeightInitScheme(WeightInitScheme.XAVIER)
    .setWeightedAggregationProperty(weightProperty)
    .setDropoutRate(0.5)
    .build();
GraphWiseDgiLayerConfig dgiLayerConfig =
analyst.graphWiseDgiLayerConfigBuilder()
    .setCorruptionFunction(new PermutationCorruption())
    .setDiscriminator(GraphWiseDgiLayerConfig.Discriminator.BILINEAR)
    .setReadoutFunction(GraphWiseDqiLayerConfig.ReadoutFunction.MEAN)
    .build();
UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex features")
    .setEdgeInputPropertyNames("edge features")
    .setConvLayerConfigs(convLayerConfig)
    .setDgiLayerConfigs(dgiLayerConfig)
    .setWeightDecay(0.001)
    .setNormalize(false) // recommended
    .setEnableAccelerator(true) // Enable or disable GPU
    .build();
```

In the preceding example, you can replace <code>GraphWiseConvLayerConfig</code> with the <code>GraphWiseAttentionLayerConfig</code> class to build a graph attention network model. Also, note that if the number of sampled neighbors is set to -1 using <code>setNumSampledNeighbors</code>, then all the neighboring nodes will be sampled.

- JShell
- Java
- Python

JShell

```
opg4j> var convLayerConfig = analyst.graphWiseAttentionLayerConfigBuilder().
    setNumSampledNeighbors(25).
    setActivationFunction(ActivationFunction.LEAKY_RELU).
    setWeightInitScheme(WeightInitScheme.XAVIER_UNIFORM).
    setHeadAggregation(AggregationOperation.MEAN).
    setNumHeads(4).
    setDropoutRate(0.5).
    build()
```

Java

```
GraphWiseAttentionLayerConfig convLayerConfig =
analyst.graphWiseAttentionLayerConfigBuilder()
    .setNumSampledNeighbors(25)
    .setActivationFunction(ActivationFunction.LEAKY_RELU)
    .setWeightInitScheme(WeightInitScheme.XAVIER_UNIFORM)
    .setHeadAggregation(AggregationOperation.MEAN)
    .setNumHeads(4)
    .setDropoutRate(0.5)
    .build();
```

```
num_heads=4,
dropout rate=0.5)
```

See the Javadoc for more information.

17.5.4 Supported Property Types for Unsupervised EdgeWise Model

The model supports two types of properties for both vertices and edges:

- continuous properties (boolean, double, float, integer, long)
- categorical properties (string)

For categorical properties, two categorical configurations are possible:

- One-hot-encoding: Each category is mapped to a vector, that is concatenated to other features (default)
- **Embedding table:** Each category is mapped to an embedding that is concatenated to other features and is trained along with the model

One-hot-encoding converts each category into an independent vector. This is useful if you want each category to be interpreted as an equally independent group. For instance, if there are categories ranging from A to E, where each alphabet has no specific meaning, then one-hot-encoding can be a good fit.

Embedding table is recommended if the semantics of the properties matter, and you want certain categories to be closer to each other than the others. For example, assume there is a day property with values ranging from *Monday* to *Sunday*. If you wish to preserve the idea that *Tuesday* is closer to *Wednesday* than *Saturday*, then by choosing the embedding table configuration, you can let the vectors that represent the categories to be learned during training, so that the vector that is mapped to *Tuesday* becomes close to that of *Wednesday*.

One advantage that the embedding table approach has over one-hot-encoding is that you can learn more suitable vectors to represent each category. However, this also means that a good amount of data is required to train the embedding table properly. The one-hot-encoding approach might be better for use-cases with limited training data.

When using the embedding table, users are allowed to set the out-of-vocabulary probability. With the given probability, the embedding will be set to the out-of-vocabulary embedding randomly during training, in order to make the model more robust to unseen categories during inference.

- JShell
- Java
- Python

```
opg4j> import oracle.pgx.config.mllib.inputconfig.CategoricalPropertyConfig
opg4j> var prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1").
```



```
oneHotEncoding().
    setMaxVocabularySize(100).
   build()
opg4j> var prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2").
    embeddingTable().
    setShared(false). // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    setEmbeddingDimension(32).
    setOutOfVocabularyProbability(0.001). // probability to set the word
embedding to the out-of-vocabulary embedding
   build()
opg4j> var model = analyst.supervisedEdgeWiseModelBuilder().
    setVertexInputPropertyNames(
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3" // string feature using one-hot-encoding
(default)
   ) .
    setVertexInputPropertyConfigs(prop1config, prop2config).
   build()
Java
import oracle.pgx.config.mllib.inputconfig.CategoricalPropertyConfig;
import oracle.pgx.config.mllib.inputconfig.InputPropertyConfig;
InputPropertyConfig prop1config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 1")
    .oneHotEncoding()
    .setMaxVocabularySize(100)
    .build();
InputPropertyConfig prop2config =
analyst.categoricalPropertyConfigBuilder("vertex str feature 2")
    .embeddingTable()
    .setShared(false) // set whether to share the vocabulary or not when
several vertex types have a property with the same name
    .setEmbeddingDimension(32)
    .setOutOfVocabularyProbability(0.001) // probability to set the word
embedding to the out-of-vocabulary embedding
    .build();
UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames(
```

"vertex int feature 1", // continuous feature

.setVertexInputPropertyConfigs(prop1config, prop2config)

"vertex_str_feature_1", // string feature using one-hot-encoding
"vertex_str_feature_2", // string feature using embedding table
"vertex str feature 3" // string feature using one-hot-encoding

(default)

.build();

```
vertex input property configs = [
    analyst.one hot encoding categorical property config(
        property name="vertex str feature 1",
        max vocabulary size=100
    ),
    analyst.learned embedding categorical property config(
        property name="vertex str feature 2",
        embedding dim=4,
        shared=False, // set whether to share the vocabulary or not when
several types have a property with the same name
        oov probability=0.001 // probability to set the word embedding to the
out-of-vocabulary embedding
model params = dict(
    vertex input property names=[
        "vertex int feature 1", // continuous feature
        "vertex str feature 1", // string feature using one-hot-encoding
        "vertex str feature 2", // string feature using embedding table
        "vertex str feature 3", // string feature using one-hot-encoding
(default)
    ],
    vertex input property configs=vertex input property configs
model = analyst.unsupervised edgewise builder(**model params)
```

17.5.5 Applying Unsupervised EdgeWise for Partitioned Graphs

You can apply unsupervised edgewise on partitioned graphs, where you have different providers and different features.

- JShell
- Java
- Python



Java

Python

You can select which providers you want to train or infer on:

- JShell
- Java
- Python

JShell

Java

```
UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider_features")
    .setEdgeInputPropertyNames("edge_provider1_features",
"edge_provider2_features")
    .setTargetEdgeLabels("provider1")
    .build();
```

```
model = analyst.unsupervised edgewise builder(**params)
```

If you wish to control the flow of the embeddings at each graph convolutional layer of the underlying Graphwise model, then you can enable or disable the connections of interest. By default, all the connections are enabled.

- JShell
- Java
- Python

JShell

```
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(10)
    .useVertexToVertexConnection(true)
    .useEdgeToVertexConnection(true)
    .useEdgeToEdgeConnection(false)
    .useVertexToEdgeConnection(false)
    .build();

UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider1_features",
"vertex_provider2_features")
    .setEdgeInputPropertyNames("edge_provider_features")
    .setTargetEdgeLabels("provider1")
    .setConvLayerConfigs(convLayerConfig)
    .build();
```



17.5.6 Setting the Edge Combination Production Method

By default, the edge embedding is computed by combining the source vertex embedding, the destination vertex embedding and the edge features. You can manually set these by setting the EdgeCombinationMethod with booleans parameters:

- JShell
- Java
- Python

Java

```
import oracle.pgx.config.mllib.edgecombination.EdgeCombinationMethod;
import oracle.pgx.config.mllib.edgecombination.EdgeCombinationMethods;

EdgeCombinationMethod method =
   EdgeCombinationMethods.concatEdgeCombinationMethod(useSourceVertex,
   useDestinationVertex, useEdge);

UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
        .setVertexInputPropertyNames("vertex_features")
        .setEdgeInputPropertyNames("edge_features")
        .setEdgeCombinationMethod(method)
        .build();
```

Python

17.5.7 Training an Unsupervised EdgeWise Model

You can train an UnsupervisedEdgeWiseModel on a graph as shown:

- JShell
- Java
- Python

```
opg4j> model.fit(trainGraph)
```

Java

```
model.fit(trainGraph);
```

Python

```
model.fit(train graph)
```

You can also add a validation step to the training. When training a model, the optimal number of training epochs is not known in advance and it is one of the key parameters that determines the model quality. Being able to monitor the training and validation losses helps you to identify a good value for the model parameters and gain visibility in the training process. The evaluation frequency can be specified in terms of epoch or step. To configure a validation step, create a GraphWiseValidationConfig and pass it to the model builder as shown:

- JShell
- Java
- Python

JShell



```
options: EPOCH, STEP (default: EPOCH)
    .build();

UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_features")
    .setEdgeInputPropertyNames("edge_features")
    .setValidationConfig(validationConfig) // configuring the validation to
be executed every 100 steps
    .build();
```

After configuring a validation step, you can then pass a graph for validation to the fit method together with the graph for training:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(trainGraph, valGraph)
```

Java

```
model.fit(trainGraph, valGraph);
```

```
model.fit(train graph, valGraph)
```

17.5.8 Getting the Loss Value for an Unsupervised EdgeWise Model

You can fetch the training loss value for an Unsupervised EdgeWise Model as shown in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var loss = model.getTrainingLoss()
```

Java

```
double loss = model.getTrainingLoss();
```

Python

```
loss = model.get_training_loss()
```

17.5.9 Getting the Training Log for an Unsupervised EdgeWise Model

If you configured a validation step (see Training an Unsupervised EdgeWise Model) earlier, then you can fetch the training log that contains the training and validation loss information.

- JShell
- Java
- Python

JShell

```
opg4j> var trainingLog = model.getTrainingLog()
```

Java

PgxFrame trainingLog = model.getTrainingLog();

```
training log = model.get training log()
```

The output frame will be similar to the following example output:

17.5.10 Inferring Embeddings for an Unsupervised EdgeWise Model

You can use a trained model to infer embeddings for unseen nodes and store them in the database as described in the following code:

- JShell
- Java
- Python

JShell

```
PgxFrame edgeVectors = model.inferEmbeddings(fullGraph,
testEdges).flattenAll();
edgeVectors.write()
   .db()
   .name("edge vectors")
   .tablename("edgeVectors")
   .overwrite(true)
   .store();
```



```
edge_vectors = model.infer_embeddings(full_Graph, test_edges).flatten_all()
edge_vectors.write().db().table_name("table_name").name("edge_vectors").overwr
ite(True).store()
```

The schema for the <code>edgeVectors</code> will be as follows without flattening (flattenAll splits the vector column into separate double-valued columns):

All the preceding examples assume that you are inferring the embeddings for a model in the current logged in database. If you must infer embeddings for the model in a different database, then you must additionally provide the database credentials such as username, password, and jdbcUrl to the inferEmbeddings method. Refer to Inferring Embeddings for a Model in Another Database for an example.

17.5.11 Classifying the Edges Using the Obtained Embeddings

You can use the obtained embeddings in downstream edge classification tasks.

The following code shows how you can train a multi-layer perceptron (MLP) classifier, which takes the embeddings as input. It is assumed that the edge label information is stored under the edge property labels.

Python

```
c.startswith("embedding")]
x = edge \ vectors \ with \ labels \ df[feature \ columns].to \ numpy()
y = edge vectors with labels df["labels"].to numpy()
scaler = StandardScaler()
x = scaler.fit transform(x)
# define an MLP classifier
model = MLPClassifier(
    hidden layer sizes=(6,),
    learning rate init=0.05,
    max iter=2000,
    random state=42,
)
# define a metric and evaluate with cross-validation
cv = RepeatedStratifiedKFold(n splits=5, n repeats=3, random state=42)
scorer = make scorer(accuracy score, greater is better=True)
scores = cross val score(model, x, y, scoring=scorer, cv=cv, n jobs=-1)
```

17.5.12 Storing an Unsupervised EdgeWise Model

You can store models in the database. The models get stored as a row inside a model store table

The following shows how to store a trained UnsupervisedEdgeWise model in the database in a specific model store table:

- JShell
- Java
- Python

JShell

```
.description("a model description") // description to store alongside the
model
    .store();
```



All the preceding examples assume that you are storing the model in the current logged in database. If you must store the model in a different database then refer to the examples in Storing a Trained Model in Another Database.

17.5.13 Loading a Pre-Trained Unsupervised EdgeWise Model

You can load a pre-trained UnsupervisedEdgeWise model from a model store table in the database as shown:

- JShell
- Java
- Python

JShell

```
UnsupervisedEdgeWiseModel model = analyst.loadUnsupervisedEdgeWiseModel().db()
    .modelstore("modeltablename") // name of the model store table
    .modelname("model") // model name (primary key of model store table)
    .load();
```

Note:

All the preceding examples assume that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the examples in Loading a Pre-Trained Model From Another Database.

17.5.14 Destroying an Unsupervised Anomaly Detection GraphWise Model

You can destroy an Unsupervised Anomaly Detection GraphWise model as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.destroy()
```

Java

model.destroy();

Python

model.destroy()

17.5.15 Example: Computing Edge Embeddings on the Movielens Dataset

This section describes the usage of UnsupervisedEdgeWise in PGX using the Movielens graph as an example.

This data set consists of 100,000 ratings (1-5) from 943 users on 1682 movies, with simple demographic information for the users (age, gender, occupation) and movies (year,

aggravating, genre). Users and movies are vertices, while ratings of users to movies are edges with a rating feature.

The following example predicts the ratings using the UnsupervisedEdgeWise model. You first build the model and fit it on the trainGraph.

- JShell
- Java
- Python

JShell

```
opg4j> var convLayer = analyst.graphWiseConvLayerConfigBuilder().
        setNumSampledNeighbors(10).
        build()
opg4j> var model = analyst.unsupervisedEdgeWiseModelBuilder().
        setVertexInputPropertyNames("movie year", "avg rating",
"movie genres", // Movies features
            "user occupation label", "user gender", "raw user age"). // Users
features
        setEdgeInputPropertyNames("user rating").
        setConvLayerConfigs(convLayer).
        setNumEpochs(10).
        setEmbeddingDim(32).
        setLearningRate(0.003).
        setStandardize(true).
        setNormalize(false). //recommended
        setSeed(0).
        build()
opg4j> model.fit(trainGraph)
```

```
GraphWiseConvLayerConfig convLayer = analyst.graphWiseConvLayerConfigBuilder()
        .setNumSampledNeighbors(10)
        .build();
UnsupervisedEdgeWiseModel model = analyst.unsupervisedEdgeWiseModelBuilder()
        .setVertexInputPropertyNames("movie year", "avg rating",
"movie genres", // Movies features
            "user occupation label", "user gender", "raw user age") // Users
features
        .setEdgeInputPropertyNames("user rating")
        .setConvLayerConfigs(convLayer)
        .setNumEpochs(10)
        .setEmbeddingDim(32)
        .setLearningRate(0.003)
        .setStandardize(true)
        .setNormalize(false) //recommended
        .setSeed(0)
```

```
.build();
model.fit(trainGraph);
```

Since EdgeWise is inductive, you can infer the ratings for unseen edges:

- JShell
- Java
- Python

JShell

```
opg4j> var embeddings = model.inferEmbeddings(fullGraph, testEdges)
opg4j> embeddings.head().print()
```

Java

```
PgxFrame embeddings = model.inferEmbeddings(fullGraph,testEdges);
embeddings.head().print();
```

```
embeddings = model.infer_embeddings(full_graph, test_edges)
embeddings.print()
```

17.6 Using the Unsupervised Anomaly Detection GraphWise Algorithm (Vertex Embeddings and Anomaly Scores)

UnsupervisedAnomalyDetectionGraphWise is an inductive vertex representation learning and anomaly detection algorithm which is able to leverage vertex and edge feature information. Although it can be applied to a wide variety of tasks, it is particularly suitable for unsupervised learning of vertex embeddings for anomaly detection. After training this model, it is possible to infer anomaly scores or labels for unseen nodes.

UnsupervisedAnomalyDetectionGraphWise is based on Deep Anomaly Detection on Attributed Networks (Dominant) by Ding, Kaize, et al.

Model Structure

A UnsupervisedAnomalyDetectionGraphWise model consists of graph convolutional layers followed by an embedding layer. There are two types of embedding layers - DGI layer and Dominant layer. Both the layers are for inductive vertex representation learning with different loss functions. The embedding layer defaults to the DGI layer.

The forward pass through a convolutional layer for a vertex proceeds as follows:

- 1. A set of neighbors of the vertex is sampled.
- 2. The previous layer representations of the neighbors are mean-aggregated, and the aggregated features are concatenated with the previous layer representation of the vertex.
- 3. This concatenated vector is multiplied with weights, and a bias vector is added.
- The result is normalized to such that the layer output has unit norm.

The DGI Layer, which is based on (Deep Graph Infomax (DGI) by Velickovic et al.) consists of three parts that enable unsupervised learning using embeddings produced by the convolution layers.

- 1. **Corruption function:** Shuffles the node features while preserving the graph structure to produce negative embedding samples using the convolution layers.
- 2. Readout function: Sigmoid activated mean of embeddings, used as summary of a graph.
- Discriminator: Measures the similarity of positive (unshuffled) embeddings with the summary as well as the similarity of negative samples with the summary from which the loss function is computed.

Since none of these contains mutable hyperparameters, the default DGI layer is always used and cannot be adjusted.

The Dominant layer enables unsupervised learning using a deep autoencoder. It uses the graph convolutional networks (GCNs) to reconstruct the features in the autoencoder setting, together with the reconstructed structure that is estimated using the dot products of the embeddings.

The loss function is computed from the feature reconstruction loss and the structure reconstruction loss. The importance given to features or to the structure can be tuned with the alpha hyperparameter.

The Dominant layer is based on Deep Anomaly Detection on Attributed Networks (Dominant) by Ding, Kaize, et al.



The following describes the usage of the main functionalities of the implementation of Dominant in PGX. The example demonstrates a scenario to detect fraudulent vertices based on their features.

- Loading a Graph
- Building a Minimal Unsupervised Anomaly Detection GraphWise Model
- Advanced Hyperparameter Customization
- Building an Unsupervised Anomaly Detection GraphWise Model Using Partitioned Graphs
- Training an Unsupervised Anomaly Detection GraphWise Model
- Getting the Loss Value for an Unsupervised Anomaly Detection GraphWise Model
- Inferring Embeddings for an Unsupervised Anomaly Detection GraphWise Model
- Inferring Anomalies
- Storing an Unsupervised Anomaly Detection GraphWise Model
- Loading a Pre-Trained Unsupervised Anomaly Detection GraphWise Model
- Destroying an Unsupervised Anomaly Detection GraphWise Model

17.6.1 Loading a Graph

The following describes the steps for loading a graph:

- Create a Session and an Analyst.
 - JShell
 - Java
 - Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
opg4j> import oracle.pgx.config.mllib.ActivationFunction
opg4j> import oracle.pgx.config.mllib.WeightInitScheme
```

```
import oracle.pgx.api.*;
import oracle.pgx.api.mllib.UnsupervisedAnomalyDetectionGraphWiseModel;
import oracle.pgx.api.frames.*;
import oracle.pgx.config.mllib.ActivationFunction;
import oracle.pgx.config.mllib.GraphWiseConvLayerConfig;
import
oracle.pgx.config.mllib.UnsupervisedAnomalyDetectionGraphWiseModelConfig;
import oracle.pgx.config.mllib.GraphWiseEmbeddingConfig;
import oracle.pgx.config.mllib.corruption.PermutationCorruption;
import oracle.pgx.config.mllib.WeightInitScheme;
```

starting the Python shell will create an implicit session and analyst

2. Load the graph.

- JShell
- Java
- Python

JShell

```
opg4j> var instance = GraphServer.getInstance("https://localhost:7007",
"<username>", "<password>".toCharArray())
opg4j> var session=instance.createSession("mySession")
opg4j> var graph =
session.readGraphByName("<graph_name>",GraphSource.PG_PGQL)
```

Java

```
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "<username>", "<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
PgxGraph graph =
session.readGraphByName("<graph name>",GraphSource.PG PGQL);
```

Python

```
instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
session = instance.create_session("my_session")
graph = session.read graph by name("<graph name>", "pg pgql")
```

17.6.2 Building a Minimal Unsupervised Anomaly Detection GraphWise Model

You can build an Unsupervised Anomaly Detection GraphWise model using the minimal configuration and default hyper-parameters. Note that even though only one feature property is specified in the following example, you can specify arbitrarily many.

- Java
- Python

JShell

Java

Python

```
model =
analyst.unsupervised_anomaly_detection_graphwise_builder(vertex_input_property
   names=["features"])
```

17.6.3 Advanced Hyperparameter Customization

You can build an Unsupervised Anomaly Detection GraphWise model using rich hyperparameter customization.

This is implemented using the sub-config classes, GraphWiseConvLayerConfig and GraphWiseEmbeddingConfig.

Also, you can enable or disable a graphics processing unit (GPU) by using the <code>enable_ml_accelerators</code> graph server (PGX) configuration parameter (see Configuration Parameters for the Graph Server (PGX) Engine for more information). In addition, ensure that your system meets the following prerequisites to use the GPU support:

- You must have a GPU device with the CUDA (Compute Unified Device Architecture) toolkit installed.
- The following list of CUDA libraries are expected:
 - libcuda.so.1libnvrtc.so.12libnvToolsExt.so.1

libcudart.so.12

Note that the <code>enable_ml_accelerators</code> option is enabled by default. But if a GPU device is not detected and the CUDA toolkit is not installed, then this feature gets disabled and the CPU will be used for all the PgxML library operations.

The following example specifies a weight decay parameter of 0.001 and dropout with dropping probability 0.5 for the model to counteract overfitting. The Dominant embedding layer's alpha value is specified as 0.6 to slightly increase the importance of the feature reconstruction. Also, note that the setEnableAccelerator method is enabled to use any available GPU.

- JShell
- Java
- Python

```
opg4j> var weightProperty = analyst.pagerank(trainGraph).getName()
opg4j> var convLayerConfig = analyst.graphWiseConvLayerConfigBuilder(). //
customize convolutional layer config
         setNumSampledNeighbors (25).
         setActivationFunction(ActivationFunction.TANH).
         setWeightInitScheme(WeightInitScheme.XAVIER).
         setWeightedAggregationProperty(weightProperty).
         setDropoutRate(0.5). // set dropout rate to prevent overfitting
         build()
opg4j> var predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder().
        setHiddenDimension(8).
        setActivationFunction(ActivationFunction.RELU).
        build()
opg4j> var dominantConfig = analyst.graphWiseDominantLayerConfigBuilder(). //
customize embedding layer config
        setDecoderLayerConfigs(predictionLayerConfig).
        setAlpha(0.6). // increase the importance of feature reconstruction
        build()
opg4j> var model =
analyst.unsupervisedAnomalyDetectionGraphWiseModelBuilder().
         setVertexInputPropertyNames("vertex features").
         setConvLayerConfigs(convLayerConfig).
         setEmbeddingConfig(dominantConfig).
         setWeightDecay(0.001). // set weight decay to prevent overfitting
         setEmbeddingDim(256).
         setLearningRate(0.05).
         setNumEpochs(30).
         setSeed(42).
         setShuffle(false).
         setStandardize(true).
         setBatchSize(64).
         setEnableAccelerator(true). // Enable or disable GPU
         build()
```



Java

```
// customize convolutional layer config
String weightProperty = analyst.pagerank(trainGraph).getName()
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(25)
    .setActivationFunction(ActivationFunction.TANH)
    .setWeightInitScheme (WeightInitScheme.XAVIER)
    .setWeightedAggregationProperty(weightProperty)
    .setDropoutRate(0.5) // set dropout rate to prevent overfitting
    .build();
GraphWisePredictionLayerConfig predictionLayerConfig =
analyst.graphWisePredictionLayerConfigBuilder()
    .setHiddenDimension(8)
    .setActivationFunction(ActivationFunction.RELU)
    .build();
// customize embedding layer config
GraphWiseEmbeddingConfig dominantConfig =
analyst.graphWiseDominantLayerConfigBuilder()
    .setDecoderLayerConfigs(predictionLayerConfig)
    .setAlpha(0.6) // increase the importance of feature reconstruction
    .build();
// build the anomaly detection model
UnsupervisedAnomalyDetectionGraphWiseModel model =
analyst.unsupervisedAnomalyDetectionGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex features")
    .setEmbeddingConfig(dominantConfig)
    .setConvLayerConfigs(convLayerConfig)
    .setWeightDecay(0.001) // set weight decay to prevent overfitting
    .setEmbeddingDim(256)
    .setLearningRate(0.05)
   .setNumEpochs(30)
    .setSeed(42)
    .setShuffle(false)
    .setStandardize(true)
    .setBatchSize(64)
    .setEnableAccelerator(true) // Enable or disable GPU
    .build();
```

```
# customize embedding layer config
dominant config = dict(alpha=0.6) # increase the importance of feature
reconstruction
dominant layer = analyst.graphwise dominant layer config(**dominant config)
# build the anomaly detection model
params = dict(conv layer config=[conv layer],
              embedding config=dominant layer,
              vertex input property names=["vertex features"],
              weight decay=0.001, # set weight decay to prevent overfitting
              layer size=256,
              learning rate=0.05,
              num epochs=30,
              seed=42,
              standardize=true,
              batch size=64,
              enable accelerator=True # Enable or disable GPU
model = analyst.unsupervised_anomaly_detection_graphwise_builder(**params)
```

17.6.4 Building an Unsupervised Anomaly Detection GraphWise Model Using Partitioned Graphs

You can build an Unsupervised Anomaly Detection GraphWise model using partitioned graphs which have different providers and features.

- JShell
- Java
- Python

JShell



```
"vertex_provider2_features")
.build();
```

```
params = dict(vertex_input_property_names=["vertex_provider1_features",
    "vertex_provider2_features"])
model = analyst.unsupervised_anomaly_detection_graphwise_builder(**params)
```

It is possible to select which providers you want to train or infer on:

- JShell
- Java
- Python

JShell

Java

```
UnsupervisedAnomalyDetectionGraphWiseModel model =
analyst.unsupervisedAnomalyDetectionGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider1_features",
"vertex_provider2_features")
    .build();
```

Python

```
params = dict(vertex_input_property_names=["vertex_provider1_features",
    "vertex_provider2_features"])
model = analyst.unsupervised anomaly detection graphwise builder(**params)
```

If you wish to control the flow of the embeddings at each layer, you can enable or disable the connections of interest. By default all the connections are enabled.



- Java
- Python

JShell

Java

```
GraphWiseConvLayerConfig convLayerConfig =
analyst.graphWiseConvLayerConfigBuilder()
    .setNumSampledNeighbors(10)
    .useVertexToVertexConnection(true)
    .useEdgeToVertexConnection(true)
    .useEdgeToEdgeConnection(false)
    .useVertexToEdgeConnection(false)
    .build();

UnsupervisedAnomalyDetectionGraphWiseModel model =
analyst.unsupervisedAnomalyDetectionGraphWiseModelBuilder()
    .setVertexInputPropertyNames("vertex_provider1_features",
"vertex_provider2_features")
    .setConvLayerConfigs(convLayerConfig)
    .build();
```

model = analyst.unsupervised_anomaly_detection_graphwise_builder(**params)

17.6.5 Training an Unsupervised Anomaly Detection GraphWise Model

You can train an Unsupervised Anomaly Detection GraphWise model on a graph as shown:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(graph)
```

Java

model.fit(graph);

Python

model.fit(graph)

17.6.6 Getting the Loss Value for an Unsupervised Anomaly Detection GraphWise Model

You can fetch the training loss value for an Unsupervised Anomaly Detection GraphWise model as shown in the following code:

- JShell
- Java
- Python

JShell

opg4j> var loss = model.getTrainingLoss()



Java

```
double loss = model.getTrainingLoss();
```

Python

```
loss = model.get_training_loss()
```

17.6.7 Inferring Embeddings for an Unsupervised Anomaly Detection GraphWise Model

You can use a trained model to infer embeddings for unseen nodes and store them in the database as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexVectors = model.inferEmbeddings(fullGraph,
fullGraph.getVertices()).flattenAll()
opg4j> vertexVectors.write().
   db().
   name("vertex vectors").
   tablename("vertexVectors").
   overwrite(true).
   store()
```

Java

```
PgxFrame vertexVectors =
model.inferEmbeddings(fullGraph, fullGraph.getVertices()).flattenAll();
vertexVectors.write()
   .db()
   .name("vertex vectors")
   .tablename("vertexVectors")
   .overwrite(true)
   .store();
```

```
vertex_vectors =
model.infer_embeddings(full_Graph,full_Graph.get_vertices()).flatten_all()
```

```
vertex_vectors.write().db().table_name("table_name").name("vertex_vectors").ov
erwrite(True).store()
```

The schema for the <code>vertexVectors</code> will be as follows without flattening (<code>flattenAll</code> splits the vector column into separate double-valued columns):

```
Note:
```

All the preceding examples assume that you are inferring the embeddings for a model in the current logged in database. If you must infer embeddings for the model in a different database then refer to the examples in Inferring Embeddings for a Model in Another Database.

17.6.8 Inferring Anomalies

You can use a trained model to infer anomaly scores or labels for unseen nodes and store them in the database as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexScores = model.inferAnomalyScores(fullGraph,
fullGraph.getVertices()).flattenAll()
opg4j> vertexScores.write().
   db().
   name("vertex scores").
   tablename("vertexScores").
   overwrite(true).
   store()
```

```
PgxFrame vertexScores =
model.inferAnomalyScores(fullGraph,fullGraph.getVertices()).flattenAll();
vertexScores.write()
   .db()
   .name("vertex scores")
   .tablename("vertexScores")
```



```
.overwrite(true)
.store();
```

```
vertex_scores =
model.infer_anomaly_scores(full_Graph,full_Graph.get_vertices()).flatten_all()
vertex_scores.write().db().table_name("table_name").name("vertex_scores").over
write(True).store()
```

If you know the contamination factor of the data, you can use it to find a good threshold:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexLabels = model.inferAnomalyScores(fullGraph,
fullGraph.getVertices()).flattenAll()
opg4j> vertexLabels.write().
   db().
   name("vertex labels").
   tablename("vertexLabels").
   overwrite(true).
   store()
```

Java

```
PgxFrame vertexLabels =
model.inferAnomalyScores(fullGraph,fullGraph.getVertices()).flattenAll();
vertexLabels.write()
   .db()
   .name("vertex labels")
   .tablename("vertexLabels")
   .overwrite(true)
   .store();
```

```
vertex_labels =
model.infer_anomaly_scores(full_Graph,full_Graph.get_vertices()).flatten_all()
vertex_labels.write().db().table_name("table_name").name("vertex_labels").over
write(True).store()
```



All the preceding examples assume that you are inferring anomalies for the model in the current logged in database. If you must infer anomalies in a different database, then you must additionally provide the database credentials such as username, password, and jdbcUrl to the inferAnomalyScores method.

- JShell
- Java
- Python

JShell

```
opg4j> vertexScores.write().
    db().
    name("vertex scores").
    tablename("vertexScores").
    username("user").
    password("password").
    jdbcUrl("jdbcUrl").
    overwrite(true).
    store()
```

Java

```
vertexScores.write()
    .db()
    .name("vertex scores")
    .tablename("vertexScores")
    .username("user")
    .password("password")
    .jdbcUrl("jdbcUrl")
    .overwrite(true)
    .store();
```

Python

17.6.9 Storing an Unsupervised Anomaly Detection GraphWise Model

You can store the trained models in a database. The models get stored as a row inside a model store table.

- JShell
- Java
- Python

JShell

Java

Python



All the preceding examples assume that you are storing the model in the current logged in database. If you must store the model in a different database then refer to the examples in Storing a Trained Model in Another Database.

17.6.10 Loading a Pre-Trained Unsupervised Anomaly Detection GraphWise Model

You can load pre-trained models from a model store table in database as follows.

- JShell
- Java
- Python

JShell

Java

```
UnsupervisedAnomalyDetectionGraphWiseModel model =
analyst.loadUnsupervisedAnomalyDetectionGraphWiseModel().db()
    .modelstore("modeltablename") // name of the model store table
    .modelname("model") // model name (primary key of model store table)
    .load();
```

Python



All the preceding examples assume that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the examples in Loading a Pre-Trained Model From Another Database.

17.6.11 Destroying an Unsupervised Anomaly Detection GraphWise Model

You can destroy an Unsupervised Anomaly Detection GraphWise model as described in the following code:



- Java
- Python

JShell

```
opg4j> model.destroy()
```

Java

model.destroy();

Python

model.destroy()

17.7 Using the Pg2vec Algorithm

Pg2vec learns representations of graphlets (partitions inside a graph) by employing edges as the principal learning units and thereby packing more information in each learning unit (as compared to employing vertices as learning units) for the representation learning task.

It consists of three main steps:

- Random walks for each vertex (with pre-defined length per walk and pre-defined number of walks per vertex) are generated.
- 2. Each edge in this random walk is mapped as a property.edge-word in the created document (with the document label as the graph-id) where the property.edge-word is defined as the concatenation of the properties of the source and destination vertices.
- 3. The generated documents (with their attached document labels) are fed to a doc2vec algorithm which generates the vector representation for each document, which is a graph in this case.

Pg2vec creates graphlet embeddings for a specific set of graphlets and cannot be updated to incorporate modifications on these graphlets. Instead, a new Pg2vec model should be trained on these modified graphlets.

The following represents the memory consumption of Pg2vec model.

```
0(2(n+m)*d)
```

where:

- n: is the number of vertices in the graph
- · m: is the number of graphlets in the graph
- d: is the embedding length

The following describes the usage of the main functionalities of the implementation of Pg2vec in PGX using NCI109 dataset as an example with 4127 graphs in it:

Loading a Graph

- Building a Minimal Pg2vec Model
- Building a Customized Pg2vec Model
- Training a Pg2vec Model
- Getting the Loss Value For a Pg2vec Model
- Computing Similar Graphlets for a Given Graphlet
- Computing Similars for a Graphlet Batch
- Inferring a Graphlet Vector
- Inferring Vectors for a Graphlet Batch
- Storing a Trained Pg2vec Model
- Loading a Pre-Trained Pg2vec Model
- Destroying a Pg2vec Model

17.7.1 Loading a Graph

The following describes the steps for loading a graph:

- Create a Session and an Analyst.
 - JShell
 - Java
 - Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.mllib.Pg2vecModel;
import oracle.pgx.api.frames.*;
```

Python

starting the Python shell will create an implicit session and analyst

- 2. Load the graph.
 - JShell

- Java
- Python

JShell

```
opg4j> var instance = GraphServer.getInstance("https://localhost:7007",
   "<username>", "<password>".toCharArray())
   opg4j> var session=instance.createSession("mySession")
   opg4j> var graph =
   session.readGraphByName("<graph name>",GraphSource.PG PGQL)
```

Java

```
ServerInstance instance = GraphServer.getInstance("https://
localhost:7007", "<username>", "<password>".toCharArray());
PgxSession session = instance.createSession("my-session");
PgxGraph graph =
session.readGraphByName("<graph name>",GraphSource.PG PGQL);
```

Python

```
instance = graph_server.get_instance("https://
localhost:7007","<username>","<password>")
session = instance.create_session("my_session")
graph = session.read graph by name("<graph name>", "pg pgql")
```

17.7.2 Building a Minimal Pg2vec Model

You can build a Pg2vec model using the minimal configuration and default hyper-parameters as described in the following code:

- JShell
- Java
- Python

JShell



Java

```
Pg2vecModel model = analyst.pg2vecModelBuilder()
    .setGraphLetIdPropertyName("graph_id")
    .setVertexPropertyNames(Arrays.asList("category"))
    .setWindowSize(4)
    .setWalksPerVertex(5)
    .setWalkLength(8)
    .build();
```

Python

```
model = analyst.pg2vec_builder(
    graphlet_id_property_name="graph_id",
    vertex_property_names=["category"],
    window_size=4,
    walks_per_vertex=5,
    walk_length=8)
```

You can specify the property name to determine each graphlet using the Pg2vecModelBuilder#setGraphLetIdPropertyName operation and also employ the vertex properties in Pg2vec which are specified using the Pg2vecModelBuilder#setVertexPropertyNames operation.

You can also use the weakly connected component (WCC) functionality in PGX to determine the graphlets in a given graph.

17.7.3 Building a Customized Pg2vec Model

You can build a Pg2vec model using customized hyper-parameters as described in the following code:

- JShell
- Java
- Python

JShell



```
setWindowSize(4).
setWalksPerVertex(5).
setWalkLength(8).
setUseGraphletSize(true).
setGraphletSizePropertyName("propertyName>").
build()
```

Java

```
Pg2vecModel model= analyst.pg2vecModelBuilder()
    .setGraphLetIdPropertyName("graph_id")
    .setVertexPropertyNames(Arrays.asList("category"))
    .setMinWordFrequency(1)
    .setBatchSize(128)
    .setNumEpochs(5)
    .setLayerSize(200)
    .setLearningRate(0.04)
    .setMinLearningRate(0.001)
    .setWindowSize(4)
    .setWalksPerVertex(5)
    .setWalkLength(8)
    .setUseGraphletSize(true)
    .setGraphletSizePropertyName("propertyName>")
    .build();
```

Python

```
model = analyst.pg2vec_builder(
    graphlet_id_property_name="graph_id",
    vertex_property_names=["category"],
    min_word_frequency=1,
    batch_size=128,
    num_epochs=5,
    layer_size=200,
    learning_rate=0.04,
    min_learning_rate=0.0001,
    window_size=4,
    walks_per_vertex=5,
    walk_length=8,
    use_graphlet_size=true,
    graphlet_size_property_name="roperty_name>")
```

See Pg2vecModelBuilder in Javadoc for more explanation for each builder operation along with the default values.

17.7.4 Training a Pg2vec Model

You can train a Pg2vec model with the specified default or customized settings as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.fit(graph)

Java
```

model.fit(graph);

Python

model.fit(graph)

17.7.5 Getting the Loss Value For a Pg2vec Model

You can fetch the training loss value on a specified fraction of training data (set in builder using setValidationFraction) as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var loss = model.getLoss()
```

Java

```
double loss = model.getLoss();
```

Python

loss = model.loss

17.7.6 Computing Similar Graphlets for a Given Graphlet

You can fetch the ${\tt k}$ most similar graphlets for a given graphlet as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var similars = model.computeSimilars(52, 10)
```

Java

```
PgxFrame similars = model.computeSimilars(52, 10);
```

Python

```
similars = model.compute similars(52, 10)
```

Searching for similar vertices for graphlet with ID = 52 using the trained model and printing it with similars.print(), will result in the following output:

```
| dstGraphlet | similarity
            | 1.0
| 10
            | 0.8748674392700195 |
| 23
             | 0.8551455140113831 |
| 26
            | 0.8493421673774719 |
| 47
            | 0.8411962985992432 |
| 25
             | 0.8281504511833191
1 43
             | 0.8202780485153198 |
| 24
            | 0.8179885745048523 |
| 8
            | 0.796689510345459 |
             | 0.7947834134101868 |
```

The following depicts the visualization of two similar graphlets (top: ID = 52 and bottom: ID = 10):

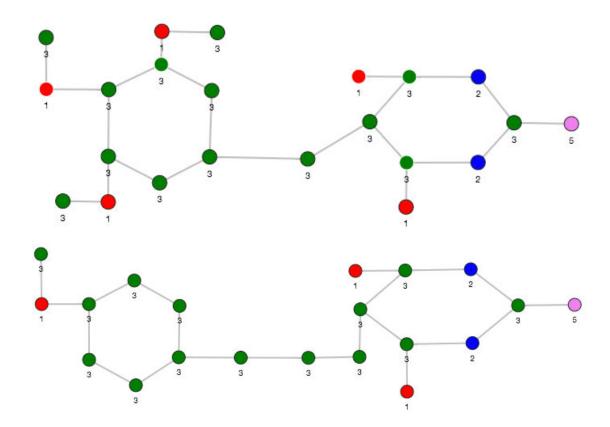


Figure 17-1 Pg2vec - Visualization of Two Similar Graphlets

17.7.7 Computing Similars for a Graphlet Batch

You can fetch the ${\it k}$ most similar graphlets for a batch of input graphlets as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var graphlets = new ArrayList()
opg4j> graphlets.add(52)
opg4j> graphlets.add(41)
opg4j> var batchedSimilars = model.computeSimilars(graphlets, 10)
```

Java

```
List graphlets = Arrays.asList(52,41);
PgxFrame batchedSimilars = model.computeSimilars(graphlets,10);
```

Python

```
batched_similars = model.compute_similars([52,41],10)
```

Searching for similar vertices for graphlet with ID = 52 and ID = 41 using the trained model and printing it with $batched_similars.print()$, will result in the following output:

 srcGraphlet		dstGraphlet		similarity
52		52		1.0
52		10		0.8748674392700195
52		23		0.8551455140113831
52		26		0.8493421673774719
52		47		0.8411962985992432
52		25		0.8281504511833191
52		43		0.8202780485153198
52		24		0.8179885745048523
52		8		0.796689510345459
52		9		0.7947834134101868
41		41		1.0
41		197		0.9653506875038147
41		84		0.9552277326583862
41		157		0.9465565085411072
41		65		0.9287481307983398
41		248		0.9177336096763611
41		315		0.9043129086494446
41		92		0.8998928070068359
41		297		0.8897411227226257
41		50		0.8810243010520935

17.7.8 Inferring a Graphlet Vector

You can infer the vector representation for a given new graphlet as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var graphlet = session.readGraphByName("<graph>",GraphSource.PG_PGQL)
opg4j> var inferredVector = model.inferGraphletVector(graphlet)
opg4j> inferredVector.print()
```

Java

```
PgxGraph graphlet = session.readGraphByName("<graph>",GraphSource.PG_PGQL);
PgxFrame inferredVector = model.inferGraphletVector(graphlet);
inferredVector.print();
```

Python

```
graphlet = session.read_graph_by_name("<graph>", "pg_pgql")
inferred_vector = model.infer_graphlet_vector(graphlet)
inferred_vector.print()
```

The schema for the inferredVector will be similar to the following output:

17.7.9 Inferring Vectors for a Graphlet Batch

You can infer the vector representations for multiple graphlets (specified with different graphids in a graph) as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var graphlet = session.readGraphByName("<graph>", GraphSource.PG_PGQL)
opg4j> var inferredVectorBatched = model.inferGraphletVectorBatched(graphlets)
opg4j> inferredVectorBatched.print()
```

Java

```
PgxGraph graphlet = session.readGraphByName("<graph>", GraphSource.PG_PGQL);
PgxFrame inferredVectorBatched = model.inferGraphletVectorBatched(graphlets);
inferredVector.print();
```

```
graphlets = session.read_graph_by_name("<graph>", "pg_pgql")
inferred_vector_batched = model.infer_graphlet_vector_batched(graphlets)
inferred_vector_batched.print()
```

The schema is same as for inferGraphletVector but with more rows corresponding to the input graphlets.

17.7.10 Storing a Trained Pg2vec Model

You can store models in database. The models get stored as a row inside a model store table.

The following code shows how to store a trained Pg2vec model in database in a specific model store table:

- JShell
- Java
- Python

JShell

Java





All the preceding examples assume that you are storing the model in the current logged in database. If you must store the model in a different database then refer to the examples in Storing a Trained Model in Another Database.

17.7.11 Loading a Pre-Trained Pg2vec Model

You can load models from a database.

You can load a pre-trained Pg2vec model from a model store table in database as described in the following:

- JShell
- Java
- Python

JShell

Java

```
Pg2vecModel model = analyst.loadPg2vecModel().db()
    .modelstore("modeltablename") // name of the model store table
    .modelname("model") // model name (primary key of model store table)
    .load();
```





All the preceding examples assume that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the examples in Loading a Pre-Trained Model From Another Database.

17.7.12 Destroying a Pg2vec Model

You can destroy a Pg2vec model as described in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> model.destroy()
```

Java

model.destroy();

Python

model.destroy()

17.8 Model Repository and Model Stores

A model store can be used to persist the trained graph server (PGX) machine learning models along with a model name (a unique identifier of the model in a particular model store) and a description.

The model repository API provides the following capabilities:

- Create a new model store
- List all the available model stores in the model repository
- Store a model in the model store
- List all the models in a given model store
- · Load a model from the model store
- Get the model description for a model that is stored in the given model store
- Delete a model from the given model store

- Delete the existing model stores
- Database-Backed Model Repository

17.8.1 Database-Backed Model Repository

In a database-backed model repository, each model store corresponds to a table in the database. Internally, the tables are prefixed by 'GMLS_'.

The following steps describe the usage of the model repository API with code examples.

- Create a model repository object as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var mr = analyst.modelRepository().db().open()
mr ==> oracle.pgx.api.mllib.DbModelRepository@5aac6f9f
```

Java

```
DbModelRepository mr = analyst.modelRepository().db().open();
```

Python

```
>>> mr = analyst.model_repository().db()
>>> mr
<pypgx.api.mllib._model_repo.ModelRepository object at 0x7f637496df60>
```

The preceding example assumes that you are creating the model repository from the current logged in database. If you must create the repository in a different database, then refer to the following example:

- JShell
- Java
- Python

JShell

Java

Python

Create a model store as shown:

- JShell
- Java
- Python

JShell

```
opg4j> var modelstore = "modelstore"
modelstore ==> "modelstore"
opg4j> mr.create(modelstore)
```

Java

```
String modelstore = "modelstore";
mr.create(modelstore);
```

Python

```
>>> mr.create("modelstore")
```

- 3. List the model store as shown and verify that the model store is empty:
 - JShell
 - Java
 - Python

JShell

```
opg4j> mr.listModelStoresNames()
$4 ==> [DW, deepwalk_model, modelstore, modelstoretablename]
opg4j> mr.listModelStoresNamesMatching(modelstore)
$5 ==> [modelstore, modelstoretablename]
opg4j> mr.listModels(modelstore)
$6 ==> []
```

Java

```
mr.listModelStoresNames();
mr.listModelStoresNamesMatching(modelstore);
mr.listModels(modelstore);
```

Python

```
>>> mr.list_model_stores_names()
>>> mr.list_model_stores_names_matching("modelstore")
>>> mr.list_models("modelstore")
```

- 4. Create and fit a DeepWalk model as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var walkLength = 5
opg4j> var walksPerVertex = 4
```

Java

```
>>> model =
analyst.deepwalk_builder(window_size=3,walks_per_vertex=6,walk_length=4)
graph = session.read_graph_by_name("<graph_name>", 'pg_pgql')
>>> model.fit(graph)
```

- 5. Store the trained model in the model store as shown:
 - JShell
 - Java
 - Python

JShell

Java

Python

```
>>> model.export().db(model_store = "modelstore", model_name =
"DeepWalkModel",
... model_description = "DeepWalk model description")
```

- **6.** Verify that the model is now stored in the model store as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> mr.listModels(modelstore)
$11 ==> [DeepWalkModel]
```

Java

mr.listModels(modelstore);

Python

```
>>> mr.list models("modelstore")
```

- 7. Load the model from the model store as shown:
 - JShell
 - Java
 - Python

JShell

Java

Python

The preceding example assumes that you are loading the model from the current logged in database. If you must load the model from a different database then refer to the example in Loading a Pre-Trained Model From Another Database.

- 8. Get the model description from the model store as shown:
 - JShell
 - Java



Python

JShell

```
opg4j> mr.getModelDescription(modelstore,modelName)
$14 ==> "DeepWalk: model desc"
```

Java

mr.getModelDescription(modelstore, modelName);

Python

```
>>> mr.get_model_description("modelstore","DeepWalkModel")
'DeepWalk model description'
```

- 9. Delete the model from the model store as shown:
 - JShell
 - Java
 - Python

JShell

```
opg4j> mr.deleteModel(modelstore, modelName)
```

Java

```
mr.deleteModel(modelstore, modelName);
```

```
>>> mr.delete_model("modelstore","DeepWalkModel")
```

- 10. Delete the model store as shown:
 - JShell
 - Java
 - Python



JShell

opg4j> mr.deleteModelStore(modelstore)

Java

mr.deleteModelStore(modelstore);

Python

>>> ("modelstore")



Executing PGQL Queries Against the Graph Server (PGX)

This section describes the Java APIs that are used to execute PGQL queries in the graph server (PGX).

- Getting Started with PGQL
 Get started with PGQL in the graph server (PGX).
- Creating Property Graphs Using Options
 Learn about the different options for graph optimization and for handling edges with missing vertices.
- Supported PGQL Features and Limitations on the Graph Server (PGX)
 Learn about the supported and unsupported PGQL functionalities in the graph server (PGX).
- Java APIs for Executing CREATE PROPERTY GRAPH Statements
 You can use the PgxSession.executePgql(String statement) method to execute a
 CREATE PROPERTY GRAPH statement.
- Python APIs for Executing CREATE PROPERTY GRAPH Statements
 You can create a property graph by executing the CREATE PROPERTY GRAPH
 statement through the Python API.
- Executing PGQL Queries Using the PGX JDBC Driver
 Starting from Graph Server and Client Release 24.1.0, you can use the PGX JDBC driver to access a PGX session and query graphs that are loaded in to the graph server (PGX).
- Java APIs for Executing SELECT Queries
 This section describes the APIs to execute SELECT queries in the graph server (PGX).
- Java APIs for Executing UPDATE Queries

 The UPDATE queries make changes to existing graphs using the INSERT, UPDATE, and

 DELETE operations.
- Python APIs for Executing UPDATE Queries
 You can update a graph that is loaded into the graph server (PGX) using the Python APIs.
- PGQL Queries with Partitioned IDs
 You can retrieve partitioned IDs using the id() function in PGQL.
- Security Tools for Executing PGQL Queries
 To safeguard against query injection, bind variables can be used in place of literals while printIdentifier(String identifier) can be used in place of identifiers like graph names, labels, and property names.
- Best Practices for Tuning PGQL Queries
 This section describes best practices regarding memory allocation, parallelism, and query planning.

18.1 Getting Started with PGQL

Get started with PGQL in the graph server (PGX).

This section provides an example on how to get started with PGQL. It assumes a database realm that has been previously set up (follow the steps in Prepare the Graph Server for Database Authentication). It also assumes that the user has read access to the HR schema.

First, create a graph with employees, departments, and employee works at department, by executing a CREATE PROPERTY GRAPH statement.

Example 18-1 Creating a graph in the graph server (PGX)

The following statement creates a graph in the graph server (PGX)

```
String statement =
     "CREATE PROPERTY GRAPH hr simplified "
   + " VERTEX TABLES ( "
   + " hr.employees LABEL employee "
           PROPERTIES ARE ALL COLUMNS EXCEPT ( job id, manager id,
   + "
department id ), "
   + " hr.departments LABEL department "
           PROPERTIES ( department id, department name ) "
   + " ) "
   + " EDGE TABLES ( "
   + " hr.employees AS works at "
          SOURCE KEY ( employee id ) REFERENCES employees (employee id) "
   + "
           DESTINATION departments "
   + "
           PROPERTIES ( employee id ) "
   + " ) ";
session.executePgql(statement);
/**
* To get a handle to the graph, execute:
PgxGraph g = session.getGraph("HR SIMPLIFIED");
/**
* You can use this handle to run PGQL queries on this graph.
* For example, to find the department that "Nandita Sarchand" works for,
execute:
* /
String query =
   "SELECT dep.department name "
 + "FROM MATCH (emp:Employee) -[:works at]-> (dep:Department) "
 + "WHERE emp.first name = 'Nandita' AND emp.last name = 'Sarchand' "
 + "ORDER BY 1";
PgqlResultSet resultSet = g.queryPgql(query);
resultSet.print();
+----+
| department name |
+----+
| Shipping
* To get an overview of the types of vertices and their frequencies, execute:
*/
String query =
     "SELECT label(n), COUNT(*) "
   + "FROM MATCH (n) "
```

```
+ "GROUP BY label(n) "
   + "ORDER BY COUNT(*) DESC";
PgqlResultSet resultSet = g.queryPgql(query);
resultSet.print();
| label(n) | COUNT(*) |
| EMPLOYEE | 107
| DEPARTMENT | 27
 *To get an overview of the types of edges and their frequencies, execute:
String query =
   "SELECT label(n) AS srcLbl, label(e) AS edgeLbl, label(m) AS dstLbl,
COUNT(*) "
 + "FROM MATCH (n) -[e]-> (m) "
 + "GROUP BY srcLbl, edgeLbl, dstLbl"
 + "ORDER BY COUNT(*) DESC";
PgqlResultSet resultSet = g.queryPgql(query);
resultSet.print();
| srcLbl | edgeLbl | dstLbl | COUNT(*) |
| EMPLOYEE | WORKS AT | DEPARTMENT | 106
+----+
```

18.2 Creating Property Graphs Using Options

Learn about the different options for graph optimization and for handling edges with missing vertices.

Using the **OPTIONS** clause in the CREATE PROPERTY GRAPH statement, you can specify any of the options explained in the following sections:

Using Graph Optimization Options

You can load a graph for querying and analytics or for performing update operations. Depending on your requirement, you can optimize the read or update performance using the **OPTIONS** clause in the CREATE PROPERTY GRAPH statement.

The following table describes the valid options that are supported in the OPTIONS clause:

Table 18-1 Graph Optimization Options

OPTIONS	Description
OPTIMIZED_FOR_READ	This can be used for read-intensive scenarios.
OPTIMIZED_FOR_UPDATES	This is the default option and can be used for fast updates.

Table 18-1 (Cont.) Graph Optimization Options

OPTIONS	Description
SYNCHRONIZABLE	This assures that the graph can be synchronized via Flashback Technology. However, exceptions are thrown if one of the edge keys is either composite or non-numeric. In these cases, the graph can normally still be loaded, but PGX generates a new (numeric and non-composite) edge key. Such edges can therefore not be synchronized with the database.

For example, the following graph is set using <code>OPTIMIZED_FOR_UPDATES</code> and <code>SYNCHRONIZABLE</code> options:

```
CREATE PROPERTY GRAPH hr

VERTEX TABLES (
employees LABEL employee, departments LABEL department
)

EDGE TABLES (
departments AS managed_by

SOURCE KEY ( department_id ) REFERENCES departments (department_id)

DESTINATION employees

NO PROPERTIES
) OPTIONS (OPTIMIZED_FOR_UPDATES, SYNCHRONIZABLE)
```

Note:

- SYNCHRONIZABLE option can be used in combination with OPTIMIZED_FOR_UPDATES
 and OPTIMIZED_FOR_READ. But, OPTIMIZED_FOR_UPDATES and
 OPTIMIZED_FOR_READ cannot be used together and in such a case an exception
 will be thrown.
- If you are creating a synchronizable graph, then ensure that the vertex and edge keys are numeric and non-composite.

Using Options to Handle Edges with Missing Vertices

If either the source or destination vertex or both are missing for an edge, then you can configure one of the following values in the OPTIONS clause in the CREATE PROPERTY GRAPH statement:

- IGNORE EDGE ON MISSING VERTEX: Specifies that the edge for a missing vertex must be ignored.
- IGNORE EDGE AND LOG ON MISSING VERTEX: Specifies that the edge for a missing vertex must be ignored and all ignored edges must be logged.
- IGNORE EDGE AND LOG ONCE ON MISSING VERTEX: Specifies that the edge for a missing vertex must be ignored and only the first ignored edge must be logged.
- ERROR ON MISSING VERTEX (default): Specifies that an error must be thrown for edges with missing vertices.



For example, the following graph is set using ERROR ON MISSING VERTEX option:

```
CREATE PROPERTY GRAPH region_graph

VERTEX TABLES (

regions KEY (region_id),

countries KEY (country_id)
)

EDGE TABLES (

countries AS countries_regions

SOURCE KEY ( country_id ) REFERENCES countries(country_id)

DESTINATION KEY (region_id) REFERENCES regions(region_id)

NO PROPERTIES
) OPTIONS ( ERROR ON MISSING VERTEX)
```

On execution, the following error response is shown:

```
unknown vertex ID received in destination 4 of edge 5
```

When using IGNORE EDGE AND LOG ON MISSING VERTEX or IGNORE EDGE AND LOG ONCE ON MISSING VERTEX option, you must update the default Logback configuration file in /etc/oracle/graph/logback.xml and the graph server (PGX) logger configuration file in /etc/oracle/graph/logback-server.xml to log the DEBUG logs. Only then you can view the ignored edges in /var/opt/log/pgx-server.log file.

18.3 Supported PGQL Features and Limitations on the Graph Server (PGX)

Learn about the supported and unsupported PGQL functionalities in the graph server (PGX).

Table 18-2 Supported PGQL Functionalities and Limitations on the Graph Server (PGX)

Features	PGQL on the Graph Server (PGX)
CREATE PROPERTY GRAPH	Supported Limitations: No composite keys for vertices. Properties need to be column references; arbitrary property expressions are not supported unless the graph is first created in the database and then loaded into the graph server (PGX).
DROP PROPERTY GRAPH	Not Supported
Fixed-length pattern matching	Supported



Table 18-2 (Cont.) Supported PGQL Functionalities and Limitations on the Graph Server (PGX)

Features	PGQL on the Graph Server (PGX)					
Variable-length pattern matching goals	Supported: Reachability Path search prefixes: ANY ANY SHORTEST SHORTEST k ALL SHORTEST ANY CHEAPEST CHEAPEST k ALL Path modes: WALK TRAIL SIMPLE					
Variable-length pattern matching quantifiers	- ACYCLIC Supported:					
Variable-length path unnesting	is supported Supported: ONE ROW PER VERTEX ONE ROW PER STEP Limitation: * quantifier is not supported					
GROUP BY	Supported Supported					
HAVING	Supported					
Aggregations	Supported: COUNT MIN, MAX, AVG, SUM LISTAGG ARRAY_AGG Not Supported JSON_ARRAYAGG					
DISTINCT SELECT DISTINCT Aggregation with DISTINCT (such as, COUNT (DISTINCT e.prop))	Supported					
SELECT v.*	Supported					



Table 18-2 (Cont.) Supported PGQL Functionalities and Limitations on the Graph Server (PGX)

Features	PGQL on the Graph Server (PGX)
ORDER BY (+ASC/DESC), LIMIT, OFFSET	Supported
Data Types	Supported: • INTEGER (32-bit)
	LONG (64-bit)FLOAT (32-bit)
	• DOUBLE (64-bit)
	STRING (no maximum length)
	• BOOLEAN
	• DATE
	• TIME
	TIME WITH TIME ZONE
	• TIMESTAMP
	TIMESTAMP WITH TIME ZONE
JSON	No built-in JSON support. However, JSON values can be stored as STRING and manipulated or queried through user-defined functions (UDFs) written in Java or JavaScript.
Operators	Supported:
	 Relational: +, -, *, /, %, - (unary minus)
	• Arithmetic: =, <>, <, >, <=, >=
	• Logical: AND, OR, NOT
	String: (concat)
Functions and predicates	Supported:
	• IS NULL, IS NOT NULL
	• JAVA_REGEXP_LIKE (based on CONTAINS)
	• LOWER, UPPER
	• SUBSTRING
	ABS, CEIL/CEILING, FLOOR, ROUND
	• EXTRACT
	• ID, VERTEX_ID, EDGE_ID
	• LABEL, LABELS, IS [NOT] LABELED
	• ALL_DIFFERENT
	• IN_DEGREE, OUT_DEGREE
	• CAST
	• CASE
	• IN and NOT IN
	• MATCHNUM
	• ELEMENT_NUMBER
	• IS [NOT] SOURCE [OF], IS [NOT] DESTINATION [OF]
	• VERTEX_EQUAL, EDGE_EQUAL
User-defined functions	Supported:
	Java UDFs
	 JavaScript UDFs



Table 18-2 (Cont.) Supported PGQL Functionalities and Limitations on the Graph Server (PGX)

Features	PGQL on the Graph Server (PGX)					
Subqueries: Scalar subqueries EXISTS and NOT EXISTS subqueries LATERAL subquery	Supported					
GRAPH_TABLE operator	Supported					
INSERT/UPDATE/DELETE	Supported					
INTERVAL literals and operations	Supported literals:					
	• SECOND					
	• MINUTE					
	• HOUR					
	• DAY					
	• MONTH					
	• YEAR					
	Supported operations:					
	 Add INTERVAL to datetime (+) 					
	Subtract INTERVAL from datetime (-)					

Also, the following explains certain supported and unsupported PGQL features:

- Support for Selecting All Properties
- Unnesting of Variable-Length Path Queries
- Using INTERVAL Literals in PGQL Queries
- Using Path Modes with PGQL
- Support for PGQL Lateral Subqueries
- Support for PGQL GRAPH_TABLE Operator
- Limitations on Quantifiers
- Limitations on WHERE and COST Clauses in Quantified Patterns

18.3.1 Support for Selecting All Properties

You can use SELECT $\, v.* \, to \, select \, all \, properties \, of the \, vertices \, or \, edges \, that \, bind \, to \, the \, variable \, v. \, For example:$

```
SELECT label(n), n.* FROM MATCH (n) ORDER BY "number", "name"
```

On execution, the query output is as shown:

+		 	 	-+
	label(n)	number	name	
+		 	 	-+
	Account	1001	<null></null>	
	Account	2090	<null></null>	
1	Account	8021	<null></null>	



```
| Account | 10039 | <null> |
| Person | <null> | Camille |
| Person | <null> | Liam |
| Person | <null> | Nikita |
| Company | <null> | Oracle |
```

You can use label expressions to select properties that belong to the specified vertex or edge labels. For example:

```
SELECT label(n), n.* FROM MATCH (n:Person) ORDER BY "name"
```

The preceding query retrieves all the properties for the specified Person label:

You can also specify a PREFIX to avoid duplicate column names in cases where you select all properties using multiple variables. For example:

```
SELECT n.* PREFIX 'n_', e.* PREFIX 'e_', m.* PREFIX 'm_'
FROM MATCH (n:Account) -[e:transaction]-> (m:Account)
ORDER BY "e amount"
```

The query output is as shown:

+-		 	 	+
	n_number	e_amount	m_number	
+-		 	 	+
	10039	1000.0	8021	
	8021	1500.3	1001	
	8021	3000.7	1001	
	2090	9900.0	10039	
	1001	9999.5	2090	
+-		 	 	+

18.3.2 Unnesting of Variable-Length Path Queries

Unnesting of variable-length path queries (such as, SHORTEST or CHEAPEST paths) to obtain a separate row for each vertex or edge along a path is supported.

You can unnest a path aggregation using one of the following options:

- ONE ROW PER MATCH (default option)
- ONE ROW PER VERTEX (vertex variable)
- ONE ROW PER STEP(edge source variable, edge variable, edge destination variable)

For example, the following PGQL query uses the ONE ROW PER STEP option:

```
SELECT v1.ACCT_ID AS src_no, k.TXN_AMOUNT, v2.ACCT_ID AS dest_no FROM MATCH ALL SHORTEST (a:Accounts) -[e:transfers]->+ (b:Accounts) ONE ROW PER STEP( v1,k,v2 ) WHERE a.ACCT ID = 284 AND b.ACCT ID = 616
```


It is important to note that the ONE ROW PER STEP option only supports paths with a minimal hop greater than 0 and hence * quantifier is not supported with this option.

On execution, the preceding query retrieves one row for every edge on the path that is bound by the corresponding source and destination vertices:

+	 	 	-+
src_no	TXN_AMOUNT	dest_no	1
+	 	 	-+
744	1000.0	616	
772	1000.0	744	
284	1000.0	772	
744	1000.0	616	
772	1500.0	744	
284	1000.0	772	
+	 	 	-+

You can also use the Graph Visualization tool to visualize edges using ONE ROW PER STEP along a path:

Figure 18-1 Visualizing Unnesting of Variable-Length Path Queries

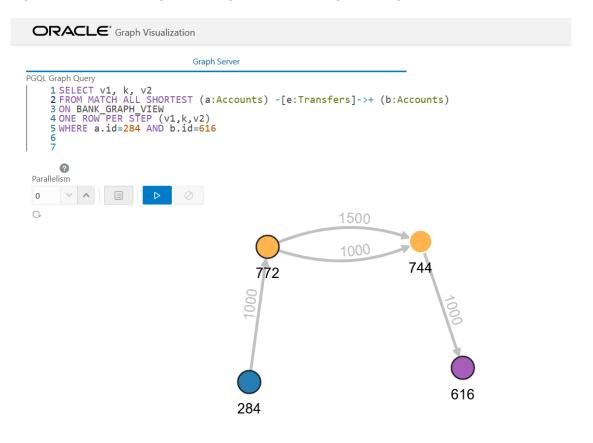



An example for a query with the ONE ROW PER VERTEX option is as follows:

```
SELECT k.acct_id AS id, k.acct_name AS name
FROM MATCH ANY SHORTEST (a:Accounts) ((src:Accounts)-[e:transfers]->){1,3}
(b:Accounts)
ONE ROW PER VERTEX(k)
WHERE a.acct id=284 AND b.acct id=616
```

On execution, the preceding query retrieves one row per vertex along a path:

```
+-----+
| id | name |
+-----+
| 616 | Account4 |
| 744 | Account3 |
| 772 | Account2 |
| 284 | Account1 |
```

Built-in Function Support for Recursive Path Unnesting Queries

PGQL supports the following two built-in functions, which can be used in combination with any of the path unnesting option (ONE ROW PER VERTEX, ONE ROW PER STEP or ONE ROW PER MATCH):

- MATCH_NUMBER (k): Returns a unique per-path identifier for each unnested path (that is, if two rows come from the same path, they have the same MATCH NUMBER (k)).
- ELEMENT_NUMBER (k): Returns the element number of a vertex or an edge along a path. Vertices are numbered with odd numbers, the leftmost vertex is numbered 1, the second 3, then 5 and so on. Edges are assigned with even numbers, starting with 2 for the leftmost edge, 4 for the next one, and so on.

For example, the following PGQL query uses the MATCH_NUMBER(k) and ELEMENT_NUMBER(k) functions with ONE ROW PER VERTEX option:

```
SELECT k.*, match_number(k), element_number(k)
FROM MATCH ANY SHORTEST (a:Accounts) -[e:transfers]->* (b:Accounts) ONE ROW
PER VERTEX ( k )
WHERE a.acct_id = 284 AND b.acct_id = 616
```

The preceding query produces the following output on execution. Note that the <code>element_number(k)</code> returned for the vertices are odd numbered values. Since the preceding query uses <code>ANY</code> path pattern, there is only one arbitrary path displayed in the output. Therefore <code>match_number(k)</code> is the same for all the rows in the path.



The following example shows a PGQL query using <code>MATCH_NUMBER(k)</code> and <code>ELEMENT_NUMBER(k)</code> functions with <code>ONE ROW PER STEP</code> option:

```
SELECT v1.acct_id AS src_no,k.txn_amount,v2.acct_id AS dest_no,
match_number(k), element_number(k)
FROM MATCH ALL SHORTEST (a:Accounts) -[e:transfers]->+ (b:Accounts)
ONE ROW PER STEP( v1,k,v2 )
WHERE a.acct id = 284 AND b.acct id = 616
```

The preceding query output is as shown. Note that there are two paths identified by match_number(k) and the edges are displayed with even numbered element_number(k) values.

src_no	txn_amount	 	dest_no	 	match_number(k)	 	element_number(k)	+
744	1000.0 1000.0 1000.0 1000.0 1500.0	 	616 744 772 616 744 772		0 0 0 1 1		6 4 2 6 4	+

18.3.3 Using INTERVAL Literals in PGQL Queries

You can use INTERVAL literals in PGQL queries to add or subtract intervals to or from PGQL temporal data types respectively.

See the PGQL 1.5 Specification for the supported temporal data types. An INTERVAL type is a period of time, which consists of the keyword "INTERVAL" followed by a numeral and a temporal unit. For example, INTERVAL '1' DAY.

The following table shows the valid temporal units that are supported in INTERVAL values:

Table 18-3 Valid values for fields in INTERVAL values

Keyword	Supported Valid Values
YEAR	Unconstrained except by <interval field="" leading="" precision=""></interval>
MONTH	Months (within years) (0-11)
DAY	Unconstrained except by <interval field="" leading="" precision=""></interval>
HOUR	Hours (within days) (0-23)
MINUTE	Minutes (within hours) (0-59)
SECOND	Seconds (within minutes) (0-59.999)

The following INTERVAL operations are supported on a temporal data type:

- TEMPORAL TYPE + INTERVAL
- INTERVAL + TEMPORAL TYPE



TEMPORAL TYPE - INTERVAL

For example, the following PGQL query retrieves persons where n.birthdate + INTERVAL '20' YEAR > TIMESTAMP '2000-01-01 00:00:00:

- JShell
- Java
- Python

JShell

```
opg4j> graph.queryPgql("SELECT n.name, n.birthdate FROM MATCH (n:Person)
WHERE n.birthdate + INTERVAL '20' YEAR > TIMESTAMP '2000-01-01
00:00:00'").print()
```

Java

```
graph.queryPgql("SELECT n.name, n.birthdate FROM MATCH (n:Person) WHERE
n.birthdate + INTERVAL '20' YEAR > TIMESTAMP '2000-01-01 00:00:00'").print();
```

Python

```
graph.query_pgql("SELECT n.name, n.birthdate FROM MATCH (n:Person) WHERE
n.birthdate + INTERVAL '20' YEAR > TIMESTAMP '2000-01-01 00:00:00'").print()
```

On execution, the query output is as shown:

```
+-----+
| name | birthdate |
+-----+
| Mary | 1982-09-25T00:00 |
| Alice | 1987-02-01T00:00 |
```

18.3.4 Using Path Modes with PGQL

The following path modes are available in combination with ANY, ALL, ANY SHORTEST, SHORTEST k, and ALL SHORTEST:

• WALK (default path mode): A walk is traversing a graph through a sequence of vertices and edges. The vertices and edges visited in a walk can be repeated. Hence there is no filtering of paths in this default path mode.

• TRAIL: A trail is traversing a graph without repeating the edges. Therefore, path bindings with repeated edges are not returned.

In the preceding output, both the paths contain the vertices 8021 and 1001 twice but they are still valid trails as long as no edges are repeated.

ACYCLIC: If the starting and ending vertex in a graph traversal are different, then this
implies that there are no cycles in the path. In this case, the path bindings with repeated
vertices are not returned.

```
SELECT CAST(a.number AS STRING) || ' -> ' || LISTAGG(x.number, ' -> ') AS accounts_along_path

FROM MATCH SHORTEST 10 ACYCLIC PATHS (a IS account) (-[IS transaction]-> (x))+ (b)

WHERE a.number = 10039 AND b.number = 1001

+-----+
| accounts_along_path |
+----+
| 10039 -> 8021 -> 1001 |
| 10039 -> 8021 -> 1001 |
```

The preceding query requested 10 shortest paths. But only two are returned since all the other paths are cyclic.

• **SIMPLE:** A simple walk is traversing a graph without repeating the vertices. Therefore, path bindings with repeated vertices are not returned. The only exception is when the repeated vertex is the first and the last in a path.



The preceding query returns a cyclic path. This path is a valid simple path since it starts and ends in the same vertex and there is no other cycle in the path.

Note that the path modes are syntactically placed after ANY, ALL, ANY SHORTEST, SHORTEST k, ALL SHORTEST, CHEAPEST, and CHEAPEST k. The path mode is optionally followed by a PATH or PATHS keyword.

Note that using TRAIL, ACYCLIC, or SIMPLE matching path modes for all unbounded quantifiers guarantees that the result set of a graph pattern matching will be finite.

18.3.5 Support for PGQL Lateral Subqueries

You can use a LATERAL subquery to pass the output rows of one query into another.

For example, you can use the ORDER BY or GROUP BY clause on top of another ORDER BY or GROUP BY clause:

Also, the Lateral subquery in the from clause can be followed by one or more match clauses. For example:

Note that the FROM clause may contain any number of MATCH clauses and LATERAL subqueries.

Both, MATCH clause followed by a LATERAL subquery, or a LATERAL subquery followed by one or more LATERAL subqueries are supported.

Also, note the following:

- Variables exported from previous table expressions can be used in subsequent table expressions.
- Operators like ORDER BY and LIMIT can be used followed by additional pattern matching.
- Variables that are not projected from a LATERAL subquery cannot be accessed in the outer query.

The following example query first retrieves a list of companies, Then, it finds the respective accounts of the companies. Finally, it finds the top 2 transactions made to the account of each company in the initial list.

```
SELECT c.name, a.number, t.amount FROM
  LATERAL ( SELECT c FROM MATCH (c:Company) ORDER BY c.name LIMIT 1),
  MATCH (a:Account)->(c),
  LATERAL (SELECT t FROM MATCH ()-[t:Transaction]->(a) ORDER BY t.amount DESC
LIMIT 2)
```

In the following query, the LATERAL subquery is followed by two other LATERAL subqueries. Each subquery builds upon the output from the previous clauses:

```
SELECT f.number as fundsAccount FROM
LATERAL ( SELECT p FROM MATCH (p:Person) WHERE p.name = 'Nikita'),
LATERAL ( SELECT a FROM MATCH (a) -> (p)),
LATERAL ( SELECT f FROM MATCH (f) -> (a))
```

18.3.6 Support for PGQL GRAPH_TABLE Operator

The GRAPH_TABLE operator in PGQL increases the interoperability between graphs loaded into the graph server (PGX) and the graphs on the database.

However, in order to comply with the SQL standard, ensure that the PGQL query syntax is aligned as shown:

- The label predicate in the graph pattern MATCH query must use the IS keyword.
- To limit the number of output rows, use the FETCH [FIRST/NEXT] x [ROW/ROWS] clause instead of the LIMIT x clause.
- To verify the orientation of the edge, use v IS [NOT] SOURCE [OF] e/v IS [NOT] DESTINATION [OF] e as the standard form instead of [NOT] is_source_of(e, v) / [NOT] is_destination_of(e, v).
- To verify if the vertex or edge has the given label, use the x IS [NOT] LABELED <label string> predicate as an alternative for has label(x, <label string>).
- To match the k shortest paths, use MATCH (n) -[e]->* (m) KEEP SHORTEST k as the standard form of MATCH TOP k SHORTEST (n) -[e]->* (m).
- ALL keyword optional in front of fixed-length path patterns.

 MATCH (n) -[e]->{1,4} (m) as an alternative for MATCH ALL (n) -[e]->{1,4} (m).
- MATCH <path pattern> KEEP <path pattern prefix> <WHERE clause> as an alternative for MATCH <path pattern prefix> <path pattern> <WHERE clause>

The following shows a few query examples using the GRAPH_TABLE operator:

Example 18-2 Aggregation Query Using TRAIL path mode with ALL



```
COLUMNS ( LISTAGG(e.amount, ', ') AS amounts )
)ORDER BY amounts
```

The preceding query produces the following output:

Example 18-3 Aggregation Query Using KEEP Clause

The preceding guery produces the following output:

18.3.7 Limitations on Quantifiers

Although all quantifiers such as *, +, and $\{1,4\}$ are supported for reachability and shortest path patterns, the only quantifier that is supported for cheapest path patterns is * (zero or more).

18.3.8 Limitations on WHERE and COST Clauses in Quantified Patterns

The WHERE and COST clauses in quantified patterns, such as reachability patterns or shortest and cheapest path patterns, are limited to referencing a single variable only.

The following are examples of queries that are not supported because the WHERE or COST clauses reference two variables e and x instead of zero or one:

```
... PATH p AS (n) -[e] \rightarrow (m) WHERE e.prop > m.prop ... 
 ... SHORTEST ( (n) (-[e] \rightarrow) (x) WHERE e.prop + x.prop > 10)* (m) ) ... 
 ... CHEAPEST ( (n) (-[e] \rightarrow) (x) COST e.prop + x.prop )* (m) ) ...
```

The following query is supported because the subquery only references a single variable $\tt a$ from the outer scope, while the variable $\tt c$ does not count since it is newly introduced in the subquery:

```
... PATH p AS (a) \rightarrow (b) WHERE EXISTS ( SELECT * FROM MATCH (a) \rightarrow (c) ) ...
```

18.4 Java APIs for Executing CREATE PROPERTY GRAPH Statements

You can use the PgxSession.executePgql(String statement) method to execute a CREATE PROPERTY GRAPH statement.

The PgxSession.executePgql (String statement) Java API creates a property graph in graph server (PGX). Note that when using this API, the graph is not persisted in the database, it is only created in the graph server (PGX). To persist a graph in the database, you can create a graph in the database (see Quick Starts for Using PGQL Property Graphs), and then load the graph into the graph server (PGX).

Example 18-4 Executing a CREATE PROPERTY GRAPH statement

```
String statement =
     "CREATE PROPERTY GRAPH hr simplified "
    + " VERTEX TABLES ( "
   + " hr.employees LABEL employee "
           PROPERTIES ARE ALL COLUMNS EXCEPT ( job id, manager id,
department id ), "
         hr.departments LABEL department "
    + "
            PROPERTIES ( department id, department name ) "
    + " EDGE TABLES ( "
   + " hr.employees AS works at "
          SOURCE KEY ( employee id ) REFERENCES employees (employee id) "
            DESTINATION departments "
            PROPERTIES ( employee id ) "
    + " ) ";
session.executePgql(statement);
PgxGraph g = session.getGraph("HR SIMPLIFIED");
/**
* Alternatively, one can use the prepared statement API, for example:
PgxPreparedStatement stmnt = session.preparePgql(statement);
stmnt.execute();
stmnt.close();
PgxGraph g = session.getGraph("HR SIMPLIFIED");
```



18.5 Python APIs for Executing CREATE PROPERTY GRAPH Statements

You can create a property graph by executing the CREATE PROPERTY GRAPH statement through the Python API.

The prepare_pgql (pgql_query>) .execute() Python API creates a property graph in the graph server (PGX). Note that when using this API, the graph is not persisted in the database, it is only created in the graph server (PGX). If you wish to persist a graph in the database, then you can create the graph in the database (see Quick Starts for Using PGQL Property Graphs) and then load the graph into graph server (PGX).

Creating a Property Graph Using the Python Client

Launch the Python client:

```
./bin/opg4py --base_url https://localhost:7007 --user customer_360
```

Define and execute the CREATE PROPERTY GRAPH statement as shown:

```
statement = (
    "CREATE PROPERTY GRAPH "+ "<graph_name>" + " " +
    "VERTEX TABLES ( " +
    "bank_accounts " +
    "KEY(acct_id) " +
    "LABEL Account PROPERTIES (acct_id) " +
    ")" +
    "EDGE TABLES ( " +
    "bank_txns " +
    "KEY (txn_id) " +
    "SOURCE KEY (from_acct_id) REFERENCES bank_accounts (acct_id) " +
    "DESTINATION KEY (to_acct_id) REFERENCES bank_accounts (acct_id) " +
    "LABEL Transfer PROPERTIES(amount) " +
    ")")
>>> session.prepare_pgql(statement).execute()
```

where *<graph_name>* is the name of the graph.

The graph gets created and you can verify through the get graph method:

```
>>> graph = session.get_graph("<graph_name>")
>>> graph
PgxGraph(name:<graph_variable>, v: 1000, e: 5001, directed: True,
memory(Mb): 0)
```

18.6 Executing PGQL Queries Using the PGX JDBC Driver

Starting from Graph Server and Client Release 24.1.0, you can use the PGX JDBC driver to access a PGX session and query graphs that are loaded in to the graph server (PGX).

To use the PGX JDBC driver, note the following:



Register the PGX JDBC driver with the DriverManager:

```
import java.sql.DriverManager;
import oracle.pgx.jdbc.PgxJdbcDriver;
...
DriverManager.registerDriver(new PgxJdbcDriver());
```

 Add the jdbc:oracle:pgx: prefix to the JDBC URL when obtaining a connection object as shown:

```
Connection conn =
DriverManager.getConnection("jdbc:oracle:pgx:@<graph_server_host>:<server_port
>", "<username>", "<password>");
```

Example 18-5 Using the PGX JDBC Driver

The following example establishes a connection using the PGX JDBC driver, accesses the underlying PGX session to load the graph into the graph server (PGX), creates a statement, and runs a PGQL query on the graph.

```
import java.sql.*;
import oracle.pgx.jdbc.*;
import oracle.pgx.api.*;
public class PgxJdbcSample {
  public static void main(String[] args) throws Exception {
    String jdbcUrl = "jdbc:oracle:pgx:https://localhost:7007";
    String username = "graphuser";
    String password = "graph";
    DriverManager.registerDriver(new PgxJdbcDriver());
    try(Connection conn = DriverManager.getConnection(jdbcUrl, username,
password)) {
             if (conn.isWrapperFor(PgxSession.class)) {
                     PgxSession session = conn.unwrap(PgxSession.class);
                     session.readGraphByName("BANK GRAPH VIEW",
GraphSource.PG PGQL);
            }
            Statement stmt = conn.createStatement();
            ResultSet rs = stmt.executeQuery("SELECT e.AMOUNT AS AMOUNT FROM
MATCH (a IS ACCOUNTS) -[e IS TRANSFERS]-> (b IS ACCOUNTS) ON BANK GRAPH VIEW
"+
                                              " WHERE a.ID = 179 AND b.ID =
688");
            while(rs.next()){
                 System.out.println("AMOUNT = " + rs.getLong("AMOUNT"));
    }
```

The resulting output of the preceding code is as shown:

AMOUNT = 1000

Note that when running the preceding code, you must provide the PGX client JARs on the runtime classpath.

- Limitations of the PGX JDBC Driver
 Review the limitations of the PGX JDBC driver.
- PGX Data Type Compatibility and Casting
 You can configure a compatibility mode for the PGX JDBC driver to determine the data type returned when calling the ResultSet#getObject() method.

Related Topics

Using the PGX JDBC Driver when Graph Server (PGX) is Utilized as a Library
When using the graph server (PGX) as a library, you can use the PGX JDBC driver to
query graphs that are loaded from files.

18.6.1 Limitations of the PGX JDBC Driver

Review the limiations of the PGX JDBC driver.

- The following PGX data types are not supported to be returned by the PGX JDBC driver:
 - VERTEX
 - EDGE
 - POINT2D
- Accessing the labels of a vertex or an edge is not supported.
- Multi-dimensional properties such as vectors, and lists are not supported.

18.6.2 PGX Data Type Compatibility and Casting

You can configure a compatibility mode for the PGX JDBC driver to determine the data type returned when calling the ResultSet#getObject() method.

The PGX JDBC driver supports the following compatibility modes:

- PGX (default): By default, the PGX JDBC driver will use the PGX compatibility mode to return the PGX native types.
- ORACLE_JDBC19: This mode enables the driver to return data types that are compatible with Oracle Database 19c.
- ORACLE_JDBC23: This mode enables the driver to return data types that are compatible
 with Oracle Database 23ai.

The following table describes the data types returned by the driver for the different compatibility modes.

Table 18-4 Data Type Compatibility

PGX Type	PGX (Default)	ORACLE_JDBC19	ORACLE_JDBC23
BOOLEAN	BOOLEAN	java.math.BigDecima	Boolean



Table 18-4 (Cont.) Data Type Compatibility

PGX Type	PGX (Default)	ORACLE_JDBC19	ORACLE_JDBC23	
INTEGER/LONG/FLOAT/ DOUBLE	INTEGER/LONG/FLOAT/ DOUBLE	java.math.BigDecima	java.math.BigDecima	
LOCAL_DATE	java.sql.Date	java.sql.Timestamp	java.sql.Timestamp	
TIME	java.sql.Time		Not supported	
TIME_WITH_TIMEZONE	<pre>java.time.OffsetTim e</pre>	Not supported	Not supported	
TIMESTAMP java.sql.Timestamp		oracle.sql.TIMESTAM P	oracle.sql.TIMESTAM P	
TIMESTAMP_WITH_TIME ZONE	<pre>java.time.OffsetDat eTime</pre>	oracle.sql.TIMESTAM PZ	oracle.sql.TIMESTAM PZ	

Setting the Compatibility Mode in the PGX JDBC Driver

If you wish to use a different compatibility mode (other than the default PGX mode), then this can be set as part of the properties as shown:

```
import static oracle.pgx.jdbc.CONNECTION_PROPERTY_COMPATIBILITY_MODE;
import static oracle.pgx.jdbc.ORACLE_JDBC19;
...
Properties properties = new Properties();
properties.put(...);
properties.put(CONNECTION_PROPERTY_COMPATIBILITY_MODE, ORACLE_JDBC19); // set compatibility mode
Connection connection = DriverManager.getConnection("<jdbc url>", properties);
```

Data Type Conversions through Casting

The PGX JDBC driver allows casting of one type into another (regardless of the compatibility mode) as shown in the following table.

Table 18-5 Additional Supported Types through Casting

PGX Type	Default Mapping (PGX Compatibility)	Additional Supported Types (through Casting)	
BOOLEAN	BOOLEAN	String, BigDecimal	
INTEGER	INTEGER	String, BigDecimal, Long, Float, Double	
FLOAT	FLOAT	String, BigDecimal, Double	
LONG	LONG	String, BigDecimal, Double	
DOUBLE	DOUBLE	String, BigDecimal	
LOCAL_DATE	java.sql.Date	String, java.time.LocalDate, java.sql.Timestamp	
TIME	java.sql.Time	String, java.time.LocalTime	
TIME_WITH_TIMEZONE	<pre>java.time.OffsetTim e</pre>	String	
TIMESTAMP	java.sql.Timestamp	String, java.time.LocalDateTime, oracle.sql.TIMESTAMP	

Table 18-5 (Cont.) Additional Supported Types through Casting

PGX Type	Default Mapping (PGX Compatibility)	Additional Supported Types (through Casting)
TIMESTAMP_WITH_TIME ZONE	<pre>java.time.OffsetDat eTime</pre>	String, oracle.sql.TIMESTAMPZ

Data Type Conversions for PreparedObject#setObject(int index, Object o)

The following table describes the data type conversions when calling the PreparedObject#setObject(int index, Object o) method.

Table 18-6 Data Type Conversions for setObject Method

Given Object Type	PGX Type
BOOLEAN	BOOLEAN
INTEGER/FLOAT/LONG/DOUBLE	INTEGER/FLOAT/LONG/DOUBLE
BIGDECIMAL	DOUBLE
java.sql.Date, java.time.LocalDate	LOCAL_DATE
java.sql.Time, java.time.LocalTime	TIME
java.time.OffsetTime	TIME_WITH_TIMEZONE
<pre>java.sql.Timestamp, java.time.LocalDateTime, oracle.sql.TIMESTAMP</pre>	TIMESTAMP
<pre>java.time.OffsetDateTime, oracle.sql.TIMESTAMPZ</pre>	TIMESTAMP_WITH_TIMEZONE

18.7 Java APIs for Executing SELECT Queries

This section describes the APIs to execute SELECT queries in the graph server (PGX).

- Executing SELECT Queries Against a Graph in the Graph Server (PGX)

 The PgxGraph.queryPgql (String query) method executes the query in the current session. The method returns a PgqlResultSet.
- Executing SELECT Queries Against a PGX Session
 The PgxSession.queryPgql (String query) method executes the given query in the session and returns a PgqlResultSet.
- Iterating Through a Result Set
 There are two ways to iterate through a result set; in a IDBC-like m

There are two ways to iterate through a result set: in a JDBC-like manner or using the Java Iterator interface.

Printing a Result Set
 The following methods of PgqlResultSet (package oracle.pgx.api) are used to print a result set:

18.7.1 Executing SELECT Queries Against a Graph in the Graph Server (PGX)

The PgxGraph.queryPgql(String query) method executes the query in the current session. The method returns a PqqlResultSet.

The ON clauses inside the MATCH clauses can be omitted since the query is executed directly against a PGX graph. For the same reason, the INTO clauses inside the INSERT clauses can be omitted. However, if you want to explicitly specify graph names in the ON and INTO clauses, then those graph names have to match the actual name of the graph (PgxGraph.getName()).

18.7.2 Executing SELECT Queries Against a PGX Session

The PgxSession.queryPgql (String query) method executes the given query in the session and returns a PgqlResultSet.

The ON clauses inside the MATCH clauses, and the INTO clauses inside the INSERT clauses, must be specified and cannot be omitted. At this moment, all the ON and INTO clauses of a query need to reference the same graph since joining data from multiple graphs in a single query is not yet supported.

18.7.3 Iterating Through a Result Set

There are two ways to iterate through a result set: in a JDBC-like manner or using the Java Iterator interface.

For JDBC-like iterations, the methods in PgqlResultSet (package oracle.pgx.api) are similar to the ones in java.sql.ResultSet. A noteworthy difference is that PGQL's result set interface is based on the new date and time library that was introduced in Java 8, while java.sql.ResultSet is based on the legacy java.util.Date. To bridge the gap, PGQL's result set provides getLegacyDate(..) for applications that still use java.util.Date.

A PgqlResultSet has a cursor that is initially set before the first row. Then, the following methods are available to reposition the cursor:

```
• next() : boolean
```

- previous() : boolean
- beforeFirst()
- afterLast()
- first(): boolean
- last() : boolean
- absolute(long row) : boolean
- relative(long rows) : boolean

After the cursor is positioned at the desired row, the following getters are used to obtain values:

- getObject(int columnIdx) : Object
- getObject(String columnName) : Object
- getString(int columnIdx) : String



- getString(String columnName) : String getInteger(int columnIdx) : Integer getInteger(String columnName) : Integer getLong(int columnIdx) : Long getLong(String columnName) : Long getFloat(int columnIdx) : Float getFloat(String columnName) : Float getDouble(int columnIdx) : Double getDouble(String columnName) : Double getBoolean(int columnIdx) : Boolean getBoolean(String columnName) : Boolean getVertexLabels(int columnIdx) : Set<String> getVertexLabels(String columnName) : Set<String> getDate(int columnIdx) : LocalDate getDate(String columnName) : LocalDate getTime(int columnIdx) : LocalTime getTime(String columnName) : LocalTime getTimestamp(int columnIdx) : LocalDateTime getTimestamp(String columnName) : LocalDateTime getTimeWithTimezone(int columnIdx) : OffsetTime getTimeWithTimezone(String columnName) : OffsetTime getTimestampWithTimezone(int columnIdx) : OffsetDateTime getTimestampWithTimezone(String columnName) : OffsetDateTime
- getLegacyDate(int columnIdx) : java.util.Date
- getLegacyDate(String columnName) : java.util.Date
- getVertex(int columnIdx) : PgxVertex<ID>
- getVertex(String columnName) : PgxVertex<ID>
- getEdge(int columnIdx) : PgxEdge
- getEdge(String columnName) : PgxEdge

See the Java Documentation for more details.

Finally, there is a PgqlResultSet.close() which releases the result set's resources, and there is a PgqlResultSet.getMetaData() through which the column names and column count can be retrieved.

An example for result set iteration is as follows:

The output of the above example will look like:

```
Oracle: 4501
Camille: 1000
```

In addition, the PgqlResultSet is also iterable via the Java Iterator interface. An example of a "for each loop" over the result set is as follows:

```
for (PgxResult result : resultSet) {
   String accountHolder = result.getString(1);
  long totalTransacted = result.getLong(2);
   System.out.println(accountHolder + ": " + totalTransacted);
}
```

The output of the above example will look like:

```
Oracle: 4501
Camille: 1000
```

Note that the same getters that are available for PgqlResultSet are also available for PgxResult.

18.7.4 Printing a Result Set

The following methods of PgqlResultSet (package oracle.pgx.api) are used to print a result set:

```
    print(): PgqlResultSet
```

- print(long numResults) : PgqlResultSet
- print(long numResults, int from): PgqlResultSet
- print(PrintStream printStream, long numResults, int from) : PgqlResultSet

For example:

```
g.queryPgql("SELECT COUNT(*) AS numPersons FROM MATCH
(n:Person)").print().close()
+----+
| numPersons |
```



Another example:

18.8 Java APIs for Executing UPDATE Queries

The UPDATE queries make changes to existing graphs using the INSERT, UPDATE, and DELETE operations.

Note that INSERT allows you to insert new vertices and edges into a graph, UPDATE allows you to update existing vertices and edges by setting their properties to new values, and DELETE allows you to delete vertices and edges from a graph.

- Updatability of Graphs Through PGQL
 Graph data that is loaded from the Oracle RDBMS or from CSV files into the PGX is not updatable through PGQL right away.
- Executing UPDATE Queries Against a Graph in the Graph Server (PGX)

 To execute UPDATE queries against a graph, use the PgxGraph.executePgql(String query) method.
- Executing UPDATE Queries Against a PGX Session
 You can also execute UPDATE queries against a PgxSession.
- Altering the Underlying Schema of a Graph
 The INSERT operations can only insert vertices and edges with known labels and properties. Similarly, UPDATE operations can only set values of known properties. Thus, new data must always conform to the existing schema of the graph.

18.8.1 Updatability of Graphs Through PGQL

Graph data that is loaded from the Oracle RDBMS or from CSV files into the PGX is not updatable through PGQL right away.

First, you need to create a copy of the data through the PgxGraph.clone() method. The resulting graph is fully updatable.

Consider the following example:

Additionally, there is also a PgxGraph.cloneAndExecutePgql(String query, String graphName) method that combines the last two steps from above example into a single step:

Note that graphs that are created through PgxGraph.clone() are local to the session. However, they can be shared with other sessions through the PgxGraph.publish(..) methods but then they are no longer updatable through PGQL. Only session-local graphs are updatable but persistent graphs are not.

18.8.2 Executing UPDATE Queries Against a Graph in the Graph Server (PGX)

To execute UPDATE queries against a graph, use the PgxGraph.executePgql (String query) method.

The following is an example of INSERT query:

Note that the INTO clause of the INSERT can be omitted. If you use an INTO clause, the graph name in the INTO clause must correspond to the name of the PGX graph (PgxGraph.getName()) that the guery is executed against.

The following is an example of UPDATE query:

```
// set the date of birth of Camille to 2014-11-15 g.executePgql("UPDATE v SET ( v.dob = DATE '2014-11-14' ) " + \frac{1}{2}
```

```
"FROM MATCH (v:Person) " +
"WHERE v.firstName = 'Camille' AND v.lastName = ' Mullins' ");
```

The following is an example of DELETE query:

18.8.3 Executing UPDATE Queries Against a PGX Session

You can also execute UPDATE queries against a PgxSession.

The following example clones a graph and runs UPDATE queries against the PgxSession.

```
//Loads the graph into the graph server (PGX)
PgxGraph g1 = session.readGraphByName("BANK GRAPH VIEW", GraphSource.PG PGQL);
//Clones the graph
PgxGraph g2 = g1.clone("BANK GRAPH NEW");
//Get the graph
session.getGraph("BANK GRAPH NEW");
//Insert vertices and an edge connecting the vertices into the graph
session.executePgql(
     "INSERT INTO BANK GRAPH NEW "+
     " VERTEX v1 LABELS (Accounts) PROPERTIES (v1.id=1001, v1.name='New
account-1') "+
     ", VERTEX v2 LABELS (Accounts) PROPERTIES (v2.id=1002, v2.name='New
account-2') "+
     ", EDGE e1 BETWEEN v1 AND v2 LABELS (Transfers) PROPERTIES
(e1.amount=3000) "
//Query the graph to verify the newly added edge
session.executePqql(
     "SELECT e.amount FROM MATCH (v1:Accounts) -[e:Transfers]-> (v2:Accounts)
     "ON BANK GRAPH NEW "+
     "WHERE v1.id=1001 AND v2.id=1002"
);
```

18.8.4 Altering the Underlying Schema of a Graph

The INSERT operations can only insert vertices and edges with known labels and properties. Similarly, UPDATE operations can only set values of known properties. Thus, new data must always conform to the existing schema of the graph.

However, some PGX APIs exist for updating the schema of a graph: while no APIs exist for adding new labels, new properties can be added through the

PgxGraph.createVertexProperty(PropertyType type, String name) and PgxGraph.createEdgeProperty(PropertyType type, String name) methods. The new properties are attached to each vertex/edge in the graph, irrespective of their labels. Initially the properties are assigned a default value but then the values can be updated through the UPDATE statements.

Consider the following example:

18.9 Python APIs for Executing UPDATE Queries

You can update a graph that is loaded into the graph server (PGX) using the Python APIs.

However, prior to updating the graph, you must first clone the graph. You can perform update operations only on the cloned graph and not on the original graph.

The following example shows the steps for running UPDATE queries against a graph in the graph server (PGX) using the Python APIs.

1. Load the PGQL property graph into the graph server (PGX).

```
>>> g1 = session.read graph by name('BANK GRAPH', 'pg pgql')
```

2. Clone the graph for the update operation.

```
>>> g2 = g1.clone(name="BANK GRAPH NEW")
```

3. Update the cloned graph as required.

For example:

Adding one or more vertices with properties

```
>>> g2.execute_pgql(
... "INSERT VERTEX v1 LABELS (Accounts) PROPERTIES (v1.id=1001,
v1.name='New account-1') "
... " , VERTEX v2 LABELS (Accounts) PROPERTIES (v2.id=1002,
v2.name='New account-2') "
... )
```

Inserting a new edge with properties

The new edge gets added between all vertices that match the WHERE clause.

```
>>> g2.execute_pgql(
... "INSERT EDGE e1 BETWEEN v1 AND v2 "
... "LABELS (Transfers) "
... "PROPERTIES (e1.from_acct_id=1001, e1.amount=3000, e1.description='Transaction-A', e1.to_acct_id=1002) "
... "FROM MATCH (v1:Accounts), MATCH (v2:Accounts) "
... "WHERE v1.id=1001 AND v2.id=1002"
... )
```

Optionally, query the graph to verify that the new edge is added.

Updating one or more vertex property

The vertex properties get updated for all vertices that match the WHERE clause.

```
>>> g2.execute_pgql(
... "UPDATE v SET (v.name='Account-1001') "
... "FROM MATCH (v:Accounts) "
... "WHERE v.id=1001"
... )
```

Updating one or more edge property

The edge properties get updated for the edge that connects the vertices in the WHERE clause.

```
>>> g2.execute_pgql(
... "UPDATE e SET (e.amount=5000) "
... "FROM MATCH (v1:Accounts) -[e:Transfers]-> (v2:Accounts) "
... "WHERE v1.id=1001 AND v2.id=1002"
...)
```

Optionally, query the graph to verify the updated edge property.

```
>>> g2.execute_pgql(
... "SELECT e.amount FROM MATCH (v1:Accounts) -[e:Transfers]->
(v2:Accounts) "
... "WHERE v1.id=1001 AND v2.id=1002"
...).print()
+-----+
| amount |
+-----+
| 5000.0 |
+-----+
```

Deleting a vertex

Note that when you delete a vertex, all edges that connect the vertex are also removed.

```
>>> g2.execute pgql("DELETE v FROM MATCH (v:Accounts) WHERE v.id=1001")
```

Alternatively, you can combine step-2 and step-3 by using the <code>clone_and_execute_pgql()</code> method as shown:

```
>>> g2 = g1.clone_and_execute_pgql(
... "INSERT VERTEX v1 LABELS (Accounts) PROPERTIES (v1.id=1001,
v1.name='New account-1') "
... ", VERTEX v2 LABELS (Accounts) PROPERTIES (v2.id=1002, v2.name='New account-2') "
... ", EDGE e1 BETWEEN v1 AND v2 LABELS (Transfers) PROPERTIES
(e1.amount=3000) "
...)
```

Optionally, query the graph to verify the newly added edge.

```
>>> g2.execute_pgql(
... "SELECT e.amount FROM MATCH (v1:Accounts) -[e:Transfers]->
(v2:Accounts) "
... "WHERE v1.id=1001 AND v2.id=1002"
...).print()
+-----+
| amount |
+-----+
| 3000.0 |
+-----+
```

Executing UPDATE Queries Against a PgxSession

You can also run UPDATE queries against a PgxSession as shown:

```
>>> g1 = session.read graph by name('BANK GRAPH', 'pg pgql')
>>> g2 = g1.clone(name="BANK GRAPH NEW")
>>> session.execute pgql(
... "INSERT INTO BANK GRAPH NEW VERTEX v1 LABELS (Accounts) PROPERTIES
(v1.id=1001, v1.name='New account-1') "
... ", VERTEX v2 LABELS (Accounts) PROPERTIES (v2.id=1002, v2.name='New
account-2') "
... ", EDGE e1 BETWEEN v1 AND v2 LABELS (Transfers) PROPERTIES
(e1.amount=3000) "
...)
>>> session.execute pgql(
... "SELECT e.amount FROM MATCH (v1:Accounts) -[e:Transfers]->
(v2:Accounts) ON BANK GRAPH NEW "
    "WHERE v1.id=1001 AND v2.id=1002"
...).print()
+----+
| amount |
+----+
| 3000.0 |
+----+
```



18.10 PGQL Queries with Partitioned IDs

You can retrieve partitioned IDs using the id() function in PGQL.

PGQL SELECT Queries

The following are a few examples to retrieve partitioned IDs using PGQL SELECT queries:

```
g.queryPgql("SELECT id(n) FROM MATCH(n)").print().close()
```

This prints an output similar to:

The output is printed as shown:

```
+----+
| name |
+----+
| User1 |
+----+

g.queryPgql("SELECT LABEL(n), n.name from MATCH(n) WHERE n.id =
1").print().close()
```

The output is printed as shown:

```
+-----+
| label(n) | name |
+-----+
| Accounts | User1 |
+-----+
```

PGX automatically creates a unique index for keys so that queries with predicates such as $MHERE\ id(n) = Accounts(1)$ and $MHERE\ n.id = 1$ can be efficiently processed by retrieving the vertex in constant time.

Using Bind Variables

Partitioned IDs can also be passed as bind values into a PgxPreparedStatement.



For example:

```
PgxPreparedStatement statement = g.preparePgql("SELECT n.name FROM MATCH (n)
WHERE id(n) = ?")
statement.setString(1, "Accounts(1)")
statement.executeQuery().print().close()
```

This prints the output as shown:

```
+----+
| name |
+----+
| User1 |
+----+
```

PGQL INSERT Queries

In INSERT queries, you must provide a value for the key property if a key property exists. The value is then used for the vertex or edge key.

For example you can execute an INSERT as shown:

```
g.executePgql("INSERT VERTEX v LABELS (Accounts) PROPERTIES (v.id = 1001,
v.name = 'User1001')")
```

The inserted values can be verified as shown:

```
g.queryPgql("SELECT id(n), n.name FROM MATCH(n) WHERE n.id =
1001").print().close()
```

This prints the output:

18.11 Security Tools for Executing PGQL Queries

To safeguard against query injection, bind variables can be used in place of literals while printIdentifier(String identifier) can be used in place of identifiers like graph names, labels, and property names.

- Using Bind Variables
 - There are two reasons for using bind variables:
- Using Identifiers in a Safe Manner

When you create a query through string concatenation, not only literals in queries pose a security risk, but also identifiers like graph names, labels, and property names do. The only problem is that bind variables are not supported for such identifier. Therefore, if these identifiers are variable from the application's perspective, then it is recommended to

protect against query injection by passing the identifier through the oracle.pggl.lang.ir.PgglUtils.printIdentifier(String identifier) method.

18.11.1 Using Bind Variables

There are two reasons for using bind variables:

- It protects against query injection.
- It speeds up query execution because the same bind variables can be set multiple times without requiring recompilation of the query.

To create a prepared statement, use one of the following two methods:

- PgxGraph.preparePgql(String query) : PgxPreparedStatement
- PgxSession.preparePgql(String query) : PgxPreparedStatement

The PgxPreparedStatement (package oracle.pgx.api) returned from these methods have setter methods for binding the bind variables to values of the designated data type.

```
PreparedStatement stmnt = g.preparePgql(
   "SELECT v.id, v.dob " +
   "FROM MATCH (v) " +
   "WHERE v.firstName = ? AND v.lastName = ?");
stmnt.setString(1, "Camille");
stmnt.setString(2, "Mullins");
ResultSet rs = stmnt.executeQuery();
```

Each bind variable in the query needs to be set to a value using one of the following setters of PgxPreparedStatement:

- setBoolean(int parameterIndex, boolean x)
- setDouble(int parameterIndex, double x)
- setFloat(int parameterIndex, float x)
- setInt(int parameterIndex, int x)
- setLong(int parameterIndex, long x)
- setDate(int parameterIndex, LocalDate x)
- setTime(int parameterIndex, LocalTime x)
- setTimestamp(int parameterIndex, LocalDateTime x)
- setTimeWithTimezone(int parameterIndex, OffsetTime x)
- setTimestampWithTimezone(int parameterIndex, OffsetDateTime x)
- setArray(int parameterIndex, List<?> x)

Once all the bind variables are set, the statement can be executed through:

- PgxPreparedStatement.executeQuery()
 - For SELECT queries only
 - Returns a ResultSet
- PgxPreparedStatement.execute()

- For any type of statement
- Returns a Boolean to indicate the form of the result: true in case of a SELECT query, false otherwise
- In case of SELECT, the ResultSet can afterwards be accessed through PgxPreparedStatement.getResultSet()

In PGQL, bind variables can be used in place of literals of any data type, including array literals. An example query with a bind variable to is set to an instance of a String array is:

```
List<String> countryNames = new ArrayList<String>();
countryNames.add("Scotland");
countryNames.add("Tanzania");
countryNames.add("Serbia");

PreparedStatement stmnt = g.preparePgql(
   "SELECT n.name, n.population " +
   "FROM MATCH (c:Country) " +
   "WHERE c.name IN ?");

ResultSet rs = stmnt.executeQuery();
```

Finally, if a prepared statement is no longer needed, it is closed through PgxPreparedStatement.close() to free up resources.

18.11.2 Using Identifiers in a Safe Manner

When you create a query through string concatenation, not only literals in queries pose a security risk, but also identifiers like graph names, labels, and property names do. The only problem is that bind variables are not supported for such identifier. Therefore, if these identifiers are variable from the application's perspective, then it is recommended to protect against query injection by passing the identifier through the

```
oracle.pgql.lang.ir.PgqlUtils.printIdentifier(String identifier) method.
```

Given an identifier string, the method automatically adds double quotes to the start and end of the identifier and escapes the characters in the identifier appropriately.

Consider the following example:

```
String graphNamePrinted = printIdentifier("my graph name with \" special %
characters ");
PreparedStatement stmnt = g.preparePgql(
    "SELECT COUNT(*) AS numVertices FROM MATCH (v) ON " + graphNamePrinted);
```

18.12 Best Practices for Tuning PGQL Queries

This section describes best practices regarding memory allocation, parallelism, and query planning.

Memory Allocation

The graph server (PGX) has on-heap and off-heap memory, the earlier being the standard JVM heap while the latter being a separate heap that is managed by PGX. Just like graph data, intermediate and final results of PGQL queries are partially stored on-heap and partially off-heap. Therefore, both heaps are needed.

Parallelism

By default, all available processor threads are used to process PGQL queries. However, if needed, the number of threads can be limited by setting the parallelism option of the graph server (PGX).

Query Plan Explaining

The PgxGraph.explainPgql(String query) method is used to get insight into the query plan of the query. The method returns an instance of Operation (package oracle.pgx.api) which has the following methods:

18.12.1 Memory Allocation

The graph server (PGX) has on-heap and off-heap memory, the earlier being the standard JVM heap while the latter being a separate heap that is managed by PGX. Just like graph data, intermediate and final results of PGQL queries are partially stored on-heap and partially off-heap. Therefore, both heaps are needed.

In case of the on-heap memory, the default maximum is chosen upon startup of the JVM, but it can be overwritten through the -Xmx option.

In case of the off-heap, there is no maximum set by default and the off-heap memory usage, therefore, keeps increasing automatically until it depletes the system resources, in which case the operation is canceled, it's memory is released, and an appropriate exception is passed to the user. If needed, a maximum off-heap size can be configured through the max_off_heap_size option in the graph server (PGX).

A ratio of 1:1 for on-heap versus off-heap is recommended as a good starting point to allow for the largest possible graphs to be loaded and queried. See Configuring On-Heap Limits for the steps to configure the on-heap memory size.

18.12.2 Parallelism

By default, all available processor threads are used to process PGQL queries. However, if needed, the number of threads can be limited by setting the parallelism option of the graph server (PGX).

See Configuration Parameters for the Graph Server (PGX) Engine for more information on the graph server configuration parameters.

18.12.3 Query Plan Explaining

The PgxGraph.explainPgql (String query) method is used to get insight into the query plan of the query. The method returns an instance of Operation (package oracle.pgx.api) which has the following methods:

- print(): for printing the operation and its child operations
- getOperationType(): for getting the type of the operation
- getPatternInfo(): for getting a string representation of the operation
- getCostEstimate(): for getting the cost of the operation
- getTotalCostEstimate(): for getting the cost of the operations and its child operations
- getCardinatlityEstimate(): for getting the expected number of result rows
- getChildren(): for accessing the child operations



Consider the following example:

```
g.explainPgql("SELECT COUNT(*) FROM MATCH (n) -[e1]-> (m) -[e2]->
(o)").print()
\--- GROUP BY GroupBy {"cardinality":"42", "cost":"42",
"accumulatedCost":"58.1"}
    \--- (m) -[e2]-> (o) NeighborMatch {"cardinality":"3.12", "cost":"3.12",
"accumulatedCost":"16.1"}
    \--- (n) -[e1]-> (m) NeighborMatch {"cardinality":"5", "cost":"5",
"accumulatedCost":"13"}
    \--- (n) RootVertexMatch {"cardinality":"8", "cost":"8",
"accumulatedCost":"8"}
```

In the above example, the print () method is used to print the query plan.

If a query plan is not optimal, it is often possible to rewrite the query to improve its performance. For example, a SELECT query may be split into an UPDATE and a SELECT query as a way to improve the total runtime.

Note that the graph server (PGX) does not provide a hint mechanism.

Also, printing the query plan shows the filters used in the query. For example:

```
g.explainPgql("SELECT id(n) FROM MATCH (n)-[e]->(m) WHERE " +
...> "id(n) > 500 " +
...> "AND id(n) < 510 " +
...> "AND id(n) <> 509 " +
...> "AND id(n) <> 507 ").print()
\--- Projection {"cardinality":"146", "cost":"0", "accumulatedCost":"175"}
    \--- (n) -[e]-> (m) NeighborMatch {"cardinality":"146", "cost":"146",
"accumulatedCost":"175"}
    \--- (n) RootVertexMatch {"cardinality":"29.2", "cost":"29.2",
"accumulatedCost":"29.2"}
    WHERE $filter1
filter1: (id(n) <> 509) AND
    (id(n) <> 507) AND
    (id(n) > 500) AND
    (id(n) < 510)</pre>
```

In the preceding example, since the query has filters that spans more than three lines, the filters are shown displayed below the query plan. If the filters are less than three lines, then the filters are shown directly within the query plan tree as shown:

REST Endpoints for the Graph Server

This chapter describes the graph server REST API endpoints.

The graph server REST API supports two different versions. It is recommended that you use version 2 of the API.

- Graph Server REST API Version 2
 Learn about the graph server REST API version 2 (v2).
- Graph Server REST API Version 1
 Learn about the graph server REST API version 1 (v1).

19.1 Graph Server REST API Version 2

Learn about the graph server REST API version 2 (v2).

This API version supports a token-based authentication for the REST endpoints. Therefore, you must first obtain an access token which can be used in the subsequent REST API requests.

- · Get an Authentication Token
- Refresh an Authentication Token
- Get Graphs
- Run a PGQL Query
- Get the Database Version
- Get User
- Asynchronous REST Endpoints

19.1.1 Get an Authentication Token

POST https://localhost:7007/auth/token

Get an authentication token which can be used to authenticate the REST API requests.

Request

Request Header

Accept: application/json; charset=UTF-8

Content-Type: application/json

Table 19-1 Request Body Parameters

Parameter	Туре	Description	Required	
username	string	Name of the user	Yes	
password	string	Password for the user	Yes	



Table 19-1 (Cont.) Request Body Parameters

Parameter	Туре	Description	Required
createSession	boolean	To determine if a session needs to be created	Optional. Set it to true if you want to run queries against the graph server (PGX).
source	string	A descriptive string identifying the client	Optional. Ensure to enter the source value without spaces (for example, "commandLine", "shellWithJava", and so on).
sessionId	string	To reuse an existing session when connecting to the graph server	Optional. Set it to an existing session ID if you want to reuse that session.

Sample Request Body

```
"username": "graphuser",
    "password": "<password_for_graphuser>",
    "createSession": true,
    "source": "<source-value-for-pgx-session>",
    "sessionId": "<session-id>"
}
```

Response

- 201 Created
- Content-Type: application/json

Sample Response Body

```
"access_token": "<token>"
  "token_type": "bearer",
  "expires_in": 3600
```

cURL Example

```
curl --location 'https://localhost:7007/auth/token' \
--header 'Content-Type: application/json' \
--data '{
    "username": "graphuser",
    "password": "<password_for_graphuser>",
    "createSession": true,
    "source": "commandLine",
    "sessionId": "<session-id>"
}'
```

19.1.2 Refresh an Authentication Token

PUT https://localhost:7007/auth/token

Refresh a valid access token.

Request

Request Header

Accept: application/json; charset=UTF-8

Content-Type: application/json

Table 19-2 Request Body Parameters

Parameter	Туре	Description	Required
token	string	Access token value	Yes
createSession	boolean	Flag to determine if a session needs to be created	Optional. Set it to true if you want to run queries against the graph server (PGX).
sessionId	string	To reuse an existing session when connecting to the graph server	Optional. Set it to an existing session ID if you want to reuse that session.

Sample Request Body

```
{
    "token": "<token>",
    "createSession": true,
    "sessionId": "<session-id>"
}
```

Response

- 201 Created
- Content-Type: application/json

Sample Response Body

```
"access_token": "<token>"
"token_type": "bearer",
"expires_in": 3600
```

cURL Example

```
curl --location --request PUT 'https://localhost:7007/auth/token' \
--header 'Content-Type: application/json' \
--data '{
    "token": "<token_value>",
    "createSession": true,
    "sessionId": "<session-id>"
}'
```



19.1.3 Get Graphs

GET https://localhost:7007/v2/graphs

Get the list of graphs for the specified driver.

Version: v2

Request

Request Header

- Accept: application/json; charset=UTF-8
- **Header:** Authorization: Bearer < token>
- Content-Type: application/json

Request Query Parameter

- **driver (required):** Specifies the PGQL driver value. This is a mandatory parameter. Supported values are as follows:
 - GRAPH_SERVER_PGX: Graphs loaded into the graph server (PGX)
 - PGQL_IN_DATABASE: PGQL property graphs in the database
 - SQL IN DATABASE: SQL property graphs in the database

Response

- 200 OK
- Content-Type: application/json

Sample Response Body

Note that the schema parameter will be NULL for graphs created in the graph server (PGX).

cURL Example

```
curl --location --request GET 'https://localhost:7007/v2/graphs?
driver=<driver-value>' \
--header 'Authorization: Bearer <token>'
```

19.1.4 Run a PGQL Query

POST https://localhost:7007/v2/runQuery

Run one or multiple statements for the specified driver.

Version: v2

Request

Request Header

Accept: application/json; charset=UTF-8
Header: Authorization: Bearer <token>

Content-Type: application/json

Table 19-3 Request Body Parameters

Parameter	Туре	Description	Required
statements	string []	One or multiple statements	Yes
driver	string	Specifies the PGQL driver. The supported values are: GRAPH_SERVER_PG X: To run PGQL queries against the graph server (PGX) PGQL_IN_DATABAS E: To run PGQL statements or queries against the database SQL_IN_DATABASE: To run graph queries against the database	Yes
formatter	string	The supported values are: DATASTUDIO GVT	Yes
parameters	<pre>object dynamicSampling : integer parallel: integer start: integer size: integer</pre>	Parameters include: Dynamic Sampling Value Degree of Parallelism Fetch size (= the number of rows) of the query result	 Parameters are all optional. Default value for dynamic sampling is 2. Default value for parallelism depends on the driver. Default value for start is 0. Default value for size is 100.
visualize	boolean	Flag to set visualization	Optional. Default value is true.

Sample Request Body

```
{
    "statements": [
        "DROP PROPERTY GRAPH TEST_GRAPH",
        "CREATE PROPERTY GRAPH TEST_GRAPH VERTEX TABLES( Male KEY (id) LABEL Male
PROPERTIES ARE ALL COLUMNS EXCEPT (gender), Female KEY (id) LABEL Female
```

PROPERTIES ARE ALL COLUMNS EXCEPT (gender)) EDGE TABLES (knowsmm KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL knows PROPERTIES (mval, firstMetAt, since), knowsmf KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Female LABEL knows PROPERTIES (mval, firstMetAt, since), knowsfm KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Male LABEL knows PROPERTIES (mval, firstMetAt, since), knowsff KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Female LABEL knows PROPERTIES (mval, firstMetAt, since), friendOfmm KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL friendOf PROPERTIES (strength), friendOfmf KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Female LABEL friendOf PROPERTIES (strength), friendOffm KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Male LABEL friendOf PROPERTIES (strength), friendOfff KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Female LABEL friendOf PROPERTIES (strength)) OPTIONS (pg pgql)", "SELECT v FROM MATCH (v) ON TEST GRAPH LIMIT 1"

```
],
"driver": "PGQL_IN_DATABASE",
"formatter": "GVT",
"parameters": {
    "dynamicSampling": 2,
    "parallel": 8,
    "start": 0,
    "size": 100
},
"visualize": true
```

Response

- 200 OK
- Content-Type: application/json

Sample Response Body

"pgqlStatement": "CREATE PROPERTY GRAPH TEST_GRAPH VERTEX
TABLES (Male KEY (id) LABEL Male PROPERTIES ARE ALL COLUMNS EXCEPT (gender),
Female KEY (id) LABEL Female PROPERTIES ARE ALL COLUMNS EXCEPT (gender))
EDGE TABLES (knowsmm KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION
KEY (did) REFERENCES Male LABEL knows PROPERTIES (mval, firstMetAt, since),
knowsmf KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did)
REFERENCES Female LABEL knows PROPERTIES (mval, firstMetAt, since), knowsfm
KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES
Male LABEL knows PROPERTIES (mval, firstMetAt, since), knowsff KEY (id)
SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Female

```
LABEL knows PROPERTIES (mval, firstMetAt, since), friendOfmm KEY (id) SOURCE
KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL
friendOf PROPERTIES (strength), friendOfmf KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Female LABEL friendOf
PROPERTIES (strength), friendOffm KEY (id) SOURCE KEY (sid) REFERENCES Female
DESTINATION KEY (did) REFERENCES Male LABEL friendOf PROPERTIES (strength),
friendOfff KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did)
REFERENCES Female LABEL friendOf PROPERTIES (strength) ) OPTIONS ( pg pgql )",
            "result": "Graph successfully created",
            "success": true,
            "error": null,
            "started": 1689656429198,
            "ended": 1689656429458
        },
            "pgqlStatement": "SELECT v FROM MATCH (v) ON TEST GRAPH LIMIT 1",
            "result":
"{\"schema\":\"GRAPHUSER\",\"name\":\"TEST GRAPH\",\"resultSetId\":\"\",\"grap
h\":{\"vertices\":[{\"id\":\"MALE(0)\",\"properties\":
{\"AGE\":\"40\",\"BVAL\":\"Y\",\"LNAME\":\"Brown\",\"FNAME\":\"Bill\",\"PREFER
ENCES\":\"{ \\\"color\\\": \\\"blue\\\", \\\"number\\\": \\\"5\\\" }
\",\"ID\":\"0\",\"TEXT\":\"the cat sat on the
mat\",\"MVAL\":\"y\"}]],\"edges\":[],\"numResults\":1},\"table\":\"V\
\nMALE(0)\"}",
            "success": true,
            "error": null,
            "started": 1689656429458,
            "ended": 1689656430029
    1
cURL Example
curl --location --request POST 'https://localhost:7007/v2/runQuery' \
--header 'Content-Type: application/json' \
--header 'Authorization: Bearer <token>' \
--data '{
  "statements": [
    "DROP PROPERTY GRAPH TEST GRAPH",
    "CREATE PROPERTY GRAPH TEST GRAPH VERTEX TABLES ( Male KEY (id) LABEL Male
PROPERTIES ARE ALL COLUMNS EXCEPT (gender), Female KEY (id) LABEL Female
PROPERTIES ARE ALL COLUMNS EXCEPT (gender) ) EDGE TABLES ( knowsmm KEY (id)
SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL
knows PROPERTIES (mval, firstMetAt, since), knowsmf KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Female LABEL knows
PROPERTIES (mval, firstMetAt, since), knowsfm KEY (id) SOURCE KEY (sid)
REFERENCES Female DESTINATION KEY (did) REFERENCES Male LABEL knows
PROPERTIES (mval, firstMetAt, since), knowsff KEY (id) SOURCE KEY (sid)
REFERENCES Female DESTINATION KEY (did) REFERENCES Female LABEL knows
PROPERTIES (mval, firstMetAt, since), friendOfmm KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL friendOf
PROPERTIES (strength), friendOfmf KEY (id) SOURCE KEY (sid) REFERENCES Male
DESTINATION KEY (did) REFERENCES Female LABEL friendOf PROPERTIES (strength),
```

friendOffm KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did)

```
REFERENCES Male LABEL friendOf PROPERTIES (strength), friendOfff KEY (id)
SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Female
LABEL friendOf PROPERTIES (strength) ) OPTIONS ( pg_pgql )",

"SELECT v FROM MATCH (v) ON TEST_GRAPH LIMIT 1"
],

"driver": "PGQL_IN_DATABASE",

"formatter": "GVT",

"parameters": {

   "dynamicSampling": 2,

   "parallel": 8,

   "start": 0,

   "size": 100
},

"visualize": true
}'
```

19.1.5 Get the Database Version

GET https://localhost:7007/v2/dbVersion

Get the database version to which the graph server is connected.

Version: v2

Request

Request Header

- Accept: application/json; charset=UTF-8
- **Header:** Authorization: Bearer < token>
- Content-Type: application/json

Response

- 200 OK
- Content-Type: application/json

Sample Response Body

```
{
    "dbVersion": "23.0"
}
```

cURL Example

```
curl --location --request GET 'https://localhost:7007/v2/dbVersion' \
--header 'Authorization: Bearer <token>'
```



19.1.6 Get User

GET https://localhost:7007/v2/user

Get the username that is currently connected to the graph server (username is attached to the token).

Version: v2

Request

Request Header

- Accept: application/json; charset=UTF-8
- **Header:** Authorization: Bearer < token>
- Content-Type: application/json

Response

- 200 OK
- Content-Type: application/json

Sample Response Body

```
{
    "username": "graphuser"
}
```

cURL Example

```
curl --location --request GET 'https://localhost:7007/v2/user' \
--header 'Authorization: Bearer <token>'
```

19.1.7 Asynchronous REST Endpoints

The graph server REST endpoints support cancellation of queries.

In order to be able to cancel queries, you need to send the query using the following asynchronous REST endpoints:

- Run an Asynchronous PGQL Query
- Check Asynchronous Query Completion
- Retrieve Asynchronous Query Result
- Cancel an Asynchronous Query Execution

19.1.7.1 Run an Asynchronous PGQL Query

POST https://localhost:7007/v2/runQueryAsync

Run a PGQL query asynchronously on a property graph.

Version: v2

Request

Request Header

```
    Accept: application/json; charset=UTF-8
```

• **Header:** Authorization: Bearer < token>

• Content-Type: application/json

Request Query Parameters: See Table 19-3 for details.

Sample Request Body

```
"statements": [
    "DROP PROPERTY GRAPH TEST GRAPH",
    "CREATE PROPERTY GRAPH TEST GRAPH VERTEX TABLES ( Male KEY (id) LABEL Male
PROPERTIES ARE ALL COLUMNS EXCEPT (gender), Female KEY (id) LABEL Female
PROPERTIES ARE ALL COLUMNS EXCEPT (gender) ) EDGE TABLES( knowsmm KEY (id)
SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL
knows PROPERTIES (mval, firstMetAt, since), knowsmf KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Female LABEL knows
PROPERTIES (mval, firstMetAt, since), knowsfm KEY (id) SOURCE KEY (sid)
REFERENCES Female DESTINATION KEY (did) REFERENCES Male LABEL knows
PROPERTIES (mval, firstMetAt, since), knowsff KEY (id) SOURCE KEY (sid)
REFERENCES Female DESTINATION KEY (did) REFERENCES Female LABEL knows
PROPERTIES (mval, firstMetAt, since), friendOfmm KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL friendOf
PROPERTIES (strength), friendOfmf KEY (id) SOURCE KEY (sid) REFERENCES Male
DESTINATION KEY (did) REFERENCES Female LABEL friendOf PROPERTIES (strength),
friendOffm KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did)
REFERENCES Male LABEL friendOf PROPERTIES (strength), friendOfff KEY (id)
SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Female
LABEL friendOf PROPERTIES (strength) ) OPTIONS ( pg pgql )",
    "SELECT v FROM MATCH (v) ON TEST GRAPH LIMIT 1"
  "driver": "PGQL IN DATABASE",
  "formatter": "GVT",
  "parameters": {
    "dynamicSampling": 2,
    "parallel": 8,
    "start": 0,
    "size": 100
  },
  "visualize": true
```

Response

- 202 OK
- Content-Type: application/json

Sample Response Body

```
{
    "message": "Query execution started.",
```

```
"result_id": 0
}
```

cURL Example

```
curl --location --request POST 'https://localhost:7007/v2/runQueryAsync' \
--header 'Content-Type: application/json' \
--header 'Authorization: Bearer <token>' \
--data '{
  "statements": [
    "DROP PROPERTY GRAPH TEST GRAPH",
    "CREATE PROPERTY GRAPH TEST GRAPH VERTEX TABLES ( Male KEY (id) LABEL Male
PROPERTIES ARE ALL COLUMNS EXCEPT (gender), Female KEY (id) LABEL Female
PROPERTIES ARE ALL COLUMNS EXCEPT (gender) ) EDGE TABLES( knowsmm KEY (id)
SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL
knows PROPERTIES (mval, firstMetAt, since), knowsmf KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Female LABEL knows
PROPERTIES (mval, firstMetAt, since), knowsfm KEY (id) SOURCE KEY (sid)
REFERENCES Female DESTINATION KEY (did) REFERENCES Male LABEL knows
PROPERTIES (mval, firstMetAt, since), knowsff KEY (id) SOURCE KEY (sid)
REFERENCES Female DESTINATION KEY (did) REFERENCES Female LABEL knows
PROPERTIES (mval, firstMetAt, since), friendOfmm KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL friendOf
PROPERTIES (strength), friendOfmf KEY (id) SOURCE KEY (sid) REFERENCES Male
DESTINATION KEY (did) REFERENCES Female LABEL friendOf PROPERTIES (strength),
friendOffm KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did)
REFERENCES Male LABEL friendOf PROPERTIES (strength), friendOfff KEY (id)
SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Female
LABEL friendOf PROPERTIES (strength) ) OPTIONS ( pg pgql )",
    "SELECT v FROM MATCH (v) ON TEST GRAPH LIMIT 1"
  ],
  "driver": "PGQL IN DATABASE",
  "formatter": "GVT",
  "parameters": {
    "dynamicSampling": 2,
    "parallel": 8,
    "start": 0,
    "size": 100
  },
  "visualize": true
} '
```

19.1.7.2 Check Asynchronous Query Completion

GET https://localhost:7007/v2/isAsyncQueryExecutionComplete/<result_id> Check if an asynchronous query execution is completed.

Version: v2

Request Header

- Accept: application/json; charset=UTF-8
- Header: Authorization: Bearer < token>

• Content-Type: application/json

Request Path Parameter:

result id: PGQL query execution result id.

Response

- 200 OK
- Content-Type: application/json

Sample Response Body

true

cURL Example

```
curl --location --request GET 'https://localhost:7007/v2/
isAsyncQueryExecutionComplete/<result-id>' \
    --header 'Authorization: Bearer <token>'
```

19.1.7.3 Retrieve Asynchronous Query Result

```
GET https://localhost:7007/v2/runQueryAsync/<result_id>
```

Retreive the result of an asynchronous query.

Version: v2

Request

Request Header

- Accept: application/json; charset=UTF-8
- **Header:** Authorization: Bearer < token>
- Content-Type: application/json

Request Path Parameter:

result id: PGQL query execution result id.

Response

- 200 OK
- Content-Type: application/json

Sample Response Body



```
},
            "pgqlStatement": "CREATE PROPERTY GRAPH TEST GRAPH VERTEX
TABLES ( Male KEY (id) LABEL Male PROPERTIES ARE ALL COLUMNS EXCEPT (gender),
Female KEY (id) LABEL Female PROPERTIES ARE ALL COLUMNS EXCEPT (gender) )
EDGE TABLES (knowsmm KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION
KEY (did) REFERENCES Male LABEL knows PROPERTIES (mval, firstMetAt, since),
knowsmf KEY (id) SOURCE KEY (sid) REFERENCES Male DESTINATION KEY (did)
REFERENCES Female LABEL knows PROPERTIES (mval, firstMetAt, since), knowsfm
KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES
Male LABEL knows PROPERTIES (mval, firstMetAt, since), knowsff KEY (id)
SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did) REFERENCES Female
LABEL knows PROPERTIES (mval, firstMetAt, since), friendOfmm KEY (id) SOURCE
KEY (sid) REFERENCES Male DESTINATION KEY (did) REFERENCES Male LABEL
friendOf PROPERTIES (strength), friendOfmf KEY (id) SOURCE KEY (sid)
REFERENCES Male DESTINATION KEY (did) REFERENCES Female LABEL friendOf
PROPERTIES (strength), friendOffm KEY (id) SOURCE KEY (sid) REFERENCES Female
DESTINATION KEY (did) REFERENCES Male LABEL friendOf PROPERTIES (strength),
friendOfff KEY (id) SOURCE KEY (sid) REFERENCES Female DESTINATION KEY (did)
REFERENCES Female LABEL friendOf PROPERTIES (strength) ) OPTIONS ( pg pgql )",
            "result": "Graph successfully created",
            "success": true,
            "error": null,
            "started": 1689656429198,
            "ended": 1689656429458
        },
            "pgqlStatement": "SELECT v FROM MATCH (v) ON TEST GRAPH LIMIT 1",
            "result":
"{\"schema\":\"GRAPHUSER\",\"name\":\"TEST GRAPH\",\"resultSetId\":\"\",\"grap
h\":{\"vertices\":[{\"id\":\"MALE(0)\",\"properties\":
{\"AGE\":\"40\",\"BVAL\":\"Y\",\"LNAME\":\"Brown\",\"FNAME\":\"Bill\",\"PREFER
ENCES\":\"{ \\\"color\\\": \\\"blue\\\", \\\"number\\\\" }
", "ID": "0", "TEXT": "the cat sat on the
mat\",\"MVAL\":\"y\"}]],\"edges\":[],\"numResults\":1},\"table\":\"V\
\nMALE(0)\"}",
            "success": true,
            "error": null,
            "started": 1689656429458,
            "ended": 1689656430029
    ]
}
cURL Example
curl --location --request GET 'https://localhost:7007/v2/runQueryAsync/
<result-id>' \
--header 'Authorization: Bearer <token>'
```

"ended": 1689656429198

19.1.7.4 Cancel an Asynchronous Query Execution

DELETE https://localhost:7007/v2/runQueryAsync/<result id>

Cancel the execution of an asynchronous query.

Version: v2

Request

Request Header

- Accept: application/json; charset=UTF-8
- **Header:** Authorization: Bearer < token>
- Content-Type: application/json

Request Path Parameter:

result id: PGQL query execution result id.

Response

- 200 Accepted
- Content-Type: application/json

cURL Example

```
curl --location --request DELETE 'https://localhost:7007/v2/runQueryAsync/
<result-id>' /
--header 'Authorization: Bearer <token>'
```

19.2 Graph Server REST API Version 1

Learn about the graph server REST API version 1 (v1).

- Login
- Get Graphs
- Run a PGQL Query
- Get User
- Logout
- Asynchronous REST Endpoints

19.2.1 Login

POST https://localhost:7007/ui/v1/login/

Login to the graph server.

Version: v1

Authentication: Uses cookie-based authentication.

Table 19-4 Parameters

Parameter	Parameter Type	Value	Required
Content-type	Header	application/json	Yes
username	Body	<username></username>	Yes
password	Body	<pre><password></password></pre>	Yes
baseUrl	Body	<pre><baseurl> to point to the graph server (PGX) or the database</baseurl></pre>	Optional. If empty, the pgx.base_ur l parameter value in the web.xml file in /opt/oracle/graph/pgx/server/graph-server-webapp-24.2.0.war will be used.
pgqlDriver	Body	Valid PGQL driver configuration values are: • pgxDriver: for PGQL on the graph server (PGX) • pgqlDriver: for PGQL on Oracle Database	Yes
sessionId	Body	sessionId from graph server (PGX)	Optional

Request

The following curl command signs the user in to the graph server:

```
curl --cacert /etc/oracle/graph/ca_certificate.pem -c cookie.txt -X POST -H
"Content-Type: application/json" -d '{"username": "<username>", "password":
"<password>", "pgqlDriver": "<pgqlDriver>","baseUrl": "<baseUrl>",
"sessionId": "<sessionId>" }' https://localhost:7007/ui/v1/login/
```

Response: The username used for the login. For example:

"oracle"

On successful login, the server session cookie is stored in a cookie file, <code>cookie.txt</code>. Use this cookie file, in the subsequent calls to the API.

19.2.2 Get Graphs

GET https://localhost:7007/ui/v1/graphs

Get the list of all graphs that belong to a user.

Version: v1 Request The following curl command lists all the graphs that belong to the user:

```
curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt 'https://
localhost:7007/ui/v1/graphs'
```

Response: The list of graphs available for the current user. For example:

Also, note that the schema parameter will be NULL for graphs created in the graph server (PGX).

19.2.3 Run a PGQL Query

POST https://localhost:7007/ui/v1/query

Run a PGQL Query on a property graph.

Version: v1

Table 19-5 Request Query Parameters

Parameter	Description	Values	Required
pgql	PGQL query string	<pgql_query></pgql_query>	Yes
graph	Name of the graph	<graph_name></graph_name>	Optional, only if the pgql query parameter contains the graph name. Otherwise, it is required.
parallelism	Degree of Parallelism	<pre><parallelism_value></parallelism_value></pre>	Optional. Default value depends on the PGQL driver configuration: • pgxDriver: <number-of-cpus> See parallelism in Table 23-1. • pgqlDriver: 1</number-of-cpus>
size	Fetch size (= the number of rows) of the query result	<size_value></size_value>	Optional. Default size value is 100.
formatter	Formatter of the graph	<formatter_value></formatter_value>	Optional. Supported formatter options are: datastudio gvt Default value is datastudio.

Request

The following curl command executes PGQL Query on a property graph:

```
curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt 'https://
localhost:7007/ui/v1/query?pgql=SELECT%20e%0AMATCH%20()-%5Be%5D-%3E()
%0ALIMIT%205&graph=hr&size=100'
```

Response: The PGQL query result in JSON format.

```
"name": "bank graph analytics 2",
"resultSetId": "pgql 14",
"graph": {
  "idType": "number",
  "vertices": [
    {
      " id": "1",
      "p": [],
      "1": [
        "Accounts"
      ],
      "g": [
        "anonymous 1"
    },
      " id": "418",
      "p": [],
      "1": [
        "Accounts"
      ],
      "q": [
        "anonymous 2"
      ]
    },
    {
      " id": "259",
      "p": [],
      "1": [
        "Accounts"
      ],
      "g": [
        "anonymous 2"
    }
  ],
  "edges": [
      " id": "0",
      "p": [
        {
          "n": "AMOUNT",
          "v": "1000.0",
          "s": false
        }
      ],
```



```
"1": [
         "Transfers"
        "g": [
          "e"
        ],
        "s": "1",
        "d": "259",
        "u": false
      },
        " id": "1",
        "p": [
            "n": "AMOUNT",
            "v": "1000.0",
            "s": false
         }
        ],
        "1": [
         "Transfers"
        ],
        "g": [
         ~"e"
        "s": "1",
        "d": "418",
        "u": false
      }
    ],
    "paths": [],
    "totalNumResults": 2
 },
 "table":
"e\nPqxEdge[provider=Transfers,ID=0]\nPqxEdge[provider=Transfers,ID=1]"
```

19.2.4 Get User

GET https://localhost:7007/ui/v1/user

Get the name of the current user.

Version: v1

Request

The following curl command gets the name of the current user:

curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt 'https://
localhost:7007/ui/v1/user'

Response: The name of the current user. For example:

"oracle"

19.2.5 Logout

POST https://localhost:7007/ui/v1/logout/

Log out from the graph server.

Version: v1

Request

The following curl command is to successfully log out from the graph server.

curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt -X POST
'https://localhost:7007/ui/v1/logout/'

Response: None

On successful logout, the server returns HTTP status code 200 and the session token from the cookie.txt file will no longer be valid.

19.2.6 Asynchronous REST Endpoints

The graph server REST endpoints support cancellation of queries.

In order to be able to cancel queries, you need to send the query using the following asynchronous REST endpoints:

- Run an Asynchronous PGQL Query
- Check Asynchronous Query Completion
- Retrieve Asynchronous Query Result
- Cancel an Asynchronous Query Execution

19.2.6.1 Run an Asynchronous PGQL Query

GET https://localhost:7007/ui/v1/async-query

Run a PGQL query asynchronously on a property graph.

Version: 1

See Table 19-5 for more information on guery parameters.

Request

The following curl command executes a PGQL query asynchronously on a property graph:

curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt 'https://
localhost:7007/ui/v1/async-query?pgql=SELECT%20e%0AMATCH%20()-%5Be%5D-%3E()
%0ALIMIT%205&graph=hr¶llelism=&size=100'

Response: None.



An error message will be returned in case the query is malformed or if the graph does not exist.

19.2.6.2 Check Asynchronous Query Completion

GET https://localhost:7007/ui/v1/async-query-complete

Checks if an asynchronous query execution is completed.

Version: v1

Request

The following curl command checks if the PGQL query execution is completed:

curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt 'https://
localhost:7007/ui/v1/async-query-complete'

Response: A boolean that indicates if the query execution is completed. For example,

true

Note:

You do not have to specify any request ID, as the currently executing query is attached to your HTTP session. You can only have one query executing per session. For concurrent query execution, create multiple HTTP sessions by logging in multiple times.

19.2.6.3 Retrieve Asynchronous Query Result

GET https://localhost:7007/ui/v1/async-result

Retreive the result of an asynchronous query.

Version: v1

Note:

The endpoint, GET https://localhost:7007/ui/v1/async-result to retrieve a query result is deprecated:

```
curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt
'https://localhost:7007/ui/v1/async-result?
pgql=SELECT%20e%0AMATCH%20()-%5Be%5D-%3E()
%0ALIMIT%205&graph=hr&parallelism=&size=100'
```

Request

The following curl command retrieves the result of a successfully completed query:

```
curl --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt 'https://
localhost:7007/ui/v1/async-result'
```

Response: The PGQL query result in JSON format.

```
"name": "bank graph analytics 2",
"resultSetId": "pgql 14",
"graph": {
  "idType": "number",
  "vertices": [
      " id": "1",
      "p": [],
      "1": [
        "Accounts"
      ],
      "g": [
       "anonymous_1"
    },
      " id": "418",
      "p": [],
      "1": [
       "Accounts"
      ],
      "g": [
        "anonymous 2"
      ]
    },
      " id": "259",
      "p": [],
      "1": [
        "Accounts"
      ],
      "g": [
```

```
"anonymous 2"
       ]
     }
   ],
    "edges": [
     {
       " id": "0",
       "p": [
         {
           "n": "AMOUNT",
           "v": "1000.0",
           "s": false
       ],
       "1": [
        "Transfers"
       ],
       "g": [
         "e"
       "s": "1",
       "d": "259",
       "u": false
     },
      {
       " id": "1",
        "p": [
         {
           "n": "AMOUNT",
           "v": "1000.0",
           "s": false
         }
       ],
       "1": [
        "Transfers"
       ],
       "g": [
         "e"
       ],
       "s": "1",
       "d": "418",
       "u": false
     }
   ],
    "paths": [],
   "totalNumResults": 2
 },
 "table":
"e\nPgxEdge[provider=Transfers,ID=0]\nPgxEdge[provider=Transfers,ID=1]"
```

19.2.6.4 Cancel an Asynchronous Query Execution

DELETE https://localhost:7007/ui/v1/async-query

Cancels the execution of an asynchronous query.

Version: 1

Request

The following curl command cancels a currently executing PGQL Query on a property graph:

curl -X DELETE --cacert /etc/oracle/graph/ca_certificate.pem -b cookie.txt
'https://localhost:7007/ui/v1/async-query'

Response: Confirmation of the cancellation or an error message if the query has already completed execution.



Part VI

Graph Visualization Application

The Graph Visualization application enables interactive exploration and visualization of property graphs. You can visualize graphs that are loaded into the graph server(PGX) and the graphs stored in the database.

- About the Graph Visualization Application
 The Graph Visualization application is a single-page web application that works with the graph server (PGX).
- Using the Graph Visualization Application
 Using the Graph Visualization application, you can run PGQL queries on graphs in the
 graph server (PGX) and database.
- Embedding the Graph Visualization Library in a Web Application You can integrate the graph visualization component in a web application to visualize graph data.



20

About the Graph Visualization Application

The Graph Visualization application is a single-page web application that works with the graph server (PGX).

The graph server can be deployed in embedded mode or in Apache Tomcat or Oracle WebLogic Server. Graph Visualization application takes PGQL queries or SQL graph queries (in case of SQL property graphs which are supported only in Oracle Database Release 23ai) as input and renders the result visually. A rich set of client-side exploration and visualization features can reveal new insights into your graph data.

Graph Visualization application works with the graph server (PGX). It can visualize graphs that are have been loaded into the graph server (PGX) at run-time by a client application and made available through the graph.publish() API.

See Also:

- · Running the Graph Visualization Web Client
- · REST Endpoints for the Graph Server

Using the Graph Visualization Application

Using the Graph Visualization application, you can run PGQL queries on graphs in the graph server (PGX) and database.

The principal point of entry for the Graph Visualization application is the query editor which comprises the following tab options:

- Graph Server: To visualize graphs loaded into the graph server (PGX).
- Database (PGQL Property Graphs): To visualize PGQL property graphs in the database.
- Database (SQL Property Graphs): To visualize SQL property graphs. This tab option is supported only with Oracle Database 23ai.

Note that you can view the list of graphs available in the respective tabs by clicking the **List of available graphs** icon in the bottom panel of the application. The visualization results for the queries are also displayed in this panel.

The following sections explain the application user interface for running the various supported queries for visualization in detail:

- Visualizing PGQL Queries on Graphs Loaded Into the Graph Server (PGX)
 You can visualize PGQL queries on graphs loaded into the graph server (PGX) in the Graph Server tab of the Graph Visualization application.
- Visualizing PGQL Queries on PGQL Property Graphs
 You can visualize PGQL queries on PGQL property graphs in the database in the
 Database (PGQL Property Graphs) tab of the Graph Visualization application.
- Visualizing Graph Queries on SQL Property Graphs
 You can query and visualize a SQL property graph in the database in the Database (SQL Property Graphs) tab of the Graph Visualization application.
- Graph Visualization Modes
 The buttons on the right let you switch between two modes: Graph Manipulation and Zoom/Move.
- Graph Visualization Settings
 You can click the Settings gear icon to display the Graph Visualization settings window.
- Using the Geographical Layout
 The Graph Visualization application offers a choice of layouts for rendering graphs. One of them is the Geographical layout that will show the graph (vertices and edges) on a global map.
- Using Live Search
 Live Search lets you to search the displayed graph and add live fuzzy search score to each
 item, so you can create a Highlight which visually shows the results of the search in the
 graph immediately.

21.1 Visualizing PGQL Queries on Graphs Loaded Into the Graph Server (PGX)

You can visualize PGQL queries on graphs loaded into the graph server (PGX) in the **Graph Server** tab of the Graph Visualization application.

Once you login to the Graph Visualization application, navigate to the **Graph Server** tab in the query editor. Enter a PGQL query on the desired graph and click the **Run Query** icon to execute the query.



Creating a property graph using the CREATE PROPERTY GRAPH statement is not supported.

The following figure shows a query visualization identifying all edges that are directed edges from any vertex in the graph to any other vertex.

Graph Visualization

Graph Server

Database (PGOL Property Graphs)

Database (SOL Property Graphs)

Parallelism

Description of the property Graphs of the prope

Figure 21-1 Query Visualization

On successful execution, the graph visualization result (including nodes and their connections) is displayed in the bottom panel. You can right-click a node or connection to display tooltip information, and you can drag the nodes around.

21.2 Visualizing PGQL Queries on PGQL Property Graphs

You can visualize PGQL queries on PGQL property graphs in the database in the **Database** (**PGQL Property Graphs**) tab of the Graph Visualization application.

You can create, query, modify and visualize PGQL property graphs in the database using the Graph Visualization application. The following PGQL operations are supported:

• CREATE PROPERTY GRAPH: To create a new PGQL property graph as shown:

Figure 21-2 Creating a PGQL property graph

```
Graph Server

Database (PGQL Property Graphs)

PGQL Graph Query

1 CREATE PROPERTY GRAPH BANK_GRAPH
2 VERTEX TABLES ( bank_accounts AS Accounts
3 KEY (id)
4 LABEL Accounts
5 PROPERTIES (id, name)
6)
7 EDGE TABLES ( bank_txns AS Transfers
8 KEY (txn_id)
9 SOURCE KEY (from_acct_id) REFERENCES Accounts (id)
10 DESTINATION KEY (to_acct_id) REFERENCES Accounts (id)
11 LABEL Transfers
12 PROPERTIES (from acct_id, to_acct_id, amount)
13 ) OPTIONS (PG_VIEW)

Confirmation

Query Execution Succeeded
Graph successfully created
```

INSERT, UPDATE and DELETE: To modify an existing PGQL property graph. For example:

Figure 21-3 Updating an Edge in a PGQL property graph

```
Graph Server

PGQL Graph Query

1 UPDATE e
2 SET (e.amount=30000)
3 FROM MATCH (v1 IS Accounts) -[e IS Transfers]-> (v2 is Accounts)
4 ON BANK GRAPH
5 WHERE vI.id = 179 and v2.id=688

Confirmation

Query Execution Succeeded
Success: 1 row(s) affected
```


Note that you must provide the graph name in the PGQL query. You can click the **List of available graphs** icon to view the list of PGQL property graphs to which you have access.

Figure 21-4 Deleting an Edge in a PGQL property graph




• SELECT: To query a PGQL property graph as shown:

Figure 21-5 Querying a PGQL property graph

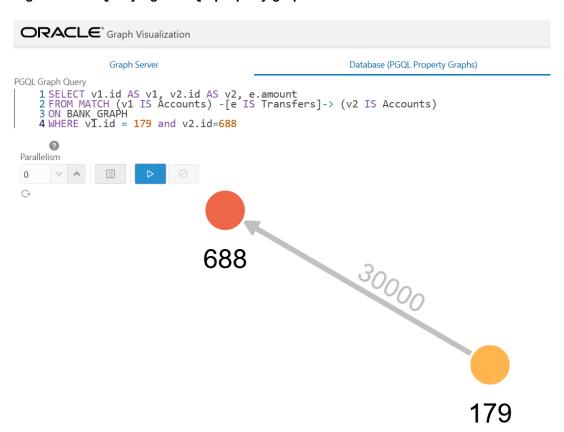

• DROP PROPERTY GRAPH: To delete a PGQL property graph as shown:

Figure 21-6 Dropping a PGQL property graph

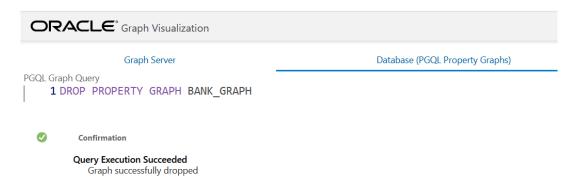

21.3 Visualizing Graph Queries on SQL Property Graphs

You can query and visualize a SQL property graph in the database in the **Database (SQL Property Graphs)** tab of the Graph Visualization application.



The **Database (SQL Property Graphs)** tab option in the Graph Visualization application is only available with Oracle Database 23ai.


However, in order to visualize the vertices and edges of a <code>GRAPH_TABLE</code> query together with their IDs and all their labels and properties, the query must return the vertex ID, or edge ID, or both.

For example, the following figure shows the visualization of a SQL graph_table query on a SQL property graph. Note that the COLUMNS clause in the query uses the VERTEX_ID and EDGE ID operators.

Note:

- In addition to the privileges mentioned in Privileges to Query a SQL Property
 Graph, you must also have the CREATE VIEW and CREATE MATERIALIZED VIEW
 privileges to query and visualize a SQL property graph in the Graph Visualization
 application
- The Graph Visualization application supports only SELECT graph queries.

Figure 21-7 Graph Query on a SQL Property Graph

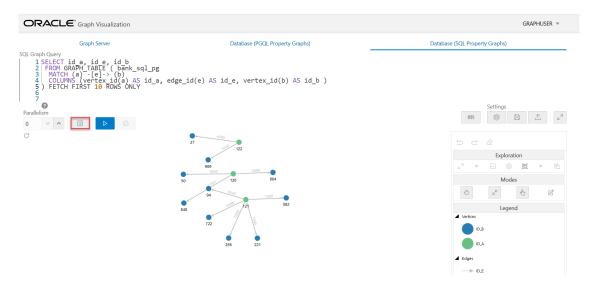

The name of the graph must be provided in the SQL graph query. You can click the **List of available graphs** icon (shown highlighted in the preceding figure) to view the list of SQL property graphs to which you have access.

See Also:

SQL Graph Queries for more information

21.4 Graph Visualization Modes

The buttons on the right let you switch between two modes: Graph Manipulation and Zoom/ Move.

- Graph Manipulation mode lets you execute actions that modify the visualization. These
 actions include:
 - Drop removes selected vertices from visualization. Can also be executed from the tooltip.
 - Group selects multiple vertices and collapses them into a single one.
 - Ungroup selects a group of collapsed vertices and ungroups them.
 - Expand retrieves a configurable number of neighbors (hops) of selected vertices. Can also be executed from the tooltip.
 - Focus, like Expand, retrieves a configurable number of neighbors, but also drops all other vertices. Can also be executed from the tooltip.
 - Undo undoes the last action.
 - Redo redoes the last action.
 - Reset resets the visualization to the original state after the query.

 Zoom/Move mode lets you zoom in and out, as well as to move to another part of the visualization. The Pan to Center button resets the zoom and returns the view to the original one.

An additional mode, called **Sticky** mode, lets you cancel the action of dragging the nodes around.

21.5 Graph Visualization Settings

You can click the **Settings** gear icon to display the Graph Visualization settings window.

The settings window lets you modify some parameters for the visualization, and it has tabs for General, Visualization, and Highlights. The following figure shows this window, with the Visualization tab selected.

2 Visualization **Ⅲ** General √ Highlights General ☆ Light ♦ Dark Theme Straight Curved Edge Style Edge Marker ← Arrow - None Similar Edges Collect Keep Page Size 100 Layouts Layout Force Edge Distance 120 -30 Force Strength Velocity Decay 0.3 Vertex Padding 40

Figure 21-8 Graph Visualization Settings Window

The General tab includes the following:

- Number of hops: The configurable number of hops for the expand and focus actions.
- **Truncate label**: Truncates the label if it exceeds the maximum length.
- Max. visible label length: Maximum length before truncating.
- Show Label On Hover: Controls whether the label is shown on hover.
- Display the graph legend: Controls whether the legend is displayed.

The Visualization tab includes the following:

- Theme: Select a light or dark mode.
- Edge Style: Select straight or curved edges.
- Edge Marker: Select arrows or no edge marker. This only applies to directed edges.
- Similar Edges: Select keep or collect.
- Page Size: Specify how many vertices and edges are displayed per page.
- Layouts: Select between different layouts (random, grid, circle, concentric, ...).
- Vertex Label: Select which property to use as the vertex label.
- Vertex Label Orientation: Select the relative position of the vertex label.
- **Edge Label**: Select which property to use as the edge label.

The **Highlights tab** includes customization options that let you modify the appearance of edges and vertices. Highlighting can be applied based on conditions (filters) on single or multiple elements. The following figure shows a condition (country = United States) and visual highlight options for vertices.

Vertices Edges Filter By Conditions (+) country United States Ü Highlights Apply To Vertex In Edge Out Edge Interpolate ✓ Size 3.2X ✓ Color red Icon flag Label Image Animations KN \oplus Q

Figure 21-9 Highlights Options for Vertices

A filter for highlights can contain multiple conditions on any property of the element. The following conditions are supported.

= (equal to)

- < (less than)</p>
- <= (less than or equal to)
- > (greater than)
- >= (greater than or equal to)
- != (not equal to)
- ~ (filter is a regular expression)
- * (any: like a wildcard, can match to anything)

The visual highlight customization options include:

- Edges:
 - Width
 - Color
 - Label
 - Style
 - Animations
- Vertices:
 - Size
 - Color
 - Icon
 - Label
 - Image
 - Animations

You can export and import highlight options by clicking the Save and Import buttons in the main window. **Save** lets you persist the highlight options, and **Load** lets you apply previously saved highlight options.

When you click **Save**, a file is saved containing a JSON object with the highlights configuration. Later, you can load that file to restore the highlights of the saved session.

21.6 Using the Geographical Layout

The Graph Visualization application offers a choice of layouts for rendering graphs. One of them is the Geographical layout that will show the graph (vertices and edges) on a global map.

The following figure shows a graph rendered on a geographical layout in the Graph Visualization application:



Figure 21-10 Geographical Layout



In order to view your vertices on a map, they must include a geographical location, in the form of a pair of properties that contain the longitude and latitude coordinates for that vertex. For example:

+		 	 	-+
iata	city	longitude	latitude	ĺ
+		 	 	-+
SIN	Singapore	103.994003	1.35019	
LAX	Los Angeles	-118.4079971	33.94250107	
MUC	Munich	11.7861	48.353802	
CDG	Paris	2.55	49.012798	
LHR	London	-0.461941	51.4706	
+		 	 	-+



You can use any name for the longitude and latitude properties (such as X and Y, or long and lat). But, you must ensure that the longitude/latitude pair are in the WGS84 system (GPS coordinates), and the coordinates are expressed in decimal degrees.

You can select the geographical layout in the Graph Visualization settings window as shown:

Figure 21-11 Setting Geographical Layout

Then, select the properties in your vertices that contain the geographical coordinates as shown:

Figure 21-12 Selecting the Coordinates for the Geographical layout

You can now move around the map and zoom in/out using your mouse or trackpad. From now on, whenever you enter a new PGQL query, the map will automatically center and zoom the vertices returned by the query.

21.7 Using Live Search

Live Search lets you to search the displayed graph and add live fuzzy search score to each item, so you can create a Highlight which visually shows the results of the search in the graph immediately.

If you run a query, and a graph is displayed, you can add the live search, which is on the settings dialog. On the bottom of the General tab, you will see these options.

- **Enable Live Search:** Enables the Live Search feature, adds the search input to the visualization, and lets you further customize the search.
- **Enable Search In:** You can select whether you want to search the properties of Vertices, Edges, or both.
- Properties To Search: Based on what you selected for Enable Search In, you can set one
 or more properties to search in. For example, if you disable the search for edges but you
 had a property from edges selected, it will be stored and added back when you enable
 search for the edges again. (This also works for vertices.)
- Advanced Settings: You can fine-tune the search even more. Each of the advanced options is documented with context help, visible upon enabling.
 - Location: Determines approximately where in the text the pattern is expected to be found.
 - Distance: Determines how close the match must be to the fuzzy location (specified by location). An exact letter match which is distance characters away from the fuzzy location would score as a complete mismatch. A distance of 0 requires the match be at the exact location specified, a distance of 1000 would require a perfect match to be within 800 characters of the location to be found using a threshold of 0.8.
 - Maximum Pattern Length: The maximum length of the pattern. The longer the pattern (that is, the search query), the more intensive the search operation will be. Whenever the pattern exceeds this value, an error will be thrown.
 - Min Char Match: The minimum length of the pattern. Whenever the pattern length is below this value, an error will be thrown.

When the search is enabled, the input will be displayed in the top left part of the Graph Visualization component. If you start typing, the search will add a score to every vertex or edge, based on the settings and the search match.

To be able to see the results visually, you have to add a **Highlight** with interpolation set to a **Live Search** score and other settings based on the desired visual change.



Embedding the Graph Visualization Library in a Web Application

You can integrate the graph visualization component in a web application to visualize graph data.

The Oracle Graph Server and Client deployment contains a JavaScript library for the Graph Visualization component in the oracle-graph-visualization-library-24.2.0.zip file.

The Graph Visualization interface in the library supports:

- Custom vertex and edge styling based on its properties
- Interactive actions for graph exploration
- Tooltip with vertex and edge details
- Automatic legend
- Multiple graph layouts

See the Graph JavaScript API Reference for Property Graph Visualization for more information.

You can download the oracle-graph-visualization-library-24.2.0.zip file from Oracle Software Delivery Cloud and integrate the library in you web application.

See the demo application on GitHub for an example.

Part VII

Graph Server (PGX) Advanced User Guide

Part II provides in-depth information on using the graph server (PGX) for advanced users.

Part II contains the following chapters:

- Graph Server (PGX) Configuration Options
 Learn about the various configuration options for the graph server (PGX).
- Memory Consumption by the Graph Server (PGX)
 The graph server (PGX) loads the graph into main memory in order to carry out analysis on the graph and its properties.
- Deploying Oracle Graph Server Behind a Load Balancer
 You can deploy multiple graph servers (PGX) behind a load balancer and connect clients to the servers through the load balancer.
- Namespaces and Sharing
 The graph server (PGX) supports separate namespaces that help you to organize your entities.
- PGX Programming Guides
 You can avail all the PGX functionalities through asynchronous Java APIs. Each asynchronous method has a synchronous equivalent, which blocks the caller thread until the server produces a response.
- Working with Files Using the Graph Server (PGX)
 This chapter describes in detail about working with different file formats to perform various actions like loading, storing, or exporting a graph using the Graph Server (PGX).
- Log Management in the Graph Server (PGX)
 The graph server (PGX) internally uses the SLF4J interface with Logback as the default logger implementation.



Graph Server (PGX) Configuration Options

Learn about the various configuration options for the graph server (PGX).

- Configuration Parameters for the Graph Server (PGX) Engine
 You can configure the graph server (PGX) engine parameters in the /etc/oracle/graph/
 pgx.conf JSON file.
- Configuration Parameters for Connecting to the Graph Server (PGX)
 You can configure the graph server (PGX) parameters in the /etc/oracle/graph/
 server.conf JSON file.

23.1 Configuration Parameters for the Graph Server (PGX) Engine

You can configure the graph server (PGX) engine parameters in the /etc/oracle/graph/pgx.conf JSON file.

During startup, the graph server (PGX) picks the settings in the /etc/oracle/graph/pgx.conf file, by default.

The following tables describe the different graph server (PGX) runtime configuration options.

Graph Server (PGX) Engine Parameters

The graph server (PGX) engine parameters are described in the following table:

Table 23-1 Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
admin_request_cache_timeout	integer	After how many seconds admin request results get removed from the cache. Requests which are not done or not yet consumed are excluded from this timeout. Note: This is only relevant if PGX is deployed as a webapp.	60
allow_idle_timeout_overwrite	boolean	If true, sessions can overwrite the default idle timeout.	true
allow_override_scheduling_information	boolean	If true, allow all users to override scheduling information like task weight, task priority, and number of threads	true
allow_task_timeout_overwrite	boolean	If true, sessions can overwrite the default task timeout.	true



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
allow_user_auto_refresh	boolean	If true, users may enable auto refresh for graphs they load. If false, only graphs mentioned in preload_graphs can have auto refresh enabled.	false
allowed_remote_loading_locations	array of string	Allow loading graphs into the PGX engine from remote locations (http, https, ftp, ftps, s3). If empty, as by default, no remote location is allowed. If "*" is specified in the array, all remote locations are allowed. Only the value "*" is currently supported. Note that preloaded graphs are loaded from any location, regardless of the value of this setting. Note that this parameter reduces security and therefore use it only when needed.	
authorization	array of object	Mapping of users and roles to resources and permissions for authorization.	[]
authorization_session_create_allow_all	boolean	If true allow all users to create a PGX session regardless of permissions granted to them.	false
basic_scheduler_config	object	Configuration parameters for the fork join pool backend.	null
bfs_iterate_que_task_size	integer	Task size for BFS iterate QUE phase.	128
bfs_threshold_parent_read_based	number	Threshold of BFS traversal level items to switch to parent-read-based visiting strategy.	0.05
bfs_threshold_read_based	integer	Threshold of BFS traversal level items to switch to read-based visiting strategy.	1024
bfs_threshold_single_threaded	integer	Until what number of BFS traversal level items vertices are visited single-threaded.	128
character_set	string	Standard character set to use throughout PGX. UTF-8 is the default. Note: Some formats may not be compatible.	utf-8
<pre>cni_diff_factor_default</pre>	integer	Default diff factor value used in the common neighbor iterator implementations.	8
<pre>cni_small_default</pre>	integer	Default value used in the common neighbor iterator implementations, to indicate below which threshold a subarray is considered small.	128



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
cni_stop_recursion_default	integer	Default value used in the common neighbor iterator implementations, to indicate the minimum size where the binary search approach is applied.	96
data_memory_limits	object	Memory limits configuration parameters.	null
dfs_threshold_large	integer	Value that determines at which number of visited vertices the DFS implementation will switch to data structures that are optimized for larger numbers of vertices.	4096
enable_csrf_token_checks	boolean	If true, the PGX webapp will verify the Cross-Site Request Forgery (CSRF) token cookie and request parameters sent by the client exist and match. This is to prevent CSRF attacks.	true
enable_gm_compiler	boolean	If true, enable dynamic compilation of PGX Algorithm API (or Green-Marl code) during runtime.	true
enable_graph_loading_cache	boolean	If true, activate the graph loading cache that will accelerate loading of graphs that were previously loaded (can only be disabled in embedded mode).	true
enable_graph_sharing	boolean	Indicates if a user is allowed to grant read permission on its published graphs to other users. This flag is only relevant for a remote server.	true
enable_memory_limits_checks	boolean	If true the graph server will enforce the configured memory limits.	true
enable_ml_accelerators	boolean	If true, the graph server will utilize the available ML accelerators to run faster machine learning trainings.	true
enable_shutdown_cleanup_hook	boolean	If true, PGX will add a JVM shutdown hook that will automatically shutdown PGX at JVM shutdown. Notice: Having the shutdown hook deactivated and not explicitly shutting down PGX may result in pollution of your temp directory.	true
enable_snapshot_properties_publish_state_p ropagation	boolean	If true, properties in a new snapshot will inherit the publishing state of properties in the parent snapshot.	true



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
enterprise_scheduler_config	object	Configuration parameters for the enterprise scheduler. See Table 23-3 and Table 23-4 for more information.	null
enterprise_scheduler_flags	object	[relevant for enterprise_scheduler] Enterprise scheduler-specific settings.	null
explicit_spin_locks	boolean	true means spin explicitly in a loop until lock becomes available. false means using JDK locks which rely on the JVM to decide whether to context switch or spin. Setting this value to true usually results in better performance.	true
file_locations	array of object	The file locations that can be used in the authorization-config.	[]
graph_algorithm_language	enum[GM, JAVA]	Front-end compiler to use.	JAVA
<pre>graph_sharing_option</pre>	enum[allow_da ta_sharing, disallow_data _sharing, allow_traceab le_data_shari ng_for_same_u ser]	This is to manage if a graph can be published and shared with other users.	allow_da ta_shari ng
graph_validation_level	<pre>enum[low, high]</pre>	Level of validation performed on newly loaded or created graphs.	low
<pre>ignore_incompatible_backend_operations</pre>	boolean	If true, only log when encountering incompatible operations and configuration values in RTS or FJ pool. If false, throw exceptions.	false
<pre>in_place_update_consistency_model</pre>	enum[ALLLOW_I NCONSISTENCIE S, CANCEL_TASKS]	Consistency model used when in- place updates occur. Only relevant if in-place updates are enabled. Currently updates are only applied in place if the updates are not structural (Only modifies properties). Two models are currently implemented, one only delays new tasks when an update occurs, the other also delays running tasks.	ALLOW_IN CONSISTE NCIES
<pre>init_pgql_on_startup</pre>	boolean	If true PGQL is directly initialized on start-up of PGX. Otherwise, it is initialized during the first use of PGQL.	true
<pre>interval_to_poll_max</pre>	integer	Exponential backoff upper bound (in ms), which once reached, the job status polling interval is fixed	1000



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
java_home_dir	string	The path to Java's home directory. If set to <system-java-home-dir>, use the java.home system property.</system-java-home-dir>	<pre><system- dir="" home-="" java-=""></system-></pre>
large_array_threshold	integer	Threshold when the size of an array is too big to use a normal Java array. This depends on the used JVM. (Defaults to Integer.MAX_VALUE - 3)	21474836 44
max_active_sessions	integer	Maximum number of sessions allowed to be active at a time.	1024
<pre>max_distinct_strings_per_pool</pre>	integer	[only relevant if string_pooling_strategy is indexed] Number of distinct strings per property after which to stop pooling. If the limit is reached, an exception is thrown.	65536
<pre>max_http_client_request_size</pre>	long	Maximum size in bytes of any http request sent to the PGX server over the REST API. Setting it to -1 allows requests of any size.	10485760
<pre>max_off_heap_size</pre>	integer	Maximum amount of off-heap memory (in megabytes) that PGX is allowed to allocate before an OutOfMemoryError will be thrown.	<availab -memory="" le-="" physical=""></availab>
		Note that this limit is not guaranteed to never be exceeded, because of rounding and synchronization tradeoffs. It only serves as threshold when PGX starts to reject new memory allocation requests.	
<pre>max_on_heap_memory_usage_ratio</pre>	number	Maximum ratio of on-heap memory that PGX is allowed to use, between 0 and 1.	0.9
max_queue_size_per_session	integer	The maximum number of pending tasks allowed to be in the queue, per session. If a session reaches the maximum, new incoming requests of that sesssion get rejected. A negative value means infinity or unlimited	-1



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
max_snapshot_count	integer	Number of snapshots that may be loaded in the engine at the same time. New snapshots can be created via auto or forced update. If the number of snapshots of a graph reaches this threshold, no more auto-updates will be performed, and a forced update will result in an exception until one or more snapshots are removed from memory. A value of zero indicates to support an unlimited amount of snapshots.	0
memory_allocator	<pre>enum[basic_al locator, enterprise_al locator]</pre>	The memory allocator to use.	basic_al locator
memory_cleanup_interval	integer	Memory cleanup interval in seconds.	5
min_array_compaction_threshold	number	Minimum value (only relevant for graphs optimized for updates) that can be used for the array_compaction_threshold value in graph configuration. If a graph configuration attempts to use a value lower than the one specified by min_array_compaction_threshold, it will use min_array_compaction_threshold instead.	0.2
min_fetch_interval_sec	integer	For delta-refresh (only relevant if the graph format supports delta updates), the lowest interval at which a graph source is queried for changes. You can tune this value to prevent PGX from hanging due to too frequent graph delta-refreshing.	2
min_update_interval_sec	integer	For auto-refresh, the lowest interval after which a new snapshot is created, either by reloading the entire graph or if the format supports delta-updates, out of the cached changes (only relevant if the format supports delta updates). You can tune this value to prevent PGX from hanging due to too frequent graph auto-refreshing.	2
ms_bfs_frontier_type_strategy	<pre>enum[auto_gro w, short, int]</pre>	The type strategy to use for MS-BFS frontiers.	auto_gro w



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
num_spin_locks	integer	Number of spin locks each generated app will create at instantiation. Trade-off: a small number implies less memory consumption; a large number implies faster execution (if algorithm uses spin locks).	1024
parallelism	integer	Number of worker threads to be used in thread pool. Note: If the caller thread is part of another thread-pool, this value is ignored and the parallelism of the parent pool is used.	<number- of-cpus></number-
<pre>pattern_matching_supernode_cache_threshold</pre>	integer	Minimum number of a node's neighbor to be a supernode. This is for the pattern matching engine.	1000
permission_checks_interval	integer	Interval in seconds to perform permission checks on source graphs.	60
pgx_realm	object	Configuration parameters for the realm. See Table 23-2.	null
pgx_server_base_url	string	This is used when deploying the graph server behind a load balancer to make clients before 21.3 backward compatible. The value should be set to the load balancer address.	null
<pre>pooling_factor</pre>	number	[only relevant if string_pooling_strategy is on_heap] This value prevents the string pool to grow as big as the property size, which could render the pooling ineffective.	0.25
preload_graphs	array of object	List of graph configs to be registered at start-up. Each item includes path to a graph config, the name of the graph and whether it should be published.	[]
random_generator_strategy	<pre>enum[non_dete rministic, deterministic]</pre>	Method of generating random numbers in PGX.	non_dete rministi c
random_seed	long	[relevant for deterministic random number generator only] Seed for the deterministic random number generator used in pgx. The default is -24466691093057031.	-2446669 10930570 31
readiness_memory_usage_ratio	number	Memory limit ratio that should be considered to detect if PGX server is ready. This is used by isReady API and the default value is 1.0	1.0



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
release_memory_threshold	number	Threshold percentage (decimal fraction) of used memory after which the engine starts freeing unused graphs. Examples: A value of 0.0 means graphs get freed as soon as their reference count becomes zero. That is, all sessions which loaded that graph were destroyed/timed out. A value of 1.0 means graphs never get freed, and the engine will throw OutOfMemoryErrors as soon as a graph is needed which does not fit in memory anymore. A value of 0.7 means the engine keeps all graphs in memory as long as total memory consumption is below 70% of total available memory, even if there is currently no session using them. When consumption exceeds 70% and another graph needs to get loaded, unused graphs get freed until memory consumption is below 70% again.	0.0
revisit_threshold	integer	Maximum number of matched results from a node to be cached.	4096
running_memory_usage_ratio	number	Memory limit ratio that should be considered to detect if PGX server is running. This is used by isRunning API and the default value is 1.0	1.0
scheduler	enum[basic_sc heduler, enterprise_sc heduler, low_latency_s cheduler]	The scheduler to use. basic_scheduler: uses a scheduler with basic features enterprise_scheduler: uses a scheduler with advanced enterprise features for running multiple tasks concurrently and providing better performance low_latency_scheduler: uses a scheduler that privileges latency of tasks over throughput or fairness across multiple sessions. The low_latency_scheduler is only available in embedded mode.	enterpri se_sched uler
session_idle_timeout_secs	integer	Timeout of idling sessions in seconds. Zero (0) means infinity or no timeout.	14400



Table 23-1 (Cont.) Runtime Parameters for the Graph Server (PGX) Engine

Parameter	Туре	Description	Default
session_task_timeout_secs	integer	Timeout in seconds to interrupt long-running tasks submitted by sessions (algorithms, I/O tasks). Zero (0) means infinity or no timeout.	0
small_task_length	integer	Task length if the total amount of work is smaller than default task length (only relevant for task-stealing strategies).	128
<pre>strict_mode</pre>	boolean	If true, exceptions are thrown and logged with ERROR level whenever the engine encounters configuration problems, such as invalid keys, mismatches, and other potential errors. If false, the engine logs problems with ERROR/WARN level (depending on severity) and makes best guesses and uses sensible defaults instead of throwing exceptions.	true
string_pooling_strategy	<pre>enum[indexed, on_heap, none]</pre>	The string pooling strategy to use.	on_heap
task_length	integer	Default task length (only relevant for task-stealing strategies). Should be between 100 and 10000. Trade-off: a small number implies more finegrained tasks are generated, higher stealing throughput; a large number implies less memory consumption and GC activity.	4096
<pre>tmp_dir</pre>	string	Temporary directory to store compilation artifacts and other temporary data. If set to <system-tmp-dir>, uses the standard tmp directory of the underlying system (/tmp on Linux).</system-tmp-dir>	"/tmp"
udf_config_directory	string	Directory path containing UDF config files.	null
use_index_for_reachability_queries	<pre>enum[auto, off]</pre>	Create index for reachability queries.	auto
<pre>use_memory_mapper_for_reading_pgb</pre>	boolean	If true, use memory mapped files for reading graphs in PGB format if possible; if false, always use a stream-based implementation.	true
use_memory_mapper_for_storing_pgb	boolean	If true, use memory mapped files for storing graphs in PGB format if possible; if false, always use a stream-based implementation.	true



The default values of the runtime configuration fields are optimized to deliver the best performance across a wide set of algorithms. Depending on your workload you may be able to improve performance further by experimenting with different strategies, sizes, and thresholds.

Advanced Access Configuration

The following table lists the fields in the pgx_realm object that can be used to customize login behavior.

Table 23-2 Advanced Access Configuration Options

Parameters	Туре	Description	Default
token_expiration_seconds	integer	After how many seconds the generated bearer token will expire.	3600 (1 hour)
<pre>refresh_time_before_token_expiry_se conds</pre>	integer	After how many seconds a token is automatically refreshed before it expires. Note that this value must always be less than the token_expiration_second s value.	1800
connect_timeout_milliseconds	integer	After how many milliseconds an connection attempt to the specified JDBC URL will time out, resulting in the login attempt being rejected.	10000
max_pool_size	integer	Maximum number of JDBC connections allowed per user. If the number is reached, attempts to read from the database will fail for the current user. Starting from 23.4 onwards, a new dedicated pool with one connection is provided for token refresh. This new dedicated pool does not affect the max_pool_size value.	64
max_num_users	integer	Maximum number of active, signed in users to allow. If this number is reached, the graph server will reject login attempts.	512
max_num_token_refresh	integer	Maximum amount of times a token can be automatically refreshed before requiring a login again.	24

Enterprise Scheduler Parameters

The following parameters are relevant only if the advanced scheduler is used. (They are ignored if the basic scheduler is used.)



Table 23-3 Enterprise Scheduler Parameters

Parameter	Туре	Description	Default
analysis_task_config	object	Configuration for analysis tasks	weight <no- cpus="" of-=""></no->
			priority MEDIUM
			max_thr eads <no- of- CPUs></no-
fast_analysis_task_config	object	Configuration for fast analysis tasks	weight
			priority HIGH
			max_thr eads <no- of- CPUs></no-
max_num_concurrent_io_tasks	integer	Maximum number of concurrent I/O tasks at a time	3
num_io_threads_per_task	integer	Number of I/O threads to use per task	<no-of- cpus></no-of-

Basic Scheduler Parameters

The following parameters are relevant only if the basic scheduler is used. (They are ignored if the advanced scheduler is used.)

Table 23-4 Basic Scheduler Parameters

Field	Туре	Description	Default
num_workers_analysis	rs analysis integer This specifies how many		<no-of-< td=""></no-of-<>
		worker threads to use for analysis tasks.	cpus>
<pre>num_workers_fast_track_analysis</pre>	integer	This specifies how many worker threads to use for fast-track analysis tasks.	1



Table 23-4 (Cont.) Basic Scheduler Parameters

Field	Туре	Description	Default
num_workers_io	integer	This specifies how many worker threads to use for I/O tasks (load/refresh/write from/to disk). This value does not impact file-based loaders, as they are always single-threaded. Database loaders will open a new connection for each I/O worker.	<no-of- cpus></no-of-

Example 23-1 Minimal Graph Server (PGX) Configuration

The following example causes the graph server (PGX) to initialize its analysis thread pool with 32 workers. (Default values are used for all other parameters.)

```
{
  "enterprise_scheduler_config": {
    "analysis_task_config": {
        "max_threads": 32
     }
  }
}
```

Example 23-2 Two Pre-loaded Graphs

This example sets more fields and specifies two fixed graphs for loading into memory during the graph server (PGX) startup.

```
{
  "enterprise scheduler config": {
    "analysis task config": {
     "max threads": 32
    "fast_analysis_task_config": {
      "max threads": 32
  },
  "memory cleanup interval": 600,
  "max active_sessions": 1,
  "release_memory_threshold": 0.2,
  "preload graphs": [
      "path": "graph-configs/my-graph.bin.json",
      "name": "my-graph"
    },
      "path": "graph-configs/my-other-graph.adj.json",
      "name": "my-other-graph",
      "publish": false
  ],
  "authorization": [{
```



```
"pgx_role": "GRAPH_DEVELOPER",
   "pgx_permissions": [{
        "preloaded_graph": "my-graph",
        "grant": "read"
   },
   {
        "preloaded_graph": "my-other-graph",
        "grant": "read"
   }]
},
   ....
]
```

Relative paths in parameter values are always resolved relative to the parent directory of the configuration file in which they are specified. For example, if the preceding JSON is in /pgx/conf/pgx.conf, then the file path graph-configs/my-graph.bin.json inside that file would be resolved to /pgx/conf/graph-configs/my-graph.bin.json.

23.2 Configuration Parameters for Connecting to the Graph Server (PGX)

You can configure the graph server (PGX) parameters in the /etc/oracle/graph/server.conf JSON file.

See Configuring the Graph Server (PGX)



Memory Consumption by the Graph Server (PGX)

The graph server (PGX) loads the graph into main memory in order to carry out analysis on the graph and its properties.

The memory consumed by the graph server for a graph is split between the memory to store the topology of the graph (the information to indicate what are the vertices and edges in the graph without their attached properties), and the memory for the properties attached to the vertices and edges. Internally, the graph server (PGX) stores the graph topology in compressed sparse row (CSR) format, a data structure which has minimal memory footprint while providing very fast read access.

Memory Management

24.1 Memory Management

The graph server (PGX) requires both on-heap and off-heap memory to store graph data.

The allocation of memory for the graph data is as shown:

- · Graph indexes and graph topology are stored off-heap.
- All primitive properties (integer, long, double, float, boolean, date, local_date, timestamp, time, point2d) are stored off-heap.
- String properties are stored on-heap.

Default Configuration of Memory Limits

You can configure both on-heap and off-heap memory limits. In case of the on-heap, if you don't explicitly set a maximum then it will default to the maximum on-heap size determined by Java Hotspot, which is based on various factors, including the total amount of physical memory available.

You can set the <code>max_on_heap_memory_usage_ratio</code> configuration field to decide on the ratio of the total JAVA heap memory that the graph server (PGX) is allowed to use (for example a value of 0.8 would mean that the graph server(PGX) is allowed to use 80% of JAVA heap memory). The default value of this parameter is 1.0 which lets the JVM handle any out of memory errors. It is recommended to set this parameter to 0.9 to avoid the graph server (PGX) from using the full on heap memory as this may cause the server to slowdown or crash.

In case of the off-heap, if you don't explicitly set a maximum then it will default to the total physical available memory on the machine.

- Configuring On-Heap Limits
- Configuring Off-Heap Limits

24.1.1 Configuring On-Heap Limits

The on-heap memory limits for the graph server (PGX) can be configured by updating the systemd configuration file for the PGX service. However, there is a risk of losing the updates to the configuration file, the next time you upgrade the graph server (PGX). Therefore, it is recommended that you provide the on-heap memory configuration in a drop-in file. All directives in the drop-in file are dynamically merged with the directives in the main configuration file (/etc/systemd/system/pgx.service) during the graph server (PGX) startup.



The graph server (PGX) periodically checks the on-heap memory size. If the memory usage grows above the threshold defined in the $max_on_heap_memory_usage_ratio$ field (default value is 0.9) in the /etc/oracle/graph/pgx.conf file, then the graph server will throw an exception and cancel the current running task (which is unable to allocate memory). This eliminates the possibility of unexpected server crashes when the heap memory is full. It is recommended that you configure the $max_on_heap_memory_usage_ratio$ option to be less than one, so that the used onheap memory value remains lesser than the JVM -Xmx value to ensure a safe buffer for heap memory allocation.

You can perform the following steps to create a drop-in file and configure the on-heap memory size:

- 1. Navigate to the /etc/systemd/system/pgx.service.d directory. If the pgx.service.d directory does not exist in the file path, then create one.
- 2. Create a drop-in file (.conf file) with any name in /etc/systemd/system/pgx.service.d. Skip this step, if one already exists.
- 3. Edit the drop-in file as a root user or with sudo command and add the on-heap memory option in the [Service] section as shown:

sudo vi /etc/systemd/system/pgx.service.d/setup.conf
The following example displays the added on-heap memory setting in the setup.conf file:

```
[Service]
# Java on-heap memory setting
Environment="JAVA TOOL OPTIONS=-Xms1G -Xmx2G"
```

This option sets the initial heap space to 1GB and allows it to grow up to 2GB.

The supported options for configuring the on-heap memory are:

- -Xmx: to set the maximum on-heap size of the JVM.
- -Xms: to set the initial on-heap size of the JVM.
- -XX:NewSize: to set the initial size of the young generation
- -XX:MaxNewSize: to set the maximum size of the young generation

See the java command documentation for more information on these options.



4. Add the JAVA_HOME environment variable to ensure that the graph server (PGX) is using the appropriate JDK.

```
[Service]
# JAVA_HOME variable
Environment=JAVA_HOME=/usr/java/jdk-15.0.1/
# Java on-heap memory setting
Environment="JAVA TOOL OPTIONS=-Xms1G -Xmx2G"
```

Note that the comments begin with # and you can optionally comment any specific option in order to test your configuration.

5. Reload the PGX service to use the updated settings by running the following command:

```
sudo systemctl daemon-reload
```

6. Restart the graph server (PGX):

```
sudo systemctl restart pgx
```

7. Verify that the service restarted with the new memory settings:

```
systemctl status pgx
```

You may see a similar output:

Review the **Drop-In** unit file as shown highlighted in the preceding output. This confirms that systemd found the drop-in file and applied the required customizations.

8. Finally, use the server-state REST endpoint to confirm the new memory usage. For example:

```
BASE_URL=https://localhost:7007
USERNAME=graph
PASSWORD=graph
PGX_RESPONSE=`curl -s -k -X POST -H 'Content-Type: application/json' -d '{"username": "'"${USERNAME}"'", "password": "'"${PASSWORD}"'"}' $
{BASE_URL}/auth/token`
PGX_ACCESS_TOKEN=`echo $PGX_RESPONSE | jq -r '.access_token'`
curl -s -k -H 'Authorization: Bearer '"${PGX_ACCESS_TOKEN}" $BASE_URL/
control/v1/serverState|jq '.entity.memory'
```

Note that the preceding example uses the **jq** tool to fetch and format the output.

24.1.2 Configuring Off-Heap Limits

You can specify the off-heap limit by setting the $max_off_heap_size$ field in the graph server (PGX) configuration. See Configuration Parameters for the Graph Server (PGX) Engine for more information on the $max_off_heap_size$ parameter. Note that the off-heap limit is not guaranteed to never be exceeded because of rounding and synchronization trade-offs.



Deploying Oracle Graph Server Behind a Load Balancer

You can deploy multiple graph servers (PGX) behind a load balancer and connect clients to the servers through the load balancer.

Using Session Persistence with a Load Balancer

You can use the Load Balancer sticky cookie feature since the graph server (PGX) is not stateless. This implies that when you configure load balancer cookie stickiness, the load balancer inserts a cookie to identify the server and the client requests are always directed to the same backend server.

The graph client supports all sessions that belong to a serverInstance to be sent to the same server. You must set the cookie name as PGX INSTANCE STICKY COOKIE.

You can use one of the following options to deploy different graph servers behind a load balancer:

- Using HAProxy for PGX Load Balancing and High Availability
 HAProxy is a high-performance TCP/HTTP load balancer and proxy server that allows
 multiplexing incoming requests across multiple web servers.
- Deploying Graph Server (PGX) Using OCI Load Balancer
 You can deploy multiple graph servers (PGX) behind a load balancer using Oracle Cloud Infrastructure (OCI) Load Balancing Service.
- Health Check in the Load Balancer

25.1 Using HAProxy for PGX Load Balancing and High Availability

HAProxy is a high-performance TCP/HTTP load balancer and proxy server that allows multiplexing incoming requests across multiple web servers.

You can use HAProxy with multiple instances of the graph server (PGX) for high availability. The following example uses the OPG4J shell to connect to PGX.

The following instructions assume you have already installed and configured the graph server (PGX), as explained in Starting the Graph Server (PGX).

 If HAProxy is not already installed on Big Data Appliance or your Oracle Linux distribution, run this command:

yum install haproxy

Start the graph server instances.

For example, if you want to load balance PGX across 4 nodes (such as bda02, bda03, bda04, and bda05) in the Big Data Appliance, start PGX on each of these nodes. Configure PGX to listen for connections on port 7007.

Configure HAProxy:

- a. Locate the haproxy.cfg file in /etc/haproxy directory on the host where you installed HAProxy.
- b. Add a frontend section with the following parameters:
 - bind: to set the listening IP address and port
 - mode: http Or https
 - default backend: to set the name of the backend to be used

For example, the following frontend configuration receives HTTP traffic on all IP addresses assigned to the server at port 7008:

```
frontend graph_server_front
  bind *:7008
  mode http
  default backend graph server
```

- **c.** Add a backend section with the following parameters:
 - mode: http Or https
 - cookie: name of the cookie to be used for session persistence
 - server: list of servers running behind the load balancer

For example, the following backend configuration uses the PGX INSTANCE STICKY COOKIE:

```
backend graph_server
  mode http
  cookie PGX_INSTANCE_STICKY_COOKIE insert indirect nocache
  server graph_server_1 host_name_graph_server_1:port check cookie
graph_server_1 # Notice that the name at the end must be the same as
the server name
  server graph_server_2 host_name_graph_server_2:port check cookie
graph_server_2
  option httpchk GET /isReady
  http-check expect string true
```

In the preceding configuration file, the <code>option</code> <code>httpchk</code> clause instructs the load balancer to check the readiness of the server. The <code>http-check</code> clause specifies that the load balancer must expect a <code>true</code> response in order to determine that the server is healthy and capable of handling more requests. See <code>Health</code> Check in the <code>Load</code> <code>Balancer</code> for supported health check endpoints.

Start the load balancer.

Start HAProxy using systemctl:

```
sudo systemctl start haproxy
```

Test the load balancer.



From any host you can test connectivity to the HAProxy server by passing in the host and port of the server running HAProxy as the <code>base_url</code> parameter to the graph client shell CLI. For example:

```
cd /opt/oracle/graph
./bin/opg4j --base url http://localhost:7008 -u <username>
```



The PGX in-memory state is lost if the server goes down. HAProxy will route commands to another server, but the client must reload all graph data.

It is recommended that you run a series of PGX commands to test routing. Stop the server and restart the graph shell CLI to confirm that HAProxy redirects the request to a new server.

25.2 Deploying Graph Server (PGX) Using OCI Load Balancer

You can deploy multiple graph servers (PGX) behind a load balancer using Oracle Cloud Infrastructure (OCI) Load Balancing Service.

You can enable cookie-based session persistence with a load balancer to direct all requests from a single client to a specific backend server.

You can you perform the following steps to deploy multiple graph servers using the OCI load balancer.

As a prerequisite requirement, you must ensure that two or more graph servers are running on different machines on the same port (7007 by default).

- Sign in to OCI console using your Oracle Cloud Account.
- 2. Open the navigation menu, click **Networking** and then **Load Balancers**.
- 3. Click Create Load Balancer.


The **Select Load Balancer Type** window opens.

Select Load Balancer and click Create Load Balancer.

The Add Details page opens as shown:



Figure 25-1 Configuring Load Balancer Details

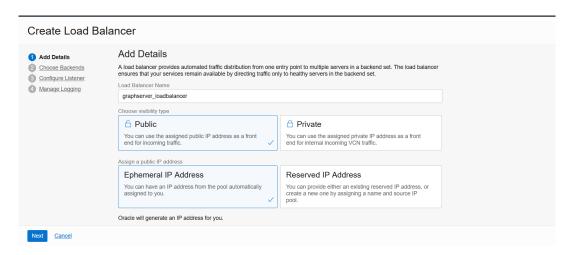

- Optionally, edit the following details:
 - Load Balancer Name
 - Choose visibility type
 - Choose IP address type
- 6. Under **Choose Networking** section, select the **Virtual Cloud Network** where the graph server instances are running.
- 7. Accept the default values for all other fields and click Next.

The Choose Backends page opens.

- 8. Select Weighted Round Robin as the Load Balancing Policy.
- Click Add Backends to add the backend servers.

The **Add Backends** slider opens as shown.

Figure 25-2 Adding Backends to Load Balancer



 Select as many backend graph server instances as available and click Add Selected Backends.

The selected backend set appear in the **Select Backend Servers** table.

- 11. Specify the following values for the parameters under Specify Health Check Policy:
 - Protocol: HTTP
 - Port: backend port used by all the graph servers
 - Interval in milliseconds: default value
 - Timeout in milliseconds: default value
 - Number of Retries: default value




- Status Code: 200
- URL Path: /isReady

See Health Check in the Load Balancer for supported health check endpoints.

- Response Body RegEx: true
- 12. Click Next.

The **Configure Listener** page opens as shown:

Figure 25-3 Configuring a Listener for the Load Balancer

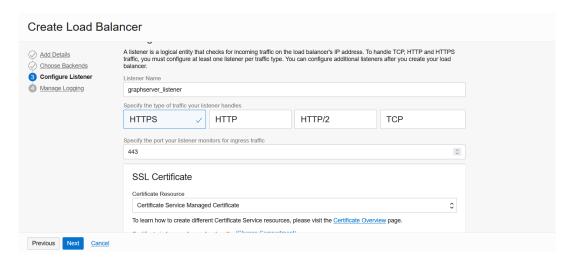

- 13. Optionally, edit the Listener Name.
- 14. Specify HTTPS or HTTP as the type of traffic handled by the listener.
- 15. Specify the listener port value to either 443 or 80.
- **16.** Upload **SSL Certificate** if you specified **HTTPS** communication.
- 17. Click Next.

The **Manage Logging** page opens as shown.

18. Accept all the default values on this page and click **Submit**.

The load balancer is provisioned and it appears on the table in the **Load Balancers** page.

- 19. Click on the provisioned load balancer to view the Load Balancer Details.
- 20. Click Backend Sets under Resources.
- 21. Click the backend set you want to edit.

The **Backend Set Details** page opens.

22. Click Edit.

The Edit Backend Set dialog opens as shown:



Networking » Load Balancers » Load Balancer Details » Backend Sets » Backend Set Details » Backends graphserver backends Edit Update Health Check Delete Backend Set Information **Backend Set Information** Policy: Weighted Round Robin Load Balancer: graphserver_loadbalancer % of Backend Set Drained: 0% Session Persistence To enable cookie-based session persistence, specify whether the cookie is generated by your application server or by the load balancer. Learn more about session persistence. Disable Session Persistence Enable application cookie persistence • Enable load balancer cookie persistence Cookie Name Optional PGX_INSTANCE_STICKY_COOKIE If blank, the default cookie name is X-Oracle-BMC-LBS-Route Disable Fallback Disable fallback to other servers when the original server is unavailable Domain Name Optional Specify the domain in which the cookie is valid

Figure 25-4 Enabling Session Persistence

- 23. Select Enable load balancer cookie persistence.
- 24. Set the Cookie Name to PGX INSTANCE STICKY COOKIE and click Save Changes.

Your work request gets submitted.

You can now send requests to the load balancer and your session will be persisted on the respective server to which you are logged in.

25.3 Health Check in the Load Balancer

Save Changes Cancel

To configure health check in the load balancer, the graph server(PGX) exposes the <code>isReady</code> and <code>isRunning</code> endpoints.



By default, the <code>isReady</code> and <code>isRunning</code> endpoints are unprotected. See Public Health Endpoint Security to enable protection for the health check API.

The load balancer can check the following health status of the graph servers:

Readiness of the graph server: The isReady endpoint detects if the graph server (PGX) is capable of handling more requests. See the readiness_memory_usage_ratio system parameter in Configuration Parameters for the Graph Server (PGX) Engine for more details.

• Liveness of the graph server: The isRunning endpoint detects if the graph server (PGX) is running and alive. See the running_memory_usage_ratio system parameter in Configuration Parameters for the Graph Server (PGX) Engine for more details.

By default, both the endpoints do not require authentication. If the server is running or ready, they return true in the HTTP body with HTTP status code 200. If the server is **not** running or ready, they return false with HTTP status code 503.



Namespaces and Sharing

The graph server (PGX) supports separate namespaces that help you to organize your entities.

Each client session has its own session-private namespace and can choose any name without affecting other sessions. There is also a public namespace for published graphs (for example, published via the publishWithSnapshots() or the publish() methods).

Similarly, each published graph defines a public namespace for published properties as well as a private namespace per session. So different sessions can create properties with the same name on a published graph.

- Defining Graph Names
- Retrieving Graphs by Name
- Checking Used Names
- Property Name Resolution and Graph Mutations

26.1 Defining Graph Names

Graphs that are created in a session either through loading or through mutations will take up a name in the session-private namespace. A graph will be placed in the public namespace only through publishing (that is, when calling the publishWithSnapshots() or the publish() methods). Publishing a graph will move its name from the session-private namespace to the public namespace.

There can only be one graph with a given name in a given namespace, but a name can be used in different namespaces to refer to different graphs. An operation that creates a new graph will fail if the chosen name of the new graph already exists in the session-private namespace. Publishing a graph fails if there is already a graph in the public namespace with the same name.

26.2 Retrieving Graphs by Name

You can retrieve a graph by name by the following two ways:

- getGraph(Namespace, String): with explicitly mentioning the namespace
- getGraph(String): without explicitly mentioning the namespace

With getGraph(Namespace, String), you need to provide the namespace (either session private or public). In this case, the graph will be looked up in the given namespace only.

With getGraph(String), the provided name will be first looked up in the private namespace. If no graph with the given name is found there, then the graph name will be looked up in the public namespace. In other words, if a graph with the same name is defined in both the public and the private namespaces, getGraph(String) will return the private graph and you need to use getGraph (Namespace, String) to get hold of the public graph with that name.

26.3 Checking Used Names

To see the currently used names in a namespace you can use the PgxSession.getGraphs(Namespace) method, which will list all the names in the given namespace. The names in the returned collection can be used in a getGraph(Namespace, String) call to retrieve the corresponding PgxGraph.

26.4 Property Name Resolution and Graph Mutations

Property names behave in a similar way as graph names. All property names of a non-published graph are in the session-private namespace. Once a graph is published with PgxGraph.publishWithSnapshots() or the PgxGraph.publish() methods, its properties are published as well and their names move into the public namespace.

Once a graph is published, newly created properties will still be private to the session and their names will be in the private namespace. Those properties can be published individually with the Property.publish() method, as long as no other property with the same name is already published for that graph.

Additionally, new private properties can be created with the same name of an already-published properties (since the names are part of separate namespaces). To handle such situations and retrieve the correct property, the PGX API offers the getVertexProperty(Namespace, String) and the getEdgeProperty(Namespace, String) methods, which allow specifying the namespace where the property name should be looked up.

Similar to graphs, if you search a property without specifying the namespace, the private namespace is searched first and if the property is not found, the search proceeds to the public namespace. This case applies for getVertexProperty(String) or the getEdgeProperty(String) methods and for PGQL queries.

Likewise, when a mutation on a graph reads or writes a property referred to by name and two properties exist with the same name, the property in the private namespace is selected. To override the default selection, some mutation mechanisms accept a collection of specific Property objects to be copied into the mutated graph. For example, such mechanism is supported for filter expressions. See Creating Subgraphs for more details.



PGX Programming Guides

You can avail all the PGX functionalities through asynchronous Java APIs. Each asynchronous method has a synchronous equivalent, which blocks the caller thread until the server produces a response.

These APIs may perform one or any combination of:

- Complex, non-blocking Java applications on top of PGX
- Simple, sequential Java scripts executed by JShell
- ShellPerforming interactive graph analysis in the JShell

Layers of PGX API

The PGX API is composed of a few different Java interfaces. Each interface provides a distinct layer of abstraction for PGX, as shown in the following table:

Table 27-1 PGX API Interface

Late Cons			
ServerInstance	Description The ServerInstance class encapsulates access to a PGX server instance and can be used to create sessions, start and stop the PGX engine, monitor the engine status and perform other administrative tasks. If the instance points to a remote instance, access to the administrative functions requires special authorization on the HTTP level by default.		
PgxSession	A PgxSession represents an active user currently connected to an instance. Each session gets its own workspace on the server side which can be used to read graphs, create in-memory data structures, hold analysis results and custom algorithms. The PgxSession class provides various methods to create new transient data (currently collections). If a session is idling for too long, the PGX engine will automatically destroy it to ensure no resources are wasted.		
PgxGraph	A PgxGraph represents a client-side handle to the graph data manage by the PGX server. A graph may contain an arbitrary amount of properties of type VertexProperty and/or EdgeProperty.		
	Note:		



The PGX currently only supports nonpartitioned graphs, meaning every vertex/ edge has the same properties with the same names and types as all the other vertices/edges.

PgxGraph class provides various methods to create new transient data (including maps and collections) as well as graph mutation operations, such as undirecting, sorting and filtering.

Table 27-1 (Cont.) PGX API Interface

Interface	Description
Analyst	The Analyst API contains all of the built-in algorithms PGX provides. Analyst objects keep track of all the transient data they created during algorithm invocations to hold analysis results. Once an Analyst gets destroyed, all the results it created get freed on the server-side automatically.
CompiledProgram	The CompiledProgram class (PGX Algorithm API) encapsulates runtime-compiled custom algorithms and allows invocation of those algorithms using PGX data objects, such as PgxGraph or VertexProperty, as arguments.

Please see the oracle.pgx.api package in the Javadoc for more details.

Design of the Graph Server (PGX) API
 This guide focuses on the design of the graph server (PGX) API.

Data Types and Collections in the Graph Server (PGX)
 This guide provides you the list of the supported data types and collections in the graph server (PGX).

Handling Asynchronous Requests in Graph Server (PGX)
 This guide explains in detail the asynchronous methods supported by the PGX API.

Graph Client Sessions

The graph server (PGX) assumes there may be multiple concurrent clients, and each client submits request to the shared PGX server independently.

Graph Mutation and Subgraphs

This guide discusses the several methods provided by the graph server (PGX) for mutating graph instances.

- Graph Builder and Graph Change Set
- Managing Transient Data

This guide discusses how to handle transient properties and collections.

Graph Versioning

This guide describes the different ways to work with graph snapshots.

Labels and Properties

You can perform various actions on the graph property and label values by executing PGQL queries.

Filter Expressions

This guide explains the usage of filter expressions.

Advanced Task Scheduling Using Execution Environments

This guide shows how you can use the advanced scheduling features of the enterprise scheduler.

Admin API

This guide shows how to use the graph server (PGX) Admin API to inspect the server state including sessions, graphs, tasks, memory and thread pools.

PgxFrames Tabular Data-Structure

27.1 Design of the Graph Server (PGX) API

This guide focuses on the design of the graph server (PGX) API.

The design of the PGX API reflects consideration of the following situations:

- Multiple clients may concurrently be accessing a single running instance of PGX, sharing its resources. Each client needs to maintain its own isolated workspace (session).
- Graph and property data can be large in size and therefore that data only resides on the server side.
- Some graph analysis may take a significant amount of time.
- Clients may not reside in the same address space (JVM) as PGX. Actually, clients may not even be Java applications.

Client Sessions

In PGX, each client maintains its own session, an isolated, private workspace. Therefore, clients first have to obtain a PgxSession object from a PGX ServerInstance before they can perform any analysis.

Asynchronous Execution

The PGX API is designed for asynchronous execution. That means that each computationally intensive method in the PGX API *immediately* returns a PgxFuture object without waiting for the request to finish. The PgxFuture class implements the Future interface, which can be used to retrieve the result of a computation at some point in the future.



The asynchronous execution aspect of this design facilitates multiple (remote) clients submitting requests to a single server. A request from one client may be queued up to wait until PGX resources become available. The asynchronous API allows the client (or calling thread) to work on other tasks until PGX completes the request.

No Direct References

The PGX API does not return objects with direct reference to PGX internal objects (such as the graph or its properties) to the client. This is because:

- The client might not be in the same JVM as the server
- The graph instance might be shared by multiple clients

Instead, the PGX API only returns lightweight, stateless pointer objects to those objects. These pointer objects only holds the ID (name) of the server-side object to which they are pointing.

Resource Management Considerations

The graph server (PGX), being an *in-memory* analytic engine, might allocate large amounts of memory to hold the graph data of clients. Therefore, it is important that client sessions clean up their resources once they have ended. The PGX API supports several features to make this easier:



 Every object returned by the PGX API pointing to a server-side resource implements the Destroyable interface, which means all memory-consuming client-side objects can be destroyed the same way. For example:

```
PgxGraph myGraph = ...
myGraph.destroyAsync(); // request destruction of myGraph, don't wait for
response
try {
   myGraph.destroy(); // blocks caller thread until destruction was done
} catch (ExecutionException e) {
   // destruction failed
}
```

 Destroyable extends AutoClosable, so users can leverage Java's built-in resource management syntax:

```
try (PgxGraph myGraph = session.readGraphWithProperties(config)) {
   // do something with myGraph
}
// myGraph is destroyed
```

Session time out. In some cases, the PGX server will remove the session and all its data
automatically. This can occur when a client fails to destroy either the data or its session, or
if it does not hear from the session after a configurable timeout. See Configuration
Parameters for the Graph Server (PGX) Engine for more information to configure timeout
parameters.

27.2 Data Types and Collections in the Graph Server (PGX)

This guide provides you the list of the supported data types and collections in the graph server (PGX).

Primitive Data Types

The following section explains the primitive data types supported by the graph server (PGX) and their limitations.

PGX supports the following primitive data types.:

- **Numeric Types**: integer, long, float, and double. These types have the same size, range and precision of the corresponding Java primitive data type.
- Boolean Type: The boolean data type has only two possible values, true and false. As with Java and C++, its size is not precisely defined.
- String: String is a primitive data type in PGX. PGX follows the Java conventions for String representation.
- Datetime Types: date, time, timestamp, time with time zone, and timestamp with time zone. These types correspond to the Java types shown in Table 27-2 from the standard library package java.util.time.
- Vertex and Edge: The type vertex or edge of the graph itself is a proper type in PGX.

Note:

- vertex and edge is itself a valid primitive data type. For instance, in a path-finding algorithm, each vertex can have a temporary property predecessor that stores which incoming neighbor is the predecessor vertex in the path. Such a property would have the type vertex.
- local_date must be used instead of date in the graph configuration file. See
 Using Datetime Data Types for more examples on usage of datetime data types.

All properties and scalar variables must be one of the above preceding data types. See Managing Transient Data for more information on handling transient properties and scalar variables.

The following table presents the overview of the supported data types, their integration in different languages and APIs and their minimum and maximum value limitations.

Note:

- For float and double types, the smallest absolute value is included in the table, the minimum value is the negative of maximum value for these types.
- For string values, PGX supports arbitrary long strings.

Table 27-2 Overview of Data types

Data Type	Loading & Storing	PGX Java API	PGQL and Filter Expression	Minimum Value Limitation	Maximum Value Limitation
string	string	String	STRING	-	_
int/integer	int/integer	int	INT/INTEGER	-2147483648	2147483647
long	long	long	LONG	-92233720368547 75808	-92233720368547 75807
float	float	float	FLOAT	1.4E-45	3.4028235e+38
double	double	double	DOUBLE	4.9E-324	1.7976931348623 157E308
boolean	boolean	boolean	BOOLEAN	-	_
date	local_date	LocalDate	DATE	-5877641-06-23	5881580-07-11
time	time	LocalTime	TIME	00:00:00.000	23:59:59.999
timestamp	timestamp	LocalDateTi me	TIMESTAMP	-292275055-05-1 7 00:00:00.000	292278994-08-17 07:12:55.807
time with time zone	time_with_t imezone	OffsetTime	TIME WITH TIME ZONE	00:00:00.000+18 :00	23:59:59.999-18 :00
timestamp with time zone	timestamp_w ith_timezon e	OffsetDateT ime	TIMESTAMP WITH TIME ZONE	-292275055-05-1 7 00:00:00.000+18 :00	292278994-08-17 07:12:55.807-18 :00
vertex	_	PgxVertex	-	-	_



Table 27-2 (Cont.) Overview of Data types

Data Type	Loading & Storing	PGX Java API	PGQL and Filter Expression	Minimum Value Limitation	Maximum Value Limitation
edge	-	PgxEdge	-	-	-

Collections

The graph server (PGX) supports three different collection types: sequence, set and order. All of these collections can contain values of the vertex type, but each has different semantics regarding uniqueness and preserving the order of its elements:

- **Sequence**: a sequence works basically like a list. It preserves the order of the elements added to it, and the same element can appear multiple times.
- **Set**: a set can contain the same value once at the most. Adding a value that is already in the set will have no effect. set does not preserve the order of the elements it contains.
- Order: just like the set, the order collection will contain each element once at the most. But the order preserves the order of the elements inserted into it (that is, it is a FIFO data structure).

See Collection Data Types for examples on creation and usage of the different collections.

Immutable Collections

Some operations, like PgxGraph.getVertices() and PgxGraph.getEdges() return immutable collections. These collections behave like normal collections, but cannot be modified by operations like addAll or removeAll and clear.

An immutable collection can be transformed into a mutable collection by using the toMutable method, which returns a mutable copy of the collection. If toMutable is called on a collection that is already mutable, the method has the same result as the method clone.

To check if a collection is mutable, use the isMutable method.

Maps

PGX provides the following two kinds of maps:

- Graph-bound maps can hold mappings between types in PropertyType. This is the kind of
 maps to use if the key or value types are graph-related like VERTEX and EDGE otherwise
 using session-bound maps is recommended.
- Session-bound maps can map between non graph-related types and are directly bound to the session.

See Map Data Types for examples on creation and usage of maps.

- Using Collections and Maps
- Using Datetime Data Types

27.2.1 Using Collections and Maps

This section explains with examples, the creation and usages of collections and maps.

You must first create a session before getting started with the collection and map data types.

- JShell
- Java
- Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j> // starting the shell will create an implicit session
```

Java

```
import oracle.pgx.api.*;
...
PgxSession session=Pgx.createSession("<session name>");
```

Python

```
from pypgx import get_session
session = get session(session name="<session name>")
```

- Collection Data Types
- Map Data Types

27.2.1.1 Collection Data Types

The graph server (PGX) defines two types of collections:

- Graph-bound collections: such as vertex and edge collections. These collections belong to the graph.
- Session-bound collections: belong to the session.
- Graph-Bound Collections
- Session-Bound Collections

27.2.1.1.1 Graph-Bound Collections

The following describes the usage of graph-bound collections.

You must first load the graph to work with vertex and edge collections as shown in Reading Graphs from Oracle Database into the Graph Server (PGX).

Vertex Collections

You can create a vertex collection as shown in the following code:



- JShell
- Java
- Python

JShell

```
v0 = graph.getVertex(100) // 'graph' is the loaded graph object. '100' ->
'103' are vertex ids that supposedly
v1 = graph.getVertex(101) // exist in the graph
v2 = graph.getVertex(102)
v3 = graph.getVertex(103)

myVertexSet = graph.createVertexSet("myVertexSet") // A name is
automatically generated if none given
myVertexSet.add(v0) // Adds vertex 'v0' to
the set
myVertexSet.addAll([v1, v2, v3]) // Supports variadic
parameter as well: myVertexSet.addAll(v1, v2, v3)
```

Java

```
import java.util.Arrays;
import oracle.pgx.api.*;
...

PgxVertex v0 = graph.getVertex(100);
PgxVertex v1 = graph.getVertex(101);
PgxVertex v2 = graph.getVertex(102);
PgxVertex v3 = graph.getVertex(103);

VertexSet myVertexSet = graph.createVertexSet("myVertexSet"); // A name is automatically generated if none given
myVertexSet.add(v0);
myVertexSet.addAll(Arrays.asList(v1, v2, v3));
```

Python

```
v0 = graph.get_vertex(100)
v1 = graph.get_vertex(101)
v2 = graph.get_vertex(102)
v3 = graph.get_vertex(103)

my_vertex_set = graph.create_vertex_set("myVertexSet")
my_vertex_set.add(v0)
my_vertex_set.add_all([v1,v2,v3])
```



Edge Collections

You can create an edge collection as shown in the following code:

- JShell
- Java
- Python

JShell

```
e0 = graph.getEdge(100) // 'graph' is the loaded graph object. '100' -> '103'
are edge ids that supposedly
e1 = graph.getEdge(101) // exist in the graph
e2 = graph.getEdge(102)
e3 = graph.getEdge(103)

myEdgeSequence = graph.createEdgeSequence("myEdgeSequence")
myEdgeSequence.add(e0)
myEdgeSequence.addAll([e1, e2, e3])
```

Java

```
import java.util.Arrays;
import oracle.pgx.api.*;
...
PgxEdge e0 = graph.getEdge(100);
PgxEdge e1 = graph.getEdge(101);
PgxEdge e2 = graph.getEdge(102);
PgxEdge e3 = graph.getEdge(103);

EdgeSequence myEdgeSequence = graph.createEdgeSequence("myEdgeSequence");
myEdgeSequence.add(e0);
myEdgeSequence.addAll(Arrays.asList(e1, e2, e3));
```

Python

```
e0 = graph.get_edge(100)
e1 = graph.get_edge(101)
e2 = graph.get_edge(102)
e3 = graph.get_edge(103)

my_edge_sequence = graph.create_edge_sequence("my_edge_sequence")
my_edge_sequence.add(e0)
my_edge_sequence.add_all([e1, e2, e3])
```



27.2.1.1.2 Session-Bound Collections

You can create and manipulate collections directly in the session without the need for a graph. Session-bound collections can be further passed as parameters to graph algorithms or used like any other collection object. The following sub-sections describe the currently supported types for these collections.

Scalar Collections

Scalar collections contain simple data types like Integer, Long, Float, Double and Boolean. They can be managed by the PqxSession APIs:

Creation of a Scalar Collection

You can use <code>createSet()</code> and <code>createSequence()</code> methods to create a scalar collection as shown in the following code:

- JShell
- Java

JShell

```
myIntSet = session.createSet(PropertyType.INTEGER, "myIntSet")
myDoubleSequence = session.createSequence(PropertyType.DOUBLE)  // A name
will be automatically generated if none is provided.
println myDoubleSequence.getName()  // Display
the generated name.
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.common.types.*;
...
ScalarSet myIntSet = session.createSet(PropertyType.INTEGER, "myIntSet");
ScalarSequence myDoubleSequence = session.createSequence(PropertyType.DOUBLE);
System.out.println(myDoubleSequence.getName());
```

Run Operations on a Scalar Collection

You can run several operations on a scalar collection as shown in the following code:

- JShell
- Java



JShell

```
myIntSet.add(10)
myIntSet.addAll([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
myIntSet.addAll([0,1,2])
                                        // Element uniqueness. This operation
has no effect on the set.
println myIntSet
myIntSet.contains(1)
                                       // Checks the presence of an element.
This code returns `true`.
myIntSet.remove(10)
myIntSet.removeAll([4, 5, 6, 7, 8, 9]) // Leaves only elements `0, 1, 2, 3`.
println myIntSet
Java
import java.util.Arrays;
import oracle.pgx.api.*;
myIntSet.add(10);
myIntSet.addAll(Arrays.asList(0, 1, 2, 3, 4, 5, 6, 7, 8, 9));
myIntSet.addAll(Arrays.asList(0, 1, 2));
myIntSet.contains(1); // Returns `true`.
myIntSet.remove(10);
```

Traversal of a Scalar Collection

You can traverse a scalar collection either using an iterator or using the new Stream API. You can add elements of a sequence to a set, traverse a sequence and filter out elements not required, and then add the rest to another scalar collection.

- JShell
- Java

JShell

```
myIntSet.forEach({x -> print x + "\n"})
myIntSet.stream().filter({x -> x % 2 == 0}).forEach({x -> myDoubleSequence.add(x)})
println myDoubleSequence
```

myIntSet.removeAll(Arrays.asList(4, 5, 6, 7, 8, 9));

Java

```
import java.util.Iterator;
import java.util.stream.Stream;
import oracle.pgx.api.*;
```



```
myIntSet.forEach(x -> System.out.println(x));
myIntSet.stream().filter(x -> x % 2 == 0).forEach(myDoubleSequence::add);
```

27.2.1.2 Map Data Types

The graph server (PGX) defines two types of maps:

- Graph-bound maps: These maps support any key or value type and are created using a graph object.
- **Session-bound maps**: Keys or values in these maps are of any type except from graphrelated types (that is, vertices or edges). These maps belong to the session.
- Graph-Bound Maps
- Session-Bound Maps

27.2.1.2.1 Graph-Bound Maps

Some data types like VERTEX or EDGE depend on the graph. Consequently, mappings involving these data types also depend on the graph. PGX provides PgxGraph and PgxMap APIs to manage such maps.

The following describes the usage of graph-bound maps.

You must first load the graph to work with vertex and edge maps.

You can create a graph-bound map using vertices as keys as shown in the following code:

- JShell
- Java
- Python

JShell

```
v0 = graph.getVertex(100)
v1 = graph.getVertex(101)
v2 = graph.getVertex(102)
v3 = graph.getVertex(103)

vertexToLongMap = graph.createMap(PropertyType.VERTEX, PropertyType.LONG,
"vertexToLongMap")
vertexToLongMap.put(v0, v0.getDegreeAsync().get())
vertexToLongMap.put(v1, v1.getDegreeAsync().get())
vertexToLongMap.put(v2, v2.getDegreeAsync().get())
vertexToLongMap.put(v3, v3.getDegreeAsync().get())
```



Java

```
import java.util.Arrays;
import oracle.pgx.api.*;
...
PgxVertex v0 = graph.getVertex(100);
PgxVertex v1 = graph.getVertex(101);
PgxVertex v2 = graph.getVertex(102);
PgxVertex v3 = graph.getVertex(103);

PgxMap<PgxVertex, Long> vertexToLongMap =
graph.createMap(PropertyType.VERTEX, PropertyType.LONG, "vertexToLongMap");
vertexToLongMap.put(v0, v0.getDegree());
vertexToLongMap.put(v1, v1.getDegree());
vertexToLongMap.put(v2, v2.getDegree());
vertexToLongMap.put(v3, v3.getDegree());
```

Python

```
v0 = graph.get_vertex(100)
v1 = graph.get_vertex(101)
v2 = graph.get_vertex(102)
v3 = graph.get_vertex(103)

vertex_to_long_map = graph.create_map("vertex", "long", "vertex_to_long_map")
vertex_to_long_map.put(v0, v0.degree)
vertex_to_long_map.put(v1, v1.degree)
vertex_to_long_map.put(v2, v2.degree)
vertex_to_long_map.put(v3, v3.degree)
```

You can create graph-bound maps using edges as keys as shown in the following code:

- JShell
- Java
- Python

JShell

```
e0 = graph.getEdge(100)
e1 = graph.getEdge(101)
e2 = graph.getEdge(102)
e3 = graph.getEdge(103)

edgeToVertexMap = graph.createMap(PropertyType.EDGE, PropertyType.VERTEX,
"edgeToVertexMap")
edgeToVertexMap.put(e0, e0.getSource())
edgeToVertexMap.put(e1, e1.getSource())
```

```
edgeToVertexMap.put(e2, e2.getSource())
edgeToVertexMap.put(e3, e3.getSource())
```

Java

```
import java.util.Arrays;
import oracle.pgx.api.*;
...
PgxEdge e0 = graph.getEdge(100);
PgxEdge e1 = graph.getEdge(101);
PgxEdge e2 = graph.getEdge(102);
PgxEdge e3 = graph.getEdge(103);

PgxMap<PgxEdge, PgxVertex> edgeToVertexMap =
graph.createMap(PropertyType.EDGE, PropertyType.VERTEX, "edgeToVertexMap");
edgeToVertexMap.put(e0, e0.getSource());
edgeToVertexMap.put(e1, e1.getSource());
edgeToVertexMap.put(e2, e2.getSource());
edgeToVertexMap.put(e3, e3.getSource());
```

Python

```
e0 = graph.get_edge(100)
e1 = graph.get_edge(101)
e2 = graph.get_edge(102)
e3 = graph.get_edge(103)

edge_to_long_map = graph.create_map("edge", "long", "edge_to_long_map")
edge_to_long_map.put(e0, e0.source)
edge_to_long_map.put(e1, e1.source)
edge_to_long_map.put(e2, e2.source)
edge_to_long_map.put(e3, e3.source)
```

Note:

If you destroy the graph you will lose the map. Consider using a session-bound maps instead if your map does not involve any graph-related key or value type.

27.2.1.2.2 Session-Bound Maps

You can directly create maps in the session. But, you cannot use any graph-related data type as the map key or value type. Session-bound maps can be further passed as parameters to graph algorithms or used like any other map object. They are managed by PgxSession and PgxMaps APIs.

Scalar collections contain simple data types like Integer, Long, Float, Double and Boolean. They can be managed by the PgxSession APIs.

Creation of a Session-bound Map

You can use <code>createMap()</code> method and its overloads to create a session-bound map.

- JShell
- Java

JShell

```
intToDouble = session.createMap(PropertyType.INTEGER, PropertyType.DOUBLE,
"intToDouble")
intToTime = session.createMap(PropertyType.INTEGER, PropertyType.TIME) // A
name will be automatically generated.
println intToTime.getName()
println intToTime.getSessionId()
println intToTime.getGraph() //
`null`: Not bound to a graph.
println intToTime.getKeyType()
println intToTime.getValueType()
```

Java

```
import java.time.LocalTime;
import oracle.pgx.api.*;
import oracle.pgx.common.types.*;
...

PgxMap<Integer, Double> intToDouble = session.createMap(PropertyType.INTEGER,
PropertyType.DOUBLE, "intToDouble");
PgxMap<Integer, LocalTime> intToTime =
session.createSequence(PropertyType.INTEGER, PropertyType.TIME);
System.out.println(intToTime.getName());
System.out.println(intToTime.getSessionId());
System.out.println(intToTime.getGraph()); // `null`: Not bound to a graph.
System.out.println(intToTime.getKeyType());
System.out.println(intToTime.getValueType());
```

Run Operations on a Session-bound Map

You can run important operations such as setting, removing and checking existence of entries on a session-bound map as shown in the following code:

- JShell
- Java



JShell

```
intToDouble.put(0, 0.314)
intToDouble.put(1, 3.14)
intToDouble.put(2, 31.4)
intToDouble.put(3, 314)
                                     // 4
println intToDouble.size()
println intToDouble.get(1)
println intToDouble.get(3)
                                     // null
println intToDouble.get(10)
println intToDouble.containsKey(0)
                                     // `true`
intToDouble.remove(0)
println intToDouble.containsKey(0)
                                     // `false`
println intToDouble.containsKey(10)
                                    // `false`
intToDouble.remove(10)
println intToDouble.containsKey(10) // `false`
println intToDouble.put(1, 999)
                                     // previous mapped value (`3.14`) is
replaced by `999`
intToDouble.destroy()
Java
import java.util.Arrays;
import oracle.pgx.api.*;
intToDouble.put(0, 0.314);
intToDouble.put(1, 3.14);
intToDouble.put(2, 31.4);
intToDouble.put(3, 314);
System.out.println(inToDouble.size());
                                                  // 4
System.out.println(intToDouble.get(1));
System.out.println(intToDouble.get(3));
                                                  // null
System.out.println(intToDouble.get(10));
System.out.println(intToDouble.containsKey(0));
                                                  // `true`
intToDouble.remove(0);
                                                // `false`
System.out.println(intToDouble.containsKey(0));
System.out.println(intToDouble.containsKey(10)); // `false`
intToDouble.remove(10);
System.out.println(intToDouble.containsKey(10)); // `false`
System.out.println(intToDouble.put(1, 999));
                                                  // previous mapped value
(`3.14`) is replaced by `999`
```

Traversal of a Session-bound Map

intToDouble.destroy();

You can traverse a session-bound map, using entries() method to get an iterable of map entries and keys() method to get an iterable of map keys.

- JShell
- Java

JShell

```
intToDouble.entries().forEach {it -> println (it)}
intToDouble.keys().forEach {it -> println (it)}
```

Java

```
import java.util.Iterable;
import java.util.stream.Stream;
import oracle.pgx.api.*;
...
Iterable<Map.Entry> entries = intToDouble.entries();
entries.forEach(System.out::println);
Iterable<Map.Entry> keys = intToDouble.keys();
keys.forEach(System.out::println);
```

27.2.2 Using Datetime Data Types

This section explains in detail working of datetime data types such as date, time and timestamp.

Overview of Datetime Data Types in Graph Server (PGX)

Table 27-3 presents the overview of the five datetime data types supported by PGX along with example values.



PGX also supports custom format specification when loading data into PGX.

Table 27-3 Overview of Datetime Data Types in PGX

Data Type	Loading and Storing	PGX Java API	PGQL and Filter Expression	Example Value-1	Example Value-1
date	local_date	LocalDate	DATE	2001-01-29	2018-10-08
time	time	LocalTime	TIME	10:15	10:30:01.000
timestamp	timestamp	LocalDateTi me	TIMESTAMP	2001-01-29 10:15	2018-10-08 10:30:01.000



10:30:01.000-08

:00

10:15+01:00

Data Type	Loading and Storing	PGX Java API	PGQL and Filter Expression	Example Value-1	Example Value-1
time with time zone	time_with_t imezone	OffsetTime	TIME WITH TIME ZONE	10:15+01:00	10:30:01.000-08 :00
timestamp	timestamp w	OffsetDateT	TIMESTAMP	2001-01-29	2018-10-08

WITH TIME

ZONE

Table 27-3 (Cont.) Overview of Datetime Data Types in PGX

Loading Datetime Data

with time ith timezon ime

- Specifying Custom Datetime Formats
- APIs for Accessing Datetime Data
- Querying Datetime Data Using PGQL
- Accessing Datetimes from PGQL Result Sets

27.2.2.1 Loading Datetime Data

zone

You must first load a graph to work with datetime data. See Reading Graphs from Oracle Database into the Graph Server (PGX) for more information on graph loading.

The following example shows how to load a graph that has three vertices representing persons and zero edges.

Example 27-1 Loading Datetime Data

Create an EDGE LIST file persons.edge list as shown:

```
1*Judy,1989-01-15,1989-01-15 10:15-08:00 2*Klara,2001-01-29,2001-01-29 21:30-08:00 3*Pete,1995-08-01,1995-08-01 03:00-08:00
```

2. Create a corresponding graph configuration file persons.edge list.json as shown:

```
}
],
"edge_props":[
],
"separator":","
}
```

- 3. You can now load the data as shown in the following code:
- JShell
- Java
- Python

JShell

```
opg4j> var graph = session.readGraphWithProperties("persons.edge_list.json",
"people graph")
```

Java

```
import oracle.pgx.api.*;
...
PgxGraph graph =
session.readGraphWithProperties("persons.edge list.json","people graph");
```

Python

```
graph =
session.read_graph_with_properties("persons.edge_list.json",graph_name="people
graph")
```

27.2.2.2 Specifying Custom Datetime Formats

You can also manually specify the datetime format(s) of your data.

By default, PGX tries to parse datetime values using a set of predefined formats. If this fails, an exception like the following is thrown:

```
property timestamp_of_birth: could not parse value at line 1 for property of
temporal type OffsetDateTime using any of the given formats
```

In such a case, you can custom format the datetime data.

There are two ways of specifying datetime formats:

- on a per-property basis
- on a per-type basis



Property-Specific Datetime format:

You can custom format the property timestamp_of_birth used in Example 27-1 to the format yyyy-MM-dd H[H]:m[m][:s[s]][XXX] as shown:

Example 27-2 Specifying Property-Specific Datetime format:

```
{
    "name":"timestamp_of_birth",
    "type":"timestamp_with_timezone",
    "format":["yyyy-MM-dd H[H]:m[m][:s[s]][XXX]"]
}
```

where yyyy-MM-dd H[H]:m[m][:s[s]][XXX] specifies that the timestamp values consist of:

- a four-digit year
- a hyphen followed by a two-digit month
- a hyphen followed by a two-digit day
- a space
- an hour, specified as either one or two digits
- a colon followed by a minute, specified as either one or two digits
- an optional part that consists of a colon followed by a second that is specified as either one
 or two digits
- an optional timezone

Note:

- H[H]:m[m] allows the value 01:15 as well as the value 1:15.
- yyyy-MM-dd allows the value 1989-01-15 but not the value 1989-1-15. However, if two-digit months and days are needed, a format like yyyy-M[M]-d[d] can be used.

Also the format specification takes a *list* of formats. In the preceding example, the list contains only a single format, but you may specify any number of formats. If more than one format is specified, then when parsing the datetime data, the formats are tried from left to right until parsing succeeds. In this way, you can even load data that contains a mixture of values in different formats.

Type-Specific Datetime format:

You can also specify datetime formats on a *per-type* basis. This is useful in cases when there are multiple properties that have the same type as well as the same format because you will only need to specify the datetime format only once.

In case of the per-type specification, the format is used for each vertex or edge property that has the particular type.

The following example shows two type-specific formats (local_date_format and timestamp_with_timezone_format):

Example 27-3 Specifying Type-Specific Datetime format:

```
"edge_props":[
],
   "separator":",",
   "local_date_format":["yyyy-MM-dd"],
   "timestamp_with_timezone_format":["yyyy-MM-dd H[H]:m[m][:s[s]][XXX]"]
}
```

In the example, properties of type date (local_date) have the format yyyy-MM-dd while properties of type timestamp with time zone (timestamp_with_timezone) have the format yyyy-MM-dd H[H]:m[m][:s[s]][XXX].



Property-specific formats always overrides type-specific formats. If you specify a type-specific format, and the property of the particular type also has a property-specific format, then only the property-specific format is used to parse the datetime data.

27.2.2.3 APIs for Accessing Datetime Data

The graph server (PGX) uses the new Java 8 temporal data types for accessing datetime data through the Java API:

- date in PGX maps to LocalDate in Java
- time in PGX maps to LocalTime in Java
- timestamp in PGX maps to LocalDateTime in Java
- time with time zone in PGX maps to OffsetTime in Java
- timestamp with time zone in PGX maps to OffsetDateTime in Java

You can retrieve a date as shown in the following code:

- JShell
- Java
- Python

```
opg4j> var dateOfBirthProperty = graph.getVertexProperty("date_of_birth")
opg4j> var birthdayOfJudy = dateOfBirthProperty.get(1)
```



```
import java.time.LocalDate;
import oracle.pgx.api.*;
...
VertexProperty<LocalDate> dateOfBirthProperty =
graph.getVertexProperty("date_of_birth");
LocalDate birthdayOfJudy = dateOfBirthProperty.get(1);
```

Python

```
date_of_birth_property = graph.get_vertex_property("date_of_birth")
birthday of judy = date of birth property.get(1)
```

27.2.2.4 Querying Datetime Data Using PGQL

You can perform various operations such as *extracting* values from datetimes, *comparing* datetime values, and, *converting* between different datetime types. on datetime data using PGOL.

The following are example PGQL queries that show different operations that involve datetime data:

Retrieving Datetime Properties

The following query retrieves the date_of_birth and timestamp_of_birth properties from the all the persons in the graph.

```
SELECT n.name AS name, n.date_of_birth AS birthday, n.timestamp_of_birth AS
timestamp
   FROM MATCH (n) ON people_graph
ORDER BY birthday
```

The result of the query is as follows:

Comparing Datetime Values

The following query provides an overview of persons who are older than other persons in the graph:

```
SELECT n.name AS person1, 'is older than' AS relation, m.name AS person2 FROM MATCH (n) ON people graph, (m) ON people graph
```

```
WHERE n.date_of_birth > m.date_of_birth
ORDER BY person1, person2
```

The result of the query is as follows:

+		re	Lation			person2	-+ -+
Klara Klara Pete	Ì	is	older older older	than	Ì	Pete	

Extracting Values from Datetimes

The following query extracts the year, month, and day from the date of birth values:

```
SELECT n.name AS name
    , n.date_of_birth AS dob
    , EXTRACT(YEAR FROM n.date_of_birth) AS year
    , EXTRACT(MONTH FROM n.date_of_birth) AS month
    , EXTRACT(DAY FROM n.date_of_birth) AS day
    FROM MATCH (n) ON people_graph
ORDER BY name
```

The result of the query is as follows:

name			year		month		day	
Klara		1989-01-15 2001-01-29 1995-08-01	2001		1	İ	15 29 1	İ

Converting Between Different Types of Datetime Values

The following query converts the timestamp_of_birth property into values of the following three datetime types:

- a timestamp (without time zone)
- a time with time zone
- a time (without time zone)

```
SELECT n.name AS name

, n.timestamp_of_birth AS original_timestamp

, CAST(n.timestamp_of_birth AS TIMESTAMP) AS utc_timestamp

, CAST(n.timestamp_of_birth AS TIME WITH TIME ZONE) AS timezoned_time

, CAST(n.timestamp_of_birth AS TIME) AS utc_time

FROM MATCH (n) ON people_graph

ORDER BY original timestamp
```



The result of the query is as follows:

27.2.2.5 Accessing Datetimes from PGQL Result Sets

You can use the following APIs for retrieving datetime values from PGQL result sets.

```
LocalDate getDate(int elementIdx)
LocalDate getDate(String variableName)
LocalTime getTime(int elementIdx)
LocalTime getTime(String variableName)
LocalDateTime getTimestamp(int elementIdx)
LocalDateTime getTimestamp(String variableName)
OffsetTime getTimeWithTimezone(int elementIdx)
OffsetTime getTimeWithTimezone(String variableName)
OffsetDateTime getTimestampWithTimezone(int elementIdx)
OffsetDateTime getTimestampWithTimezone(String variableName)
```

The following example prints the birthdays of all the persons in the graph is as follows:

- JShell
- Java

```
opg4j> var resultSet = session.queryPgql("""
    SELECT n.name, n.date_of_birth
        FROM MATCH (n) ON people_graph
ORDER BY n.name
""")
opg4j> while (resultSet.next()) {
...> System.out.println(resultSet.getString(1) + " has birthday " + resultSet.getDate(2));
...> }
opg4j> resultSet.close()
```



```
import java.time.LocalDate;
import oracle.pgx.api.*;
...

PgqlResultSet resultSet = session.queryPgql(
   " SELECT n.name, n.date_of_birth\n" +
   " FROM MATCH (n) ON people_graph\n" +
   "ORDER BY n.name");

while (resultSet.next()) {
   System.out.println(resultSet.getString(1) + " has birthday " +
   resultSet.getDate(2));
}

resultSet.close();
```

The result of the query is as follows:

```
Judy has birthday 1989-01-15
Klara has birthday 2001-01-29
Pete has birthday 1995-08-01
```

In addition to the Java types from the new java.time package, the legacy java.util.Date is also supported through the following APIs:

```
Date getLegacyDate(int elementIdx)
Date getLegacyDate(String variableName)
```



The legacy <code>java.util.Date</code> can store dates, times, as well as timestamps, so these two APIs can be used for accessing values of any of the five datetime types.

27.3 Handling Asynchronous Requests in Graph Server (PGX)

This guide explains in detail the asynchronous methods supported by the PGX API.

The PGX API is designed to be asynchronous. This means that all of its core methods ending with *Async* **do not** block the caller thread until the request is completed. Instead, a PgxFuture object is instantly returned.

You can perform the following three actions on the returned PgxFuture object:

- Block
- Chain
- Cancel
- Blocking Operation



- Chaining Operation
- Cancelling Operation
- Handling Concurrent Asynchronus Operations

27.3.1 Blocking Operation

You can easily get the result by calling the get() method on the PgxFuture. The get() blocks the caller thread until the result is available:

```
PgxFuture<PgxSession> sessionPromise = instance.createSessionAsync("my-
session");
try {
    // block caller thread
    PgxSession session = sessionPromise.get();
    // do something with session
    ...
} catch (InterruptedException e) {
    // caller thread was interrupted while waiting for result
} catch (ExecutionException e) {
    // an exception was thrown during asynchronous computation
    Throwable cause = e.getCause(); // the actual exception is nested
}
```

PGX provides blocking convenience methods for every *Async* method, which calls the get () method. Typically, those methods have the same name as the asynchronous method they wrap, but without the *Async* suffix. For example, the preceding code snippet is equal to:

```
try {
    // block caller thread
    PgxSession session = instance.createSession("my-session");
    // do something with session
    ...
} catch (InterruptedException e) {
    // caller thread was interrupted while waiting for result
} catch (ExecutionException e) {
    // an exception was thrown during asynchronous computation
    Throwable cause = e.getCause(); // the actual exception is nested
}
```

27.3.2 Chaining Operation

The graph server (PGX) ships a version of Java 8's CompletableFuture named PgxFuture, an enhancement of the Future interface.

The CompletableFuture allows chaining of asynchronous computations without polling or the need of deeply nested callbacks (also known as callback hell). All PgxFuture instances returned by PGX APIs are instances of CompletableFuture and can be chained without the need of Java 8.

```
import java.util.concurrent.CompletableFuture
```



```
final GraphConfig graphConfig = ...
instance.createSessionAsync("my-session")
   .thenCompose(new Fun<PgxSession, CompletableFuture<PgxGraph>>() {
   @Override
   public CompletableFuture<PgxGraph> apply(PgxSession session) {
      return session.readGraphWithPropertiesAsync(graphConfig);
   }
}).thenAccept(new Action<PgxGraph>() {
   @Override
   public void accept(PgxGraph graph) {
      // do something with loaded graph
   }
});
```

The asynchronous chaining in the preceding example is explained as follows:

- The first line in the code makes an asynchronous call to createSessionAsync() to create a session.
 - Once the promise is resolved, it returns a PgxFuture object, which is the newly created PgxSession.
- The code then calls the .thenCompose() handler by passing a function which takes the PgxSession object as an argument.
 - Inside the function, there is another asynchronous readGraphWithPropertiesAsync() request which return another PgxFuture object.
 - The outer PgxFuture object returned by .thenCompose() gets resolved when the readGraphWithPropertiesAsync() request completes.
- This is followed by the .thenAccept() handler. The function that is passed
 to .thenAccept() does not return anything. Therefore, the future return type
 of .thenAccept() is PgxFuture<Void>.

Blocking Versus Chaining

For most use cases, you can block the caller thread. However, blocking can quickly lead to poor performance or deadlocks once things get more complex. As a rule, use blocking to quickly analyze selected graphs in a sequential manner, for example, in shell scripts or during interactive analysis using the interactive PGX shell.

Use chaining for applications built on top of PGX.

27.3.3 Cancelling Operation

You can cancel a pending request by invoking the cancel method of the returned PgxFuture instance.

For example:

```
PgxFuture<Object> promise=...
// do something else
promise.cancel(); // will cancel computation
```

Any subsequent calls to promise.get() will result in a Cancellation Exception being thrown.



Due to Java's cooperative threading model, it might take some time before PGX actually stops the computation.

27.3.4 Handling Concurrent Asynchronus Operations

Using the PgxSession#runConcurrently API provided by the graph server (PGX), you can submit a list of suppliers of asynchronous APIs to run concurrently in the PGX server.

For example:

```
import oracle.pgx.api.*;
    Supplier<PgxFuture<?>> asyncRequest1 = () ->
session.readGraphWithPropertiesAsync(...);
    Supplier<PgxFuture<?>> asyncRequest2 = () ->
session.getAvailableSnapshotsAsync(...);

    List<Supplier<PgxFuture<?>>> supplierList = Arrays.asList(asyncRequest1, asyncRequest2);

    //executing the async requests with the enabled optimization feature
    List<?> results = session.runConcurrently(supplierList);

    //the supplied requests are mapped to their results and orderly collected
    PgxGraph graph = (PgxGraph) results.get(0);
    Deque<GraphMetaData> metaData = (Deque<GraphMetaData>) results.get(1);
```

27.4 Graph Client Sessions

The graph server (PGX) assumes there may be multiple concurrent clients, and each client submits request to the shared PGX server independently.

Each session has its own workspace in PGX and is isolated from other sessions.

You can share graphs or properties among sessions.

Creating Sessions

The following methods in the ServerInstance class are used to create sessions:

- Java
- Python

Java

PgxSession createSession(String source)
PgxSession createSession(String source, long idleTimeout, long taskTimeout,
TimeUnit unit)

The preceding methods accept the following arguments:

- source is any arbitrary string that describes the client. Currently, this string is only used for logging purposes.
- The user can specify the idle timeout (idleTimeout) and task timeout (taskTimeout) when creating a new session. If these values are not specified, default values are used. See Configuration Parameters for the Graph Server (PGX) Engine for more information on graph server (PGX) configuration options.

Python

```
import pypgx
session = pypgx.get session()
```

Destroying Sessions

To destroy a session, simply call:

- JShell
- Java
- Python

JShell

```
session.destroyAsync();
```

Java

```
session.destroy();
```

Python

session.destroy()

Administrators can destroy sessions by ID using the following code:

```
instance.killSession(sessionId);
```



Calling administrative methods by default requires special authorization in client/ server mode. When a session is destroyed, PGX reclaims all of the resources associated with the session. Specifically, all transient data is destroyed immediately. See Managing Transient Data for more information on transient data.

However, PGX may choose to keep the loaded graph instance in memory for caching purposes, especially if a graph instance is shared by multiple clients. In summary, every graph remains in memory until no client is using it.



A session can be destroyed automatically via the session time-out mechanism. See Configuration Parameters for the Graph Server (PGX) Engine for more information on graph server (PGX) configuration options.

27.5 Graph Mutation and Subgraphs

This guide discusses the several methods provided by the graph server (PGX) for mutating graph instances.

You can use the mutation and subgraph methods that are defined in the PgxGraph class, to mutate a graph.



All of the mutating methods create a new graph or snapshot instance as the mutated version of the original graph, rather than mutating the original graph directly.

- Altering Graphs
- Simplifying and Copying Graphs
- Transposing Graphs
- Undirecting Graphs
- Advanced Multi-Edge Handling
- Creating a Subgraph
- Creating a Bipartite Subgraph
- Creating a Sparsified Subgraph

27.5.1 Altering Graphs

This section explains the graph alteration mutation used to add or remove vertex and edge providers of a graph.

You can add or remove vertex and edge providers in a graph that has been loaded or created previously. Providers can be added from existing datasources, or new empty providers can be created. The mutation can either create a new independent graph, or create a new snapshot for the graph.

The following topics explain in detail on adding and removing vertex and edge providers:

You must first create a graph-alteration builder to start altering an existing graph. For example, the following code shows how to start a graph alteration on a graph that is stored in a variable graph:

- JShell
- Java
- Python

JShell

```
opg-jshell> var alterationBuilder = graph.alterGraph()
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.graphalteration.GraphAlterationBuilder;
GraphAlterationBuilder alterationBuilder = graph.alterGraph();
```

Python

```
alteration builder = graph.alter graph()
```

Loading Or Removing Additional Vertex or Edge Providers

27.5.1.1 Loading Or Removing Additional Vertex or Edge Providers

You can alter your graph by adding or removing vertex or edge providers from a specific datasource. Alternatively you can also add empty vertex or edge providers.

Keys in Additionally Loaded Providers

The vertex and edge providers that are loaded must provide the respective keys in accordance with the vertex ID and edge ID strategy of the graph being altered. If the ID strategy is KEYS_AS_IDS, the provider must create a key mapping. But, if the ID strategy is UNSTABLE GENERATED IDS, it must not create the key mapping.

- · Loading Vertex Providers
- Loading Edge Providers
- Adding Additional Empty Vertex or Edge Providers
- · Removing Vertex or Edge Providers
- Applying the Alteration and Building a Graph or Snapshot

27.5.1.1.1 Loading Vertex Providers

You can add a vertex provider by calling

alterationBuilder.addVertexProvider(EntityProviderConfig vertexProviderConfig).

vertexProviderConfig is a vertex provider configuration and it provides configuration details such as:

- location of the datasource to load from
- the stored format
- properties of the vertex provider

Adding a Vertex Provider from a JSON Configuration

You can add the provider by calling alterationBuilder.addVertexProvider(String pathToVertexProviderConfig) where pathToVertexProviderConfig points to a file accessible from the client that contains a JSON representation of a vertex provider configuration.

For example, a vertex provider configuration can be stored in a JSON file as shown:

```
"name": "Accounts",
  "format": "rdbms",
  "database_table_name": "BANK_ACCOUNTS",
  "key_column": "ID",
  "key_type": "integer",
  "props": [
      {
         "name": "ID",
         "type": "integer"
      },
      {
         "name": "NAME",
         "type": "string"
      }
    ]
}
```

You can then add the vertex provider as shown in the following example:

- JShell
- Java
- Python

```
// Loading by indicating the path to the JSON file
opg4j> alterationBuilder.addVertexProvider("<path-to-vertex-provider-
configuration>")
$9 ==>
```

```
oracle.pgx.api.graphalteration.internal.GraphAlterationBuilderImpl@48d464cf

// Or by first loading the content of a JSON file into an
EntityProviderConfig object
opg4j> var vertexProviderConfig = new
AnyFormatEntityProviderConfigFactory().fromPath("<path-to-vertex-provider-
configuration>")
vertexProviderConfig ==>
{"format":"rdbms", "name":"Accounts", "database_table_name":"BANK_ACCOUNTS", "loa
ding":{"create_key_mapping":true}, "key_type":"integer", "props":
[{"type":"integer", "name":"ID"},
{"type":"string", "name":"NAME"}], "key_column":"ID"}
opg4j> alterationBuilder.addVertexProvider(vertexProviderConfig)
$15 ==>
oracle.pgx.api.graphalteration.internal.GraphAlterationBuilderImpl@77e2a5d3
```

```
// Loading by indicating the path to the JSON file
alterationBuilder.addVertexProvider("<path-to-vertex-provider-
configuration>");

// Or by first loading the content of a JSON file into an
EntityProviderConfig object
EntityProviderConfig vertexProviderConfig = new
AnyFormatEntityProviderConfigFactory().fromPath("<path-to-vertex-provider-
configuration>");
alterationBuilder.addVertexProvider(vertexProviderConfig);
```

Python

```
# Loading by indicating the path to the JSON file
alterationBuilder.add_vertex_provider("<path-to-vertex-provider-
configuration>");
```

Adding a Vertex Provider Programmatically Using an API

Alternatively, the vertex provider configuration can be built programmatically:

- JShell
- Java

```
opg4j> var vertexProviderConfigBuilder = new
RdbmsEntityProviderConfigBuilder().
...> setName("Accounts").
...> setKeyColumn("ID").
```



```
...> setDatabaseTableName("BANK_ACCOUNTS").
...> addProperty("ID", PropertyType.INTEGER)
vertexProviderConfigBuilder ==>
oracle.pgx.config.RdbmsEntityProviderConfigBuilder@8ff4d2b

opg4j> var vertexProviderConfig = vertexProviderConfigBuilder.build()
vertexProviderConfig ==> {"error_handling":
{},"format":"rdbms","name":"Accounts","database_table_name":"BANK_ACCOUNTS","loading":{"create_key_mapping":true},"attributes":{},"key_type":"long","props":
[{"dimension":0,"type":"integer","name":"ID"}],"key_column":"ID"}

opg4j> alterationBuilder.addVertexProvider(vertexProviderConfig)
$24 ==>
oracle.pgx.api.graphalteration.internal.GraphAlterationBuilderImpl@7b303608
```

```
RdbmsEntityProviderConfigBuilder vertexProviderConfigBuilder = new
RdbmsEntityProviderConfigBuilder()
    .setName("Accounts")
    .setKeyColumn("ID")
    .setDatabaseTableName("BANK_ACCOUNTS")
    .addProperty("ID", PropertyType.INTEGER);
EntityProviderConfig vertexProviderConfig =
vertexProviderConfigBuilder.build();
alterationBuilder.addVertexProvider(vertexProviderConfig);
```

27.5.1.1.2 Loading Edge Providers

You can add an edge provider by calling

alterationBuilder.addEdgeProvider(EntityProviderConfig edgeProviderConfig) where edgeProviderConfig. edgeProviderConfig is an edge provider configuration and it provides configuration details such as:

- location of the datasource to load from
- the stored format
- properties of the edge provider

The source and destination vertex providers to which it is linked must either be already in the base graph (and not removed in the alteration), or added with the alteration.

Adding an Edge Provider from a JSON Configuration

You can also add the provider by calling alterationBuilder.addEdgeProvider(String pathToEdgeProviderConfig) where pathToEdgeProviderConfig points to a file accessible from the client that contains a JSON representation of an edge provider configuration.

For example, an edge provider configuration can be stored in a JSON file as shown:

```
"name": "Transfers",
"format": "rdbms",
```



You can then add the edge provider as shown in the following example:

- JShell
- Java
- Python

JShell

```
// Loading by indicating the path to the JSON file
opg4j> alterationBuilder.addEdgeProvider("<path-to-edge-provider-
configuration>")
$10 ==>
oracle.pgx.api.graphalteration.internal.GraphAlterationBuilderImpl@48d464cf
// Or by first loading the content of a JSON file into an
EntityProviderConfig object
opg4j> EntityProviderConfig edgeProviderConfig = new
AnyFormatEntityProviderConfigFactory().fromPath("<path-to-edge-provider-
configuration>")
edgeProviderConfig ==>
{"format":"rdbms", "source vertex provider":"Accounts", "name":"Transfers", "data
base_table_name":"BANK_EDGES_AMT","loading":
{"create key mapping":false}, "source column": "SRC ID", "destination column":
"DEST ID", "key type": "long", "destination vertex provider": "Accounts", "props":
[{"type":"float", "name": "AMOUNT"}], "key column": "ID"}
opg4j> alterationBuilder.addEdgeProvider(edgeProviderConfig)
$26 ==>
oracle.pgx.api.graphalteration.internal.GraphAlterationBuilderImpl@7b303608
Java
// Loading by indicating the path to the JSON file
alterationBuilder.addEdgeProvider("<path-to-edge-provider-configuration>");
```

// Or by first loading the content of a JSON file into an

```
EntityProviderConfig object
EntityProviderConfig edgeProviderConfig = new
AnyFormatEntityProviderConfigFactory().fromPath("<path-to-edge-provider-configuration>");
alterationBuilder.addEdgeProvider(edgeProviderConfig);
```

Python

```
# Loading by indicating the path to the JSON file
alterationBuilder.add_edge_provider("<path-to-edge-provider-configuration>");
```

Adding an Edge Provider Programmatically Using an API

Alternatively, the edge provider configuration can be built programmatically:

- JShell
- Java

```
opg4j> RdbmsEntityProviderConfigBuilder edgeProviderConfigBuilder = new
RdbmsEntityProviderConfigBuilder().
                                                   setName("Transfers").
...>
...>
                                                   setKeyColumn("id").
                                                   setSourceColumn("src id").
...>
setDestinationColumn("dest id").
...>
setSourceVertexProvider("Accounts").
setDestinationVertexProvider("Accounts").
                                                   createKeyMapping(true).
...>
setDatabaseTableName("bank txns").
                                                   addProperty("from acct id",
...>
PropertyType.LONG).
                                                   addProperty("to acct id",
...>
PropertyType.LONG) .
                                                   addProperty("amount",
PropertyType.LONG)
edgeProviderConfigBuilder ==>
oracle.pgx.config.RdbmsEntityProviderConfigBuilder@5a5f65b9
opg4j> EntityProviderConfig edgeProviderConfig =
edgeProviderConfigBuilder.build()
edgeProviderConfig ==> {"error handling":
{}, "attributes{}, "destination column": "dest id", "key type": "long", "destination
vertex provider":"Accounts","key column":"id","format":"rdbms","source vertex
provider":
```

```
"Accounts", "name": "Transfers", "database_table_name": "bank_txns", "loading":
{"create_key_mapping":true}, "source_column": "src_id", "props":
[{"dimension":0, "type": "long", "name": "from_acct_id"},
{"dimension":0, "type": "long",
"name": "to_acct_id"}, {"dimension":0, "type": "long", "name": "amount"}]}

opg4j> alterationBuilder.addEdgeProvider(edgeProviderConfig)
$30 ==>
oracle.pgx.api.graphalteration.internal.GraphAlterationBuilderImpl@441ccfd7
```

```
RdbmsEntityProviderConfigBuilder edgeProviderConfigBuilder = new
RdbmsEntityProviderConfigBuilder()
.setName("Transfers")
.setKeyColumn("id")
.setSourceColumn("src_id")
.setDestinationColumn("dest_id")
.setSourceVertexProvider("Accounts")
.setDestinationVertexProvider("Accounts")
.createKeyMapping(true)
.setDatabaseTableName("bank_txns")
.addProperty("from_acct_id", PropertyType.LONG)
.addProperty("to_acct_id", PropertyType.LONG)
.addProperty("amount", PropertyType.LONG);
EntityProviderConfig edgeProviderConfig = edgeProviderConfigBuilder.build();
alterationBuilder.addEdgeProvider(edgeProviderConfig);
```

27.5.1.1.3 Adding Additional Empty Vertex or Edge Providers

You can also add empty vertex or edge providers, without having the providers connected to any specific datasource.

The names and types of the properties of each empty provider can be specified programmatically. Similarly, you can also specify if a key mapping for the providers needs to be created.

Adding Additional Empty Vertex Providers

You can add an empty vertex provider by calling

alterationBuilder.addEmptyVertexProvider(String vertexProviderName). You can then add properties, specify the key column, create the key mapping programmatically as shown in the following example.

See the **GraphAlterationEmptyVertexProviderBuilder** Interface in the Javadoc for more details.

- JShell
- Java

JShell

Java

```
alterationBuilder.addEmptyVertexProvider("AccountsProvider")
          .setLabel("Accounts")
          .createKeyMapping(true)
          .addProperty("NAME", PropertyType.STRING);
```

Adding Additional Empty Edge Providers

You can add an empty edge provider by calling

alterationBuilder.addEmptyEdgeProvider(String providerName, String sourceProvider, String destProvider). You can then add properties, specify the key column, create the key mapping programmatically as shown in the following example.

See the **GraphAlterationEmptyEdgeProviderBuilder** Interface in the Javadoc for more details.

- JShell
- Java

JShell

```
opg4j> alterationBuilder.addEmptyEdgeProvider("TransactionProvider",
"Accounts", "Accounts").
...> setLabel("Transfers").
...> createKeyMapping(false). // set to false if no keys are needed
...> addProperty("Description", PropertyType.STRING)
$26 ==>
oracle.pgx.api.graphalteration.internal.GraphAlterationEmptyEdgeProviderBuilde
rImpl@54720caf
```

Java

```
alterationBuilder.addEmptyEdgeProvider("TransactionProvider", "Accounts",
"Accounts")
.setLabel("Transfers")
.createKeyMapping(false)
.addProperty("Description", PropertyType.STRING);
```



27.5.1.1.4 Removing Vertex or Edge Providers

You can remove an edge provider by calling alterationBuilder.removeEdgeProvider(String edgeProviderName), where edgeProviderName is the name of the edge provider to be removed from the graph.

Similarly, calling alterationBuilder.removeVertexProvider(String vertexProviderName) will result in the graph to not contain that specific vertex provider. If that vertex provider was the source or destination provider for some edge providers in the base graph, those edge providers should also be removed before the application of the alteration or an exception will be thrown.

It is possible to indicate that the edge providers associated to a removed vertex provider should be automatically removed by calling

alterationBuilder.cascadeEdgeProviderRemovals(boolean cascadeEdgeProviderRemovals) with cascadeEdgeProviderRemovals set to true.

27.5.1.1.5 Applying the Alteration and Building a Graph or Snapshot

You must call <code>alterationBuilder.build()</code>, once the different vertex and edge providers have been added or removed in the alteration to actually apply the operation. By calling <code>alterationBuilder.build()</code>, a new graph is created and that graph contains all the providers of the base graph excluding the removed providers, and the additionally loaded providers.

You can also call <code>alterationBuilder.buildNewSnapshot()</code>, in which case, a new snapshot for the base graph is created and that snapshot contains all the providers of the base graph excluding the removed providers, and the additionally loaded providers.

27.5.2 Simplifying and Copying Graphs

You can create a simplified version of the graph by calling the simplify() method.

- Java
- Python

Java

Python



The first two arguments (vertexProps and edgeProps) list which properties will be copied into the newly created simplified graph instance. PGX provides convenience constants VertexProperty.ALL, EdgeProperty.ALL and VertexProperty.NONE, EdgeProperty.NONE to specify all properties or none properties to be stored, respectively.

The next three arguments determine which operations will be performed to simplify the graph.

- multiEdges: if MultiEdges.REMOVE_MULTI_EDGES, eliminate multiple edges between a source vertex and a destination vertex, that is, leave at most one edge between two vertices. MultiEdges.KEEP_MULTI_EDGES indicates to keep them. By default, PGX picks one edge out of the multi-edges and takes its properties. See Advanced Multi-Edge Handling for more fine-grained control over the edge properties during simplification.
- selfEdges: if SelfEdges.REMOVE_SELF_EDGES, eliminate every edge whose source and destination are the same vertex. SelfEdges.KEEP MULTI EDGES indicates to keep them.
- trivialVertices: if TrivialVertices.REMOVE_TRIVIAL_VERTICES, eliminate all the vertices that have neither incoming edges nor outgoing edges.
 TrivialVertices.KEEP TRIVIAL VERTICES indicates to keep them.

The mode argument, if set to <code>Mode.MUTATE_IN_PLACE</code>, requests that the mutation occurs directly on the specified graph instance without creating a new one. If set to <code>Mode.CREATE_COPY</code>, the method will create a new graph instance with the new name in <code>newGraphName</code>. If <code>newGraphName</code> is omitted (or <code>null</code>), PGX will generate a unique graph name.

The return value of this method is the simplified PgxGraph instance.

The Mode.MUTATE_IN_PLACE option is only applicable if the graph is marked as mutable. Every graph is immutable by default when loaded into PGX. To make a PgxGraph mutable, the client should create a private copy of the graph first, using one of the following methods:

- Java
- Python

Java

```
PgxGraph clone()
PgxGraph clone(String newGraphName)
PgxGraph clone(Collection<VertexProperty<?, ?>> vertexProps,
Collection<EdgeProperty<?>> edgeProps, String newGraphName)
```

Python

clone(self, vertex properties=True, edge properties=True, name=None)

As with simplify(), the user can specify optional properties of the graph to copy with vertexProps and edgeProps. If no properties are specified, all of the original graph's properties will be copied into the new graph instance. The user can specify the name of the newly created graph instance with newGraphName.

27.5.3 Transposing Graphs

You can create a transposed version of the graph.

- Java
- Python

Java

Python

The edgeLabelMapping argument can be used to rename edge labels. If any key in the given map does not exist as an edge label, it will be ignored.

edgeLabelMapping argument can also be an empty Map or null.

- null: if argument is null, edge labels from source graph will be removed on transposed graph. (default behavior when using convenience methods).
- empty Map: if argument is an empty Map, edge labels from source graph will be neither removed or renamed. Instead, it will be kept as it is in source graph.

See Simplifying and Copying Graphs for the meaning of the other parameters.

Additionally, the graph server (PGX) provides the following convenience methods from the PgxGraph class for the common operation of copying all vertex and edge properties into the transposed graph instance:

- transpose (Mode mode, String newGraphName)
- transpose (String newGraphName)
- transpose (Mode mode)

27.5.4 Undirecting Graphs

The following methods create the undirected version of a graph instance:



- Java
- Python

```
PgxGraph undirect()
PgxGraph undirect(String newGraphName)
PgxGraph undirect(MultiEdges multiEdges, SelfEdges selfEdges, TrivialVertices
trivialVertices, Mode mode, String newGraphName)
PgxGraph undirect(Collection<VertexProperty<?, ?>> vertexProps,
Collection<EdgeProperty<?>> edgeProps, MultiEdges multiEdges, SelfEdges
selfEdges, Mode mode, String newGraphName)
```

Python

The first two methods create an undirected version of the graph while copying all of the vertex properties. newGraphName is an optional argument to specify the name of the newly created graph instance.

In contrast, the third and fourth methods concurrently perform *undirecting* and *simplifying* of a graph. See Simplifying and Copying Graphs for the meaning of each parameter.

All methods return an object of the undirected PgxGraph type.

An undirected graph has some restrictions. Some algorithms are only supported on directed graphs or are not yet supported for undirected graphs. Further, PGX does not support to store undirected graphs nor reading from undirected formats. Since the edges do not have a direction anymore, the behavior of pgxEdge.getSource() or pgxEdge.getDestination() can be ambiguous. In order to provide deterministic results, PGX will always return the vertex with the smaller internal id as source and the other as destination vertex.

27.5.5 Advanced Multi-Edge Handling

Both <code>simplify()</code> and <code>undirect()</code> support the removal of multi-edges using <code>MultiEdges.REMOVE_MULTI_EDGES</code>. If this parameter is set, all multi-edges in this graph are removed, that is, collapsed. Whenever several multi-edges with edge properties are collapsed into one edge, you can choose one of the following two strategies supported by the graph server (PGX) to decide how to treat the corresponding properties:

- Picking
- Merging

If you choose picking, the graph server (PGX) picks one edge out of every set of multi-edges and copies all its properties including the edge label and key into the new graph. In the case of merging, the graph server (PGX) creates a completely new edge out for every set of multi-edges. PGX determines the properties of these new edges by applying a MergingFunction on every property of the multi-edges.

If there are no multi-edges between two vertices, that is, zero or only one edge, the chosen strategy does not have an effect on the outcome. The edge is kept with all its properties as it is.

- Picking
- Merging
- StrategyBuilder in General

27.5.5.1 Picking

This strategy can be used to pick an edge out of multi-edges. The graph server (PGX) allows the user to define several picking criteria. You can pick by:

- Property
- Label
- Edge-ID

Every picking criteria has to be combined with a PickingStrategyFunction. PGX supports either PickingStrategyFunction.MIN and PickingStrategyFunction.MAX, which picks the edge whose property/label/id is either minimal or maximal. If one does not specify a picking criteria, PGX will non-deterministically pick an edge out of the multi-edges.

A PickingStrategy can be created using a PickingStrategyBuilder, which can be retrieved by calling createPickingStrategyBuilder() on the target graph.

You can call one of the following functions as per your chosen picking criteria:

PickingStrategyBuilder setPickByEdgeId(PickingStrategyFunction pickingStrategyFunction)
PickingStrategyBuilder setPickByLabel(PickingStrategyFunction pickingStrategyFunction)
PickingStrategyBuilder setPickByProperty(EdgeProperty edgeProperty,
PickingStrategyFunction pickingStrategyFunction)
PickingStrategyBuilder setPickByProperty(String propertyName, PickingStrategyFunction
pickingStrategyFunction)

The following figure shows how PGX picks the edge with the *minimal* cost and takes all its properties.



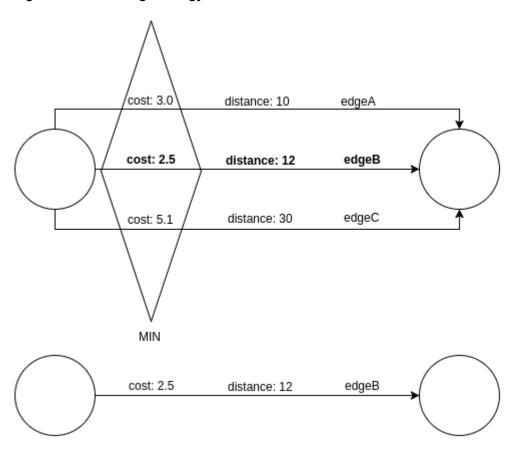


Figure 27-1 Picking Strategy

27.5.5.2 Merging

This strategy can be used to merge the properties of multi-edges. The graph server (PGX) allows the user to define a MergingFunction for every property. Currently, PGX supports the following functions:


- MergingFunction.MIN
- MergingFunction.MAX
- MergingFunction.SUM



SUM is only defined on numeric properties.

The following figure shows how the graph server (PGX) merges the different edge properties and labels. It takes the *minimal* cost, the *sum* of distances and the *maximal* edge label.

Figure 27-2 Merging Strategy

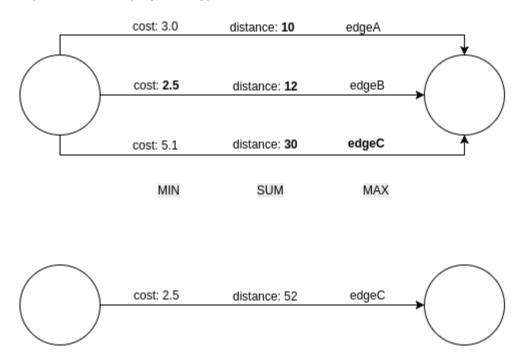

27.5.5.3 StrategyBuilder in General

By default, both the StrategyBuilders use the same values as in the convenience methods of simplify() and undirect(). This includes that all properties are kept by default. If one wants to drop specific properties, one can either use the dropVertexProperty() or dropEdgeProperty() functions.

```
MutationStrategyBuilder setNewGraphName(String newGraphName)
MutationStrategyBuilder setCopyMode(Mode mode)
MutationStrategyBuilder setTrivialVertices(TrivialVertices trivialVertices)
MutationStrategyBuilder setSelfEdges (SelfEdges selfEdges)
MutationStrategyBuilder setMultiEdges (MultiEdges multiEdges)
MutationStrategyBuilder dropVertexProperties(Collection<VertexProperty<?, ?>>
vertexProperty)
MutationStrategyBuilder dropEdgeProperties(Collection<EdgeProperty<?>>
edgeProperty)
MutationStrategyBuilder dropVertexProperty(VertexProperty<?, ?>
vertexProperty)
MutationStrategyBuilder dropEdgeProperty(EdgeProperty?>> edgeProperty)
MutationStrategy build()
Simplify() and undirect() can be called using a MutationStrategy as follows:
MutationStrategy strategy = strategyBuilder.build()
PgxGraph simplifiedGraph graph.simplify(strategy)
//OR
PgxGraph undirectedGraph graph.undirect(strategy)
```

27.5.6 Creating a Subgraph

PGX provides the following methods for creating subgraphs via a filter (see Filter Expressions for more information) expression:

- Java
- Python

Java

```
PgxGraph filter(GraphFilter graphFilter)
PgxGraph filter(GraphFilter graphFilter, String newGraphName)
PgxGraph filter(Collection<VertexProperty<?, ?>> vertexProps,
Collection<EdgeProperty<?>> edgeProps, GraphFilter graphFilter, String
newGraphName)
```

Python

```
filter(self, graph_filter, vertex_properties=True, edge_properties=True,
name=None)
```

As in the other graph mutating methods, the user has the option to specify the name of the subgraph with the <code>newGraphName</code> parameter and of choosing the vertex and edge properties to be copied into the subgraph (<code>vertexProps</code> and <code>edgeProps</code>). All of the preceding methods return a <code>PgxGraph</code> object which represents the created subgraph.

All filter methods require a <code>GraphFilter</code> argument containing a filter expression. Fundamentally, the filter expression is a Boolean expression that is evaluated for every vertex and edge in the original graph (in parallel). If the expression is evaluated as <code>true</code> for the vertex or edge, then that vertex or edge is included in the subgraph.

See Creating Subgraphs for more information on how to create subgraphs from graphs loaded into memory.

27.5.7 Creating a Bipartite Subgraph

The graph server (PGX) enables the client to create a bipartite subgraph. The following methods return the created BipartiteGraph instance:

- Java
- Python



BipartiteGraph bipartiteSubGraphFromLeftSet(VertexSet<?> vertexSet)
BipartiteGraph bipartiteSubGraphFromLeftSet(VertexSet<?> vertexSet, String
newGraphName)

BipartiteGraph bipartiteSubGraphFromLeftSet(Collection<VertexProperty<?, ?>>
vertexProps, Collection<EdgeProperty<?>> edgeProps, VertexSet<?> vertexSet,
String newGraphName)

BipartiteGraph bipartiteSubGraphFromLeftSet(Collection<VertexProperty<?, ?>>
vertexProps, Collection<EdgeProperty<?>> edgeProps, VertexSet<?> vertexSet,
String newGraphName, String isLeftPropName)

Python

bipartite_sub_graph_from_left_set(self, vset, vertex_properties=True,
edge properties=True, name=None, is left name=None)

These methods require an additional argument <code>vertexSet</code>, which points to a set of vertices (see Using Collections and Maps for more information) whose elements (vertices) would contain the left vertices (that is, vertices on the left side of the bipartite graph that have only edges to vertices on the right side) in the resulting bipartite graph.

When creating the bipartite subgraph, PGX automatically inserts an additional boolean vertex property isLeft. The value of this property is set true for the left vertices and false for the right vertices in the bipartite subgraph. The name of the isLeft vertex property can be obtained with getIsLeftPropertyAsync() on the returned BipartiteGraph object.

The user has the option to specify a name for the newly created graph (newGraphName) as well as a custom name for the Boolean left-vertex indicating property (isLeftPropName). The user can also specify the vertex and edge properties to be copied into the newly created graph instance (vertexProps and edgeProps).

27.5.8 Creating a Sparsified Subgraph

The graph server (PGX) supports creating a sparsified subgraph of a graph:

- Java
- Python

Java

PgxGraph sparsify(double e)
PgxGraph sparsify(double e, String newGraphName)
PgxGraph sparsify(Collection<VertexProperty<?, ?>> vertexProps,
Collection<EdgeProperty<?>> edgeProps, double e, String newGraphName)



Python

sparsify(self, sparsification, vertex_properties=True, edge_properties=True,
name=None)

The double argument e is the sparsification coefficient with a value between 0.0 and 1.0.

The user again has the option to specify the name for the newly created graph (newGraphName) as well as the vertex and edge properties to be copied into the newly created graph instance (vertexProps and edgeProps).

The returned PgxGraph object represents a sparsified subgraph which has fewer edges than the original graph.

27.6 Graph Builder and Graph Change Set

This guide explains the GraphBuilder API used for creating graphs and the GraphChangeSet interface used for modifying loaded graphs.

- Building Graphs Using GraphBuilder Interface
- Modifying Loaded Graphs Using ChangeSet

27.6.1 Building Graphs Using GraphBuilder Interface

Using the GraphBuilder interface, you can create graphs programmatically.

The basic work flow for creating graphs from scratch is:

- Acquire a modifiable graph builder to accumulate all the new vertices and edges
- 2. Add vertices and edges to the graph builder
- 3. Create a PgxGraph out of the accumulated changes
- Creating a Simple Graph
- Adding a Vertex Property
- Using Strings as Vertex Identifiers
- Referencing a Vertex for Creating Edges
- Adding an Edge Property and a Label
- Using Graph Builder with Implicit IDs

27.6.1.1 Creating a Simple Graph

This section shows an example of creating a simple graph using the createGraphBuilder() method.

- JShell
- Java



Python

JShell

```
opg4j> var builder = session.createGraphBuilder()
builder ==> GraphBuilderImpl[session=cd201ac9-e73f-447c-9cec-
cd929293acc3, vertexChanges=0, edgeChanges=0]
opg4j> builder.addEdge(1, 2)
opg4j> builder.addEdge(2, 3)
opg4j> builder.addEdge(2, 4)
opg4j> builder.addEdge(3, 4)
opg4j> builder.addEdge(4, 2)
opg4j> var graph = builder.build()
graph ==> PgxGraph[name=anonymous graph 16,N=4,E=5,created=1629805890550]
Java
import oracle.pgx.api.*;
PgxSession session = Pgx.createSession("example");
GraphBuilder<Integer> builder = session.createGraphBuilder();
builder.addEdge(1, 2);
builder.addEdge(2, 3);
builder.addEdge(2, 4);
builder.addEdge(3, 4);
builder.addEdge(4, 2);
PgxGraph graph = builder.build();
Python
from pypgx import get session
session = get session(session name="example")
builder = session.create graph builder()
builder.add edge(1, 2)
builder.add edge(2, 3)
builder.add edge(2, 4)
builder.add edge(3, 4)
builder.add edge(4, 2)
graph = builder.build()
```

Also, note that the following:

- A call to addEdge consists of the new unique edge ID, the source vertex ID and the
 destination vertex ID.
- No graph configuration is required.

- When adding edges, all vertices that do not already exist are created on the fly as edges are created.
- GraphBuilder supports only the following two generation strategies for creating vertices and edge IDs:
 - USER_IDS (the default value)
 - AUTO GENERATED

27.6.1.2 Adding a Vertex Property

You can also add vertices separately and assign property values to them.

The following example shows how to add a vertex property using the GraphBuilder interface.

- JShell
- Java
- Python

JShell

```
opg4j> var builder = session.createGraphBuilder()
opg4j> builder.addVertex(1).setProperty("double-prop", 0.1)
opg4j> builder.addVertex(2).setProperty("double-prop", 2.0)
opg4j> builder.addVertex(3).setProperty("double-prop", 0.3)
opg4j> builder.addVertex(4).setProperty("double-prop", 4.56789)
opg4j> builder.addEdge(1, 2)
opg4j> builder.addEdge(2, 3)
opg4j> builder.addEdge(2, 4)
opg4j> builder.addEdge(3, 4)
opg4j> builder.addEdge(4, 2)
opg4j> var graph = builder.build()
```

Java

```
import oracle.pgx.api.*;

PgxSession session = Pgx.createSession("example");
GraphBuilder<Integer> builder = session.createGraphBuilder();

builder.addVertex(1).setProperty("double-prop", 0.1);
builder.addVertex(2).setProperty("double-prop", 2.0);
builder.addVertex(3).setProperty("double-prop", 0.3);
builder.addVertex(4).setProperty("double-prop", 4.56789);

builder.addEdge(1, 2);
builder.addEdge(2, 3);
builder.addEdge(2, 4);
builder.addEdge(3, 4);
builder.addEdge(4, 2);
```

```
PgxGraph graph = builder.build();
```

Python

```
from pypgx import get_session

session = get_session(session_name="example")
builder = session.create_graph_builder()

builder.add_vertex(1).set_property("double-prop", 0.1)
builder.add_vertex(2).set_property("double-prop", 2.0)
builder.add_vertex(3).set_property("double-prop", 0.3)
builder.add_vertex(4).set_property("double-prop", 4.56789)

builder.add_edge(1, 2)
builder.add_edge(2, 3)
builder.add_edge(2, 4)
builder.add_edge(3, 4)
builder.add_edge(4, 2)

graph=builder.build()
```

If the value for a property is missing for a vertex or an edge, a default value is assumed as shown:

Table 27-4 Default Property Values

Properties	Default Values
Numeric	0 (or the respective equivalent)
Boolean	false
Date	1.1.1970 00:00:00
String	null



Tip:

Multiple calls to setProperty can be chained to set multiple property values at once.

27.6.1.3 Using Strings as Vertex Identifiers

By default, integer vertex IDs are used to identify a vertex. But, the type of the vertex ID can also be a long or a string.

In order to implement this, you must specify the vertex ID type when creating the graph using the GraphBuilder as shown:

- JShell
- Java
- Python

JShell

```
opg4j> GraphBuilder<String> builder =
session.createGraphBuilder(IdType.STRING)
opg4j> builder.addVertex("vertex 1").setProperty("double-prop", 0.1)
opg4j> builder.addVertex("vertex 2").setProperty("double-prop", 2.0)
opq4j> builder.addVertex("vertex 3").setProperty("double-prop", 0.3)
opg4j> builder.addVertex("vertex 4").setProperty("double-prop", 4.56789)
opg4j> builder.addEdge("vertex 1", "vertex 2")
opg4j> builder.addEdge("vertex 2", "vertex 3")
opg4j> builder.addEdge("vertex 2", "vertex 4")
opg4j> builder.addEdge("vertex 3", "vertex 4")
opg4j> builder.addEdge("vertex 4", "vertex 2")
opg4j> var graph = builder.build()
Java
import oracle.pgx.api.*;
import oracle.pgx.common.types.IdType;
PgxSession session = Pgx.createSession("example");
GraphBuilder<String> builder = session.createGraphBuilder(IdType.STRING);
builder.addVertex("vertex 1").setProperty("double-prop", 0.1);
builder.addVertex("vertex 2").setProperty("double-prop", 2.0);
builder.addVertex("vertex 3").setProperty("double-prop", 0.3);
builder.addVertex("vertex 4").setProperty("double-prop", 4.56789);
builder.addEdge("vertex 1", "vertex 2");
builder.addEdge("vertex 2", "vertex 3");
builder.addEdge("vertex 2", "vertex 4");
builder.addEdge("vertex 3", "vertex 4");
builder.addEdge("vertex 4", "vertex 2");
PgxGraph graph = builder.build();
Python
from pypqx import get session
session = get session(session name="example")
builder = session.create graph builder(id type='string')
builder.add vertex("vertex 1").set property("double-prop", 0.1)
builder.add vertex("vertex 2").set property("double-prop", 2.0)
builder.add vertex("vertex 3").set property("double-prop", 0.3)
```

builder.add vertex("vertex 4").set property("double-prop", 4.56789)

```
builder.add_edge("vertex 1", "vertex 2")
builder.add_edge("vertex 2", "vertex 3")
builder.add_edge("vertex 2", "vertex 4")
builder.add_edge("vertex 3", "vertex 4")
builder.add_edge("vertex 4", "vertex 2")
graph = builder.build()
```

27.6.1.4 Referencing a Vertex for Creating Edges

You can also avoid entering the full vertex ID when adding an edge. For this, you must obtain a reference to the vertex that is created, which can be later used in the addEdge statement.

- JShell
- Java
- Python

```
opg4j> GraphBuilder<String> builder =
session.createGraphBuilder(IdType.STRING)
opq4j> var v1 = builder.addVertex("vertex 1").setProperty("double-prop", 0.1)
opg4j> var v2 = builder.addVertex("vertex 2").setProperty("double-prop", 2.0)
opg4j> var v3 = builder.addVertex("vertex 3").setProperty("double-prop", 0.3)
opg4j> var v4 = builder.addVertex("vertex 4").setProperty("double-prop",
4.56789)
opg4j> builder.addEdge(v1, v2)
opg4j> builder.addEdge(v2, v3)
opg4j> builder.addEdge(v2, v4)
opg4j> builder.addEdge(v3, v4)
opg4j> builder.addEdge(v4, v2)
opg4j> var graph = builder.build()
Java
import oracle.pgx.api.*;
import oracle.pgx.common.types.IdType;
PgxSession session = Pgx.createSession("example");
GraphBuilder<String> builder = session.createGraphBuilder(IdType.STRING);
VertexBuilder<String> v1 = builder.addVertex("vertex 1").setProperty("double-
prop", 0.1);
VertexBuilder<String> v2 = builder.addVertex("vertex 2").setProperty("double-
prop", 2.0);
```

```
VertexBuilder<String> v3 = builder.addVertex("vertex 3").setProperty("double-
prop", 0.3);
VertexBuilder<String> v4 = builder.addVertex("vertex 4").setProperty("double-
prop", 4.56789);
builder.addEdge(v1, v2);
builder.addEdge(v2, v3);
builder.addEdge(v2, v4);
builder.addEdge(v3, v4);
builder.addEdge(v4, v2);
PgxGraph graph = builder.build();
Python
from pypgx import get session
session = get session(session name="example")
builder = session.create graph builder(id type='string')
v1 = builder.add vertex("vertex 1").set property("double-prop", 0.1)
v2 = builder.add vertex("vertex 2").set property("double-prop", 2.0)
v3 = builder.add vertex("vertex 3").set property("double-prop", 0.3)
v4 = builder.add vertex("vertex 4").set property("double-prop", 4.56789)
```

27.6.1.5 Adding an Edge Property and a Label

graph = builder.build()

builder.add_edge(v1, v2) builder.add_edge(v2, v3) builder.add_edge(v2, v4) builder.add_edge(v3, v4) builder.add_edge(v4, v2)

The following examples show how to add an edge property and a label to a graph.

- JShell
- Java
- Python

```
opg4j> var builder = session.createGraphBuilder(IdType.STRING)

opg4j> var v1 = builder.addVertex("vertex 1").setProperty("double-prop", 0.1)
opg4j> var v2 = builder.addVertex("vertex 2").setProperty("double-prop", 2.0)
opg4j> var v3 = builder.addVertex("vertex 3").setProperty("double-prop", 0.3)
```

```
opq4j> var v4 = builder.addVertex("vertex 4").setProperty("double-prop",
4.56789)
opg4j> builder.addEdge(v1, v2).setProperty("edge-prop",
"edge prop 1 2").setLabel("label")
opg4j> builder.addEdge(v2, v3).setProperty("edge-prop",
"edge prop 2 3").setLabel("label")
opg4j> builder.addEdge(v2, v4).setProperty("edge-prop",
"edge prop 2 4").setLabel("label")
opg4j> builder.addEdge(v3, v4).setProperty("edge-prop",
"edge prop 3 4").setLabel("label")
opg4j> builder.addEdge(v4, v2).setProperty("edge-prop",
"edge prop 4 2").setLabel("label")
opg4j> var graph = builder.build()
Java
import oracle.pgx.api.*;
import oracle.pgx.common.types.IdType;
PgxSession session = Pgx.createSession("example");
GraphBuilder<String> builder = session.createGraphBuilder(IdType.STRING);
VertexBuilder<String> v1 = builder.addVertex("vertex 1").setProperty("double-
prop", 0.1);
VertexBuilder<String> v2 = builder.addVertex("vertex 2").setProperty("double-
prop", 2.0);
VertexBuilder<String> v3 = builder.addVertex("vertex 3").setProperty("double-
prop", 0.3);
VertexBuilder<String> v4 = builder.addVertex("vertex 4").setProperty("double-
prop", 4.56789);
builder.addEdge(v1, v2).setProperty("edge-prop",
"edge prop 1 2").setLabel("label");
builder.addEdge(v2, v3).setProperty("edge-prop",
"edge prop 2 3").setLabel("label");
builder.addEdge(v2, v4).setProperty("edge-prop",
"edge prop 2 4").setLabel("label");
builder.addEdge(v3, v4).setProperty("edge-prop",
"edge prop 3 4").setLabel("label");
builder.addEdge(v4, v2).setProperty("edge-prop",
"edge prop 4 2").setLabel("label");
PgxGraph graph = builder.build();
Python
from pypgx import get session
session = get session(session name="example")
builder = session.create graph builder(id type='string')
v1 = builder.add vertex("vertex 1").set property("double-prop", 0.1)
```

```
v2 = builder.add_vertex("vertex 2").set_property("double-prop", 2.0)
v3 = builder.add_vertex("vertex 3").set_property("double-prop", 0.3)
v4 = builder.add_vertex("vertex 4").set_property("double-prop", 4.56789)
builder.add_edge(v1, v2).set_property("edge-prop",
   "edge_prop_1_2").set_label("label")
builder.add_edge(v2, v3).set_property("edge-prop",
   "edge_prop_2_3").set_label("label")
builder.add_edge(v2, v4).set_property("edge-prop",
   "edge_prop_2_4").set_label("label")
builder.add_edge(v3, v4).set_property("edge-prop",
   "edge_prop_3_4").set_label("label")
builder.add_edge(v4, v2).set_property("edge-prop",
   "edge_prop_4_2").set_label("label")
graph = builder.build()
```

27.6.1.6 Using Graph Builder with Implicit IDs

The GraphBuilder supports an AUTO_GENERATED generation strategy that allows to omit the edge or vertex IDs.

In this generation strategy, the graph server (PGX) will automatically assign IDs to the entities being added to the changeset. PgxSession supports

createGraphBuilder(IdGenerationStrategy vertexIdGenerationStrategy, IdGenerationStrategy edgeIdGenerationStrategy) and createGraphBuilder(IdType idType, IdGenerationStrategy vertexIdGenerationStrategy, IdGenerationStrategy edgeIdGenerationStrategy) to specify the IdGenerationStrategy.

The following example illustrates creating a graph with three vertices and three edges using the GraphBuilder interface.

- JShell
- Java
- Python

```
opg4j> var builder =
session.createGraphBuilder(IdGenerationStrategy.AUTO_GENERATED,
IdGenerationStrategy.AUTO_GENERATED)

opg4j> var v1 = builder.addVertex()
opg4j> var v2 = builder.addVertex()
opg4j> var v3 = builder.addVertex()
opg4j> builder.addEdge(v1, v2)
opg4j> builder.addEdge(v1, v2)
opg4j> builder.addEdge(v1, v3)
opg4j> builder.addEdge(v3, v2)
opg4j> var graph = builder.build()
```

Java

```
import oracle.pgx.api.*;

PgxSession session = Pgx.createSession("example");
GraphBuilder<Integer> builder =
session.createGraphBuilder(IdGenerationStrategy.AUTO_GENERATED,
IdGenerationStrategy.AUTO_GENERATED);

VertexBuilder<Integer> v1 = builder.addVertex();
VertexBuilder<Integer> v2 = builder.addVertex();
VertexBuilder<Integer> v3 = builder.addVertex();
builder.addEdge(v1, v2);
builder.addEdge(v1, v3);
builder.addEdge(v3, v2);

PgxGraph graph = builder.build();
```

Python

```
>>> builder =
session.create_graph_builder(vertex_id_generation_strategy='auto_generated',
edge_id_generation_strategy='auto_generated')
>>> v1 = builder.add_vertex()
>>> v2 = builder.add_vertex()
>>> v3 = builder.add_vertex()
>>> builder.add_edge(v1, v2)
>>> builder.add_edge(v1, v3)
>>> builder.add_edge(v3, v2)
>>> graph = builder.build()
```

27.6.2 Modifying Loaded Graphs Using ChangeSet

This guide explains how to add and remove vertices and edges from already loaded graphs.

As a prerequisite, you must have a graph already loaded into the graph server (PGX). See Reading Graphs from Oracle Database into the Graph Server (PGX) for more information.

You can now use the GraphChangeSet interface to modify the loaded graphs.



Modifying undirected graphs is not supported in graph server (PGX) 21.3.

- Modifying Vertices
- Adding Edges
- GraphChangeSet with Partitioned IDs
- Error Handling when Using a ChangeSet

27.6.2.1 Modifying Vertices

You can add, remove and modify vertices using the GraphChangeSet object.

- **JShell**
- Java
- Python

JShell

```
opg4j> var changeSet = graph.<Integer>createChangeSet()
opg4j> changeSet.addVertex(42).setProperty("prop", 23)
opg4j> changeSet.updateVertex(128).setProperty("prop", 5)
opg4j> changeSet.removeVertex(1908)
opg4j> var updatedGraph = changeSet.build()
opg4j> updatedGraph.hasVertex(42) // Evaluates to: true
opg4j> updatedGraph.hasVertex(1908) // Evaluates to: false
Java
import oracle.pgx.api.*;
GraphChangeSet<Integer> changeSet = graph.createChangeSet();
changeSet.addVertex(42).setProperty("prop", 23);
changeSet.updateVertex(128).setProperty("prop", 5);
changeSet.removeVertex(1908);
PgxGraph updatedGraph = changeSet.build();
Python
```

```
from pypgx.api import *
change set = graph.create change set()
change set.add vertex(42).set property("prop", 23)
changeSet.update vertex(128).set property("prop", 5)
changeSet.remove_vertex(1908)
updated graph = change set.build()
```



27.6.2.2 Adding Edges

You can also add edges to a graph using GraphChangeSet.

- JShell
- Java
- Python

JShell

```
opg4j> var changeSet2 = updatedGraph.<Integer>createChangeSet()
opg4j> changeSet2.addEdge(333, 42).setProperty("cost", 42.3)
opg4j> changeSet2.addEdge(42, 99)
opg4j> var updatedGraph2 = changeSet2.build()

Java
import oracle.pgx.api.*;
GraphChangeSet<Integer> changeSet2 = graph.createChangeSet();
changeSet2.addEdge(333, 42).setProperty("cost", 42.42);
changeSet2.addEdge(42, 99);
PgxGraph updatedGraph2 = changeSet2.build();
```

Python

```
from pypgx.api import *
change_set_2 = graph.create_change_set()
changeSet2.add_edge(333, 42).set_property("cost", 42.42)
changeSet2.add_edge(42, 99)
updated_graph_2 = change_set_2.build()
```

Note that by calling <code>changeSet2.build()</code>, you created a brand new graph with a unique name assigned by the graph server (PGX). If need be, you can specify a name argument to the <code>build()</code> method.

Additionally, you can create a new snapshot on top of the current graph with the buildNewSnapshot() method. See Creating a Snapshot via ChangeSet for more information.

27.6.2.3 GraphChangeSet with Partitioned IDs

You can use the <code>GraphChangeSet</code> API with graph with partitioned IDs. Ensure to set both the vertex ID generation strategy as well as the edge ID generation strategy to <code>IdGenerationStrategy.USER_IDS</code>. Furthermore, make sure to set the vertex ID type to <code>String</code>. An edge ID type does not need to be specified.

You can add, update and remove vertices and edges as shown in the following examples:

- Java
- Python

Java

```
GraphChangeSet<String> changeSet =
g.createChangeSet(IdGenerationStrategy.USER_IDS,
IdGenerationStrategy.USER_IDS);
changeSet.addVertex("Accounts(1002)").setProperty("NAME","User1002");
changeSet.updateVertex("Accounts(4)").setProperty("NAME","User4");
changeSet.removeVertex("Accounts(3)");
changeSet.addEdge("Transfers(5002)", "Accounts(5)",
"Accounts(6)").setProperty("AMOUNT", 12.50);
changeSet.updateEdge("Transfers(5)").setProperty("DESCRIPTION", 'Transfer from User');
changeSet.removeEdge("Transfers(5001)");
PgxGraph g1 = changeSet.build();
```

Python

```
change_set = graph.create_change_set(vertex_id_generation_strategy =
'user_ids', edge_id_generation_strategy = 'user_ids')
change_set.add_vertex("Accounts(1002)").set_property("NAME", "User1002")
change_set.update_vertex("Accounts(4)").set_property("NAME", "User4")
change_set.remove_vertex("Accounts(3)")
change_set.remove_edge("Transfers(5001)")
PgxGraph g1 = change_set.build()
```

Note:

You cannot use the <code>setLabel()</code> API when IDs are partitioned. The vertex or edge will be labelled automatically based on the label attached to the provider (for which the name is provided as part of the ID). Similarly, you cannot set the vertex or edge key properties through the <code>setProperty()</code> API as the value is already extracted from the vertex or edge ID.

27.6.2.4 Error Handling when Using a ChangeSet

Error handling while populating a ChangeSet or while applying a ChangeSet to the existing graph can be configured by setting the InvalidChangePolicy. The options are:

- OnInvalidChange.ERROR: throws an exception (This is the default configuration)
- OnInvalidChange.IGNORE: ignores the issue and continues
- OnInvalidChange.IGNORE_AND_LOG: ignores the issue, logs in DEBUG log level and continues
- OnInvalidChange.IGNORE AND LOG ONCE: only logs the first occurrence of each issue type

Issues that can be ignored with InvalidChangePolicy include trying to remove a vertex or an edge that does not exist in the graph, property type mismatch, updates to non existing properties, providing a vertex ID with wrong type or invalid vertex or edge providers.

The following example, tries to remove vertex 9032 which does not exist in the graph. By configuring IGNORE_AND_LOG, this action will be ignored while the property value update for vertex 99 will be applied successfully.

- JShell
- Java

JShell

```
opg4j> var changeSet3 = updatedGraph2.<Integer>createChangeSet()
opg4j> changeSet3.setInvalidChangePolicy(OnInvalidChange.IGNORE_AND_LOG)

opg4j> changeSet3.removeVertex(9032)
opg4j> changeSet3.updateVertex(99).setProperty("prop1", 17)
opg4j> var updatedGraph3 = changeSet3.build() // will log that a vertex removal was ignored

opg4j> var prop1Val = updatedGraph3.getVertex(99).getProperty("prop1") // evaluates to 17
```

Java

```
import oracle.pgx.api.*;

GraphChangeSet<Integer> changeSet3 = graph.createChangeSet();
changeSet3.setInvalidChangePolicy(OnInvalidChange.IGNORE_AND_LOG);
changeSet3.removeVertex(9032);
changeSet3.updateVertex(99).setProperty("prop1", 17);
PgxGraph updatedGraph3 = changeSet3.build(); // will log that a vertex
removal was ignored

int prop1Val = updatedGraph3.getVertex(99).getProperty("prop1"); // evaluates
to 17
```





When connecting to a remote graph server (PGX), error handling log messages will not be relayed to the client. In such a case, you need access to the server logs to determine which issues have been ignored. For this, you must update the default Logback configuration file in /etc/oracle/graph/logback.xml and the graph server (PGX) logger configuration file in /etc/oracle/graph/logback-server.xml to log the DEBUG logs. You can then view the ignored issues in /var/opt/log/pgx-server.log file.

Add Existing Edges and Vertices

The error handling for adding a vertex or an edge where its ID is already used in the graph or in an incompatible ChangeSet action can be configured with AddExistingVertexPolicy and AddExistingEdgePolicy.



The default setting for AddExistingVertexPolicy and AddExistingEdgePolicy is IGNORE. This is different from InvalidChangePolicy where the default is ERROR.

27.7 Managing Transient Data

This guide discusses how to handle transient properties and collections.

The graph server (PGX) allows each client to maintain its own isolated workspace, called session. Clients may create additional data objects in their own session, which they can then use for analysis.

- Managing Transient Properties
- Managing Collections and Scalars

27.7.1 Managing Transient Properties

The graph server (PGX) adopts the Property Graph data model. Once a graph is loaded into PGX, the graph instance itself and its original properties are set as immutable. However, the client can create and attach additional properties to the graph dynamically. These extra properties are referred to as *transient* properties and are mutable by the client

The methods for creating transient properties are available in PgxGraph:

- Java
- Python



Java

```
VertexProperty<ID, V> createVertexPropertyAsync(PropertyType type)
VertexProperty<ID, V> createVertexPropertyAsync(PropertyType type, String name)
EdgeProperty<V> createEdgePropertyAsync(PropertyType type)
EdgeProperty<V> createEdgePropertyAsync(PropertyType type, String name)
```

In the preceding code:

- PropertyType: is an enum for the data type of the property, which must be one of the primitive types supported by PGX.
- name: is an optional argument to assign a unique name to the newly created property. If no name is specified, PGX will assign one to the client.



Names must be unique. There cannot be two different vertex or edge properties for the same graph and with the same name.

Python

create vertex property(self,data type,name=None)

All methods return a Property object, which represent the newly created transient property. Both of the underlying classes, VertexProperty<ID, V> and EdgeProperty<V>, are parametrized with the value type V the property holds. V matches the given PropertyType. VertexProperty<ID, V> is additionally parametrized with the vertex ID type. This is due to PGX support of several types of vertex identifiers. See our graph configuration chapter on how to specify the vertex ID type of a graph. EdgeProperty<V> is not parametrized with the edge ID type, because PGX only supports edge identifiers of type long.

- Java
- Python

Java

```
GraphConfig config = GraphConfigBuilder.forFileFormats(...)
    ...
    .setVertexIdType(IdType.LONG)
    ...
    .build();

PgxGraph G = session.readGraphWithProperties(config);
VertexProperty<Long, String> p1 = G.createVertexProperty(PropertyType.STRING);
EdgeProperty<Double> p2 = G.createEdgeProperty(PropertyType.DOUBLE);
```



Python

```
G = session.read_graph_with_properties(config)
p1 = G.create_vertex_property("string")
p2 = G.create edge property("double")
```

To delete a transient property from the session, call <code>destroyAsync()</code> (or <code>destroy()</code>) on the property object.

27.7.2 Managing Collections and Scalars

The client can create graph-bound vertex and edge collections to use during the analysis with the following methods in PqxGraph:

- Java
- Python

Java

```
VertexSequence<E> createVertexSequence()
VertexSequence<E> createVertexSequence(String name)
VertexSet<E> createVertexSet()
VertexSet<E> createVertexSet(String name)
EdgeSequence createEdgeSequence()
EdgeSequence createEdgeSequence(String name)
EdgeSet createEdgeSet()
EdgeSet createEdgeSet(String name)
```

Python

```
create_edge_sequence(self, name=None)
create_vertex_sequence(self, name=None)
create_edge_set(self, name=None)
create_edge_sequence(self, name=None)
```

PGX also supports scalar collections such as set and sequence. Each of these collections can hold elements of various primitive data types like INTEGER, LONG, FLOAT, DOUBLE OR BOOLEAN. Scalar collections are session-bound and can be created with the following methods in PgxSession:

```
ScalarSet<T> createSet(PropertyType contentType, String name)
ScalarSequence<T> createSequence(PropertyType contentType, String name)
ScalarSet<T> createSet(PropertyType contentType)
ScalarSequence<T> createSequence(PropertyType contentType)
```



In the preceding code, the optional argument (name) specifies the name of the newly created collection. If omitted, PGX chooses a name for the client. As with properties, the collections holding vertices are parametrized with the ID type of the vertices. Refer to graph configuration chapter to learn how to specify the vertex ID type of a graph.

The return value is the collection object which points to the newly created empty collection.

To drop a collection from the session, call destroy() on the collection object.

To check which collections are currently allocated for a graph you can use the following method:

- Java
- Python

Java

Map<String, PqxCollection<? extends PqxEntity<?>, ?>> qetCollections()

Python

```
get collections(self)
```

The returned map contains the names of the collections as keys and the collections as values. The collections can be casted to the matching collection subclass.

PGX supports special Map collection types and allows users to map between different data types (oracle.pgx.common.types.PropertyType). Maps can be created using PgxGraph or PgxSession APIs, the difference is that the latter supports only non graph-related types, and that the created maps directly depend on the session:

```
PgxMap<K, V> createMap(PropertyType keyType, PropertyType valType)
PgxMap<K, V> createMap(PropertyType keyType, PropertyType valType, String mapName)
```

Similarly, scalar variables can be created in the client session using the following methods:

- Java
- Python

Java

```
Scalar<T> createScalar(PropertyType type, String newScalarName)
Scalar<T> createScalar(PropertyType type)
```



Python

create scalar(self,data type,name=None)

These collections and scalar variables can then be passed as arguments to graph algorithms. See Using Custom PGX Graph Algorithms for more information.

27.8 Graph Versioning

This guide describes the different ways to work with graph snapshots.

A graph can have multiple snapshots associated with it, reflecting different versions of the graph. All snapshots of a graph have the same graph configuration associated.

The following topics explains the various operations you can perform on graph snapshots:

- Configuring the Snapshots Source
- Creating a Snapshot via Refreshing
- Creating a Snapshot via ChangeSet
- · Checking Out the Latest Snapshots of a Graph
- Checking Out Different Snapshots of a Graph
- Directly Loading a Specific Snapshot of a Graph

27.8.1 Configuring the Snapshots Source

Snapshots can be created from two sources: Refreshing and ChangeSet.

Refreshing is available for graphs that are read from a persistent data source, that is, a file. When the data source has changed with respect to the version stored in the graph server (PGX), it can be read again manually by calling the PgxSession.readGraphWithProperties() method. Similarly, if auto-refresh is set for the graph, the graph server (PGX) automatically reads the data source and creates new snapshots when the data source has changed.

Instead, a ChangeSet is a set of changes to a graph that the user creates and populates via the PGX ChangeSet API. Once a ChangeSet is created and populated with the desired changes, the user can simply call GraphChangeSet.buildNewSnapshot() to create a new snapshot for the graph. In this way, you are empowered to integrate changes coming from any source into the graph and build snapshots out of them.

Only one source of snapshots is allowed for a single graph and is chosen during graph configuration via the <code>snapshots_source</code> option, which can be set to either <code>REFRESH</code> or <code>CHANGE_SET</code>. In case the <code>snapshots_source</code> option is not explicitly set by the user, the following default settings apply:

- If the graph is from a persistent data source, the default value is REFRESH, so that snapshots can be created only by calling PgxSession.readGraphWithProperties() (or via auto-refresh, if configured).
- If the graph is transient, that is, built from a graph builder, the default value is CHANGE_SET, since the graph is not backed by a persistent data source from which changes can be read. It is for this reason, CHANGE SET is the only admissible value for transient graphs.



Additionally, the following restrictions apply:

- If auto-refresh is enabled, then snapshots come from reading the backing data source and hence only REFRESH is admissible for the snapshots source option.
- If the user attempts to create snapshots in a way that is different from the configuration (for example, by calling GraphChangeSet.buildNewSnapshot() when the graph's snapshots source is REFRESH), the operation is invalid and an exception is thrown.

27.8.2 Creating a Snapshot via Refreshing

You can create a snapshot via refreshing by performing the following steps:

- Create a session and load the graph into memory.
- Check the available snapshots of the graph with PgxSession.getAvailableSnapshots() method.
 - JShell
 - Java
 - Python

JShell

```
opg4j> session.getAvailableSnapshots(G)
==> GraphMetaData [getNumVertices()=4, getNumEdges()=4, memoryMb=0,
dataSourceVersion=1453315103000, creationRequestTimestamp=1453315122669
(2016-01-20 10:38:42.669), creationTimestamp=1453315122685 (2016-01-20 10:38:42.685), vertexIdType=integer, edgeIdType=long]
```

Java

```
Deque<GraphMetaData> snapshots = session.getAvailableSnapshots(G);
for( GraphMetaData metaData : snapshots ) {
   System.out.println( metaData );
}
```

Python

```
snapshots = session.get_available_snapshots(G)
for metadata in snapshots:
    print(metadata)
```

- Edit the source file to contain an additional vertex and an additional edge or insert two rows in the database.
- Reload the updated graph within the same session as you loaded the original graph. A new snapshot is created.



- JShell
- Java
- Python

JShell

```
opg4j> var G = session.readGraphWithProperties( G.getConfig(), true )
==> PGX Graph named 'sample_2' bound to PGX session 'a1744e86-65fb-4bd1-
b2dc-5458b20954a9' registered at PGX Server Instance running in embedded
mode
opg4j> session.getAvailableSnapshots(G)
==> GraphMetaData [getNumVertices()=4, getNumEdges()=4, memoryMb=0,
dataSourceVersion=1453315103000, creationRequestTimestamp=1453315122669
(2016-01-20 10:38:42.669), creationTimestamp=1453315122685 (2016-01-20
10:38:42.685), vertexIdType=integer, edgeIdType=long]
==> GraphMetaData [getNumVertices()=5, getNumEdges()=5, memoryMb=3,
dataSourceVersion=1452083654000, creationRequestTimestamp=1453314938744
(2016-01-20 10:35:38.744), creationTimestamp=1453314938833 (2016-01-20
10:35:38.833), vertexIdType=integer, edgeIdType=long]
```

Java

```
G = session.readGraphWithProperties( G.getConfig(), true );
Deque<GraphMetaData> snapshots = session.getAvailableSnapshots( G );
```

Python

```
G = session.read_graph_with_properties(G.config,update_if_not_fresh=True)
```

Note that there are two GraphMetaData objects in the call for available snapshots, one with 4 vertices and 4 edges and one with 5 vertices and 5 edges.

- 5. Verify that the graph variable points to the newly loaded graph using getNumVertices() and getNumEdges() methods.
 - JShell
 - Java
 - Python



JShell

```
opg4j> G.getNumVertices()
==> 5
opg4j> G.geNumEdges()
==> 5
```

Java

```
int vertices = G.getNumVertices();
long edges = G.getNumEdges();
```

Python

```
vertices = G.num_vertices
edges = G.num_edges
```

27.8.3 Creating a Snapshot via ChangeSet

You can create a graph snapshot with ChangeSet via the PGX Java API. When you want to create the graph from a persistent data source, you can use

PgxSession.readGraphWithProperties() with the snapshots_source configuration option set to CHANGE SET.

You can create a snapshot via ChangeSet by performing the following steps:

- 1. Create a snapshot of a transient graph from database:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var builder = session.createGraphBuilder()
opg4j> builder.addEdge(1, 2)
opg4j> builder.addEdge(2, 3)
opg4j> builder.addEdge(2, 4)
opg4j> builder.addEdge(3, 4)
opg4j> builder.addEdge(4, 2)
opg4j> var graph = builder.build()
```

Java

```
import oracle.pgx.api.*;
GraphBuilder<Integer> builder = session.createGraphBuilder();
```

```
builder.addEdge(1, 2);
builder.addEdge(2, 3);
builder.addEdge(2, 4);
builder.addEdge(3, 4);
builder.addEdge(4, 2);

PgxGraph graph = builder.build();

Python

builder = session.create_graph_builder();

builder.add_edge(1, 2);
builder.add_edge(2, 3);
builder.add_edge(2, 4);
builder.add_edge(3, 4);
builder.add_edge(4, 2);

graph = builder.build()
```

2. Create a ChangeSet from graph and populate it. The following example shows adding a new edge between vertices 1 and 4:

- JShell
- Java
- Python

JShell

```
opg4j> var changeSet = graph.<Integer>createChangeSet()
opg4j> changeSet.addEdge(6, 1, 4)
```

Java

```
import oracle.pgx.api.*;
GraphChangeSet<Integer> changeSet = graph.createChangeSet();
changeSet.addEdge(6, 1, 4);
```

Python

```
changeSet = graph.create change set()changeSet.add edge(1,4,6)
```

3. Create a second snapshot using GraphChangeSet.buildNewSnapshot() as shown in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var secondSnapshot = changeSet.buildNewSnapshot()
opg4j> session.getAvailableSnapshots(secondSnapshot).size()
==> 2
```

Java

```
PgxGraph secondSnapshot = changeSet.buildNewSnapshot();
System.out.println( session.getAvailableSnapshots(secondSnapshot).size() );
```

Python

```
second_snapshot = change_set.build_new_snapshot()
print(len(session,get available snapshots()))
```

Thus two snapshots, referenced via the variables graph and secondSnapshot are created.

27.8.4 Checking Out the Latest Snapshots of a Graph

With multiple snapshots of a graph being available and regardless of their source, you can check out a specific snapshot using the PgxSession.setSnapshot() method. You can use the LATEST_SNAPSHOT constant of PgxSession to easily check out the latest available snapshot, as shown in the following example:

- JShell
- Java

JShell

```
opg4j> session.setSnapshot( G, PgxSession.LATEST_SNAPSHOT )
==> null
opg4j> session.getCreationTimestamp()
==> 1453315122685
```



Java

```
session.setSnapshot( G, PgxSession.LATEST_SNAPSHOT );
System.out.println(session.getCreationTimestamp());
```

See the printed timestamp to verify the most recent snapshot.

27.8.5 Checking Out Different Snapshots of a Graph

You can also check out a specific snapshot, again using the PgxSession.setSnapshot().

For example, consider the following two snapshots of a graph:

```
==> GraphMetaData [getNumVertices()=4, getNumEdges()=4, memoryMb=0, dataSourceVersion=1453315103000, creationRequestTimestamp=1453315122669 (2016-01-20 10:38:42.669), creationTimestamp=1453315122685 (2016-01-20 10:38:42.685), vertexIdType=integer, edgeIdType=long] ==> GraphMetaData [getNumVertices()=5, getNumEdges()=5, memoryMb=3, dataSourceVersion=1452083654000, creationRequestTimestamp=1453314938744 (2016-01-20 10:35:38.744), creationTimestamp=1453314938833 (2016-01-20 10:35:38.833), vertexIdType=integer, edgeIdType=long]
```

To check out a specific snapshot of the graph, you must pass the <code>creationTimestamp</code> of the snapshot you want to load to <code>setSnapshot()</code>.

For example, if G is pointing to the newest graph with 5 vertices and 5 edges, but you want to analyze the older graph, you need to set the snapshot to 1453315122685.

- JShell
- Java
- Python

JShell

```
opg4j> G.getNumVertices()
==> 5
opg4j> G.getNumEdges()
==> 5
opg4j> session.setSnapshot( G, 1453315122685 )
==> null
opg4j> G.getNumVertices()
==> 4
opg4j> G.getNumEdges()
==> 4
```



Java

```
session.setSnapshot(G,1453315122685);
```

Python

```
session.set snapshot(G,1453315122685)
```

Note that setting the snapshot, changes the number of vertices and edges from 5 to 4.

Alternatively, you can also retrieve the creation timestamp of each snapshot from its associated GraphMetaData object via the GraphMetaData.getCreationTimestamp() method. The easiest way to get the GraphMetaData information of all the snapshots is to use the PgxSession.getAvailableSnapshots() method, which returns a collection of GraphMetaData information of each snapshot ordered by creation timestamp from the most recent to the oldest.

27.8.6 Directly Loading a Specific Snapshot of a Graph

You can also load a specific snapshot of a graph directly using the PgxSession.readGraphAsOf() method. This is a shortcut for loading a graph with readGraphWithProperties() followed by a setSnapshot().

Consider two snapshots of a graph that are already loaded into the PGX session. The following example shows how to get a reference to a specific snapshot:

- Get a graph configuration for the graph:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var config =
GraphConfigFactory.forAnyFormat().fromPath("<path_to_json>")
==> {"format":"adj_list", ... }
```

Java

```
GraphConfig config =
GraphConfigFactory.forAnyFormat().fromPath("<path_to_json>");
```

Python

```
config = GraphConfigFactory.for any format().from path("<path to json>")
```

- 2. Check the loaded snapshots for this graph config using getAvailableSnapshots():
 - JShell
 - Java
 - Python

JShell

```
opg4j> session.getAvailableSnapshots(G)
==> GraphMetaData [getNumVertices()=4, getNumEdges()=4, memoryMb=0,
dataSourceVersion=1453315103000, creationRequestTimestamp=1453315122669
(2016-01-20 10:38:42.669), creationTimestamp=1453315122685 (2016-01-20
10:38:42.685), vertexIdType=integer, edgeIdType=long]
==> GraphMetaData [getNumVertices()=5, getNumEdges()=5, memoryMb=3,
dataSourceVersion=1452083654000, creationRequestTimestamp=1453314938744
(2016-01-20 10:35:38.744), creationTimestamp=1453314938833 (2016-01-20
10:35:38.833), vertexIdType=integer, edgeIdType=long]
```

Java

Deque<GraphMetaData> snapshots = session.getAvailableSnapshots(G);

Python

```
session.get available snapshots(G)
```

- 3. Check out the snapshot of the graph which has 4 vertices and 4 edges and having the timestamp 1453315122685:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var G = session.readGraphAsOf( config, 1453315122685 )
==> PGX Graph named 'sample' bound to PGX session 'a1744e86-65fb-4bd1-
b2dc-5458b20954a9' registered at PGX Server Instance running in embedded
mode
opg4j> G.getNumVertices()
==> 4
```



```
opg4j> G.getNumEdges()
==> 4
```

Java

```
PgxGraph G = session.readGraphAsOf( config, 1453315122685 );
```

Python

```
G = read graph as of (config, creation timestamp=1453315122685)
```

27.9 Labels and Properties

You can perform various actions on the graph property and label values by executing PGQL queries.

- Setting and Getting Property Values
- Getting Label Values

27.9.1 Setting and Getting Property Values

Getting Property Values

You can obtain the vertex or edge property values by executing a SELECT PGQL query on the graph.

For example:

- JShell
- Java

JShell

```
opg4j> session.queryPgql("SELECT e.src_id, e.dest_id, e.amount FROM MATCH
(n:Account) -[e:Transfers]-> (m:Account) on bank_graph").print()
```

Java

```
...
...
PgxGraph g = session.getGraph("bank_graph");
String query =
     "SELECT e.src_id, e.dest_id, e.amount FROM MATCH (n:Account) -
[e:Transfers]-> (m:Account)";
g.queryPgql(query).print();
```



The resulting property values may appear as:	The resulting	property	values	may	appear	as:
--	---------------	----------	--------	-----	--------	-----

+				+
src_id		dest_id		amount
+				+
1		259		1000
1		418		1000
1		584		1000
1		644		1000
1		672		1000
2		493		1000
2		546		1000
2		693		1000
2		833		1000
2		840		1000
+				+

Setting Property Values

You can set the vertex or edge property values by executing insert or update PGQL queries on the graph.

For example, to set a new vertex account ID on a graph using INSERT query:

- JShell
- Java

JShell

```
opg4j> PgxGraph g = session.getGraph("bank_graph_analytics")
g ==> PgxGraph[name=bank_graph_analytics, N=1000, E=5001, created=1616312153556]
opg4j> PgxGraph g_mutable = g.clone("bank_graph_analytics_copy")
g_mutable ==>
PgxGraph[name=bank_graph_analytics_copy, N=1000, E=5001, created=1616312413799]
opg4j> g_mutable.executePgql("INSERT VERTEX v LABELS (Accounts) PROPERTIES
( v.id = 1001)")
```

Java

```
...

PgxGraph g1 = session.readGraphWithProperties("bank_graph_analytics.json");

PgxGraph g2 = g1.clone("bank_graph_analytics_copy");

g2.executePgq1("INSERT VERTEX v " +

" LABELS ( Accounts ) " +

" PROPERTIES ( v.id = 1001 )");
```



27.9.2 Getting Label Values

You can retrieve the vertex or edge label values of a graph as shown:

The result may appear as shown:

```
+----+
| LABEL(n) | COUNT(*) |
+----+
| ACCOUNT | 1000 |
```

27.10 Filter Expressions

This guide explains the usage of filter expressions.

Filter expressions are applied in the following scenarios:

- Path-Finding: Include only specific vertices and edges in a path
- Sub-Graphs: Include only specific vertices and edges in a subgraph
- Set creation: Create a vertex or edge set and include only specific vertices or edges

There are two types of filter expressions:

- · Vertex filters:: Evaluated on each vertex
- Edge filters: Evaluated on each edge, including the two vertices it connects.

These filter expressions will evaluate to true if the current edge or vertex matches the expression or to false if it does not. Filter expressions are stateless and side-effect free.

The following short example below will evaluate to true for all edges where the source vertex's string property name is "PGX".

```
src.name="PGX"
```

- Syntax
- Type System
- Path Finding Filters
- Subgraph Filters
- Operations on Filter Expressions



27.10.1 Syntax

Trivial Expressions

Always evaluates to true:

true

Always evaluates to false:

false

Constants

Legal constants are integer, long and floating point numbers of single and double precision as well as strings literals and true and false. Long constants need to be suffixed with 1 or L. Floating point numbers are treated as double precision numbers by default. To force a certain precision you can use f or f for single precision and f or f for double precision floating point numbers. String literals are UTF-8 character sequences, surrounded by single or double quotation marks.

```
25
4294967296L
0.62f
0.33d
"Double quoted string"
'Single quoted string'
```

Vertex and Edge Identifiers

Depending on the filter type, different identifiers are valid.

Vertex Filter

Vertex filter expressions have only one keyword that addresses the vertex in the current context.

vertex denotes the vertex that is currently being evaluated by the filter expression.

vertex

Edge Filter

Edge filter expressions have several keywords that addresses the edge or its vertices in the current context.

edge denotes the edge that is currently being evaluated by the filter expression.

edge

dst denotes the destination vertex of the current edge. dst is only valid in the subgraph context.

dst.

src denotes the source vertex of the current edge. src is only valid in the subgraph context.



src

Properties

Filter expressions can access the values of vertex and edge properties.

<id>.<property>

where:

- <id>: is any vertex or edge identifier (that is, src, dst, vertex, edge).
- property>: is the name of a vertex or edge property.



This has to be the name of an edge property if the identifier is edge. Otherwise it has to be a vertex property.

If the property name is a reserved name in the filter expression syntax or contains spaces, it must be quoted in single or double quotes.

The following code accesses the 'cost' property of the source vertex.

src.cost

Temporal properties support values comparison (constants and property values) using special constructors. The default temporal formats are shown in the following table:

Table 27-5 Default Temporal Formats

Property Type	Constructor		
DATE	date ('yyyy-MM-dd HH:mm:ss')		
LOCAL_DATE	date 'yyyy-MM-dd'		
TIME	time 'HH:mm:ss'		
TIME_WITH_TIMEZONE	time 'HH:mm:ss+/-XXX'		
TIMESTAMP	timestamp 'yyyy-MM-dd HH:mm:ss'		
TIMESTAMP_WITH_TIMEZONE	timestamp 'yyyy-MM-dd HH:mm:ss+/-XXX'		

The following expression accesses the property 'timestamp_withTZ' of an edge and checks if it is equal to 3/27/2007 06:00+01:00.

edge.timestamp_withTZ = timestamp'2007-03-2706:00:00+01:00'



Properties of type *date* can only be checked for equality. *date* type usage is deprecated since version 2.5, instead use *local date* or *timestamp* types that support all operations.

Methods

Filter expressions support the following functions:



Degree Functions

1. outDegree () returns the number of outgoing edges of the vertex identifier. degree () is a synonym for outDegree.

```
int <id>.degree()
int <id>.outDegree()
```

The following example determines whether the <code>out-degree</code> of the source vertex is greater than three:

```
src.degree() > 3
```

2. inDegree () returns the number of incoming edges of the vertex identifier.

```
int <id>.inDegree()
```

Label Functions

1. hasLabel() checks if a vertex has a label.

```
boolean <id>.hasLabel('<label>')
```

The following example determines whether a vertex has the label "city":

```
vertex.hasLabel('city')
```

2. label() returns the label of an edge.

```
string <id>.label()
```

The following expression checks whether the label of an edge is "clicked by":

```
edge.label() = 'clicked_by'
```

Relational Expressions

To compare values (e.g., property values or constants), filter expressions provide the comparison operators listed below. Note: Both == and = are synonyms.

== != < <= >

The following example checks whether the "cost" property of the source vertex is lower than or equals to 1.23.

```
src.cost <= 1.23</pre>
```

Vertex ID Comparison

It is also possible to filter for vertices with a specific vertex ID.

```
<id> = <vertex id>
```

The following example determines whether the source vertex of an edge has the vertex ID "San Francisco"

```
src = "San Francisco"
```

Regular Expressions



Strings can be matched using regular expressions.

```
<string expression> =~ '<regularexpression>'
```

The following example checks if the edge label starts with a lowercase letter and ends with a number:

```
edge.label() =~ '^[a-z].*[0-9]$'
```



The syntax followed for the pattern on the right-hand side, is Java REGEX.

Type Conversions

The following syntax allows converting the type of <expression> to <type>.

```
(<type>) <expression>
```

The following example converts the value of the 'cost' property of the source vertex to an integer value:

```
(int) src.cost
```

Boolean Expressions

Filter expressions can be composed to form other filter expressions. This can be done using the Boolean operators & (and), $| \cdot |$ (or) and ! (not).



Only boolean operands can be composed.

```
(! true) || false
edge.cost < INF && dst.visited = false
src.degree() < 10 || !(dst.visited)</pre>
```

Arithmetic Expressions

Any numeric expression can be combined using arithmetic expressions. The available arithmetic operators are: +, -, *, /, \$.



These operators only work on numeric operands.

```
1 + 5
-vertex.degree()
edge.cost * 2 > 5
src.value * 2.5 = (dst.inDegree() + 5) / dst.outDegree()
```

Operator Precedence



Operator precedences are shown in the following list, from highest precedence to the lowest. An operator on a higher level is evaluated before an operator on a lower level.

```
1. + (unary plus), - (unary minus)
```

```
2. *,/, %
```

- 3. +, -
- 4. =,!=,<,>,<=,>=,=~
- **5.** NOT
- 6. AND
- 7. OR

Syntactic Sugar

both and any denote the source and destination vertex of the current edge. They can be used to express a condition that should be true for both or at least either one of the two vertices. These keywords are only valid in an edge filter expression. To use them in a vertex filter results in a runtime type-checking exception.

```
both
any
```

The filter expressions inside the following examples are equivalent:

```
both.property = 1
src.property = 1 && dst.property = 1
any.degree() > 1
src.degree() > 1 || dst.degree() > 1
```

27.10.2 Type System

Filter expressions are a very simple type system. There are only the following 13 types:

- integer (can be abbreviated in expressions with int)
- 2. long
- 3. float
- 4. double
- 5. boolean
- 6. string
- 7. date
- 8. time
- 9. time with timezone
- 10. timestamp
- 11. timestamp with timezone
- 12. vertex
- **13.** edge

Conversions are only allowed from one numeric type to another numeric type (i.e. integer, float, double, long).

Comparisons require both sides to be of the same (or convertible) type.

27.10.3 Path Finding Filters

Filters can be used to limit the analyzed edges when searching for a shortest path between a source and destination vertex in a graph.

An edge filter expression is evaluated against each edge that is visited during the traversal of the graph. If the filter evaluates to false on an edge, this edge will be ignored and will not appear in the resulting shortest path.

It is also possible to use a vertex filter for path finding.

A vertex filter expression is evaluated against each vertex that is visited during the traversal of the graph, except for the source and destination vertex.

If the filter evaluates to false on a vertex, the edge to this vertex and all outgoing edges of the vertex will be ignored. The vertex will not appear in the resulting shortest path.

The source and destination vertex can be any vertex in the graph and the filter is not evaluated for them.

27.10.4 Subgraph Filters

Edge Filters

An edge filter expression is evaluated for each edge in the graph. The edge filter has access to the source and destination vertex of each edge and all of its properties.

If the filter expression evaluates to true, the edge and both the source and destination vertex will appear in the subgraph.

Vertex Filters

A vertex filter expression is evaluated for every vertex in the graph.

Every vertex for which the filter expression evaluates to true will appear in the subgraph.

Every edge connecting two vertices for which the expression evaluates to true will also appear in the subgraph.

Result Set Filters

Result set edge and vertex filters allow the creation of edge and vertex sets out of a given PGQL result set.

Vertex and Edge Collection Filters

Vertex and edge collection filters allow the creation of edge and vertex filters out of a given vertex and edge collection.

27.10.5 Operations on Filter Expressions

This section explains the various operations that you can perform on filter expressions.

- Defining Filter Expressions
- Defining Result Set Filters
- Creating a Subgraph from PGQL Result Set



- Defining Collection Filters
- Creating a Subgraph from Collection Filters
- Combining Filter Expressions
- Creating a Subgraph Using Filter Expressions with Partitioned IDs

27.10.5.1 Defining Filter Expressions

You can define a new vertex filter, as shown in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var vertexFilter = VertexFilter.fromExpression("vertex.name = 'PGX'")
```

Java

```
VertexFilter vertexFilter = VertexFilter.fromExpression("vertex.name =
'PGX'");
```

Python

```
vertex_filter = VertexFilter("vertex.name = 'PGX'")
```

You can define a new edge filter, as shown in the following code:

- JShell
- Java
- Python

JShell

```
opg4j> var edgeFilter = EdgeFilter.fromExpression("edge.cost > 5")
```

Java

EdgeFilter edgeFilter = EdgeFilter.fromExpression("edge.cost > 5");

Python

```
edge filter = EdgeFilter("edge.cost > 5")
```

27.10.5.2 Defining Result Set Filters

You can define a result set vertex filter, as shown in the following code:

- JShell
- Java

JShell

```
// Evaluates query on graph g to obtain a result set
opg4j> var resultSet = g.queryPgql("SELECT x FROM MATCH (x) WHERE x.age > 24")
// Define a filter on the result set for the column "x"
opg4j> var vertexFilter = VertexFilter.fromPgqlResultSet(resultSet, "x")
// Obtain a vertex set
opg4j> var vertexSet = g.getVertices(vertexFilter)
```

Java

```
// Evaluates query on graph g to obtain result set
PgqlResultSet resultSet = g.queryPgql("SELECT x FROM MATCH (x) WHERE x.age >
24");
// Define a filter on the result set for the column "x"
VertexFilter vertexFilter = VertexFilter.fromPgqlResultSet(resultSet, "x");
// Obtain a vertex set
VertexSet vertexSet = g.getVertices(vertexFilter);
```

You can define a result set edge filter, as shown in the following code:

- JShell
- Java

JShell

```
// Evaluates query on graph g to obtain result set
opg4j> var resultSet = g.queryPgql("SELECT e FROM MATCH ()-[e]->() WHERE
e.weight >= 8")
// Define a filter on the result set for the column "e"
opg4j> var edgeFilter = EdgeFilter.fromPgqlResultSet(resultSet, "e")
```



```
// Obtain an edge set
opg4j> var edgeSet = g.getEdges(edgeFilter)
```

Java

```
// Evaluates query on graph g to obtain result set
PgqlResultSet resultSet = g.queryPgql("SELECT e FROM MATCH ()-[e]->() WHERE
e.weight >= 8");
// Define a filter on the result set for the column "e"
EdgeFilter edgeFilter = EdgeFilter.fromPgqlResultSet(resultSet, "e");
// Obtain an edge set
EdgeSet edgeSet = g.getEdges(edgeFilter);
```

27.10.5.3 Creating a Subgraph from PGQL Result Set

A subgraph can be obtained from a PGQL result set using result set filters.

You can create a subgraph from a result set vertex filter, as shown in the following code:

- JShell
- Java

JShell

```
// Evaluates query on graph g to obtain result set
opg4j> var resultSet = g.queryPgql("SELECT x FROM MATCH (x) WHERE x.age > 24")
// Define a filter on the result set for the column "x"
opg4j> var resultSetVertexFilter = VertexFilter.fromPgqlResultSet(resultSet,
"x")
// Create a subgraph of g containing the matched vertices in the resultSet
and the edges that connect them if any.
opg4j> var newGraph = g.filter(resultSetVertexFilter)
```

Java

```
// Evaluates query on graph g to obtain result set
PgqlResultSet resultSet = g.queryPgql("SELECT x MATCH (x) WHERE x.age > 24");
// Define a filter on the result set for the column "x"
VertexFilter resultSetVertexFilter =
VertexFilter.fromPgqlResultSet(resultSet, "x");
// Create a subgraph of g containing the matched vertices in the resultSet and the edges that connect them if any.
PgxGraph newGraph = g.filter(resultSetVertexFilter);
```

You can create a subgraph from a result set edge filter, as shown in the following code:

- JShell
- Java

JShell

```
// Evaluates query on graph g to obtain result set
opg4j> var resultSet = g.queryPgql("SELECT e FROM MATCH ()-[e]->() WHERE
e.cost < 100")
// Define a filter on the result set for the column "e"
opg4j> var resultSetEdgeFilter = EdgeFilter.fromPgqlResultSet(resultSet, "e")
// Create a subgraph of g containing the matched edges in the resultSet and
their corresponding source and destination vertices.
opg4j> var newGraph = g.filter(resultSetEdgeFilter)
```

Java

```
// Evaluates query on graph g to obtain result set
PgqlResultSet resultSet = g.queryPgql("SELECT e FROM MATCH ()-[e]->() WHERE
e.cost < 100");
// Define a filter on the result set for the column "e"
EdgeFilter resultSetEdgeFilter = EdgeFilter.fromPgqlResultSet(resultSet, "e");
// Create a subgraph of g containing the matched edges in the resultSet and
their corresponding source and destination vertices.
PgxGraph newGraph = g.filter(resultSetEdgeFilter);</pre>
```

27.10.5.4 Defining Collection Filters

You can define a vetex collection filter, as shown in the following code:

- JShell
- Java

JShell

```
// Obtain a vertex collection from an algorithm, query execution or any other
way
opg4j> VertexCollection<?> vertexCollection = ...
// Define a filter from the collection
opg4j> var vertexFilter = VertexFilter.fromCollection(vertexCollection)
```

Java

// Obtain a vertex collection from an algorithm, query execution or any other
way

```
VertexCollection<?> vertexCollection = ...
// Define a filter from the collection
VertexFilter vertexFilter = VertexFilter.fromCollection(vertexCollection);
```

You can define a edge collection filter, as shown in the following code:

- JShell
- Java

JShell

```
// Obtain an edge collection from an algorithm, query execution or any other
way
opg4j> EdgeCollection edgeCollection = ...
// Define a filter from the collection
opg4j> var edgeFilter = EdgeFilter.fromCollection(edgeCollection)
```

Java

```
// Obtain an edge collection from an algorithm, query execution or any other
way
EdgeCollection edgeCollection = ...
// Define a filter from the collection
EdgeFilter edgeFilter = EdgeFilter.fromCollection(edgeCollection);
```

27.10.5.5 Creating a Subgraph from Collection Filters

A subgraph can be obtained by using vertex or edge collection filters.

You can create a subgraph from vertex collection filter, as shown in the following code:

- JShell
- Java

JShell

```
// Obtain a vertex collection from an algorithm, query execution or any other
way
opg4j> VertexCollection<?> vertexCollection = ...
// Define a filter from the collection
opg4j> var vertexFilter = VertexFilter.fromCollection(vertexCollection)
// Create a subgraph of g containing the matched vertices in the vertex
```



```
collection and the edges that connect them if any.
opg4j> var newGraph = g.filter(vertexFilter)
```

Java

```
// Obtain a vertex collection from an algorithm, query execution or any other
way
VertexCollection<?> vertexCollection = ...
// Define a filter from the collection
VertexFilter vertexFilter = VertexFilter.fromCollection(vertexCollection);
// Create a subgraph of g containing the matched vertices in the vertex
collection and the edges that connect them if any.
PgxGraph newGraph = g.filter(vertexFilter);
```

You can create a subgraph from edge collection filter, as shown in the following code:

- JShell
- Java

JShell

```
// Obtain an edge collection from an algorithm, query execution or any other
way
opg4j> EdgeCollection edgeCollection = ...
// Define a filter from the collection
opg4j> var edgeFilter = EdgeFilter.fromCollection(edgeCollection)
// Create a subgraph of g containing the matched edges in the collection and
their corresponding source and destination vertices.
opg4j> var newGraph = g.filter(edgeFilter)
```

Java

```
// Obtain an edge collection from an algorithm, query execution or any other
way
EdgeCollection edgeCollection = ...
// Define a filter from the collection
EdgeFilter edgeFilter = EdgeFilter.fromCollection(edgeCollection);
// Create a subgraph of g containing the matched edges in the collection and
their corresponding source and destination vertices.
PgxGraph newGraph = g.filter(edgeFilter);
```

27.10.5.6 Combining Filter Expressions

Any filter expression used for subgraph filtering, can be combined with any other filter expression to form a new filter expression.

Filters can be combined using the following operations:

- intersection
- union

The intersection of two filters will only keep a vertex or edge, if both filters would accept it.



The intersection of two filters will not behave as an ${\tt AND}$ in the filter expression.

The union of two filters will keep a vertex or edge, if one of the filters would accept it.



The union of filters will not behave as an OR in the filter expression.

In the following example an edge filter is intersected with a vertex filter. The resulting subgraph will only include vertices that have the name 'PGX'' and will only include edges that have a cost greater than 5.

- JShell
- Java
- Python

JShell

```
opg4j> var edgeFilter = EdgeFilter.fromExpression("edge.cost > 5")
opg4j> var vertexFilter = VertexFilter.fromExpression("vertex.name = 'PGX'")
opg4j> var combinedFilter = edgeFilter.intersect(vertexFilter)
```

Java

```
EdgeFilter edgeFilter = EdgeFilter.fromExpression("edge.cost > 5");
VertexFilter vertexFilter = VertexFilter.fromExpression("vertex.name = 'PGX'");
GraphFilter combinedFilter = edgeFilter.intersect(vertexFilter);
```

Python

```
edge_filter = EdgeFilter("edge.cost > 5")
vertex_filter = VertexFilter("vertex.name = 'PGX'")
combined filter = edge filter.intersect(vertex filter)
```



In contrast, the subgraph created by the union of those filters will include vertices that either have the name 'PGX' or that has an incoming or outgoing edge with a cost greater than 5. It will also include edges with a cost greater than 5, as well as edges for which the source and destination vertex have the name 'PGX'.

27.10.5.7 Creating a Subgraph Using Filter Expressions with Partitioned IDs

You can create a subgraph using filter expressions with partitioned IDs.

For example, the following creates a subgraph that contains only a single vertex with ID Account(1):

- JShell
- Java
- Python

JShell

```
opg4j> PgxGraph subgraph = g.filter(VertexFilter.fromExpression("vertex =
'Accounts(1)'"))
subgraph ==> PgxGraph[name=sub-graph_26,N=1,E=0,created=1630414040396]
```

Java

```
PgxGraph subgraph = g.filter(VertexFilter.fromExpression("vertex =
'Accounts(1)'"));
```

Python

```
subgraph = graph.filter(VertexFilter.from_expression("vertex =
'Accounts(1)'"))
```

The following example creates a subgraph that contains only a single edge with ID Transfers(1), and two accompanying vertices:

- JShell
- Java
- Python

JShell

```
opg4j> PgxGraph subgraph = g.filter(EdgeFilter.fromExpression("edge =
'Transfers(1)'"))
subgraph ==> PgxGraph[name=sub-graph 27,N=2,E=1,created=1630414144529]
```

Java

```
PgxGraph subgraph = g.filter(EdgeFilter.fromExpression("edge =
'Transfers(1)'"));
```

Python

```
subgraph = graph.filter(EdgeFilter.from_expression("edge = 'Transfers(1)'"))
```

27.11 Advanced Task Scheduling Using Execution Environments

This guide shows how you can use the advanced scheduling features of the enterprise scheduler.

The following topics provide more detailed information on enabling and scheduling tasks using the execution environment:

- · Prerequisites for Using the Enterprise Scheduler
- Enabling Enterprise Scheduler Features
- Retrieving and Inspecting the Execution Environment
- Modifying and Submitting Tasks Under an Updated Environment
- Using Lambda Syntax
- Enterprise Scheduler Configuration Guide

27.11.1 Prerequisites for Using the Enterprise Scheduler

- Ensure that you meet the following system prerequisites to use the enterprise scheduler feature of the graph server (PGX):
 - Operating System: Linux (x86_64)
 - The following shared libraries are required:
 - * The GNU C Library libc.so.6 (GLIBC 2.6)
 - * The GNU dynamic linker/loader ld-linux-x86-64.so.2 (GLIBC 2.3)
 - * The POSIX Threading Library libpthread.so.0 (GLIBC 2.3.2)
 - * The Standard Math Library libm.so.6 (GLIBC 2.2.5)
 - * The Realtime Extensions library librt.so.1 (GLIBC 2.2.5)
 - * The NUMA policy support library libnuma.so.1 (libnuma_1.2)
 - * The GCC low-level runtime library libgcc s.so.1 (GCC 3.4)



- * The GNU C++ Library libstdc++.so.6 (GLIBCXX 3.4.19 and CXXABI 1.3.5)
- Ensure that you set the scheduler parameter in the pgx.conf file as shown: "scheduler": "enterprise scheduler"

Note:

When using the enterprise scheduler, if the graph server (PGX) fails to start with the following error message in the log file - The enterprise scheduler backend is not supported on this system, then note that the server no longer falls back to the basic scheduler.

If you wish to use the basic scheduler then you must set the scheduler parameter in the pgx.conf file as shown:

"scheduler": "basic scheduler"

27.11.2 Enabling Enterprise Scheduler Features

You can enable the enterprise scheduler features, by setting the flag allow_override_scheduling_information of the the graph server (PGX) configuration file to true:

```
{"allow override scheduling information":true}
```

See Configuration Parameters for the Graph Server (PGX) Engine for all configuration options of the graph server (PGX).

27.11.3 Retrieving and Inspecting the Execution Environment

Execution environments are bound to a session. You can retrieve the execution environment for a session by calling <code>getExecutionEnvironment()</code> on a <code>PqxSession</code>:

- JShell
- Java

JShell

```
opg4j> execEnv.getValues()
==> [analysis-pool.max_num_threads=4, analysis-pool.weight=4, analysis-
pool.priority=MEDIUM, io-pool.num_threads_per_task=4, fast-track-analysis-
pool.max_num_threads=4, fast-track-analysis-pool.weight=1, fast-track-
analysis-pool.priority=HIGH]
```

Java

```
import oracle.pgx.api.*;
import java.util.List;
import java.util.Map.Entry;
```

```
List<Entry<String, Object>> currentValues = execEnv.getValues();
for (Entry<String, Object> value : currentValues) {
   System.out.println(value.getKey() + " = " + value.getValue());
}
```

See Enterprise Scheduler Configuration Guide for the values of an unmodified execution environment.

To retrieve the sub-environments use the <code>getIoEnvironment()</code>, <code>getAnalysisEnvironment()</code> and <code>getFastAnalysisEnvironment()</code> methods. Each sub-environment has their own <code>getValues()</code> method for retrieving the configuration of the sub-environment.

- JShell
- Java

JShell

```
opg4j> var ioEnv = execEnv.getIoEnvironment()
ioEnv ==> IoEnvironment[pool=io-pool]
opg4j> ioEnv.getValues()
$5 ==> {num_threads_per_task=4}

opg4j> var analysisEnv = execEnv.getAnalysisEnvironment()
analysisEnv ==> CpuEnvironment[pool=analysis-pool]
opg4j> analysisEnv.getValues()
$7 ==> {max_num_threads=4, weight=4, priority=MEDIUM}

opg4j> var fastAnalysisEnv = execEnv.getFastAnalysisEnvironment()
fastAnalysisEnv ==> CpuEnvironment[pool=fast-track-analysis-pool]
opg4j> fastAnalysisEnv.getValues()
$9 ==> {max_num_threads=4, weight=1, priority=HIGH}
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.executionenvironment.*;
import java.util.Map;

IoEnvironment ioEnv = execEnv.getIoEnvironment();
CpuEnvironment analysisEnv = execEnv.getAnalysisEnvironment();
CpuEnvironment fastAnalysisEnv = execEnv.getFastAnalysisEnvironment();

for (Entry<String, Object> value : ioEnv.getValues().getEntrySet()) {
   System.out.println(value.getKey() + " = " + value.getValue());
}

for (Entry<String, Object> value : analysisEnv.getValues().getEntrySet()) {
   System.out.println(value.getKey() + " = " + value.getValue());
}
```



```
for (Entry<String, Object> value : fastAnalysisEnv.getValues().getEntrySet())
{
   System.out.println(value.getKey() + " = " + value.getValue());
}
```

27.11.4 Modifying and Submitting Tasks Under an Updated Environment

You can modify an Input/Output (IO) environment in the number of threads by using the setNumThreadsPerTask() method of the IoEnvironment. The value is updated immediately and all tasks that are submitted after updating it are executed with the updated value.

- JShell
- Java

JShell

```
opg4j> ioEnv.setNumThreadsPerTask(8)
opg4j> var g = session.readGraphWithProperties(...)
==> PgxGraph[name=graph,N=3,E=6,created=0]
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.executionenvironment.*;
ioEnv.setNumThreadsPerTask(8);
PgxGraph g = session.readGraphWithProperties(...);
```

You can reset an environment to their initial values by calling the <code>ioEnv.reset()</code> method. Additionally, you can reset all environments at once by calling <code>execEnv.reset()</code> on the <code>ExecutionEnvironment class</code>.

You can modify CPU environments in their weight, priority and maximum number of threads using the setWeight(), setPriority() and setMaxThreads() methods:

- JShell
- Java



```
opg4j> analysisEnv.setWeight(50)
opg4j> fastAnalysisEnv.setMaxNumThreads(1)
opg4j> var rank = analyst.pagerank(g)
rank ==> VertexProperty[name=pagerank,type=double,graph=my-graph]
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.executionenvironment.*;
analysisEnv.setWeight(50);
fastAnalysisEnv.setMaxThreads(1);
Analyst analyst = session.createAnalyst();
VertexProperty rank = analyst.pagerank(g);
```

27.11.5 Using Lambda Syntax

Generally you can perform the following actions in the environment:

- 1. Set up the execution environment
- Execute task
- 3. Reset execution environment

All these actions can be combined and performed in a single step using the set method. For each set method there is a method using the with prefix which takes the updated value and a lambda which should be executed using the updated value.

For example, use withNumThreadsPerTask() instead of setNumThreadsPerTask() as shown:

- JShell
- Java

JShell

```
opg4j> var g = ioEnv.withNumThreadsPerTask(8, () ->
session.readGraphWithProperties(...))
==> PgxGraph[name=graph, N=3, E=6, created=0]
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.executionenvironment.*;

PgxGraph g = ioEnv.withNumThreadsPerTask(8, () ->
session.readGraphWithProperties(...));
```



The preceding code execution is equivalent to the following sequence of actions:

```
var oldValue = ioEnv.getNumThreadsPerTask()
ioEnv.setNumThreadsPerTask(currentValue)
var g = session.readGraphWithProperties(...)
ioEnv.setNumThreadsPerTask(oldValue)
```

27.11.6 Enterprise Scheduler Configuration Guide

This chapter describes the extra configuration options for the enterprise scheduler.



These configuration options are only available if the scheduler configuration variable is set to enterprise_scheduler in Configuration Parameters for the Graph Server (PGX) Engine.

The configuration is divided into the following two parts:

- 1. enteprise scheduler config: for setting details about how tasks should be scheduled
- 2. enterprise_scheduler_flags: where you can configure the enterprise scheduler in more detail

Enterprise Scheduler Fields

Field	Туре	Description	Default
analysis_task _config	object	Configuration for analysis tasks.	weight <no-of-cpus></no-of-cpus>
			<pre>priority medium</pre>
			max_threads <no-of-cpus></no-of-cpus>
<pre>fast_analysis _task_config</pre>	object	Configuration for fast analysis tasks.	weight
			<pre>priority high</pre>
			max_threads <no-of-cpus></no-of-cpus>
<pre>max_num_concu rrent_io_task s</pre>	integer	Maximum number of concurrent io tasks at a time.	3
<pre>num_io_thread s_per_task</pre>	integer	Number of io threads to use per task.	<no-of-cpus></no-of-cpus>



Analysis Task Config Fields

Field	Туре	Description	Default
max_threads	integer	A hard limit on the number of threads to use for a task.	required
priority	<pre>enum[high, medium, low]</pre>	The priority of the task. Threads are given to the task with the highest priority at the moment of execution. If there are more threads that have the highest priority, threads are given to the tasks according to their weight	required
weight	integer	The weight of the task. Threads are given to tasks proportionally to their weight. Tasks with higher weight will get more threads than tasks with lower weight. Tasks with the same weight will get the same amount of threads.	required

Enterprise Scheduler Flags

Field	Туре	Description	Default
show_allocati	boolean	If true show memory allocation information.	false
show_environm ent	boolean	If true show version numbers and main environment settings at startup.	false
show_logging	boolean	If true enable summary logging. This is available even in non-debug builds and includes information such as the machine hardware information obtained at start-up, and per-job / per-loop information about the workload.	false
<pre>show_profilin g</pre>	boolean	If true show profiling information.	false
show_schedule r_state	boolean	If true dump scheduler state on each update.	false
show_warnings	boolean	If true enable warnings. These are non-fatal errors. For example, if a NUMA-aware allocation cannot be placed on the intended socket.	true

Example 27-4 Custom Enterprise Scheduler Configuration

This configuration sets the number of io threads per task to 16, increases the maximum number of concurrent io tasks to 5. It also sets the configuration for fast analysis tasks to have a weight of 1, priority of "high" and sets a limit to the maximum number of threads used to 1.

```
{
  "enterprise_scheduler_config": {
    "num_io_threads_per_task": 16,
    "max_num_concurrent_io_tasks": 5,
    "fast_analysis_task_config": {
        "weight": 1,
        "priority": "high",
        "max_threads": 1
    }
```



```
}
```

Example 27-5 Using the Enterprise Scheduler Flags

This configuration enables extra logging output from the enterprise scheduler.

```
{
   "enterprise_scheduler_flags": {
     "show_logging": true
   }
}
```

27.12 Admin API

This guide shows how to use the graph server (PGX) Admin API to inspect the server state including sessions, graphs, tasks, memory and thread pools.

- Get a Server Instance
- Get Inspection Data
- Get Active Sessions
- · Get Cached Graphs
- · Get Published Graphs
- · Get Currently Loading Graphs
- Get Tasks
- Get Available Memories

27.12.1 Get a Server Instance

You can get a PGX Instance as shown in the following code:

- Java
- Python

Java

```
import oracle.pgx.api.*;
ServerInstance instance = Pgx.getInstance(Pgx.EMBEDDED_URL);
```

```
instance = pypgx.get_session(base_url = "url")
```



27.12.2 Get Inspection Data

Inspection data is information about the server state.

You can get the inspection data using the following code. Note that you must the PGX SERVER GET INFO permission to access the server state data.

- JShell
- Java
- Python

JShell

```
var serverState = instance.getServerState()
```

Java

```
JsonNode serverState = instance.getServerState();
```

Python

```
server_state = instance.get_server_state()
```

This returns a JsonNode which contains all the administration information, such as number of graphs loaded, number of sessions, memory usage for graphs, properties, and so on.

```
{
    "cached_graphs": [],
    "published_graphs": [],
    "graphs_currently_loading": [],
    "sessions": [],
    "tasks": [],
    "pools": [],
    "memory": {}
}
```

Note that the sessions parameter lists all the sessions and the memory used by the sessions along with the user information for each session.



27.12.3 Get Active Sessions

serverState.get ("sessions") returns an array of current active sessions. Each entry contains information about a session.

```
"session id": "530b5f9a-75c4-4838-9cc3-44df44b035c5",
"source": "testServerState",
"user": "user1",
"task timeout ms":0,
"idle timeout ms":0,
"alive ms":237,
"total analysis time ms":115,
"state": "RELEASED",
"private graphs":[
   {
      "name": "anonymous graph 1",
      "creation timestamp":1589317879755,
      "is transient":true,
      "memory":{
         "topology bytes":46,
         "key mapping bytes":30,
         "persistent property mem bytes":0,
         "transient property mem bytes":0
      "vertices num":1,
      "edges num":0,
      "persistent vertex properties":[
      ],
      "persistent edge properties":[
      "transient vertex properties":[
      "transient edge properties":[
"published graphs":[
   {
      "name": "multigraph",
      "creation timestamp":1589317879593,
      "is transient":false,
      "memory":{
         "topology bytes":110,
         "key mapping bytes":56,
         "persistent property_mem_bytes":64,
         "transient property mem bytes":0
      },
      "vertices num":2,
      "edges num":6,
```

```
"persistent_vertex_properties":[
            {
               "loaded":true,
               "mem_size_bytes":16,
               "name":"tProp",
               "type": "string"
         ],
         "persistent_edge_properties":[
            {
               "loaded":true,
               "mem size bytes":48,
               "name":"cost",
               "type": "double"
         ],
         "transient_vertex_properties":[
         "transient_edge_properties":[
         ]
      }
   ]
}
```

The following table explains session information fields:

Table 27-6 Session Information Options

Field	Description
sessionID	Session ID generated by the graph server (PGX)
source	Descriptive string identifying the client session
user	Session owner
task_timeout_ms	Timeout to interrupt long-running tasks submitted by sessions (algorithms, I/O tasks) in milliseconds. Set to zero for infinity/no timeout.
idle_timeout_ms	Timeout of idling sessions in milliseconds. Set to zero for infinity/no timeout.
alive_ms	Session's age in milliseconds
total_analysis_time_ms	Total session's executing time in milliseconds
state	Current session of the session can be Idle, Submitted, Released or Terminating
private_graphs	Session bounded graphs
published_graphs	Published graphs pointed to from the session

Note:

The is_transient field indicates if the graph is transient. A graph is transient if it is not loaded from an external source.

27.12.4 Get Cached Graphs

The server state contains also cached graph information <code>serverState.get("cached_graphs")</code> which returns a collection of graphs cached in memory. Each entry contains information about a graph as shown:

```
{
   "name": "sf-1589317879394",
   "creation_timestamp":1589317879394,
   "vertex_properties":[
         "loaded":true,
         "mem size bytes":478504,
         "name": "prop1",
         "type": "double"
   ],
   "edge_properties":[
      {
         "loaded":true,
         "mem size bytes":1197720,
         "name": "cost",
         "type": "double"
      },
      {
         "loaded":true,
         "mem size bytes":598860,
         "name":"0",
         "type": "integer"
      }
   ],
   "memory":{
      "topology bytes":3921814,
      "key mapping bytes":1407466,
      "property mem bytes":2275084
   },
   "vertices num":59813,
   "edges num":149715
```

The following table explains graph information fields:

Table 27-7 Graph Information

Field	Description
name	Name of the graph.
creation_timestamp	Creation timestamp of the graph.
vertex_properties	List of vertex properties, each entry contains the name, type, memory size used by the property, and a boolean flag to indicate if the property is loaded into memory.
edge_properties	List of edges properties, similar to vertex properties.



Table 27-7 (Cont.) Graph Information

Field	Description
Field	Description
memory	Memory size used by the whole graph (topology, key mappings and properties).
vertices_num	Number of vertices.
edges_num	Number of edges.

27.12.5 Get Published Graphs

serverState.get("published_graphs") returns a list of published graphs.

Each graph entry contains information about the published graph, similar to cached_graphs.

27.12.6 Get Currently Loading Graphs

serverState.get("graphs_currently_loading") returns progress information about graphs which are currently loading.

Each entry, corresponding to one graph, is shown as follows:

```
"name": "anonymous graph 1",
    "session id": "530b5f9a-75c4-4838-9cc3-44df44b035c5",
    "start loading timestamp": 1605468453030,
    "elapsed loading time ms": 281742,
    "num vertices read": 10000000,
    "num edges read": 196500000,
    "num edge providers loaded": 1,
    "num edge providers remaining": 9,
    "num vertex providers loaded": 1,
    "num vertex providers remaining": 0,
    "loading phase": "reading edges",
    "loading phase start timestamp": 1605468453085,
    "loading phase elapsed time ms": 281687,
    "loading phase state": "current vertex provider index: 1, number of
vertices read for prorvider: 0, current edge provider index: 1, number of
edges read for prorvider: 76,500,000"
```

The name field contains a temporary name of the graph. It may not be equal to the name that is assigned to graph after loading.

Fields indicating the number of read vertices and edges are updated in regular intervals of 10,000 entities.

The field <code>loading_phase</code> indicates the current phase during graph loading. Valid values are "reading edges" or "building graph indices". For some loading phases, the field <code>loading_phase_state</code> contains a string with additional information on the phase. However, not all loading phases provide this additional information.

Note

graphs_currently_loading is supported for data formats CSV, ADJ_LIST, EDGE_LIST, TWO_TABLES and PG (FLAT_FILE) for homogeneous graphs and for formats CSV and RDBMS for partitioned graphs.

27.12.7 Get Tasks

serverState.get("tasks") returns the last 100 queued tasks.

Each task has a type, the pool to be executed on (the task might be already executed) and other status fields ({Queued|Started|Done} time), and a sessionid if the task belongs to a session.

27.12.8 Get Available Memories

This section contains a map of available memories, the key is the hostname and the value is a list of current available memories (managed and unmanaged). Each entry contains how much memory is free, used and the maximum available memory.

27.13 PgxFrames Tabular Data-Structure

PgxFrame is a data-structure to load, store and manipulate tabular data. It contains rows and columns. A PgxFrame can contain multiple columns where each column consist of elements of the same data type, and has a name. The list of the columns with their names and data types defines the schema of the frame. (The number of rows in the PgxFrame is not part of the schema of the frame.)

PgxFrame provides some operations that also output PgxFrames (described later in the tutorial). Those operations can be performed in-place (meaning that the frame is mutated during the operation) in order to save memory. In place operations should be used whenever possible. However, we provide out-place variants, i.e., a new frame is created during the operation.

The following table lists all the in-place operations along with the respective out-place operations:

Table 27-8 Mapping between In-Place and Out-Place Operations

In-place operations	Out-place operations
headInPlace	head
tailInPlace	tail
flattenAllInPlace	flattenAll
renameColumnInPlace	renameColumn
renameColumnsInPlace	renameColumns
selectInPlace	select

- Converting PgqlResultSet to a PgxFrame
- Storing a PgxFrame to a Database
- Storing a PgxFrame to a CSV File

- Union of PGX Frames
- Joining PGX Frames
- Printing the Content of a PgxFrame
- Destroying a PgxFrame
- Loading and Storing Vector Properties
- Flattening Vector Properties
- PgxFrame Helpers
- Converting a PgxFrame to PgqlResultSet
- PgxFrame to Pandas DataFrame Conversions
- Loading a PgxFrame from a Database
- Loading a PgxFrame from a CSV File
- Loading a PgxFrame from Client-Side Data
- Creating a Graph from Multiple PgxFrame Objects

27.13.1 Converting PgqlResultSet to a PgxFrame

The following example describes how to save the PgqlResultSet to a PgxFrame.

- JShell
- Java
- Python

JShell

```
opg4j> var pg = session.readGraphByName("BANK GRAPH",GraphSource.PG PGQL)
opq4j> var rs = pq.queryPqql("SELECT e.* FROM MATCH (v1:Accounts)-
[e:Transfers] -> (v2:Accounts) LIMIT 5")
opg4j> var rsFrame = rs.toFrame()
opg4j> rsFrame.print()
| FROM ACCT ID | TO ACCT ID | AMOUNT | DESCRIPTION |
 999
        | 934 | 1000.0 | transfer
1 999
            | 71
                        | 1000.0 | transfer
1 999
            | 839
                        | 1000.0 | transfer
| 999
            | 891
                        | 1000.0 | transfer
1 999
             | 919
                         | 1000.0 | transfer
$4 ==> oracle.pgx.api.frames.internal.PgxFrameImpl@39a1c200
```

Java

import oracle.pgx.api.frames.*;

```
PgxGraph pg = session.readGraphByName("BANK_GRAPH",GraphSource.PG_PGQL);
PgqlResultSet rs = pg.queryPgql("SELECT e.* FROM MATCH (v1:Accounts)-
[e:Transfers]->(v2:Accounts) LIMIT 5");
PgxFrame rsFrame = rs.toFrame();
rsFrame.print();
```

Python

```
>>> pg = session.read graph by name('BANK GRAPH', 'pg pgql')
>>> rs = pg.query pgql("SELECT e.* FROM MATCH (v1:Accounts)-[e:Transfers]-
>(v2:Accounts) LIMIT 5")
>>> rs frame = rs.to frame()
>>> rs frame.print()
+----+
| FROM ACCT ID | TO ACCT ID | AMOUNT | DESCRIPTION |
+----+
         | 418 | 1000.0 | transfer
| 1
          | 584
                    | 1000.0 | transfer
| 1
          | 644
                    | 1000.0 | transfer
           | 672
                     | 1000.0 | transfer
          | 259
                    | 1000.0 | transfer
```

Converting PgqlResultSet to pandas DataFrame

You can also save the PgqlResultSet to pandas DataFrame as shown in the following example:

27.13.2 Storing a PgxFrame to a Database

When storing a PgxFrame to a database, the frame is stored as a table, where the columns correspond to the columns of the PgxFrame and the rows correspond to the rows of the PgxFrame. Note that the column order preservation may or may not happen when storing a PgxFrame in the database.

The following example shows how to store the PgxFrame in the database. The example assumes that you are storing the PgxFrame in the current logged in schema.

- JShell
- Java

Python

JShell

```
opg4j> rsFrame.write().
           db().
                                     // select the "format" to be relational
db
           name("F1").
                                     // name of the frame
                                     // name of the table in which the data
           tablename("T1").
must be stored
           overwrite(true).
                                     // indicates that if there is a table
with the same name, it will be overwritten (truncated)
           connections (16).
                                     // indicates that 16 connections can be
used to store in parallel
           store()
```

Java

```
rsFrame.write()
    .db()
    .name("F1")
    .tablename("T1")
    .overwrite(true)
    .connections(16)
    .store();
```

Python

```
>>> rs_frame.write().db().\
... table_name('T1').\
... overwrite(True).\
... store()
```

Alternatively, you can also store the PgxFrame in a different schema as shown in the following example. Ensure that you have CREATE TABLE privilege when writing to a different schema:

- JShell
- Java
- Python

JShell

Java

```
rsFrame.write()
   .db()
                              // select the "format" to be relational db
                              // name of the frame
    .name("framename")
    .tablename("tablename")
                             // name of the table in which the data must be
stored
                             // indicates that if there is a table with the
    .overwrite(true)
same name, it will be overwritten (truncated)
   .connections(16)
                            // indicates that 16 connections can be used to
store in parallel
    .jdbcUrl("<jdbcUrl>")
    .username("<db username>")
    .password("<password>")
    .store();
```

Python

```
>>> rs_frame.write().db().\
... table_name('T1').\
... overwrite(True).\
... jdbc_url("<jdbcUrl>").\
... username("<db_username>").\
... password("<password>").\
... store()
```

27.13.3 Storing a PgxFrame to a CSV File

In order to write a PgxFrame to a CSV file, you first need to explicitly authorize access to the corresponding directories by defining a directory object pointing to the directory (on the graph server) where the file needs to be written.

```
CREATE OR REPLACE DIRECTORY graph_files AS '/tmp';
GRANT READ, WRITE ON DIRECTORY graph files TO GRAPH DEVELOPER;
```

Also, note the following:

- The directory in the CREATE DIRECTORY statement must exist on the graph server (PGX).
- The directory must be writable at the OS level by the graph server (PGX).

The preceding code grants the privileges on the directory to the <code>GRAPH_DEVELOPER</code> role. However, you can also grant permissions to an individual user:

```
GRANT WRITE ON DIRECTORY graph_files TO <graph_user>;
```

You can then save a PgxFrame to a CSV file as shown in the following example:

- JShell
- Java
- Python

JShell

```
opg4j> rsFrame.write().overwrite(true).csv("/tmp/Transfers.csv")
```

Java

```
rsFrame.write().overwrite(true).csv("/tmp/Transfers.csv");
```

Python

```
>>> rs frame.store("/tmp/Transfers.csv")
```

27.13.4 Union of PGX Frames

You can join two PgxFrames that have compatible columns (that is, same type and order).

- JShell
- Java
- Python

JShell

```
opg4j> <first-frame>.union(<secondframe>).print()
```

Java

<first-frame>.union(<first-frame>).print();

Python

```
<first-frame>.union(<first-frame>).print()
```

The rows of the resulting PaxFrame are the union of the rows from the two original frames.

Note that the union operation does not remove duplicate rows that resulted by joining the two frames.

27.13.5 Joining PGX Frames

You can join two frames whose rows are correlated through one of the columns using the join functionality. This allows us to combine frames by checking for equality between rows for a specific column.

The following example shows joining two PgxFrames exampleFrame and moreInfoFrame on the name column by calling the join method.

- JShell
- Java
- Java

JShell

```
opg4j> exampleFrame.join(moreInfoFrame, "name", "leftFrame",
"rightFrame").print()
```

Java

```
exampleFrame.join(moreInfoFrame, "name", "leftFrame", "rightFrame").print();
```

Java

```
example frame.join(moreInfoFrame, "name", "leftFrame", "rightFrame").print()
```

The result may appear as shown:



The joined frame contains the columns of the two frames involved in the operation for the rows with the same name.



The column prefixes specified in the join() call, leftFrame and rightFrame.

27.13.6 Printing the Content of a PgxFrame

You can observe the contents of a frame using the print functionality as shown:

- JShell
- Java
- Python

JShell

```
opg4j> exampleFrame.print()
```

Java

exampleFrame.print();

Python

example frame.print()

The output appears as follows:

+-		 	 	 	+
	FROM_ACCT_ID	TO_ACCT_ID	AMOUNT	DESCRIPTION	
+-		 	 	 	+
	2	546	1000.0	transfer	
	2	840	1000.0	transfer	
	2	493	1000.0	transfer	
	2	693	1000.0	transfer	
	2	833	1000.0	transfer	
+-		 	 	 	+

27.13.7 Destroying a PgxFrame

PgxFrames consumes a lot of memory on the graph server (PGX) if they have a lot of rows or columns. Hence, it is necessary to close them with the close() operation. After this operation, the content of the PgxFrame is not available anymore.

You can close a frame as shown:

- JShell
- Java
- Python

JShell

```
opg4j> exampleFrame.close()
```

Java

exampleFrame.close();

Python

example_frame.close()

27.13.8 Loading and Storing Vector Properties

You can load or store vector properties which are fundamental for PgxML functionality in the graph server (PGX) using PgxFrames.

In order to load a PgxFrame with vector properties, follow the steps as shown:

1. Create the PgxFrame schema, defining the columns as shown:

- JShell
- Java

```
opg4j> var vecFrameSchema = List.of(
  columnDescriptor("intProp", DataTypes.INTEGER TYPE),
  columnDescriptor("intProp2", DataTypes.INTEGER TYPE),
  columnDescriptor("vectProp", DataTypes.vector(DataTypes.FLOAT TYPE, 3)),
 columnDescriptor("stringProp", DataTypes.STRING TYPE),
  columnDescriptor("vectProp2", DataTypes.vector(DataTypes.FLOAT TYPE, 2))
).toArray(new ColumnDescriptor[0])
Java
ColumnDescriptor[] vecFrameSchema = {
    columnDescriptor("intProp", DataTypes.INTEGER TYPE),
    columnDescriptor("intProp2", DataTypes.INTEGER TYPE),
    columnDescriptor("vectProp", DataTypes.vector(DataTypes.FLOAT TYPE,
3)),
    columnDescriptor("stringProp", DataTypes.STRING TYPE),
    columnDescriptor("vectProp2", DataTypes.vector(DataTypes.FLOAT TYPE,
2))
};
```

- 2. Load the PgxFrame with the given schema from the specified path:
 - JShell
 - Java

JShell

```
opg4j> var vecFrame = session.readFrame().
    db().
    name("vector PgxFrame").
    tablename ("tablename").
                                 // name of the table from where the data
must be loaded
    jdbcUrl("jdbcUrl").
    username("user").
    owner("owner").
                                 // necessary if the table is owned by
another user
    connections (16).
                                  // indicates that 16 connections can be
used to load in parallel
    columns (vecFrameSchema).
                                 // columns to load
    load()
```

Java

```
PgxFrame vecFrame = session.readFrame()
    .name("vector PgxFrame")
    .tablename("tablename")
                                 // name of the table from where the data
must be loaded
    .jdbcUrl("jdbcUrl")
    .username("user")
    .owner("owner")
                                 // necessary if the table is owned by
another user
    .connections(16)
                                 // indicates that 16 connections can be
used to load in parallel
                                 // columns to load
    .columns(vecFrameSchema)
    .load();
```

The final result in the PgxFrame may appear as follows:

+ intProp +	 	intProp2	 	vectProp	 	stringProp vectProp2	-+ -+
0 1 1 2 3		2 1 2 3 1	 	0.1;0.2;0.3 0.1;0.2;0.3 0.1;0.2;0.3	 	testProp0 0.1;0.2 testProp10 0.1;0.2 testProp20 0.1;0.2 testProp30 0.1;0.2 testProp40 0.1;0.2	

27.13.9 Flattening Vector Properties

You can split the vector properties into multiple columns using the flattenAll() operation.

For example, you can flatten the vector properties for the example explained in Loading and Storing Vector Properties as shown:

- JShell
- Java

JShell

```
opg4j> vecFrame.flattenAll()
```

Java

vecFrame.flattenAll();

The resulting flattened PgxFrame may appear as shown:

intPr	op intProp p2_0 vectF	2 vectProp	o_0 vectProp	_1 vectProp	p_2 stringProp
		+			
0	2	0.1	0.2	0.3	testProp0
0.1	0.2	I			
1	1	0.1	0.2	0.3	testProp10
0.1	0.2	I			
1	2	0.1	0.2	0.3	testProp20
0.1	0.2				
2	3	0.1	0.2	0.3	testProp30
0.1	0.2				
3	1	0.1	0.2	0.3	testProp40
0.1	0.2	I			
+					

27.13.10 PgxFrame Helpers

PgxFrame supports the following operations:

- head
- tail
- select
- renameColumns

Head Operation

The head operation can be used to only keep the first rows of a PgxFrame. (The result is deterministic only for ordered PgxFrame.)

- JShell
- Java

JShell

```
opg4j> vecFrame.head(2).print()
```

Java

vecFrame.head(2).print();



The output appears as follows:

+-		 	 	 	 	-+
	intProp	intProp2	vectProp	stringProp	vectProp2	
+-		 	 	 	 	-+
	0	2	0.1;0.2;0.3	testProp0	0.1;0.2	
	1	1	0.1;0.2;0.3	testProp10	0.1;0.2	
+-		 	 	 	 	-+

Tail Operation

The tail operation can be used to only keep the last rows of a PgxFrame. (The result is deterministic only for ordered PgxFrame).

- JShell
- Java

JShell

```
opg4j> vecFrame.tail(2).print()
```

Java

```
vecFrame.tail(2).print();
```

The output appears as follows:

+	intProp		intProp2	 	vectProp	 	stringProp vectProp2	-+
	2		3				testProp30 0.1;0.2 testProp40 0.1;0.2	

Select Operation

The select operation can be used to keep only a specified list of columns of an input PgxFrame.

- JShell
- Java
- Python



```
opg4j> var vecFrameSelected = vecFrame.select("vectProp2", "vectProp",
"stringProp")
```

Java

```
PgxFrame vecFrameSelected =
vecFrame.select("vectProp2","vectProp","stringProp");
```

Python

```
vec_frame_selected = vec_frame.select("vectProp2","vectProp","stringProp")
```

The result may appear as follows:

Rename PgxFrame Columns

You can rename the columns in a PgxFrame to customized names as follows:

- JShell
- Java

JShell

```
opg4j> var vecFrameRenamed = vecFrame.renameColumns(
  renaming("vectProp2", "vectProp2_renamed"),
  renaming("vectProp", "vectProp_renamed"),
  renaming("stringProp", "stringProp_renamed"))
```

Java

The renamed PgxFrame appears as follows:

27.13.11 Converting a PgxFrame to PgqlResultSet

You can convert a PgxFrame to PgqlResultSet as follows:

- JShell
- Java
- Python

JShell

```
opg4j> var resultSet = exampleFrame.toPgqlResultSet()
```

Java

PgqlResultSet resultSet = exampleFrame.toPgqlResultSet();

```
result set = example frame.to pgql result set()
```

You can view the content of the result set through the usual $PgqlResultSet$ APIs. The output
appears as follows:

+							+
from_acct_id		to_acct_id		amount		description	I
+							+
1		418		1000.0		transfer	
1		584		1000.0		transfer	
1		644		1000.0		transfer	
1		672		1000.0		transfer	
1	Ì	259	ĺ	1000.0	Ì	transfer	
+							_

27.13.12 PgxFrame to Pandas DataFrame Conversions

You can save a PgxFrame to a pandas DataFrame as shown in the following example:

```
>>> pandas data frame = example frame.to pandas()
```

Similarly, you can load a PgxFrame from a pandas DataFrame as shown in the following example:

```
>>> example_frame = session.pandas_to_pgx_frame(pandas_data_frame, "example
frame")
```

27.13.13 Loading a PgxFrame from a Database

You can load a PgxFrame from relational tables in an Oracle database. Each column of the relational table will correspond to a column in the loaded frame. When loading a PgxFrame from the database, the default behavior is to detect the table columns and load them all. If not specified explicitly, the connection details of the current user and session are used and the columns are detected automatically.

The following describes the steps to load a PgxFrame from a database table:

Create a Session and an Analyst:

- JShell
- Java
- Python

JShell

```
cd /opt/oracle/graph/
./bin/opg4j
// starting the shell will create an implicit session and analyst
opg4j> import static
oracle.pgx.api.frames.functions.ColumnRenaming.renaming
```

```
opg4j> import static
oracle.pgx.api.frames.schema.ColumnDescriptor.columnDescriptor
opg4j> import oracle.pgx.api.frames.schema.*
opg4j> import oracle.pgx.api.frames.schema.datatypes.*
```

Java

```
import oracle.pgx.api.*;
import oracle.pgx.api.frames.*;
import oracle.pgx.api.frames.functions.*;
import oracle.pgx.api.frames.schema.*;
import oracle.pgx.api.frames.schema.datatypes.*;
import static oracle.pgx.api.frames.functions.ColumnRenaming.renaming;
import static
oracle.pgx.api.frames.schema.ColumnDescriptor.columnDescriptor;

PgxSession session = Pgx.createSession("my-session");
Analyst analyst = session.createAnalyst();
```

Python

```
session = pypgx.get_session(session_name="my-session")
analyst = session.create analyst()
```

- 2. Load a PgxFrame. The example assumes that you are loading the PgxFrame from the current logged in schema.
 - JShell
 - Java
 - Python

JShell

Java

```
PgxFrame exampleFrame = session.readFrame()
    .db()
    .name("Transfers")
```

```
.tablename("T1")
.connections(16)
.load();
```

Python

- 3. If only a subset of the columns must be loaded, then you can specify the columns as shown in the following example. Note that the following example loads the PgxFrame from a different schema.
 - JShell
 - Java
 - Python

JShell

```
opg4j> session.registerKeystore(<pathToKeystore>, <keystorePassword>)
opg4j> var exampleFrame = session.readFrame().
...>
          db().
...>
          name("Transfers").
...>
          tablename("T1").
                                       // name of the table from where
the data must be loaded
...> jdbcUrl("<jdbcUrl>").
...>
          username("<username>").
         keystoreAlias("<keystore alias>").
...>
          connections (16).
                                       // indicates that 16 connections
can be used to load in parallel
...>
        columns(
          columnDescriptor("FROM ACCT ID", DataTypes.INTEGER TYPE),
...>
...>
          columnDescriptor("TO ACCT ID", DataTypes.INTEGER TYPE)
                                      // columns to load
...>
...>
          load()
```

Java

Python

You can also create a graph from the PgxFrame(s). See Creating a Graph from Multiple PgxFrame Objects for more information.

27.13.14 Loading a PgxFrame from a CSV File

In order to load a PgxFrame from a CSV file, you first need to explicitly authorize access to the corresponding directories by defining a directory object pointing to the directory (on the graph server) where the file needs to be written.

```
CREATE OR REPLACE DIRECTORY graph_files AS '/tmp';
GRANT READ, WRITE ON DIRECTORY graph files TO GRAPH DEVELOPER;
```

Also, note the following:

- The directory in the CREATE DIRECTORY statement must exist on the graph server (PGX).
- The directory must be readable at the OS level by the graph server (PGX).

The preceding code grants the privileges on the directory to the <code>GRAPH_DEVELOPER</code> role. However, you can also grant permissions to an individual user:

```
GRANT READ ON DIRECTORY graph files TO <graph user>;
```

You can then load a PgxFrame from a CSV file as shown in the following example:

- JShell
- Java
- Python

```
opg4j> import oracle.pgx.api.frames.schema.datatypes.*
opq4j> import static
oracle.pgx.api.frames.schema.ColumnDescriptor.columnDescriptor
opg4j> var exampleFrame = session.readFrame().csv().
...>
        name("transfersFrame").
...>
        columns(
         columnDescriptor("from acct id", DataTypes.INTEGER TYPE),
...>
           columnDescriptor("to acct id", DataTypes.INTEGER TYPE),
...>
           columnDescriptor("amount", DataTypes.FLOAT TYPE),
...>
...>
           columnDescriptor("description", DataTypes.STRING TYPE)
...>
         load("/tmp/Transfers.csv")
...>
```

Java

```
import oracle.pgx.api.frames.schema.datatypes.*;
import static oracle.pgx.api.frames.schema.ColumnDescriptor.columnDescriptor;

PgxFrame exampleFrame = session.readFrame().csv().
    name("transfersFrame").
    columns(
        columnDescriptor("from_acct_id", DataTypes.INTEGER_TYPE),
        columnDescriptor("to_acct_id", DataTypes.INTEGER_TYPE),
        columnDescriptor("amount", DataTypes.FLOAT_TYPE),
        columnDescriptor("description", DataTypes.STRING_TYPE)
    ).
    load("/tmp/Transfers.csv");
```

```
>>> example_frame = session.read_frame(). \
... csv(). \
... name('transfers_frame'). \
... columns([('from_acct_id', 'INTEGER_TYPE'),
... ('to_acct_id', 'INTEGER_TYPE'),
... ('amount', 'FLOAT_TYPE'),
... ('description', 'STRING_TYPE')]). \
... load('/tmp/Transfers.csv')
```



27.13.15 Loading a PgxFrame from Client-Side Data

You can also load PgxFrame(s) directly from client-side data.

The following describes the steps to load a PgxFrame from client-side data:

- Create a Session and an Analyst:
 - See step-1 in Loading a PgxFrame from a Database for the code examples.
- 2. Define a frame schema to load a PgxFrame from client side data. For example, the following shows a frame schema defined with various data types:
 - JShell
 - Java
 - Python

JShell

```
opg4j> var exampleFrameSchema = List.of(
    columnDescriptor("name", DataTypes.STRING_TYPE),
    columnDescriptor("age", DataTypes.INTEGER_TYPE),
    columnDescriptor("salary", DataTypes.DOUBLE_TYPE),
    columnDescriptor("married", DataTypes.BOOLEAN_TYPE),
    columnDescriptor("tax_rate", DataTypes.FLOAT_TYPE),
    columnDescriptor("random", DataTypes.LONG_TYPE),
    columnDescriptor("date_of_birth", DataTypes.LOCAL_DATE_TYPE)
)
```

Java

```
List<ColumnDescriptor> exampleFrameSchema = Arrays.asList(
   columnDescriptor("name", DataTypes.STRING_TYPE),
   columnDescriptor("age", DataTypes.INTEGER_TYPE),
   columnDescriptor("salary", DataTypes.DOUBLE_TYPE),
   columnDescriptor("married", DataTypes.BOOLEAN_TYPE),
   columnDescriptor("tax_rate", DataTypes.FLOAT_TYPE),
   columnDescriptor("random", DataTypes.LONG_TYPE),
   columnDescriptor("date_of_birth", DataTypes.LOCAL_DATE_TYPE));
```

```
example_frame_schema = [
    ("name", "STRING_TYPE"),
    ("age", "INTEGER_TYPE"),
    ("salary", "DOUBLE_TYPE"),
    ("married", "BOOLEAN_TYPE"),
    ("tax_rate", "FLOAT_TYPE"),
    ("random", "LONG_TYPE"),
```

```
("date_of_birth", "LOCAL_DATE_TYPE")
```

- 3. Define data as per the schema.
 - JShell
 - Java
 - Python

Java

```
from datetime import date
example frame data = {
```

- **4.** Load the frame as shown:
 - JShell
 - Java
 - Python

```
opg4j> var exampleFrame = session.createFrame(exampleFrameSchema,
exampleFrameData, "example frame")
```

Java

```
PgxFrame exampleFrame = session.createFrame(exampleFrameSchema,
exampleFrameData, "example frame");
```

```
example_frame=session.create_frame(example_frame_schema,example_frame_data,
'example frame')
```

- 5. You can also load the frame incrementally as you receive more data:
 - JShell
 - Java
 - Python

```
opg4j> var exampleFrameBuilder =
session.createFrameBuilder(exampleFrameSchema);
opg4j> exampleFrameBuilder.addRows (exampleFrameData)
opg4j> Map<String, Iterable<?>> exampleFrameDataPart2 = Map.of(
    "name", Arrays.asList("Dave"),
    "age", Arrays.asList(26),
    "salary", Arrays.asList(18000.0),
    "married", Arrays.asList(true),
    "tax rate", Arrays.asList(0.30),
    "random", Arrays.asList(456783423423L),
    "date of birth", Arrays.asList(LocalDate.of(1989, 9, 15))
opg4j> exampleFrameBuilder.addRows (exampleFrameDataPart2)
opg4j> var exampleFrame = exampleFrameBuilder.build("example frame")
Java
PgxFrameBuilder exampleFrameBuilder =
session.createFrameBuilder(exampleFrameSchema);
exampleFrameBuilder.addRows (exampleFrameData);
Map<String, Iterable<?>> exampleFrameDataPart2 = new HashMap<>();
exampleFrameDataPart2.put("name", Arrays.asList("Dave"));
exampleFrameDataPart2.put("age", Arrays.asList(26));
exampleFrameDataPart2.put("salary", Arrays.asList(18000.0));
exampleFrameDataPart2.put("married", Arrays.asList(true));
exampleFrameDataPart2.put("tax rate", Arrays.asList(0.30));
exampleFrameDataPart2.put("random", Arrays.asList(456783423423L));
exampleFrameDataPart2.put("date of birth",
    Arrays.asList(LocalDate.of(1989, 9, 15))
);
exampleFrameBuilder.addRows (exampleFrameDataPart2);
PgxFrame exampleFrame = exampleFrameBuilder.build("example frame");
Python
example frame builder = session.create frame builder(example frame schema)
example frame builder.add rows(example frame data)
example frame data part 2 = {
    "name": ["Dave"],
    "age": [26],
    "salary": [18000.0],
    "married": [True],
    "tax rate": [0.30],
    "random": [456783423423],
    "date of birth": [date(1989, 9, 15)]
example frame builder.add rows (example frame data part 2)
```

example frame = example frame builder.build("example frame")

6. Finally, you can also load a frame from a Pandas dataframe in Python as shown:

```
import pandas as pd
example_pandas_dataframe = pd.DataFrame(data=example_frame_data)
example_frame = session.pandas_to_pgx_frame(example_pandas_dataframe,
"example frame")
```

You can also create a graph from the PgxFrame(s) . See Creating a Graph from Multiple PgxFrame Objects for more information.

27.13.16 Creating a Graph from Multiple PgxFrame Objects

You can create a PgxGraph with vertex PgxFrame(s) and edge PgxFrame(s).

Consider the following PgxFrame objects:

```
people

+-----+

| id | name |

+-----+

| 1 | Alice |

| 2 | Bob |

| 3 | Charlie |
```

houses

+.		 	+
	${\tt identification}$	location	
+.		 	+
	1	Road 1	
	2	Street 5	
	3	Avenue 4	
+.		 	+

knows

src		dst
1		1
2		3
3		2
	1 2	2

lives

+.		 +
	source	destination
+.		 +
	1	2
	2	1
	3	3
+.		 +

You can now create a PgxGraph as shown in the following examples:

- JShell
- Java
- Python

JShell

```
opg4j> var graphFromFramesCreator = session.createGraphFromFrames("example
graph")
opg4j> graphFromFramesCreator.vertexProvider("people", people).label("people")
opg4j> graphFromFramesCreator.vertexProvider("houses",
houses).vertexKeyColumn("identification")
opq4j> graphFromFramesCreator.edgeProvider("knows", "people", "people",
knows).edgeKeyColumn("identifier")
opg4j> var edge provider = graphFromFramesCreator.edgeProvider("lives",
"people", "houses", lives)
opg4j> edge provider.edgeKeyColumn("id")
opg4j> edge provider.sourceVertexKeyColumn("source")
opg4j> edge provider.destinationVertexKeyColumn("destination")
opg4j> edge provider.label("lives")
opg4j> graphFromFramesCreator.partitioned(true)
opq4j> graphFromFramesCreator.vertexIdStrategy(IdStrategy.PARTITIONED IDS)
opg4j> graphFromFramesCreator.vertexIdStrategy(IdStrategy.KEYS AS IDS)
opg4j> var graph = graphFromFramesCreator.create()
```

Java

```
PgxGraphFromFramesCreator graphFromFramesCreator =
session.createGraphFromFrames("example graph");
graphFromFramesCreator.vertexProvider("people", people).label("people");
graphFromFramesCreator.vertexProvider("houses",
houses).vertexKeyColumn("identification");
graphFromFramesCreator.edgeProvider("knows", "people", "people",
knows).edgeKeyColumn("identifier");
PgxEdgeProviderFromFramesCreator edgeProvider =
graphFromFramesCreator.edgeProvider("lives", "people", "houses", lives);
edgeProvider.edgeKeyColumn("id");
edgeProvider.sourceVertexKeyColumn("source");
edgeProvider.destinationVertexKeyColumn("destination");
edgeProvider.label("lives");
graphFromFramesCreator.partitioned(true);
graphFromFramesCreator.vertexIdStrategy(IdStrategy.PARTITIONED IDS);
graphFromFramesCreator.edgeIdStrategy(IdStrategy.KEYS AS IDS);
PgxGraph graph = graphFromFramesCreator.create();
```

Python

```
label="people"),
    session.vertex_provider_from_frame("house",
                                        frame = houses,
                                       vertex_key_column = "identification")
edge providers from frames = [
    session.edge provider from frame ("person knows person",
                                     source provider = "person",
                                     destination provider = "person",
                                     frame = knows,
                                     source vertex column="src",
                                     destination vertex column="dst",
                                     edge_key_column="identifier"),
    session.edge provider from frame("person lives at house",
                                     source_provider = "person",
                                     destination provider = "house",
                                     frame = lives,
                                     source vertex column="source",
                                     destination vertex column="destination",
                                     edge_key column="id",
                                     label="lives")
graph = session.graph from frames("example graph",
         vertex_providers_from_frames,
          edge providers from frames,
         partitioned=True,
         vertex id strategy="partitioned ids",
          edge id strategy="keys as ids"
)
```

Working with Files Using the Graph Server (PGX)

This chapter describes in detail about working with different file formats to perform various actions like loading, storing, or exporting a graph using the Graph Server (PGX).

In order to read or write files, you need to explicitly authorize access to the corresponding directories by defining a directory object pointing to the directory (on the graph server) that contains the files to read or write.

```
CREATE OR REPLACE DIRECTORY graph_files AS '/data/graphs/my_graphs'; GRANT READ, WRITE ON DIRECTORY graph files TO GRAPH DEVELOPER;
```

Also, note the following:

- The directory in the CREATE DIRECTORY statement must exist on the graph server (PGX).
- The directory must be readable (and/or writable) at the OS level by the graph server (PGX).

The preceding code grants the privileges on the directory to the <code>GRAPH_DEVELOPER</code> role. However, you can also grant permissions to an individual user:

```
GRANT READ ON DIRECTORY graph files TO <graph user>;
```

- Loading Graph Data from Files
- · Loading Graph Data in Parallel from Multiple Files
- · Exporting Graphs Into a File
- Exporting a Graph into Multiple Files

28.1 Loading Graph Data from Files

You can load graph data from files by either of the two ways:

- using the header format specified in the files
- by directly calling the graph builder API

Creating a graph using file header format

The graph server (PGX) uses the header of the files to determine the name and types of the properties to load. It also infers the column to be used as vertex ID, the columns that indicate the source and destination vertex ID for edges, and the column to be loaded as vertex or edge label.

Creating a graph using graph builder API

You can also use PgxSession.readGraphFiles() to load the graph. This method takes the following three arguments:

- path to the vertex file
- path to the edge file
- name of the graph to be created
- JShell
- Java
- Python

JShell

```
opg4j> var loadedGraph = session.readGraphFiles("<path/vertices.csv>", "<path/
edges.csv>", "<graph name>")
```

Java

```
import oracle.pgx.api.PgxSession;
import oracle.pgx.api.PgxGraph;
PgxSession session = Pgx.createSession("NewSession");
PgxGraph loadedGraph = session.readGraphFiles("<path/vertices.csv>", "<path/edges.csv>", "<graph name>");
```

Python

```
session = pypgx.get_session(session_name="<session_name>")
loaded_graph = session.read_graph_files("<path/vertices.csv>", "<path/edges.csv>", "<graph_name>")
```

The graph server (PGX) supports loading graph data from files for the following data formats

- Plain Text Formats
- XML File Formats
- Binary File Formats
- Graph Configuration for Loading from File
- Specifying the File Path
- Supported File Access Protocols
- Plain Text Formats
- XML File Formats
- Binary File Formats



28.1.1 Graph Configuration for Loading from File

For graphs in the CSV format, the columns used to specify the key column, source column, destination column (for partitioned graphs) need to be either all specified, or none. If none are specified, the graph server (PGX) assumes the key column is the first (for vertex files) or missing (for edge files), followed by source and destination column (for edge files), and then by the property columns according to their order in the graph configuration.

Partitioned Graphs

In order to load a partitioned graph from supported files, you must set the following additional graph configuration fields.

Table 28-1 Loading a Partitioned Graph From File - Additional Graph Configuration Options

Field	Туре	Description	Default
format	<pre>enum[pgb, csv, rdbms, es]</pre>	Provider format.	required
name	string	Entity provider name.	required
attributes	object	Additional attributes needed to read/write the graph data.	null
<pre>destination_vert ex_provider</pre>	string	Name of the destination vertex provider to be used for this edge provider.	null
detect_gzip	boolean	Enable or disable automatic gzip compression detection when loading graphs.	true
error_handling	object	Error handling configuration.	null
has_keys	boolean	Indicates if the provided entities data have keys.	true
header	boolean	First line of file is meant for headers, such as EdgeId, SourceId, DestId, EdgeProp1, and EdgeProp2	false
key_type	<pre>enum[int, integer, long, string]</pre>	Type of the keys.	long
keystore_alias	string	Alias to the keystore to use when connecting to database.	null
label	string	Label for the entities loaded from this provider.	null
loading	object	Loading specific configuration.	null
<pre>local_date_forma t</pre>	array of string	Array of local_date formats to use when loading and storing local_date properties. See DateTimeFormatter for a documentation of the format string.	[]
password	string	Password to use when connecting to database.	null
point2d	string	Longitude and latitude as floating point values separated by a space.	0.0
props	array of object	Specifies the properties associated with this entity provider.	[]



Table 28-1 (Cont.) Loading a Partitioned Graph From File - Additional Graph Configuration Options

Field	Туре	Description	Default
separator	string	A series of single-character separators for tokenizing. The characters ", $\{$, $\}$, and \n cannot be used as separators. Default value is , for CSV files, and \t for other formats. The first character will be used as a separator when storing.	null
<pre>source_vertex_pr ovider</pre>	string	Name of the source vertex provider to be used for this edge provider.	null
storing	object	Storing specific configuration.	null
time_format	array of string	The time format to use when loading and storing time properties. See DateTimeFormatter for a documentation of the format string.	[]
time_with_timezo ne_format	array of string	The time with timezone format to use when loading and storing time with timezone properties. See DateTimeFormatter for a documentation of the format string.	[]
timestamp_format	array of string	The timestamp format to use when loading and storing timestamp properties. See DateTimeFormatter for a documentation of the format string.	[]
<pre>timestamp_with_t imezone_format</pre>	array of string	The timestamp with timezone format to use when loading and storing timestamp with timezone properties. See DateTimeFormatter for a documentation of the format string.	[]
uris	array of string	List of unified resource identifiers.	[]
<pre>vector_component _delimiter</pre>	character	Delimiter for the different components of vector properties.	;

The key column, source column, destination column can be configured with the following CSV specific fields:

Table 28-2 CSV Specific Options for Partitioned Graphs

Field	Туре	Description	Default
format	<pre>enum[pgb, csv, rdbms, es]</pre>	Provider format.	required
name	string	Entity provider name.	required
attributes	object	Additional attributes needed to read/write the graph data.	null
destination_column	value	Name or index (starting from 1) of column corresponding to edge destination (for CSV format only).	null

Table 28-2 (Cont.) CSV Specific Options for Partitioned Graphs

Field	Туре	Description	Default
destination_vert ex_provider	string	Name of the destination vertex provider to be used for this edge provider.	null
detect_gzip	boolean	Enable or disable automatic gzip compression detection when loading graphs.	true
error_handling	object	Error handling configuration.	null
has_keys	boolean	Indicates if the provided entities data have keys.	true
header	boolean	First line of file is meant for headers, such as EdgeId, SourceId, DestId, EdgeProp1, EdgeProp2.	false
key_column	value	Name or index (starting from 1) of column corresponding to keys (for CSV format only)	null
key_type	<pre>enum[int, integer, long, string]</pre>	Type of the keys.	long
keystore_alias	string	Alias to the keystore to use when connecting to database.	null
label	string	Label for the entities loaded from this provider.	null
loading	object	Loading-specific configuration.	null
local_date_forma t	array of string	Array of local_date formats to use when loading and storing local_date properties. See DateTimeFormatter for a documentation of the format string.	[]
password	string	Password to use when connecting to database.	null
point2d	string	Longitude and latitude as floating point values separated by a space.	0.0 0.0
props	array of object	Specifies the properties associated with this entity provider.	[]



Table 28-2 (Cont.) CSV Specific Options for Partitioned Graphs

Field	Туре	Description	Default
separator	string	A series of single-character separators for tokenizing. The characters , {, }, and \n cannot be used as separators. Default value is , for CSV files, and \t for other formats. The first character will be used as a separator when storing.	null
source_column	value	Name or index (starting from 1) of column corresponding to edge source (for CSV format only).	null
source_vertex_pr ovider	string	Name of the source vertex provider to be used for this edge provider.	null
storing	object	Storing-specific configuration.	null
time_format	array of string	The time format to use when loading and storing time properties. See DateTimeFormatter for a documentation of the format string.	[]
time_with_timezo ne_format	array of string	The time with timezone format to use when loading and storing time with timezone properties. See DateTimeFormatter for a documentation of the format string.	[]
<pre>timestamp_format</pre>	array of string	The timestamp format to use when loading and storing timestamp properties. See DateTimeFormatter for a documentation of the format string.	[]
<pre>timestamp_with_t imezone_format</pre>	array of string	The timestamp with timezone format to use when loading and storing timestamp with timezone properties. See DateTimeFormatter for a documentation of the format string.	[]
vector_component _delimiter	character	Delimiter for the different components of vector properties.	;

28.1.2 Specifying the File Path

The following examples show how to specify the file path for various file formats.

For formats that contain vertices and edges specified in one file (for example, EdgeList), use uris as shown in the following code:

```
{"uris":["path/to/file.format"]}
```

For formats that require separate files for edges and vertices (for example, FlatFile), use vertex uris and edge uris as shown in the following code:

```
{"vertex_uris":["vertices1.format", "vertices2.format"], "edge_uris":
["edges1.format", "edges2.format"]}
```

PGX will parse graphs in most of the plain text formats in parallel if the graph data is split into multiple files, as shown in the following code:

```
{"uris":["file1.format","file2.format",...,"fileN.format"]}
```

28.1.3 Supported File Access Protocols

The graph server (PGX) supports loading from graph configuration files and graph data files over various protocols and virtual file systems. The type of file system or protocol is determined by the scheme of the uniform resource identifier (URI):

- local file system (file:) this is also the default if the given URI does not contain any scheme
- classpath (classpath: or res:)
- HTTPS (https:)
- FTPS (ftps:)
- various archive formats (zip:, jar:, tar:, tgz:, tbz2:, gz: and bz2:). The URI format is scheme://arch-file-uri[!absolute-path] (if you would like to use the ! as a literal file-name character it must be escaped using %21).

```
For example, jar:../lib/classes.jar!/META-INF/graph.json.
```

Paths may be nested as in tar:gz:https://anyhost/dir/mytar.tar.gz!/mytar.tar!/path/in/tar/graph.data.



Relative paths are always resolved relative to the parent directory of the configuration file.

28.1.4 Plain Text Formats

The graph server (PGX) supports the following plain-text formats:

- Comma-Separated Values (CSV)
- Adjacency List (ADJ LIST)
- Edge List (EDGE_LIST)
- Two Tables (TWO_TABLES)
- Flat File (FLAT_FILE)

Note that loading graphs from files encoded in UTF-8, without *Byte Order Mark* (BOM), is only supported. Therefore, to successfully load graph from files, ensure text-based provider files are UTF-8 encoded without a BOM.

Parsing of Vertices

PGX supports three types of vertex identifies (id): integer, long and string. The type defaults to integer, but can be configured through the vertex_id_type option in the graph configuration.

Parsing of Edges

Of the various formats and protocols supported by graph server (PGX), only CSV and flat file parsing support edge identifiers. For all other data sources, the id of an edge is PGX's internal id, which is an integer from zero to num edges - 1.

Parsing of Properties

string properties, spatial properties (currently only point2d) and temporal properties (date, local_date, time, timestamp, time_with_timezone and timestamp_with_timezone) must be quoted ("<string>") only if they contain a separator character (usually, for CSV and ' ' for Edge List and Adjacency List) or if they contain " or \n.

date properties are parsed using Java's SimpleDateFormat utility, instantiated with the format string yyyy-MM-dd HH:mm:ss unless specified otherwise in the graph configuration. All other types of temporal properties are parsed using Java's DateTimeFormatter utility.

point2d can be specified by its longitude followed by its latitude, separated by a space. Both longitude and latitude are doubles. For example, "-74.0445 40.6892" is the representation of a point2d instance representing the location of the Statue of Liberty.

Boolean values are interpreted as true if the value is true (ignoring case), Y (ignoring case) or 1, false otherwise. The suggested notation for false is false (ignoring case), N (ignoring case) or 0. All other types are parsed using the parseXXX() functions of its corresponding Java type, for example, Integer.parseInt(...) for integer types.

Vector properties are supported in the Adjacency List (ADJ_LIST), Comma-Separated Values (CSV), Edge List (EDGE_LIST), and Two Tables text (TWO_TABLES) formats. Vector properties with vector components of type <code>integer</code>, <code>long</code>, <code>float</code> and <code>double</code> can be loaded from these formats. In order to specify that a vertex or edge property is a vector property, the <code>dimension</code> field of the graph property configuration must be set to the dimension of the vector and be a strictly positive integer value. A vector value is represented in the supported text formats by the list of the vector components values separated by the vector component delimiter. By default the vector component delimiter is ;, but this delimiter can be changed by changing the <code>vector_component_delimiter</code> graph configuration entry. Therefore a 3-dimensional vector of doubles could for example look like <code>0.1;0.0004;3.14</code> in the text file if the vector component delimiter is ;.



Separators

When using single file formats, IDs and properties are separated with tab or one single space ("\t ") by default, for multiple file formats comma (",") is used instead. However, PGX allows to configure the separator string.

Parallel Loading

The following formats support parallel loading from multiple files:

- CSV (specify multiple files in vertex uris and/or edge uris)
- Adjacency List (specify multiple files in uris)
- Edge List (specify multiple files in uris)
- Two Tables (specify multiple files in vertex_uris and/or edge_uris)
- Flat File (specify multiple files in vertex_uris and/or edge_uris)

Legend

The following abbreviations are used to specify text formats:

- V = Vertex Key
- VG = Neighbor Vertex
- VL = Vertex Labels
- VP = Vertex Property
- VPK = Vertex Property Key
- VPT = Vertex Property Type
- EL = Edge Label
- EP = Edge Property
- EPK = Edge Property Key
- EPT = Edge Property Type

For example <V-2, VG-4> or <V-2, VG-4> denotes the 4th neighbor of the 2nd vertex.

- Comma-Separated Values (CSV)
- Adjacency List (ADJ_LIST)
- Edge List (EDGE_LIST)
- Two Tables (TWO_TABLES)

28.1.4.1 Comma-Separated Values (CSV)

The CSV format is a text file format with vertices and edges stored in different files. Each line of the files represents a vertex or an edge. The vertex key and labels, the edge key, source, destination and label, and the attached properties are stored in the order specified by the file header (first line) and the configuration.

A graph with V vertices, having N vertex properties and K neighbors each, and E edges, having M edge properties, would be represented in CSV as shown:

vertices.csv



```
<V-1>, <VL-1>, <V-1, NP-1>, ..., <V-1, NP-N>
<V-2>, <VL-2>, <V-2, NP-1>, ..., <V-2, NP-N>
...
<V-V>, <VL-N>, <V-V, NP-1>, ..., <V-V, NP-N>
edges.csv
<E-1>, <V-1>, <V-1, VG-1>, <EL-1>, <E-1, EP-1>, ..., <E-1, EP-M>
...
<E-K>, <V-1>, <V-1, VG-K>, <EL-N>, <E-K, EP-1>, ..., <E-K, EP-M>
...
<E-K+1>, <V-2>, <V-2, VG-1>, <EL-N+1>, <E-K+1, EP-1>, ..., <E-K+1, EP-M>
...
<E-V*K>, <V-V>, <V-V, VG-K>, <EL-V*K>, <E-V*K, EP-1>, ..., <E-V*K, EP-M>
```

Example 28-1 Loading graph from a CSV file with header details

The following examples shows a graph configuration file for loading a graph with two vertices and two edges:

```
vertices.csv
key,integer_prop,string_prop
1,33,"Alice"
2,42,"Bob"

edges.csv
source,dest,integer_prop,string_prop
1,2,0,"baz"
2,2,-12,"bat"
```

The corresponding graph configuration file is as shown:

```
{
    "format": "csv",
    "header": true,
    "vertex id column": "key",
    "edge source column": "source",
    "edge destination column": "dest",
    "vertex uris": ["vertices.csv"],
    "edge uris": ["edges.csv"],
    "vertex props": [
            "name": "integer_prop",
            "type": "integer"
        },
            "name": "string_prop",
            "type": "string"
    ],
    "edge _props": [
            "name": "integer prop",
            "type": "integer"
        },
```

```
{
         "name": "string_prop",
         "type": "string"
      }
]
```

Example 28-2 Loading graph from a CSV file without header details

The following examples shows a graph configuration file for loading a graph with two vertices and two edges:

```
vertices.csv

1,33,"Alice"
2,42,"Bob"

edges.csv

1,2,0,"baz"
2,2,-12,"bat"
```

The corresponding graph configuration file is as shown:

Note:

The column indices are given in place of the column names.

```
"format": "csv",
"header": false,
"vertex id column": 1,
"edge source column": 1,
"edge_destination_column": 2,
"vertex uris": ["vertices.csv"],
"edge uris": ["edges.csv"],
"vertex_props": [
        "name": "integer_prop",
        "type": "integer",
        "column": 2
    },
        "name": "string prop",
        "type": "string",
        "column": 3
"edge_props": [
        "name": "integer_prop",
        "type": "integer",
```

```
"column": 3
},
{
         "name": "string_prop",
         "type": "string",
         "column": 4
}
]
```

If no column indices are set in the configuration file, the columns are assumed to be in the following order:

- For vertex files: Vertex ID Vertex labels (if present) Vertex properties in the order they
 are declared in the configuration
- For edge files: Edge ID (if present) Edge source Edge destination Edge label (if present) - Edge properties in the order they are declared in the configuration

Therefore the earlier configuration is equivalent to:

```
"format": "csv",
"header": false,
"vertex uris": ["vertices.csv"],
"edge uris": ["edges.csv"],
"vertex props": [
        "name": "integer prop",
        "type": "integer"
    },
        "name": "string prop",
        "type": "string"
],
"edge_props": [
        "name": "integer prop",
        "type": "integer"
    },
        "name": "string prop",
        "type": "string"
]
```

28.1.4.2 Adjacency List (ADJ_LIST)

The Adjacency List format is a text file format containing a list of neighbors from a vertex, per line. The format is extended to encode properties. The following shows a graph with V vertices, having N vertex properties and M edge properties:

```
<V-1> <V-1, VP-1> ... <V-1, VP-N> <V-1, VG-1> <EP-1> ... <EP-M> <V-1, VG-2> <EP-1> ... <EP-M> 
<V-2> <V-2, VP-1> ... <V-2, VP-N> <V-2, VG-1> <EP-1> ... <EP-M> <V-2, VG-2> <EP-1> ...
```

```
<EP-M>
...
<V-V, VP-1> ... <V-V, VP-N> <V-V, VG-1> <EP-1> ... <EP-M> <V-V, VG-2> <EP-1> ...
<EP-M>
```



Trailing separators will be considered as errors. For example, if whitespace is used to separate the properties, any trailing whitespace will cause an exception to be raised.

Example 28-3 Graph in Adjacency List Format

This example shows a graph with 4 vertices (1, 2, 3 and 4), each having a double and a string property, and 3 edges, each having a boolean and a date property, encoded in Adjacency List format:

```
1 8.0 "foo"
2 4.3 "bar" 1 false "1985-10-18 10:00:00"
3 6.1 "bax" 2 true "1961-12-30 14:45:14" 4 false "2001-01-15 07:00:43"
4 17.78 "f00"
```



ADJ_LIST is more space efficient than EDGE_LIST. This is because vertices are first defined and then the edges are being created, indicating that we are repeating each vertex at least once.

28.1.4.3 Edge List (EDGE LIST)

The Edge List format is a text file format starting with a section with one vertex per line, followed by a section with one edge per line. If a vertex does not have any labels or properties, it is possible to omit the vertex in the first section, but still specify edges for the vertex in the second section.

```
:= {Vertex '\n'}* '\n' {Edge '\n'}*
EdgeList
            := VertexId '*' VertexLabels? PropertyValue*
Vertex
VertexId
             := Integer | Long | String
VertexLabels := '{' String* '}'
Edge
             := SrcVertex DstVertex EdgeLabel? PropertyValue*
SrcVertex
             := VertexId
DstVertex
             := VertexId
EdgeLabel
             := String
PropertyValue := Integer | Long | Double | Float | Boolean | String | Date
```

The vertices start with an identifier (VertexId), followed by a *, an optional set of vertex labels (VertexLabels?) and the vertex properties (PropertyValue*). A vertex identifier is either an Integer, a Long, or a String. Furthermore, vertex labels are zero or more Strings between curly braces ('{' String* '}').

The edges start with source and destination vertex identifiers (SrcVertex DstVertex), followed by optional edge label (EdgeLabel?) and the edge properties (PropertyValue*). The edge label is a String.

Example 28-4 Graph in Edge List format

This example shows a graph with two vertices and two edges, with labels and properties:

```
1 * { "Person" "Male" } "Mario" 15
2 * { "Person" "Male" } "Luigi" 14
1 2 "likes" 3.5
2 1 "likes" 2.1
```

The two vertices (lines 1-2) have identifiers 1 and 2 and both have the labels "Person" and "Male", a string property ("Mario" and "Luigi") and an integer property (15 and 14). There is an edge from vertex 1 to vertex 2 (line 3) with label "likes" and a double property with value 3.5, and another edge from vertex 2 to vertex 1 with label "likes" and a double property with value 2.1.

The following shows the corresponding graph configuration:

```
"format": "edge list",
"uri": "example.edgelist",
"vertex id type": "long",
"vertex labels":true,
"edge label":true,
"vertex props":[
    "name": "name",
    "type": "string"
  {
    "name": "age",
    "type":"int"
],
"edge_props":[
    "name": "rating",
    "type": "double"
"loading options": {
  "load vertex labels":true,
  "load edge label":true
},
"separator":" "
```

28.1.4.4 Two Tables (TWO TABLES)

When configured to use file as datastore, the Two Tables format becomes a text file format similar to the Edge List format, with the only difference that the vertices and edges are stored

in two different files. The vertices file contains vertex IDs followed by vertex properties. The edges file contains the source vertices and target vertices, followed by edge properties.

A graph with V vertices, having N vertex properties and M edge properties would be represented in two files as shown in the following:

Example 28-5 Graph in Two Tables Text format

The following example shows the graph of 4 vertices (1, 2, 3 and 4), each having a double and a string property, and 3 edges, each having a boolean and a date property, encoded in Two Tables Text format:

```
vertices.ttt:

1 8.0 "foo"
2 4.3 "bar"
3 6.1 "bax"
4 17.78 "f00"

edges.ttt:

2 1 false "1985-10-18 10:00:00"
3 2 true "1961-12-30 14:45:14"
3 4 false "2001-01-15 07:00:43"
```



If you are planning on storing big graphs you must consider Two Tables Text format in order to save disk space.

28.1.5 XML File Formats

Graph ML

The graph server (PGX) supports loading graphs from files using the XML-based Graph ML format. Graphs already in memory may also be exported into GraphML files. See GraphML specification for a detailed description of the XML schema.

PGX GraphML Limitation

PGX does not support all features of the GraphML format. Some of the limitations are:

If the graph is undirected (edgedefault="undirected"), then edge properties are not supported

- All vertices (edges) must have the same amount and type of vertex (edge) properties
- port, default, and hyperedge are not supported

Example 28-6

The following example graph consists of 3 vertices and 3 edges. Each vertex has an integer property named number and each edge has a string property named label. Note that the edges are directed and that the strings for the property do not have to be put in (double) quotation marks.

```
<?xml version="1.0" encoding="UTF-8"?>
<graphml xmlns="http://graphml.graphdrawing.org/xmlns">
    <key attr.name="number" attr.type="integer" for="node" id="number"/>
    <key attr.name="label" attr.type="string" for="edge" id="label"/>
    <graph edgedefault="directed">
        <node id="1">
            <data key="number">2</data>
        </node>
        <node id="2">
            <data key="number">45</data>
        </node>
        <node id="3">
            <data key="number">83</data>
        </node>
        <edge target="2" source="1">
            <data key="label">this graph</data>
        <edge source="3" target="2">
            <data key="label">forms a</data>
        </edge>
        <edge target="1" source="3">
            <data key="label">triangle</data>
        </edge>
    </graph>
</graphml>
```

A

Caution:

Due to the verbose nature of XML, the GraphML format comes with a large overhead compared to other file-based graph formats. You must use a different format if you want to consider the load or store performance and file size as important factors.

28.1.6 Binary File Formats

PGX Binary Format (PGB)

PGX binary format (.pgb) is the proprietary binary format for graph server (PGX), which allows fast and efficient file processing. Fundamentally, the file is a binary dump of the graph and property data. Bytes are written in network byte order (big endian).

Type Encoding

Table 28-3 Type Encoding

Value	Туре	Size in bytes
0	Boolean	1
1	Integer	4
2	Long	8
3	Float	4
4	Double	8
7	String	varies
11	Vertex labels	varies
13	Local date	4
14	Time	4
15	Timestamp	8
16	Time with time zone	8
17	Timestamp with time zone	12
18	Vector property	<pre>variable: <sizeof component-<br="">type> * <dimension></dimension></sizeof></pre>

File Layout

Table 28-4 File Layout

Size in bytes	Description	Require d	Comment
4	magic word	Yes	0x99191191
4	vertex size	Yes	Allowed values are 4 and 8.
4	edge size	Yes	Allowed values are 4 and 8.
<vertex size=""></vertex>	number of vertices	Yes	
<edge size=""></edge>	number of edges	Yes	
<pre><edge size=""> * (<numvertices> + 1)</numvertices></edge></pre>	edge begin array	Yes	
<pre><vertex size=""> * <numedges></numedges></vertex></pre>	destination vertex array	Yes	
1	component bitmap	Yes	• 0x0001: node keys
			• 0x0002: vertex labels
			• 0x0004: edge label
			• 0x0008: edge keys
			 other bits: reserved
4	vertexKey type	No	Only present if <i>component bitmap</i> & $0 \times 0001 == 0 \times 0001$. See Table 28-3 for type encoding.
<pre><vertex key="" layout=""></vertex></pre>	vertex keys	No	Only present if <i>component bitmap</i> & $0 \times 0001 == 0 \times 0001$.
4	edgeKey type	No	Only present if <i>component bitmap</i> & $0x0008 == 0x0008$. See table Table 28-3 for type encoding

Table 28-4 (Cont.) File Layout

Size in bytes	Description	Require d	Comment
<numedges> * 8</numedges>	edge keys	No	Only present if <i>component bitmap</i> & 0x0008 == 0x0008.
4	number of vertex properties	Yes	
<num vertex<br="">properties> * <property layout=""></property></num>	property data	Yes	See Table 28-10.
4	number of edge properties	Yes	
<pre><num edge="" properties=""> * <pre><pre>cproperty layout></pre></pre></num></pre>	property data	Υ	See Edge Property Layout.
<pre><vertex labels="" layout=""></vertex></pre>	vertex labels	No	Only present if <i>component bit</i> & 0x0002 == 0x0002.
<edge labels="" layout=""></edge>	edge label	No	Only present if <i>component bit</i> & 0x0004 == 0x0004.
4	number of shared pools	Yes	
<pre><shared pools="" size=""></shared></pre>	shared pools	No	
<pre><pre><pre><pre>size></pre></pre></pre></pre>	property names	No	Only present if component bit & 0×0010 == 0×0010 . See Table 28-19.

Vertex Key Layout

The layout of vertex keys depends on the vertexKey type. PGB supports integer, long and string vertex keys.

Table 28-5 Integer Vertex Keys

Size in bytes	Description	Require d	Comment
<pre><numvertices> * 4</numvertices></pre>	key data	Yes	For each vertex, the corresponding integer key value.

Table 28-6 Long Vertex Keys

Size in bytes	Description	Require d	Comment
<numvertices> * 8</numvertices>	key data	Yes	For each vertex, the corresponding long key value.

Table 28-7 String Vertex Keys

Size in bytes	Description	Require d	Comment
4	compression scheme	Yes	reserved (must be 0)



Table 28-7 (Cont.) String Vertex Keys

Size in bytes	Description	Require d	Comment
8	property size	Yes	size of each element in bytes in the following data
<pre><number keys="" of=""> * <string element="" key="" layout=""></string></number></pre>	string key data	Yes	content of the vertex keys (see Table 28-5)

Table 28-8 String Key Element Layout

Size in bytes	Description	Require d	Comment
4	string length	Yes	length of the string in bytes
<string length=""></string>	string key data	Yes	content of the string as bytes, No zero- character

Property Layout

The following shows the special layout for string properties, and for vector properties:

Table 28-9 Primitive Type Layout

Size in bytes	Description	Require d	Comment
4	property type	Yes	See Table 28-3 for type encoding.
8	property size	Yes	Size of the property data in bytes
<pre><pre><pre><pre>property size></pre></pre></pre></pre>	property data	Yes	<pre>Stored as <numvertices numedges=""></numvertices></pre>

Table 28-10 Vector Property Layout

Size in bytes	Description	Comment
4	vector type mark	Always equal to 18.
8	size of vector property data and extra fields	<pre>dataSize = <sizeof component-type=""> * <dimension> + 8 (The 8 extra bytes are for the added following 2 extra fields in the vector property header.)</dimension></sizeof></pre>
4	vector component data type	Valid types are integer, long, float, double. Encoded with the value specified in Table 28-3.
4	vector dimension	Number of components per vector value. Must be greater than 0 to be a valid vector property.
dataSize - 8	data	Stored as array of length * ` in which the value of the j-th component of the vector for the i-th entity is at position i * + j`.



Table 28-11 String Type Layout

Size in bytes	Description	Require d	Comment
4	property type	Yes	Must be 7.
8	property size	Yes	Size of the following data in bytes.
1	reserved	Yes	Reserved (must be 0).
<dictionary layout=""></dictionary>	dictionary	Yes	String dictionary used in the property
<pre><numvertices numedges=""> * 8</numvertices></pre>	property content	Yes	Content of the string property, stored as IDs that refer to the strings in the dictionary.

Table 28-12 String Dictionary Layout

Size in bytes	Description	Require d	Comment
1	reserved	Yes	Reserved (must be 0).
8	number of strings	Yes	Number of strings in the following dictionary.
<pre><number of="" strings=""> * <dictionary element="" layout=""></dictionary></number></pre>	dictionary data	Yes	See Table 28-13.

Table 28-13 String Dictionary Element Layout

Size in bytes	Description	Require d	Comment
8	string id	Yes	Unique ID of the string.
4	string length	Yes	Length of the string in bytes.
<string length=""></string>	string data	Yes	Content of the string as bytes, No zero- character

Vertex Labels Layout

Table 28-14 Vertex Labels Layout

Size in bytes	Description	Require d	Comment
4	type	Yes	Must be 11.
8	size	Yes	Size of the following data in bytes.
<dictionary layout=""></dictionary>	dictionary	Yes	String dictionary used in the vertex labels.
<numvertices +="" 1=""> * 8</numvertices>	string id begin array	Yes	<pre><string ids=""> offset array for each vertex.</string></pre>
8	number of string ids	Yes	The number of string ids.
<pre><number ids="" of="" string=""> * 8</number></pre>	string ids	Yes	Array of string ids in the string dictionary.



Edge Label Layout

The edge label layout follows the string type layout.

Shared Pools Layout

Table 28-15 Shared Pools Layout

Size in bytes	Description	Require d	Comment
1	type	Yes	1: enum, 2: prefixed

Table 28-16 Type == Enum

Size in bytes	Description	Require d	Comment
8	num strings	Yes	
<pre><number of="" strings=""> * <string layout="" table=""></string></number></pre>	dictionary data	Yes	See Table 28-18.

Table 28-17 Type == Prefix

Size in bytes	Description	Require d	Comment
8	num prefixes	Yes	
<pre><number of="" prefixes=""> * <string layout="" table=""></string></number></pre>	dictionary data	Yes	See Table 28-18.
8	num suffixes	Yes	
<pre><number of="" suffixes=""> * <string layout="" table=""></string></number></pre>	dictionary data	Yes	See Table 28-18.

Table 28-18 String Table for Shared Pools

Size in bytes	Description	Require d	Comment
8	string id	Yes	String can be literal (in case of enum) or prefix/suffix (in case of prefix).
4	string length	Yes	
<string length=""></string>	string data	Yes	



Property Names Layout

Table 28-19 Property Names Layout

Size in bytes	Description	Require d	Comment
8	size	Yes	String can be literal (in case of enum) or prefix/suffix (in case of prefix).
<pre><sum names="" of="" property="" size="" vertex=""></sum></pre>	vertex property names	No	Follows the String Key Element Layout. See Table 28-8.
<pre><sum edge="" names="" of="" property="" size=""></sum></pre>	edge property names	No	Follows the String Key Element Layout. See Table 28-8.

28.2 Loading Graph Data in Parallel from Multiple Files

You can load a graph in parallel using multiple files.

The following example demonstrates how to load graph data from multiple files.

For example, consider a vertex file split into four partitions as shown:

```
vertex_file1

1,Color,1,red,,
2,Color,1,yellow,,

vertex_file2

3,Color,1,blue,,
4,Color,1,green,,

vertex_file3

5,Color,1,orange,,
6,Color,1,white,,

vertex_file4

7,Color,1,black,,
```

The edge file is split into two partitions as shown:

```
edge_file1
1,1,2,edge1,Weight,4,,1.0,
```

```
2,2,3,edge2,Weight,4,,2.0,3,3,4,edge3,Weight,4,,3.0,edge_file2
4,4,5,edge4,Weight,4,,4.0,5,5,6,edge5,Weight,4,,5.0,6,6,7,edge6,Weight,4,,6.0,
```

The following graph configuration can be used to load the graph data from four vertex files and two edge files into the same graph. Note that all the uris are specified inside the JSON graph configuration.

```
{
  "format": "flat file",
 "vertex uris": ["vertex file1", "vertex file2", "vertex file3",
"vertex file4"],
  "edge uris": ["edge file1", "edge file2"],
  "separator": ",",
  "edge props": [
    {
      "name": "Weight",
     "type": "double"
   }
 ],
  "vertex_props": [
      "name": "Color",
      "type": "string"
    }
 1
```

You can also create a graph configuration with multiple file partitions using Java as shown:

```
FileGraphConfig config = GraphConfigBuilder
    .forFileFormat(Format.FLAT_FILE)
    .setSeparator(",")
    .addVertexUri("vertex_file1")
    .addVertexUri("vertex_file2")
    .addVertexUri("vertex_file3")
    .addVertexUri("vertex_file4")
    .addEdgeUri("edge_file1")
    .addEdgeUri("edge_file2")
    .addVertexProperty("Color", PropertyType.STRING)
    .addEdgeProperty("Weight", PropertyType.DOUBLE)
    .build();
```



Note:

The graph configuration in the preceding codes include one double edge property named "Weight" and one string vertex property named "Color".

You can now load the graph data from the files as explained in Creating a graph using graph builder API.

The graph server (PGX) will automatically load the graph in parallel, using one thread for each file. This means that a graph can be loaded in parallel with as many threads as files are given depending on the configured parallelism for the graph server (PGX) instance.

Note:

Since the graph config will be used for all of the specified files, it is crucial to use the same format for all these files, that is, using the same separator, having the same defined properties, complying with the same format specification.

28.3 Exporting Graphs Into a File

The graph server (PGX) allows the client to export a currently loaded graph into a file.

Using the store() method on any PgxGraph object, the client can specify which file format to store the graph in. The client can also dynamically select the set of properties to be stored with the graph, that is, not all the properties need to be exported. The client can specify a CompressionScheme to use when storing as shown:

Table 28-20 Files CompressionScheme

CompressionScheme	Supported Formats
NONE	All formats
GZIP	ADJ_LIST, EDGE_LIST, FLAT_FILE, TWO_TABLES (text)

The client can export to multiple files as well.

When PGX exports the specified graph into a file, PGX also creates a graph config which the client receives as return value. This is to help loading the created graph instance later.

When exporting graph data into multiple files a FileGraphStoringConfig can be used which contains the following JSON fields:



Table 28-21 Graph Configuration when Exporting Graph into Multiple Files

Field	Туре	Description	Default
base_path	string	Base path to use for storing a graph; file paths will be constructed using the following format , that is, parent_path/ my_graph_1.edges.	null
compression_sche me	<pre>enum[none, gzip]</pre>	The scheme to use for compression, or none to disable compression.	none
delimiter	character	Delimiter character used as separator when storing. The characters ", {, } and \n cannot be used as delimiters.	null
edge_extension	string	The extension to use when creating edge file partitions.	edges
<pre>initial_partitio n_index</pre>	integer	The value used as initial partition index, that is, initial_partition_i ndex=1024 -> my_graph_1024.edges	1
		<pre>my_graph_1025.edges .</pre>	
num_partitions	integer	The number of partitions that should be created, when exporting to multiple files.	1
row_extension	string	The extension to use when creating row file partitions.	rows
vertex_extension	string	The extension to use when creating vertex file partitions.	nodes

• Exporting a Graph to Disk

28.3.1 Exporting a Graph to Disk

You can save a graph loaded into memory to the disk in various formats. Therefore you can make sub-graphs and graph data computed at run time through analytics persistent, for future use. The resulting file can be used later as input for the graph server (PGX).

Consider the following example where a graph is loaded into memory and PageRank analysis is executed on the graph.

JShell

- Java
- Python

JShell

```
var g = session.readGraphWithProperties("<path_to_json>")
var rank = analyst.pagerank(g, 0.001, 0.85, 100)
```

Java

```
PgxGraph g = session.readGraphWithProperties("<path_to_json>");
Analyst analyst = session.createAnalyst();
VertexProperty<Integer, Double> rank = analyst.pagerank(g, 0.001, 0.85, 100);
```

Python

```
g = session.read_graph_with_properties("<path_to_json>")
analyst = session.create_analyst()
rank = analyst.pagerank(g, 0.001, 0.85, 100)
```

You can now store the graph, together with the result of the PageRank analysis and all original edge properties, as a file in edge-list format, on disk. When a graph is stored, you need to specify the graph format, a path where the file should be stored, the properties to store and a flag that specifies whether or not a file should be overwritten should a file with the same name already exist.

- JShell
- Java
- Python

JShell

```
var config = g.store(Format.EDGE_LIST, "<file-path>", List.of(rank),
EdgeProperty.ALL, false)
```

Java

```
var config = g.store(Format.EDGE_LIST, "<file-path>", List.of(rank),
EdgeProperty.ALL, false);
```

Python

```
config = g.store('edge_list', "<file-path>", vertex_properties = [rank],
overwrite= False)
```

The graph data can now be found under the file path. The graph configuration returned by the store method can be used to load the new graph back into memory. To persist the graph configuration to disk as well, you can use the config's toString method to get a JSON representation:

- JShell
- Java
- Python

JShell

```
var path = Paths.get("<file-path>")
Files.writeString(path, config.toString())
```

Java

```
import apache.commons.io.*; // PGX contains a version of Apache Commons IO
...
FileUtils.write(new File("<file-path>"), config.toString());
```

Python

```
with open("<file-path>","w"):
    f.write(str(config))
```

28.4 Exporting a Graph into Multiple Files

You can store a graph into multiple files using the store method. Most parameters are the same, as if storing to a single file. However, the main difference lies in specifying how to partition the data.

You can partition the data in either of the following two ways:

- specifying a FileGraphStoringConfig (see Table 28-21 for more information)
- specifying a base path and the number of partitions

Export into Multiple Files Using FileGraphStoringConfig

You can specify a more detailed way of creating the multiple partitions used to store the graph by using the FileGraphStoringConfig. You can create a FileGraphStoringConfig object using a FileGraphStoringConfigBuilder.

For example, the following code specifies that the storing should be done into four partitions using the specified base path and using zero as the initial index for the partitioning. It also

contains the file extension to use for vertex files and for edge files and finally it sets comma as the delimiter to be used when storing the graph data:

```
FileGraphStoringConfig storingConfig = new
FileGraphStoringConfigBuilder(basePath) //
    .setNumPartitions(4) //
    .setInitialPartitionIndex(0) //
    .setVertexExtension(vertexExtension) //
    .setEdgeExtension(edgeExtension) //
    .setDelimiter(',') //
    .build();
```

You can also partition all tables equally using the numPartitions parameter. This implies that all tables are exported into the same number of files.

If you do not want to partition the tables equally, you can either create one PartitionedGraphConfig which contains for each provider a FileGraphStoringConfig (see Table 28-21) or we can use a version of store() that takes two maps of FileGraphStoringConfigs, one for the vertex tables and one for the edge tables.

For the first option, you can create for each vertex and edge table a FileGraphStoringConfig and put it into a FileEntityProviderConfig using setStoringOptions in the builder of FileEntityProviderConfig. The providers are then added to the PartitionedGraphConfig as edge and vertex providers using addVertexProvider() and addEdgeProvider() in the builder of PartitionedGraphConfig. Later you can use the store() method which takes the PartitionedGraphConfig as parameter.

The second option creates for every edge and vertex table a storing configuration, adds those into a vertex provider and an edge provider map and calls the corresponding <code>store()</code> method with these maps as parameters.

For example:

```
FileGraphStoringConfig vertexStoringConfig1 = new
FileGraphStoringConfigBuilder(basePath + " vertexTable1") //
  .setNumPartitions(4) //
  .setInitialPartitionIndex(0) //
  .setVertexExtension(vertexExtension) //
  .setDelimiter(',') //
  .build();
FileGraphStoringConfig vertexStoringConfig2 = new
FileGraphStoringConfigBuilder(basePath + " vertexTable2") //
  .setNumPartitions(4) //
  .setInitialPartitionIndex(0) //
  .setVertexExtension(vertexExtension) //
  .setDelimiter(',') //
  .build();
FileGraphStoringConfig edgeStoringConfig1 = new
FileGraphStoringConfigBuilder(basePath + " edgeTable1") //
  .setNumPartitions(4) //
  .setInitialPartitionIndex(0) //
  .setEdgeExtension(edgeExtension) //
  .setDelimiter(',') //
  .build();
```



```
Map<String, FileGraphStoringConfig> vertexStoringConfigs = new HashMap<>();
vertexStoringConfigs.put("vertexTable1", vertexStoringConfig1);
vertexStoringConfigs.put("vertexTable2", vertexStoringConfig2);

Map<String, FileGraphStoringConfig> edgeStoringConfigs = new HashMap<>();
edgeStoringConfigs.put("edgeTable1", edgeStoringConfig);
```

Export into Multiple Files without FileGraphStoringConfig

If you only need to specify how many partitions are required and the base name to be used, it is simpler to use <code>store()</code> method by only specifying those parameters. Following this procedure, the graph server (PGX) will use defaults for the other fields. See Table 28-21 for more information on default values.

Export into Multiple Files Using a Graph Configuration Object

An alternate way for exporting into multiple files is by creating a FileGraphStoringConfig and putting it into a Graph Configuration object using setStoringOptions in its builder, and then using the corresponding version of the store() method.



Log Management in the Graph Server (PGX)

The graph server (PGX) internally uses the SLF4J interface with Logback as the default logger implementation.

Configuring Logback Logging

29.1 Configuring Logback Logging

The default Logback logging configuration file is located in /etc/oracle/graph/logback-server.xml. This configuration file contains the target location for the logs in /var/log/oracle/graph/. Additionally, the rolling file appenders are also defined in this configuration file.



- Logback is configured to roll the log files based on both log size (250 MB) and date.
- Log files are automatically saved in a compressed format in subdirectories, one directory per month. There can be multiple files on a given day.
- Also, each startup of the graph server(PGX) triggers a new log file.

The Logback configuration file is picked up automatically by the the graph server(PGX). To use this configuration in your java application, you can set the <code>logback.configurationFile</code> system variable when launching the JVM:

```
java -Dlogback.configurationFile=$PGX HOME/conf/logback.xml ...
```

Changing Logging Level During a JShell Session

When connected to the graph server using JShell, you can use the <code>loglevel(String loggerName, String levelName)</code> function to quickly change the logging level of any logger. For example:

```
loglevel("oracle.pgx", "debug")
loglevel("ROOT", "info")
loglevel("org.apache.hadoop", "off")
```

Logging in a Web Application Server

The graph-server-webapp-<version>.war file in the oracle-graph-webapps-<version>.zip download package contains the logback.xml. This file determines what should be logged in the web application running on the application server of your choice. The file is located in the folder WEB-INF/classes inside the graph-server-webapp-<version>.war file. By default, only

errors are logged. But you can change this file if you want more logging in your web server. You must restart the web server after you change the file, for the change to take effect.



Part VIII

Supplementary Information for Property Graph Support

This document has the following appendixes.

- Mapping Graph Server Roles to Default Privileges
- Disabling Transport Layer Security (TLS) in Graph Server
- Migrating Property Graph Applications from Before Release 21c
 If you are migrating from a previous version of Oracle Spatial and Graph to Release 21c, you may need to make some changes to existing property graph-related applications.
- Upgrading From Graph Server and Client 20.4.x to 21.x If you are upgrading from Graph Server and Client 20.4.x to 21.x version, you may need to create new roles in database and migrate authorization rules from pgx.conf file to the database. Also, starting from Graph Server and Client Release 21.1, TLS is enforced at the time of the RPM file installation.
- Third-Party License Information for Oracle Graph Server and Client
 This appendix contains licensing information about third-party products included with
 Oracle Graph Server and Client.

A

Mapping Graph Server Roles to Default Privileges

The following table describes the graph server (PGX) roles and the default privileges that are created in Basic Steps for Using an Oracle Database for Authentication:

Table A-1 Mapping Graph Server Roles to Default Privileges

Roles	Description	Permission
GRAPH_ADMINISTR ATOR	User who performs operations on the graph server (PGX) using the Java API. (As compared to running start and stop operations as an OS user.)	PGX_SESSION_CREATE PGX_SERVER_GET_INFO PGX_SERVER_MANAGE
GRAPH_DEVELOPER	User who creates graphs, publishes graphs, modifies graphs, queries graphs, and views graphs using the Java API or SQLcl or the graph visualization application.	PGX_SESSION_CREATE PGX_SESSION_NEW_GRAPH PGX_SESSION_GET_PUBLISHED_GR APH PGX_SESSION_MODIFY_MODEL PGX_SESSION_READ_MODEL
GRAPH_USER	User who queries graphs and views graphs Java API or SQLcl or the graph visualization application.	PGX_SESSION_CREATE PGX_SESSION_GET_PUBLISHED_GR APH

B

Disabling Transport Layer Security (TLS) in Graph Server

For demonstration or evaluation purposes, it is possible to turn off transport layer security (TLS) of the graph server.



Caution:

This is **not** recommended for production. In a secure configuration, the server must always have TLS enabled.

The following instructions only apply if you installed the graph server via the RPM package.



If you deployed the graph server into your own web server (such as Weblogic or Apache Tomcat), please refer to the manual of your web server for TLS configuration.

- 1. Edit /etc/oracle/graph/server.conf to change enable tls to false.
- 2. Optionally, if you are using Graph Server REST API Version 1 (cookie-based authentication), then perform the following by editing the WEB-INF/web.xml file inside the /opt/oracle/graph/pgx/server/graph-server-webapp-24.2.0.war file:
 - a. Replace `https` with `http` for the `pgx.base url` property. For example:

b. Configure the cookies to be sent over non-secure connections by setting <secure>false/secure> as follows:

Restart the server.

```
sudo systemctl restart pgx
```

The graph server now accepts connections over HTTP instead of HTTPS.

On Oracle Linux 7, you can execute the following script to perform the preceding four steps all at once:

```
echo "$(jq '.enable_tls = false' /etc/oracle/graph/server.conf)" > /etc/
oracle/graph/server.conf
WAR=$(find /opt/oracle/graph/pgx/server -name '*.war')
TMP=$(mktemp -d)
cd $TMP
unzip $WAR WEB-INF/web.xml
sed -i 's|<secure>true</secure>|<secure>false</secure>|' WEB-INF/web.xml
sed -i 's|https://|http://|' WEB-INF/web.xml
sudo zip $WAR WEB-INF/web.xml
rm -r $TMP
sudo systemctl restart pgx
```



C

Migrating Property Graph Applications from Before Release 21c

If you are migrating from a previous version of Oracle Spatial and Graph to Release 21c, you may need to make some changes to existing property graph-related applications.

Also note that Oracle Graph Server and Client is required for property graph applications. This can be downloaded from Oracle Software Delivery Cloud or from Oracle Downloads page.

Security-Related Changes

The Property Graph feature contains a series of enhancements to further strengthen the security of the property graph component of product. The following enhancements may require manual changes to existing graph applications so that they continue to work properly.

 Graph configuration files now require sensitive information such as passwords to be stored in Java Keystore files

If you use graph configuration files you are required to use Java Keystore files to store sensitive information such as passwords. (See Store the Database Password in a Keystore for how to create and reference such a keystore.)

All existing graph configuration files with secrets in them must be migrated to the keystore-based approach.

 In a three-tier deployment, access to the PGX server file system requires a directories allowlist

By default, the PGX server does not allow remote access to the local file system. This can be explicitly allowed, though, in /etc/oracle/graph/pgx.conf by setting allow_local_filesystem to true. If you set allow_local_filesystem to true, you must also specify a list of directories that are allowed to be accessed, by setting datasource dir whitelist. For example:

```
"allow_local_filesystem": true,
"datasource dir whitelist": ["/scratch/data1", "/scratch/data2"]
```

This will allow remote users to read and write data on the server's file-system from and into /scratch/data1 and /scratch/data2.

 In a three-tier deployment, reading from remote locations into PGX is no longer allowed by default

Previously, PGX allowed graph data to be read from remote locations over FTP or HTTP. This is no longer allowed by default and requires explicit opt-in by the server administrator. To opt-in, specify the allowed_remote_loading_locations configuration option in /etc/oracle/graph/pgx.conf. For example:

```
allowed remote loading locations: ["*"]
```

In addition:

 The ftp and http protocols are no longer supported for loading or storing data because they are unencrypted and thus insecure. Configuration files can no longer be loaded from remote locations, but must be loaded from the local file system.

Removed shell command line options

The following command line options of the Groovy-based opg shell have been removed and will no longer work:

- --attach the shell no longer supports attaching to existing sessions via command line
- --password the shell will prompt now for the password

Also note that the Groovy-based shell has been deprecated, and you are encourage to use the new JShell-based shell instead (see Interactive Graph Shell CLIs).

Changes to PGX APIs

The following APIs no longer return graph configuration information:

- ServerInstance#getGraphInfo()
- ServerInstance#getGraphInfos()
- ServerInstance#getServerState()

The REST API now identifies collections, graphs, and properties by UUID instead of a name.

The namespaces for graphs and properties are session private by default now. This implies that some operations that would previously throw an exception due to a naming conflict could succeed now.

PgxGraph#publish() throws an exception now if a graph with the given name has been published before.

Migrating Data to a New Database Version

Oracle Graph Server and Client works with older database versions. (See Verifying Database Compatibility for information.) If as part of your upgrade you also upgraded your Oracle Database, you can migrate your existing graph data that was stored using the Oracle Property Graph format by invoking the following helper script in your database after the upgrade:

```
sqlplus> EXECUTE mdsys.opg.migrate pg to current(graph name=>'mygraph');
```

The preceding example migrates the property graph *mygraph* to the current database version.

Uninstalling Previous Versions of Property Graph Libraries

This is only necessary if you are using Oracle Database versions 12.2, 18c, or 19c.

Use of the Property Graph feature of Oracle Database now requires Oracle Graph Server and Client that is installed separately. After you have completed the Graph Server and Client installation, complete the preceding migration steps (if needed), and confirmed that everything is working well, it is recommended that you remove the binaries of *older* graph installations from your Oracle Database installation by performing the following un-install steps:

1. Make sure the Property Graph mid-tier components are not in use on the target database host. For example, ensure that there is no application running which uses any files under <code>\$ORACLE_HOME/md/property_graph</code>. Examples of such an application are a running PGX server on the same host as the database or a client application that references the JAR files under <code>\$ORACLE_HOME/md/property_graph/lib</code>.



- It is **not** necessary to shut down the database to perform the uninstall. The Oracle database itself does not reference or use any files under $property_graph$.
- 2. Remove the files under <code>\$ORACLE_HOME/md/property_graph</code> on your database host. On Linux, you can copy the following helper script to your database host and run it with as the DBA operating system user: <code>/opt/oracle/graph/scripts/patch-opg-oracle-home.sh</code>



D

Upgrading From Graph Server and Client 20.4.x to 21.x

If you are upgrading from Graph Server and Client 20.4.x to 21.x version, you may need to create new roles in database and migrate authorization rules from pgx.conf file to the database. Also, starting from Graph Server and Client Release 21.1, TLS is enforced at the time of the RPM file installation.

One of the main enhancements of Graph Server and Client Release 21.1 is moving the graph access permissions from the pgx.conf file to the database.

In order to comply with this feature you must perform the database actions explained in the following sections:

Creating additional roles in the database

- See Basic Steps for Using an Oracle Database for Authentication for more information on manually creating the roles in the database with the default set of privileges.
- Mapping Graph Server Roles to Default Privileges in the appendix for more details on the default mappings.

Migrating authorization rules

You must execute database GRANTS for user-added mappings contained in the pgx.conf file when upgrading to 21.x.

The following examples explain the various scenarios where migration of authorization rules may or may not apply.

Example D-1 Migrating user-added mappings to database

To migrate the following user-added mappings in pgx.conf file:

```
"authorization": [{
    "pgx_role": "GRAPH_DEVELOPER",
    "pgx_permissions": [{
        "grant": "PGX_SESSION_ADD_PUBLISHED_GRAPH"
    },
...
```

You must execute the following GRANT statement in the database used by 21.x:

```
GRANT PGX SESSION ADD PUBLISHED GRAPH TO GRAPH DEVELOPER
```

Example D-2 Migrating user-added file system authorization rules to database

To migrate the following user-added file system authorization rules in pgx.conf file:

```
"file_locations": [{
    "name": "my_graph_data",
    "location": "/opt/oracle/graph/data"
}],
"authorization": [{
    "pgx_role": "GRAPH_DEVELOPER",
    "pgx_permissions": [{
        "file_location": "my_graph_data",
        "grant": "read"
    },
...
```

You must execute the following GRANT statement in the database used by 21.x:

```
CREATE OR REPLACE DIRECTORY my_graph_data AS '/opt/oracle/graph/data' GRANT READ ON DIRECTORY my graph data TO GRAPH DEVELOPER
```

Example D-3 User-added graph authorization rules for preloaded graphs



No migration required for user-added graph authorization rules for preloaded graphs.

You must not migrate user-added graph authorization rules for preloaded graphs (as shown in the following code) as these rules continue to be configured in pgx.conf file.

```
"preload_graphs": [{
    "path": "/data/my-graph.json",
    "name": "global_graph"
}],
"authorization": [{
    "pgx_role": "GRAPH_DEVELOPER",
    "pgx_permissions": [{
        "preloaded_graph": "global_graph",
        "grant": "read"
    },
...
```

Self-signed TLS certificate now generated upon RPM installation

In Graph Server and Client 21.x the RPM installation generates a self-signed certificate into /etc/oracle/graph, which the server uses to enable TLS by default.

According to security best practices, access to the certificate is restricted to the <code>oraclegraph</code> operating system user. The implication of this is that you no longer can start the graph server via the <code>/opt/oracle/graph/pgx/bin/start-server</code> script, even if your user is part of the <code>oraclegraph</code> group. Instead, manage the lifecycle of the graph server via <code>systemctl</code> commands. For example:

sudo systemctl start pgx

Another possible option is to change the ownership of the certificate as shown:

sudo chown <youruser> /etc/oracle/graph/server key.pem

Turning off TLS is not recommended as it reduces the security of your connection. However, if you must do so, see Disabling Transport Layer Security (TLS) in Graph Server for more details.



F

Third-Party License Information for Oracle Graph Server and Client

This appendix contains licensing information about third-party products included with Oracle Graph Server and Client.

Eclipse Parsson

Vendor: Eclipse Foundation

Version: 1.1.5

```
Eclipse Parsson (org.eclipse.parsson:parsson)
Copyright (c) 2011, 2023 Oracle and/or its affiliates. All rights reserved.
```

This program and the accompanying materials are made available under the terms of the Eclipse Public License v. 2.0, which is available at http://www.eclipse.org/legal/epl-2.0.

This Source Code may also be made available under the following Secondary Licenses when the conditions for such availability set forth in the Eclipse Public License v. 2.0 are satisfied: GNU General Public License, version 2 with the GNU Classpath Exception, which is available at https://www.qnu.org/software/classpath/license.html.

SPDX-License-Identifier: Eclipse Public License 2.0 + GPL v.2 with CPE

```
Eclipse Public License 2.0 + GPL v.2 with CPE
```

Notices for Eclipse Parsson

This content is produced and maintained by the Eclipse Parsson project.

- * Project home: https://projects.eclipse.org/projects/ee4j.parsson
- ## Trademarks

Eclipse Parsson is a trademark of the Eclipse Foundation.

Copyright

All content is the property of the respective authors or their employers. For more information regarding authorship of content, please consult the listed source code repository logs.

Declared Project Licenses

This program and the accompanying materials are made available under the terms of the Eclipse Public License v. 2.0 which is available at https://www.eclipse.org/legal/epl-2.0.

SPDX-License-Identifier: EPL-2.0

Source Code

The project maintains the following source code repositories:

* https://github.com/eclipse-ee4j/parsson

Third-party Content

This project leverages the following third party content.

None

Cryptography

Content may contain encryption software. The country in which you are currently may have restrictions on the import, possession, and use, and/or re-export to another country, of encryption software. BEFORE using any encryption software, please check the country's laws, regulations and policies concerning the import, possession, or use, and re-export of encryption software, to see if this is permitted.

Eclipse Public License - v 2.0

THE ACCOMPANYING PROGRAM IS PROVIDED UNDER THE TERMS OF THIS ECLIPSE PUBLIC LICENSE ("AGREEMENT"). ANY USE, REPRODUCTION OR DISTRIBUTION OF THE PROGRAM CONSTITUTES RECIPIENT'S ACCEPTANCE OF THIS AGREEMENT.

1. DEFINITIONS

"Contribution" means:

- a) in the case of the initial Contributor, the initial content Distributed under this Agreement, and
- b) in the case of each subsequent Contributor:
 - i) changes to the Program, and
 - ii) additions to the Program;

where such changes and/or additions to the Program originate from and are Distributed by that particular Contributor. A Contribution "originates" from a Contributor if it was added to the Program by such Contributor itself or anyone acting on such Contributor's behalf. Contributions do not include changes or additions to the Program that are not Modified Works.

"Contributor" means any person or entity that Distributes the Program.

"Licensed Patents" mean patent claims licensable by a Contributor which are necessarily infringed by the use or sale of its Contribution alone or when combined with the Program.

"Program" means the Contributions Distributed in accordance with this Agreement.

"Recipient" means anyone who receives the Program under this Agreement or any Secondary License (as applicable), including Contributors.

"Derivative Works" shall mean any work, whether in Source Code or other form, that is based on (or derived from) the Program and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship.

"Modified Works" shall mean any work in Source Code or other form that results from an addition to, deletion from, or modification of the contents of the Program, including, for purposes of clarity any new file



in Source Code form that contains any contents of the Program. Modified Works shall not include works that contain only declarations, interfaces, types, classes, structures, or files of the Program solely in each case in order to link to, bind by name, or subclass the Program or Modified Works thereof.

"Distribute" means the acts of a) distributing or b) making available in any manner that enables the transfer of a copy.

"Source Code" means the form of a Program preferred for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Secondary License" means either the GNU General Public License, Version 2.0, or any later versions of that license, including any exceptions or additional permissions as identified by the initial Contributor.

2. GRANT OF RIGHTS

- a) Subject to the terms of this Agreement, each Contributor hereby grants Recipient a non-exclusive, worldwide, royalty-free copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, Distribute and sublicense the Contribution of such Contributor, if any, and such Derivative Works.
- b) Subject to the terms of this Agreement, each Contributor hereby grants Recipient a non-exclusive, worldwide, royalty-free patent license under Licensed Patents to make, use, sell, offer to sell, import and otherwise transfer the Contribution of such Contributor, if any, in Source Code or other form. This patent license shall apply to the combination of the Contribution and the Program if, at the time the Contribution is added by the Contributor, such addition of the Contribution causes such combination to be covered by the Licensed Patents. The patent license shall not apply to any other combinations which include the Contribution. No hardware per se is licensed hereunder.
- c) Recipient understands that although each Contributor grants the licenses to its Contributions set forth herein, no assurances are provided by any Contributor that the Program does not infringe the patent or other intellectual property rights of any other entity. Each Contributor disclaims any liability to Recipient for claims brought by any other entity based on infringement of intellectual property rights or otherwise. As a condition to exercising the rights and licenses granted hereunder, each Recipient hereby assumes sole responsibility to secure any other intellectual property rights needed, if any. For example, if a third party patent license is required to allow Recipient to Distribute the Program, it is Recipient's responsibility to acquire that license before distributing the Program.
- d) Each Contributor represents that to its knowledge it has sufficient copyright rights in its Contribution, if any, to grant the copyright license set forth in this Agreement.
- e) Notwithstanding the terms of any Secondary License, no Contributor makes additional grants to any Recipient (other than those set forth in this Agreement) as a result of such Recipient's receipt of the Program under the terms of a Secondary License (if permitted under the terms of Section 3).



3. REQUIREMENTS

- 3.1 If a Contributor Distributes the Program in any form, then:
 - a) the Program must also be made available as Source Code, in accordance with section 3.2, and the Contributor must accompany the Program with a statement that the Source Code for the Program is available under this Agreement, and informs Recipients how to obtain it in a reasonable manner on or through a medium customarily used for software exchange; and
 - b) the Contributor may Distribute the Program under a license different than this Agreement, provided that such license:
 - i) effectively disclaims on behalf of all other Contributors all warranties and conditions, express and implied, including warranties or conditions of title and non-infringement, and implied warranties or conditions of merchantability and fitness for a particular purpose;
 - ii) effectively excludes on behalf of all other Contributors all liability for damages, including direct, indirect, special, incidental and consequential damages, such as lost profits;
 - iii) does not attempt to limit or alter the recipients' rights in the Source Code under section 3.2; and
 - iv) requires any subsequent distribution of the Program by any party to be under a license that satisfies the requirements of this section 3.
- 3.2 When the Program is Distributed as Source Code:
 - a) it must be made available under this Agreement, or if the Program (i) is combined with other material in a separate file or files made available under a Secondary License, and (ii) the initial Contributor attached to the Source Code the notice described in Exhibit A of this Agreement, then the Program may be made available under the terms of such Secondary Licenses, and
 - b) a copy of this Agreement must be included with each copy of the Program.
- 3.3 Contributors may not remove or alter any copyright, patent, trademark, attribution notices, disclaimers of warranty, or limitations of liability ("notices") contained within the Program from any copy of the Program which they Distribute, provided that Contributors may add their own appropriate notices.

4. COMMERCIAL DISTRIBUTION

Commercial distributors of software may accept certain responsibilities with respect to end users, business partners and the like. While this license is intended to facilitate the commercial use of the Program, the Contributor who includes the Program in a commercial product offering should do so in a manner which does not create potential liability for other Contributors. Therefore, if a Contributor includes the Program in a commercial product offering, such Contributor ("Commercial Contributor") hereby agrees to defend and indemnify every other Contributor ("Indemnified Contributor") against any losses, damages and costs (collectively "Losses") arising from claims, lawsuits and other legal actions brought by a third party against the Indemnified Contributor to the extent caused by the acts or omissions of such



Commercial Contributor in connection with its distribution of the Program in a commercial product offering. The obligations in this section do not apply to any claims or Losses relating to any actual or alleged intellectual property infringement. In order to qualify, an Indemnified Contributor must: a) promptly notify the Commercial Contributor in writing of such claim, and b) allow the Commercial Contributor to control, and cooperate with the Commercial Contributor in, the defense and any related settlement negotiations. The Indemnified Contributor may participate in any such claim at its own expense.

For example, a Contributor might include the Program in a commercial product offering, Product X. That Contributor is then a Commercial Contributor. If that Commercial Contributor then makes performance claims, or offers warranties related to Product X, those performance claims and warranties are such Commercial Contributor's responsibility alone. Under this section, the Commercial Contributor would have to defend claims against the other Contributors related to those performance claims and warranties, and if a court requires any other Contributor to pay any damages as a result, the Commercial Contributor must pay those damages.

5. NO WARRANTY

EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, AND TO THE EXTENT PERMITTED BY APPLICABLE LAW, THE PROGRAM IS PROVIDED ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR CONDITIONS OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Each Recipient is solely responsible for determining the appropriateness of using and distributing the Program and assumes all risks associated with its exercise of rights under this Agreement, including but not limited to the risks and costs of program errors, compliance with applicable laws, damage to or loss of data, programs or equipment, and unavailability or interruption of operations.

6. DISCLAIMER OF LIABILITY

EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, AND TO THE EXTENT PERMITTED BY APPLICABLE LAW, NEITHER RECIPIENT NOR ANY CONTRIBUTORS SHALL HAVE ANY LIABILITY FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING WITHOUT LIMITATION LOST PROFITS), HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OR DISTRIBUTION OF THE PROGRAM OR THE EXERCISE OF ANY RIGHTS GRANTED HEREUNDER, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

7. GENERAL

If any provision of this Agreement is invalid or unenforceable under applicable law, it shall not affect the validity or enforceability of the remainder of the terms of this Agreement, and without further action by the parties hereto, such provision shall be reformed to the minimum extent necessary to make such provision valid and enforceable.

If Recipient institutes patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Program itself (excluding combinations of the Program with other software or hardware) infringes such Recipient's patent(s), then such Recipient's rights granted under Section 2(b) shall terminate as of the date such litigation is filed.



All Recipient's rights under this Agreement shall terminate if it fails to comply with any of the material terms or conditions of this Agreement and does not cure such failure in a reasonable period of time after becoming aware of such noncompliance. If all Recipient's rights under this Agreement terminate, Recipient agrees to cease use and distribution of the Program as soon as reasonably practicable. However, Recipient's obligations under this Agreement and any licenses granted by Recipient relating to the Program shall continue and survive.

Everyone is permitted to copy and distribute copies of this Agreement, but in order to avoid inconsistency the Agreement is copyrighted and may only be modified in the following manner. The Agreement Steward reserves the right to publish new versions (including revisions) of this Agreement from time to time. No one other than the Agreement Steward has the right to modify this Agreement. The Eclipse Foundation is the initial Agreement Steward. The Eclipse Foundation may assign the responsibility to serve as the Agreement Steward to a suitable separate entity. Each new version of the Agreement will be given a distinguishing version number. The Program (including Contributions) may always be Distributed subject to the version of the Agreement under which it was received. In addition, after a new version of the Agreement is published, Contributor may elect to Distribute the Program (including its Contributions) under the new version.

Except as expressly stated in Sections 2(a) and 2(b) above, Recipient receives no rights or licenses to the intellectual property of any Contributor under this Agreement, whether expressly, by implication, estoppel or otherwise. All rights in the Program not expressly granted under this Agreement are reserved. Nothing in this Agreement is intended to be enforceable by any entity that is not a Contributor or Recipient. No third-party beneficiary rights are created under this Agreement.

Exhibit A - Form of Secondary Licenses Notice

"This Source Code may also be made available under the following Secondary Licenses when the conditions for such availability set forth in the Eclipse Public License, v. 2.0 are satisfied: {name license(s), version(s), and exceptions or additional permissions here}."

Simply including a copy of this Agreement, including this Exhibit A is not sufficient to license the Source Code under Secondary Licenses.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

GNU GENERAL PUBLIC LICENSE Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your

freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software—to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

O. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of



running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

- 2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
 - a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
 - b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
 - c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of



Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections
 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

- 4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
- 5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
- 6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
 - 7. If, as a consequence of a court judgment or allegation of patent



infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

- 8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
- 9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY



11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'. This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may



be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

CLASSPATH EXCEPTION

Linking this library statically or dynamically with other modules is making a combined work based on this library. Thus, the terms and conditions of the GNU General Public License version 2 cover the whole combination.

As a special exception, the copyright holders of this library give you permission to link this library with independent modules to produce an executable, regardless of the license terms of these independent modules, and to copy and distribute the resulting executable under terms of your choice, provided that you also meet, for each linked independent module, the terms and conditions of the license of that module. An independent module is a module which is not derived from or based on this library. If you modify this library, you may extend this exception to your version of the library, but you are not obligated to do so. If you do not wish to do so, delete this exception statement from your version.

Fourth Party Dependencies

"Jakarta JSON Processing API" (jakarta.json:jakarta.json-api)

Copyright (c) 2011, 2023 Oracle and/or its affiliates. All rights reserved.

This program and the accompanying materials are made available under the terms of the Eclipse Public License v. 2.0, which is available at http://www.eclipse.org/legal/epl-2.0.

This Source Code may also be made available under the following Secondary Licenses when the conditions for such availability set forth in the Eclipse Public License v. 2.0 are satisfied: GNU General Public License, version 2 with the GNU Classpath Exception, which is available at https://www.gnu.org/software/classpath/license.html.

SPDX-License-Identifier: Eclipse Public License 2.0 + GPL v.2 with CPE

Licenses:

Eclipse Public License 2.0 + GPL v.2 with CPE

Titanium JSON-LD

Vendor: The original authors or authors

Version: 1.3.2

----- Top-level license

Apache License
Version 2.0, January 2004
http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to

communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution



notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.



To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

------ Copyright notices ------ \star Copyright 2020 the original author or authors. * Licensed under the Apache License, Version 2.0 (the "License"); * you may not use this file except in compliance with the License. * You may obtain a copy of the License at * http://www.apache.org/licenses/LICENSE-2.0 * Unless required by applicable law or agreed to in writing, software * distributed under the License is distributed on an "AS IS" BASIS, * WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. * See the License for the specific language governing permissions and * limitations under the License. ----- Fourth-party information -----== NAME OF DEPENDENCY 1 jakarta.json-api == License

Eclipse Public License - v 2.0

THE ACCOMPANYING PROGRAM IS PROVIDED UNDER THE TERMS OF THIS ECLIPSE PUBLIC LICENSE ("AGREEMENT"). ANY USE, REPRODUCTION OR DISTRIBUTION OF THE PROGRAM CONSTITUTES RECIPIENT'S ACCEPTANCE OF THIS AGREEMENT.

1. DEFINITIONS

"Contribution" means:

- a) in the case of the initial Contributor, the initial content Distributed under this Agreement, and
- b) in the case of each subsequent Contributor:
 - i) changes to the Program, and
 - ii) additions to the Program;

where such changes and/or additions to the Program originate from and are Distributed by that particular Contributor. A Contribution "originates" from a Contributor if it was added to the Program by

such Contributor itself or anyone acting on such Contributor's behalf. Contributions do not include changes or additions to the Program that are not Modified Works.

"Contributor" means any person or entity that Distributes the Program.

"Licensed Patents" mean patent claims licensable by a Contributor which are necessarily infringed by the use or sale of its Contribution alone or when combined with the Program.

"Program" means the Contributions Distributed in accordance with this Agreement.

"Recipient" means anyone who receives the Program under this Agreement or any Secondary License (as applicable), including Contributors.

"Derivative Works" shall mean any work, whether in Source Code or other form, that is based on (or derived from) the Program and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship.

"Modified Works" shall mean any work in Source Code or other form that results from an addition to, deletion from, or modification of the contents of the Program, including, for purposes of clarity any new file in Source Code form that contains any contents of the Program. Modified Works shall not include works that contain only declarations, interfaces, types, classes, structures, or files of the Program solely in each case in order to link to, bind by name, or subclass the Program or Modified Works thereof.

"Distribute" means the acts of a) distributing or b) making available in any manner that enables the transfer of a copy.

"Source Code" means the form of a Program preferred for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Secondary License" means either the GNU General Public License, Version 2.0, or any later versions of that license, including any exceptions or additional permissions as identified by the initial Contributor.

2. GRANT OF RIGHTS

- a) Subject to the terms of this Agreement, each Contributor hereby grants Recipient a non-exclusive, worldwide, royalty-free copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, Distribute and sublicense the Contribution of such Contributor, if any, and such Derivative Works.
- b) Subject to the terms of this Agreement, each Contributor hereby grants Recipient a non-exclusive, worldwide, royalty-free patent license under Licensed Patents to make, use, sell, offer to sell, import and otherwise transfer the Contribution of such Contributor, if any, in Source Code or other form. This patent license shall apply to the combination of the Contribution and the Program if, at the time the Contribution is added by the Contributor, such addition of the Contribution causes such combination to be covered by the Licensed Patents. The patent license shall not apply to any other combinations which include the Contribution. No hardware per se is licensed hereunder.



- c) Recipient understands that although each Contributor grants the licenses to its Contributions set forth herein, no assurances are provided by any Contributor that the Program does not infringe the patent or other intellectual property rights of any other entity. Each Contributor disclaims any liability to Recipient for claims brought by any other entity based on infringement of intellectual property rights or otherwise. As a condition to exercising the rights and licenses granted hereunder, each Recipient hereby assumes sole responsibility to secure any other intellectual property rights needed, if any. For example, if a third party patent license is required to allow Recipient to Distribute the Program, it is Recipient's responsibility to acquire that license before distributing the Program.
- d) Each Contributor represents that to its knowledge it has sufficient copyright rights in its Contribution, if any, to grant the copyright license set forth in this Agreement.
- e) Notwithstanding the terms of any Secondary License, no Contributor makes additional grants to any Recipient (other than those set forth in this Agreement) as a result of such Recipient's receipt of the Program under the terms of a Secondary License (if permitted under the terms of Section 3).

3. REQUIREMENTS

- 3.1 If a Contributor Distributes the Program in any form, then:
 - a) the Program must also be made available as Source Code, in accordance with section 3.2, and the Contributor must accompany the Program with a statement that the Source Code for the Program is available under this Agreement, and informs Recipients how to obtain it in a reasonable manner on or through a medium customarily used for software exchange; and
 - b) the Contributor may Distribute the Program under a license different than this Agreement, provided that such license:
 - i) effectively disclaims on behalf of all other Contributors all warranties and conditions, express and implied, including warranties or conditions of title and non-infringement, and implied warranties or conditions of merchantability and fitness for a particular purpose;
 - ii) effectively excludes on behalf of all other Contributors all liability for damages, including direct, indirect, special, incidental and consequential damages, such as lost profits;
 - iii) does not attempt to limit or alter the recipients' rights in the Source Code under section 3.2; and
 - iv) requires any subsequent distribution of the Program by any party to be under a license that satisfies the requirements of this section 3.
- 3.2 When the Program is Distributed as Source Code:
 - a) it must be made available under this Agreement, or if the Program (i) is combined with other material in a separate file or files made available under a Secondary License, and (ii) the initial Contributor attached to the Source Code the notice described in Exhibit A of this Agreement, then the Program may be made available under the terms of such Secondary Licenses, and



- b) a copy of this Agreement must be included with each copy of the $\ensuremath{\operatorname{Program}}$.
- 3.3 Contributors may not remove or alter any copyright, patent, trademark, attribution notices, disclaimers of warranty, or limitations of liability ("notices") contained within the Program from any copy of the Program which they Distribute, provided that Contributors may add their own appropriate notices.

4. COMMERCIAL DISTRIBUTION

Commercial distributors of software may accept certain responsibilities with respect to end users, business partners and the like. While this license is intended to facilitate the commercial use of the Program, the Contributor who includes the Program in a commercial product offering should do so in a manner which does not create potential liability for other Contributors. Therefore, if a Contributor includes the Program in a commercial product offering, such Contributor ("Commercial Contributor") hereby agrees to defend and indemnify every other Contributor ("Indemnified Contributor") against any losses, damages and costs (collectively "Losses") arising from claims, lawsuits and other legal actions brought by a third party against the Indemnified Contributor to the extent caused by the acts or omissions of such Commercial Contributor in connection with its distribution of the Program in a commercial product offering. The obligations in this section do not apply to any claims or Losses relating to any actual or alleged intellectual property infringement. In order to qualify, an Indemnified Contributor must: a) promptly notify the Commercial Contributor in writing of such claim, and b) allow the Commercial Contributor to control, and cooperate with the Commercial Contributor in, the defense and any related settlement negotiations. The Indemnified Contributor may participate in any such claim at its own expense.

For example, a Contributor might include the Program in a commercial product offering, Product X. That Contributor is then a Commercial Contributor. If that Commercial Contributor then makes performance claims, or offers warranties related to Product X, those performance claims and warranties are such Commercial Contributor's responsibility alone. Under this section, the Commercial Contributor would have to defend claims against the other Contributors related to those performance claims and warranties, and if a court requires any other Contributor to pay any damages as a result, the Commercial Contributor must pay those damages.

5. NO WARRANTY

EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, AND TO THE EXTENT PERMITTED BY APPLICABLE LAW, THE PROGRAM IS PROVIDED ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR CONDITIONS OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Each Recipient is solely responsible for determining the appropriateness of using and distributing the Program and assumes all risks associated with its exercise of rights under this Agreement, including but not limited to the risks and costs of program errors, compliance with applicable laws, damage to or loss of data, programs or equipment, and unavailability or interruption of operations.

6. DISCLAIMER OF LIABILITY

EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, AND TO THE EXTENT

PERMITTED BY APPLICABLE LAW, NEITHER RECIPIENT NOR ANY CONTRIBUTORS SHALL HAVE ANY LIABILITY FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING WITHOUT LIMITATION LOST PROFITS), HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OR DISTRIBUTION OF THE PROGRAM OR THE EXERCISE OF ANY RIGHTS GRANTED HEREUNDER, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

7. GENERAL

If any provision of this Agreement is invalid or unenforceable under applicable law, it shall not affect the validity or enforceability of the remainder of the terms of this Agreement, and without further action by the parties hereto, such provision shall be reformed to the minimum extent necessary to make such provision valid and enforceable.

If Recipient institutes patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Program itself (excluding combinations of the Program with other software or hardware) infringes such Recipient's patent(s), then such Recipient's rights granted under Section 2(b) shall terminate as of the date such litigation is filed.

All Recipient's rights under this Agreement shall terminate if it fails to comply with any of the material terms or conditions of this Agreement and does not cure such failure in a reasonable period of time after becoming aware of such noncompliance. If all Recipient's rights under this Agreement terminate, Recipient agrees to cease use and distribution of the Program as soon as reasonably practicable. However, Recipient's obligations under this Agreement and any licenses granted by Recipient relating to the Program shall continue and survive.

Everyone is permitted to copy and distribute copies of this Agreement, but in order to avoid inconsistency the Agreement is copyrighted and may only be modified in the following manner. The Agreement Steward reserves the right to publish new versions (including revisions) of this Agreement from time to time. No one other than the Agreement Steward has the right to modify this Agreement. The Eclipse Foundation is the initial Agreement Steward. The Eclipse Foundation may assign the responsibility to serve as the Agreement Steward to a suitable separate entity. Each new version of the Agreement will be given a distinguishing version number. The Program (including Contributions) may always be Distributed subject to the version of the Agreement under which it was received. In addition, after a new version of the Agreement is published, Contributor may elect to Distribute the Program (including its Contributions) under the new version.

Except as expressly stated in Sections 2(a) and 2(b) above, Recipient receives no rights or licenses to the intellectual property of any Contributor under this Agreement, whether expressly, by implication, estoppel or otherwise. All rights in the Program not expressly granted under this Agreement are reserved. Nothing in this Agreement is intended to be enforceable by any entity that is not a Contributor or Recipient. No third-party beneficiary rights are created under this Agreement.

Exhibit A - Form of Secondary Licenses Notice

"This Source Code may also be made available under the following Secondary Licenses when the conditions for such availability set forth in the Eclipse Public License, v. 2.0 are satisfied: {name license(s), version(s), and exceptions or additional permissions here}."

Simply including a copy of this Agreement, including this Exhibit A is not sufficient to license the Source Code under Secondary Licenses.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

The GNU General Public License (GPL) Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor Boston, MA 02110-1335 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.



Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

O. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

- 2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
 - a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
 - b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
 - c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)



These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

- 3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
 - a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 - b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 - c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties

who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

- 5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
- 6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
- 7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

- 8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
- 9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may



differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

- 11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
- 12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

One line to give the program's name and a brief idea of what it does. Copyright (C) \leq came of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but

WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1335 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'. This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

signature of Ty Coon, 1 April 1989 Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

CLASSPATH EXCEPTION

Linking this library statically or dynamically with other modules is making a combined work based on this library. Thus, the terms and conditions of the GNU General Public License version 2 cover the whole combination.

As a special exception, the copyright holders of this library give you permission to link this library with independent modules to produce an executable, regardless of the license terms of these independent modules, and to copy and distribute the resulting executable under terms of your choice, provided that you also meet, for each linked independent module, the terms and conditions of the license of that module. An independent module is a module which is not derived from or based on this library. If you modify this library, you may extend this exception to your version of the library, but you are not obligated to do so. If you do not wish to do so, delete this exception statement from your version.

== Copyright Notices

/*



```
* Copyright (c) YYYY Oracle and/or its affiliates. All rights reserved.

* This program and the accompanying materials are made available under the

* terms of the Eclipse Public License v. 2.0, which is available at

* http://www.eclipse.org/legal/epl-2.0.

* This Source Code may also be made available under the following Secondary

* Licenses when the conditions for such availability set forth in the

* Eclipse Public License v. 2.0 are satisfied: GNU General Public License,

* version 2 with the GNU Classpath Exception, which is available at

* https://www.gnu.org/software/classpath/license.html.

* SPDX-License-Identifier: EPL-2.0 OR GPL-2.0 WITH Classpath-exception-2.0

*/
```

cytoscape.js

Vendor: Cytoscape Consortium

Version: 3.23.0

Cytoscape.js v. 3.23.0 Source URL: https://github.com/cytoscape/cytoscape.js/tree/v3.23.0 MIT License & Copyright https://github.com/cytoscape/cytoscape.js/blob/v3.23.0/LICENSE

Copyright (c) 2016-2022, The Cytoscape Consortium.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

```
Fourth party dependencies***

Heap v. 0.2.6

Source url: https://github.com/qiao/heap.js/tree/0.2.6

License PSF (other)

License and copyright URL:https://github.com/qiao/heap.js/blob/0.2.6/README.md

Ported by Xueqiao Xu

PSF LICENSE AGREEMENT FOR PYTHON 2.7.2
```

This LICENSE AGREEMENT is between the Python Software Foundation ("PSF"), and the Individual or Organization ("Licensee") accessing and otherwise using Python 2.7.2 software in source or binary form and its associated documentation.

Subject to the terms and conditions of this License Agreement, PSF hereby grants Licensee a nonexclusive, royalty-free, world-wide license to reproduce, analyze, test, perform and/or display publicly, prepare derivative works, distribute, and otherwise use Python 2.7.2 alone or in any derivative version, provided, however, that PSF's License Agreement and PSF's notice of copyright, i.e., "Copyright © 2001-2012 Python Software Foundation; All Rights Reserved" are retained in Python 2.7.2 alone or in any derivative version prepared by Licensee.

In the event Licensee prepares a derivative work that is based on or incorporates Python 2.7.2 or any part thereof, and wants to make the derivative work available to others as provided herein, then Licensee hereby agrees to include in any such work a brief summary of the changes made to Python 2.7.2.

PSF is making Python 2.7.2 available to Licensee on an "AS IS" basis. PSF MAKES NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED. BY WAY OF EXAMPLE, BUT NOT LIMITATION, PSF MAKES NO AND DISCLAIMS ANY REPRESENTATION OR WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF PYTHON 2.7.2 WILL NOT INFRINGE ANY THIRD PARTY RIGHTS.

PSF SHALL NOT BE LIABLE TO LICENSEE OR ANY OTHER USERS OF PYTHON 2.7.2 FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES OR LOSS AS A RESULT OF MODIFYING, DISTRIBUTING, OR OTHERWISE USING PYTHON 2.7.2, OR ANY DERIVATIVE THEREOF, EVEN IF ADVISED OF THE POSSIBILITY THEREOF.

This License Agreement will automatically terminate upon a material breach of its terms and conditions.

Nothing in this License Agreement shall be deemed to create any relationship of agency, partnership, or joint venture between PSF and Licensee. This License Agreement does not grant permission to use PSF trademarks or trade name in a trademark sense to endorse or promote products or services of Licensee, or any third party.

By copying, installing or otherwise using Python 2.7.2, Licensee agrees to be bound by the terms and conditions of this License Agreement.

lodash v. 4.17.21

Source url: https://github.com/lodash/lodash/tree/4.17.21 License URL: https://github.com/lodash/lodash/blob/4.17.21/LICENSE Copyright JS Foundation and other contributors

Based on Underscore.js, copyright Jeremy Ashkenas, DocumentCloud and Investigative Reporters & Editors

This software consists of voluntary contributions made by many individuals. For exact contribution history, see the revision history available at https://github.com/lodash/lodash

The following license applies to all parts of this software except as documented below:

====

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall bemonaco included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION

OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

====

Copyright and related rights for sample code are waived via CCO. Sample code is defined as all source code displayed within the prose of the documentation.

CCO: http://creativecommons.org/publicdomain/zero/1.0/

====

Files located in the node_modules and vendor directories are externally maintained libraries used by this software which have their own licenses; we recommend you read them, as their terms may differ from the terms above.

Iodash

Vendor: OpenJS Foundation

Version: 4.17.21

The MIT License

Copyright JS Foundation and other contributors

Based on Underscore.js, copyright Jeremy Ashkenas, DocumentCloud and Investigative Reporters & Editors

This software consists of voluntary contributions made by many individuals. For exact contribution history, see the revision history available at https://github.com/lodash/lodash

The following license applies to all parts of this software except as documented below:

====

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

====

Copyright and related rights for sample code are waived via CCO. Sample code is defined as all source code displayed within the prose of the

documentation.

CCO: http://creativecommons.org/publicdomain/zero/1.0/

====

Files located in the node_modules and vendor directories are externally maintained libraries used by this software which have their own licenses; we recommend you read them, as their terms may differ from the terms above.

Moment.js

Vendor: JS Foundation and other contributors

Version: 2.29.4

Copyright (c) JS Foundation and other contributors

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

three.js

Vendor: three.js authors

Version: 0.145.0

The MIT License

Copyright © 2010-2022 three.js authors

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE

AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Nimbus JOSE+JWT

Vendor: Connect2id Ltd.

Version: 9.37.3

----- Copyright Info

Nimbus JOSE + JWT

Copyright 2012 - 2022, Connect2id Ltd.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

https://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Apache License Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.



"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and



- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a



result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

```
4th Party Dependencies:
```

jackson-annotations

Vendor: FasterXML. LLC

Version: 2.14.2

License:

Version 2.0, January 2004
http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all

other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work,

where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor,



except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Copyright © 2007-2022 FasterXML. All rights reserved.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0
Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

Copyright © 2007-2022 FasterXML. All rights reserved.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0
Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.

Notice.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

jackson-core

Vendor: FasterXML, LLC

Version: 2.14.2

Jackson Core

Copyright © 2008-2019 FasterXML. All rights reserved.

This copy of Jackson JSON processor streaming parser/generator is licensed under the Apache (Software) License, version 2.0 ("the License"). See the License for details about distribution rights, and the specific rights regarding derivate works.

You may obtain a copy of the License at:

http://www.apache.org/licenses/LICENSE-2.0



NOTICE FILE:

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers, as well as supported commercially by FasterXML.com.

Licensing

Jackson core and extension components may licensed under different licenses. To find the details that apply to this artifact see the accompanying LICENSE file. For more information, including possible other licensing options, contact FasterXML.com (http://fasterxml.com).

Credits

A list of contributors may be found from CREDITS file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

From the LICENSE file:

Apache License Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.



"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and



- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a



result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

jackson-databind

Vendor: FasterXML, LLC

Version: 2.14.2

TOP LEVEL COMPONENT NAMES: com.fasterxml.jackson.core:jackson-databind Copyright © 2008-2019 FasterXML. All rights reserved.

Apache License
Version 2.0, January 2004
http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the



Work and such Derivative Works in Source or Object form.

- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of



this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at



http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

======End of Apache License 2.0 of top level component========

FOURTH-PARTY DEPENDENCY

-----COPYRIGHT: Copyright (c) 2007-2020 Tatu Saloranta, tatu.saloranta@iki.fi LICENSE: Apache 2.0

------COPYRIGHT: Copyright (c) 2007- 2020 Tatu Saloranta, tatu.saloranta@iki.fi LICENSE: Apache 2.0

Copyright Notice: # Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers, as well as supported commercially by FasterXML.com.

Licensing

Jackson core and extension components may be licensed under different licenses. To find the details that apply to this artifact see the accompanying LICENSE file. For more information, including possible other licensing options, contact FasterXML.com (http://fasterxml.com).

Credits

A list of contributors may be found from CREDITS file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

jackson-jaxrs-base

Vendor: FasterXML, LLC

Version: 2.14.2

jackson-jaxrs-base

This copy of Jackson JSON processor databind module is licensed under the Apache (Software) License, version 2.0 ("the License"). See the License for details about distribution rights, and the specific rights regarding derivate works.

Apache License Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION



1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual,



- worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");

you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Copyright © 2021 FasterXML. All rights reserved.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers, as well as supported commercially by FasterXML.com.

Licensing

Jackson core and extension components may licensed under different licenses. To find the details that apply to this artifact see the accompanying LICENSE file. For more information, including possible other licensing options, contact FasterXML.com (http://fasterxml.com).

Credits

A list of contributors may be found from CREDITS file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

4th Party Dependency

jackson-core

License: Apache Software License, Version 2.0 http://www.apache.org/licenses/LICENSE-2.0.txt

Copyright Notice

Copyright (c) 2007- Tatu Saloranta, tatu.saloranta@iki.fi

Copyright (c) Fasterxml

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits



A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Copyright from source code:

- * Copyright (c) 2007- Tatu Saloranta, tatu.saloranta@iki.fi
- * Copyright 2018-2020 Raffaello Giulietti

jackson-databind

License: Apache Software License, Version 2.0 http://www.apache.org/licenses/ LICENSE-2.0.txt

Copyright Notice

Copyright © 2012 FasterXML. All Rights Reserved.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

.....

jackson-annotations

License: Apache Software License, Version 2.0 http://www.apache.org/licenses/LICENSE-2.0.txt

Copyright Notice

Copyright © 2007-2022 FasterXML. All rights reserved.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License.

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has

been in development since 2007. It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

jackson-jaxrs-json-provider

Vendor: FasterXML, LLC

Version: 2.14.2

Top Level Component : jackson-jaxrs-json-provider

Top Level Component License : Apache License

Apache License
Version 2.0, January 2004
https://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.



"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and



- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a



result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

https://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Top Level Component Copyright:

Copyright © 2022 FasterXML. All rights reserved.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers, as well as supported commercially by FasterXML.com.

Licensing

Jackson core and extension components may be licensed under different licenses. To find the details that apply to this artifact see the accompanying LICENSE file. For more information, including possible other licensing options, contact FasterXML.com (http://fasterxml.com).

Credits

A list of contributors may be found from CREDITS file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Fourth Party Component: jackson-annotations Fourth Party Component License: Apache 2.0 Fourth Party Component Copyright Notice:

Copyright © 2008-2022 FasterXML. All rights reserved.

Licensed to the Apache Software Foundation (ASF) under one or more contributor license agreements. See the NOTICE file distributed with this work for additional information regarding copyright ownership. The ASF licenses this file to you under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language

From META-INF/NOTICE:
Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007. It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Fourth Party Component: jackson-core Fourth Party Component License: Apache 2.0 Fourth Party Component Copyright Notice:

Copyright © 2008-2022 FasterXML. All rights reserved.

Jackson JSON-processor.

Copyright (c) 2007- Tatu Saloranta, tatu.saloranta@iki.fi

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library.

It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

From source code:

- * Copyright (c) 2007- Tatu Saloranta, tatu.saloranta@iki.fi
- * Copyright 2018-2020 Raffaello Giulietti

Fourth Party Component : jackson-databind Fourth Party Component License: Apache 2.0 Fourth Party Component Copyright Notice:

Copyright © 2008-2022 FasterXML. All rights reserved.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007. It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

From source code:

- * Copyright 2011 Google Inc. All Rights Reserved.
- * Copyright 2010 Google Inc. All Rights Reserved.

Fourth Party Component : jackson-jaxrs-base
Fourth Party Component License: Apache 2.0
Fourth Party Component Copyright Notice:

Copyright © 2022 FasterXML. All rights reserved.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Fourth Party Component : jackson-module-jaxb-annotations Fourth Party Component License: Apache 2.0 Fourth Party Component Copyright Notice:

Copyright © 2022 FasterXML. All rights reserved.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

jackson-module-jaxb-annotations

Vendor: FasterXML, LLC

Version: 2.14.2

This copy of Jackson JSON processor `jackson-module-jaxb-annotations` module is licensed under the

Apache (Software) License, version 2.0 ("the License"). See the License for details about distribution rights, and the specific rights regarding derivate works. You may obtain a copy of the License at: http://www.apache.org/licenses/LICENSE-2.0

Apache License

Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

Notwithstanding the above, nothing herein shall supersede or modify

the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0



Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

======End of Apache License 2.0 of top level component=======

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers, as well as supported commercially by FasterXML.com.

Licensing

Jackson core and extension components may licensed under different licenses. To find the details that apply to this artifact see the accompanying LICENSE file. For more information, including possible other licensing options, contact FasterXML.com (http://fasterxml.com).

Credits

A list of contributors may be found from CREDITS file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Fourth Party Component: jackson-annotations Fourth Party Component License: Apache 2.0 Fourth Party Component Copyright Notice:

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Fourth Party Component: jackson-core
Fourth Party Component License: Apache 2.0
Fourth Party Component Copyright Notice:
Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007.

It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file. ## Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Fourth Party Component : jackson-databind Fourth Party Component License: Apache 2.0 Fourth Party Component Copyright Notice: Copyright © 2008-2022 FasterXML. All rights reserved.

Jackson JSON processor

Jackson is a high-performance, Free/Open Source JSON processing library. It was originally written by Tatu Saloranta (tatu.saloranta@iki.fi), and has been in development since 2007. It is currently developed by a community of developers.

Licensing

Jackson 2.x core and extension components are licensed under Apache License 2.0 To find the details that apply to this artifact see the accompanying LICENSE file.

Credits

A list of contributors may be found from CREDITS(-2.x) file, which is included in some artifacts (usually source distributions); but is always available from the source code management (SCM) system project uses.

Fourth Party Component: jakarta.activation-api Copyright (c) 2018 Oracle and/or its affiliates. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the Eclipse Foundation, Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Fourth Party Component Copyright Notice:

Copyright (c) 1997, 2021 Oracle and/or its affiliates. All rights reserved.

This program and the accompanying materials are made available under the terms of the Eclipse Distribution License v. 1.0, which is available at http://www.eclipse.org/org/documents/edl-v10.php.

SPDX-License-Identifier: BSD-3-Clause

Fourth Party Component: jakarta.xml.bind-api

Copyright (c) 2007, Eclipse Foundation, Inc. and its licensors.

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of the Eclipse Foundation, Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Copyright (c) 2018, 2020 Oracle and/or its affiliates. All rights reserved.

This program and the accompanying materials are made available under the terms of the Eclipse Distribution License v. 1.0, which is available at http://www.eclipse.org/org/documents/edl-v10.php.

SPDX-License-Identifier: BSD-3-Clause

Guava

Vendor: Google

Version: 32.0

Copyright (C) 2020 The Guava Authors

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Apache License Version 2.0

Apache License
Version 2.0, January 2004
http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the



Work and such Derivative Works in Source or Object form.

- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at



http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

+--- 4th party: com.google.guava:failureaccess

Copyright (C) 2018 The Guava Authors

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

< Apache License Version 2.0>

+--- 4th party: com.google.guava:listenablefuture

Copyright (C) 2018 The Guava Authors

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

< Apache License Version 2.0>

+--- 4th party: com.google.code.findbugs:jsr305 Copyright: JSR305 expert group

=== Source URL: https://github.com/findbugsproject/findbugs/releases

License: BSD 3-Clause

Copyright (c) 2007-2009, JSR305 expert group All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice,

- this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the JSR305 expert group nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

== jcip-annotations relicensed to Oracle under BSD 3-clause license

Copyright (c) 2005, Brian Goetz and Tim Peierls

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the JSR305 expert group nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

+--- 4th party: com.google.errorprone:error_prone_annotations

Copyright 2015 The Error Prone Authors.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

< Apache License Version 2.0>

+--- 4th party: com.google.j2objc:j2objc-annotations

Google Inc.
Daniel Connelly

Copyright 2012 Google Inc. All Rights Reserved.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

< Apache License Version 2.0>

+--- 4th party: org.checkerframework:checker-qual

Copyright 2004-present by the Checker Framework developers

MIT License:

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

fuse.js

Vendor: Kirollos Risk

Version: 6.6.2

Apache License

Version 2.0, January 2004
http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

 Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.

- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "{}" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright 2017 Kirollos Risk

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

MapLibre GL

Vendor: MapLibre

Version: 2.4.0

Copyright (c) 2020, MapLibre contributors

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of MapLibre GL JS nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Contains code from mapbox-gl-js v1.13 and earlier

Version v1.13 of mapbox-gl-js and earlier are licensed under a BSD-3-Clause license

Copyright (c) 2020, Mapbox

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Mapbox GL JS nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE,
EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Contains code from glfx.js

Copyright (C) 2011 by Evan Wallace

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Contains a portion of d3-color https://github.com/d3/d3-color

Copyright 2010-2016 Mike Bostock All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the author nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR



ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Fourth-party information -----

== NAME OF DEPENDENCY 1
.@mapbox/geojson-rewind
== License
Copyright (c) 2020, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

== DEPENDENCY 1 DEPENPENCIES
.get-stream
== License
MIT License

Copyright (c) Sindre Sorhus <sindresorhus@gmail.com> (https://sindresorhus.com)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

.minimist == License

This software is released under the MIT license:

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all

copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)-----

- == NAME OF DEPENDENCY 2
- .@mapbox/jsonlint-lines-primitives
- == License

MIT License

Copyright (C) 2012 Zachary Carter

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABLLITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

- == NAME OF DEPENDENCY 3
- .@mapbox/mapbox-gl-supported
- == License

BSD 3-Clause License

Copyright (c) 2017, Mapbox All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER

CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- (separator)

== NAME OF DEPENDENCY 4

.@mapbox/point-geometry

== License

Copyright (c) 2015, Mapbox <>

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 5

.@mapbox/tiny-sdf

BSD-2-Clause

Copyright (c) 2016-2022 Mapbox, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

-----(separator)------

== NAME OF DEPENDENCY 6

.@mapbox/unitbezier

BSD-2-Clause

Copyright (C) 2008 Apple Inc. All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY APPLE INC. ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL APPLE INC. OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Ported from Webkit

http://svn.webkit.org/repository/webkit/trunk/Source/WebCore/platform/graphics/UnitBezier.h

-----(separator)------

== NAME OF DEPENDENCY 7

.@mapbox/vector-tile

== License

Copyright (c) 2014, Mapbox

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Mapbox nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

== DEPENDENCY 7 DEPENPENCIES

.@mapbox/point-geometry

== License

Copyright (c) 2015, Mapbox <>

-----(separator)-----

- == NAME OF DEPENDENCY 8
- .@mapbox/whoots-js
- == License

ISC License

Copyright (c) 2017, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.



THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)-----

- == NAME OF DEPENDENCY 9
- .@types/geojson
- == License

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

----- (separator) -----

- == NAME OF DEPENDENCY 10
- .@types/mapbox point-geometry

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)-----

- == NAME OF DEPENDENCY 11
- .@types/mapbox vector-tile

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

Permission is hereby granted, free of charge, to any person obtaining a copy of this

software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE

== DEPENDENCY 11 DEPENDENCIES

.@types/geojson

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

.@types/mapbox point-geometry

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

.@types/pbf

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

-----(separator)------

== NAME OF DEPENDENCY 12

.@types/pbf

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 13

.csscolorparser

(c) Dean McNamee <dean@gmail.com>, 2012.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is

furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 14

.earcut

ISC License

Copyright (c) 2016, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE

-----(separator)-----

== NAME OF DEPENDENCY 15

.geojson-vt

ISC License

Copyright (c) 2015, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 16

.gl-matrix

Copyright (c) 2015-2021, Brandon Jones, Colin MacKenzie IV.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)-----

== NAME OF DEPENDENCY 17
.global-prefix
The MIT License (MIT)

Copyright (c) 2015-present, Jon Schlinkert.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

== DEPENDENCY 17 DEPENPENCIES .ini
The ISC License

Copyright (c) Isaac Z. Schlueter and Contributors

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. .kind-of

The MIT License (MIT)

Copyright (c) 2014-2017, Jon Schlinkert.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

.which

The ISC License

Copyright (c) Isaac Z. Schlueter and Contributors

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

.isexe

The ISC License

Copyright (c) 2016-2022 Isaac Z. Schlueter and Contributors

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

----- (separator)-----

== NAME OF DEPENDENCY 18

.murmurhash-js

Copyright (c) 2011 Gary Court

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 19 .pbf
Copyright (c) 2017, Mapbox
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of pbf nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

== DEPENDENCY 19 DEPENPENCIES
.ieee754

.ieee754 Copyright 2008 Fair Oaks Labs, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

.resolve-protobuf-schema
The MIT License (MIT)

Copyright (c) 2014 Mathias Buus

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

.protocol-buffers-schema
The MIT License (MIT)

Copyright (c) 2014 Mathias Buus

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)-----

== NAME OF DEPENDENCY 20
.potpack
ISC License

Copyright (c) 2022, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 21 .quickselect

The MIT License

Copyright (c) 2014-2018 Google, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 22

.supercluster

ISC License

Copyright (c) 2021, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF == DEPENDENCY 22 DEPENPENCIES

.kdbush

ISC License

Copyright (c) 2018, Vladimir Agafonkin

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

THIS SOFTWARE.-----(separator)-----(separator)------

== NAME OF DEPENDENCY 23

.tinyqueue

ISC License

Copyright (c) 2017, Vladimir Agafonkin

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice

and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)-----

== NAME OF DEPENDENCY 24 .vt-pbf
The MIT License (MIT)

Copyright (c) 2015 Anand Thakker

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Contains geojson wrapper.js from https://github.com/mapbox/mapbox-gl-js

Copyright (c) 2014, Mapbox

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Mapbox GL JS nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF

LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. == DEPENDENCY 24 DEPENPENCIES .@mapbox/point-geometry Copyright (c) 2015, Mapbox <> Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. .@mapbox/vector-tile Copyright (c) 2014, Mapbox All rights reserved. .pbf Copyright (c) 2017, Mapbox All rights reserved. .ieee754 Copyright 2008 Fair Oaks Labs, Inc. .resolve-protobuf-schema The MIT License (MIT) Copyright (c) 2014 Mathias Buus .protocol-buffers-schema The MIT License (MIT)

D3

Vendor: Michael Bostock

Version: 7.1.1

Copyright 2010-2020 Mike Bostock

Copyright (c) 2014 Mathias Buus

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the author nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

FOURTH-PARTY DEPENDENCY (of d3): d3-array

Copyright 2010-2016 Mike Bostock
All rights reserved.
(see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-axis

ORACLE"

Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) _____ FOURTH-PARTY DEPENDENCY (of d3): d3-brush _____ Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-chord Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) _____ FOURTH-PARTY DEPENDENCY (of d3): d3-color _____ Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-contour _____ Copyright 2012-2017 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-delaunay Copyright 2018 Observable, Inc. Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies. THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE. _____ FOURTH-PARTY DEPENDENCY (of d3): d3-dispatch Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) _____ FOURTH-PARTY DEPENDENCY (of d3): d3-drag _____ Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-dsv ______ Copyright 2013-2016 Mike Bostock All rights reserved. (see license under d3)



FOURTH-PARTY DEPENDENCY (of d3): d3-ease

Copyright 2010-2016 Mike Bostock Copyright 2001 Robert Penner All rights reserved. (see license under d3)

.----

FOURTH-PARTY DEPENDENCY (of d3): d3-fetch

Copyright 2016 Mike Bostock All rights reserved. (see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-force

Copyright 2010-2016 Mike Bostock

All rights reserved.

(see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-format

Copyright 2010-2015 Mike Bostock

All rights reserved.

(see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-geo

Copyright 2010-2016 Mike Bostock

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the author nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This license applies to GeographicLib, versions 1.12 and later.

Copyright (c) 2008-2012, Charles Karney

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN

CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE. _____ FOURTH-PARTY DEPENDENCY (of d3): d3-hierarchy _____ Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-interpolate _____ Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-path _____ Copyright 2015-2016 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-polygon Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-quadtree Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) _____ FOURTH-PARTY DEPENDENCY (of d3): d3-random _____ Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3) _____ FOURTH-PARTY DEPENDENCY (of d3): d3-scale ______ Copyright 2010-2015 Mike Bostock All rights reserved. (see license under d3) FOURTH-PARTY DEPENDENCY (of d3): d3-scale-chromatic _____ Copyright 2010-2018 Mike Bostock All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met: * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer. * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. * Neither the name of the author nor the names of contributors may be used to

endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR

ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Apache-Style Software License for ColorBrewer software and ColorBrewer Color Schemes

Copyright (c) 2002 Cynthia Brewer, Mark Harrower, and The Pennsylvania State University.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License. Apache License

Version 2.0, January 2004

http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files. "Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

You must give any other recipients of the Work or Derivative Works a copy of this License; and

You must cause any modified files to carry prominent notices stating that You changed the files; and

You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort

(including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

FOURTH-PARTY DEPENDENCY (of d3): d3-selection

Copyright (c) 2010-2018, Michael Bostock All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The name Michael Bostock may not be used to endorse or promote products derived from this software without specific prior written permission.

 THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"

 AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL MICHAEL BOSTOCK BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

FOURTH-PARTY DEPENDENCY (of d3): d3-shape

Copyright 2010-2015 Mike Bostock

All rights reserved.

(see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-time

Copyright 2010-2016 Mike Bostock

All rights reserved.

(see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-time-format

.

Copyright 2010-2017 Mike Bostock

All rights reserved.

(see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-timer

Copyright 2010-2016 Mike Bostock All rights reserved. (see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): d3-transition

Copyright (c) 2010-2015, Michael Bostock

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The name Michael Bostock may not be used to endorse or promote products derived from this software without specific prior written permission.

 THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"

 AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL MICHAEL BOSTOCK BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

TERMS OF USE - EASING EQUATIONS

Open source under the BSD License.

Copyright 2001 Robert Penner

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the author nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

FOURTH-PARTY DEPENDENCY (of d3): d3-zoom

Copyright 2010-2016 Mike Bostock All rights reserved.

(see license under d3)

FOURTH-PARTY DEPENDENCY (of d3): commander

(The MIT License)

Copyright (c) 2011 TJ Holowaychuk

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED 'AS IS', WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

FOURTH-PARTY DEPENDENCY (of d3): delaunator

ISC License

Copyright (c) 2017, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

FOURTH-PARTY DEPENDENCY (of d3): iconv-lite

Copyright (c) 2011 Alexander Shtuchkin

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

FOURTH-PARTY DEPENDENCY (of d3): internmap

Copyright 2021 Mike Bostock

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation



- and/or other materials provided with the distribution.
- * Neither the name of the author nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

FOURTH-PARTY DEPENDENCY (of d3): rw

Copyright (c) 2014-2016, Michael Bostock

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The name Michael Bostock may not be used to endorse or promote products derived from this software without specific prior written permission.

 THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS"

 AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL MICHAEL BOSTOCK BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

FOURTH-PARTY DEPENDENCY (of d3): safer-buffer

MIT License

Copyright (c) 2018 Nikita Skovoroda

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Monaco Editor

Vendor: Microsoft Corporation

Version: 0.34.0

monaco-editor

https://github.com/microsoft/monaco-editor/blob/main/LICENSE.txt

The MIT License (MIT)

Copyright (c) 2016 - present Microsoft Corporation

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

OWASP Java Encoder Project

Vendor: Open Web Application Security Project (OWASP)

Version: 1.2.3

Copyright (c) 2015 Jeff Ichnowski All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the OWASP nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR

SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Commons IO

Vendor: The Apache Software Foundation

Version: 2.15.1

Apache Commons IO Copyright 2002-2023 The Apache Software Foundation

This product includes software developed at
The Apache Software Foundation (https://www.apache.org/).
--

Apache License

Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of,

the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must



include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only

on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Commons Lang

Vendor: The Apache Software Foundation

Version: 3.13.0

NOTICE:

Apache Commons Lang

Copyright 2001-2023 The Apache Software Foundation

This product includes software developed at The Apache Software Foundation (https://www.apache.org/).

LICENSE: Apache 2.0

Apache License Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the

outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a



cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each



Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Tomcat

Vendor: The Apache Software Foundation

Version: 8.5.99

== NOTICE file

Apache Tomcat Copyright 1999-2024 The Apache Software Foundation

This product includes software developed at The Apache Software Foundation (https://www.apache.org/).

This software contains code derived from netty-native developed by the Netty project (https://netty.io, https://github.com/netty/netty-tcnative/) and from finagle-native developed at Twitter (https://github.com/twitter/finagle).

Java compilation software for JSP pages is provided by the Eclipse JDT Core Batch Compiler component, which is open source software. The original software and related information is available at https://www.eclipse.org/jdt/core/.

For portions of the Tomcat JNI OpenSSL API and the OpenSSL JSSE integration The org.apache.tomcat.jni and the org.apache.tomcat.net.openssl packages are derivative work originating from the Netty project and the finagle-native project developed at Twitter

- * Copyright 2014 The Netty Project
- * Copyright 2014 Twitter

==LICENSE FILE

Apache License
Version 2.0, January 2004
http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

- 1. Definitions.
 - "License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.
 - "Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.
 - "Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.
 - "You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.
 - "Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.
 - "Object" form shall mean any form resulting from mechanical



transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:



- (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
- (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
- (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
- (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise,



unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

APACHE TOMCAT SUBCOMPONENTS:

Apache Tomcat includes a number of subcomponents with separate copyright notices and license terms. Your use of these subcomponents is subject to the terms and conditions of the following licenses.

For the Eclipse JDT Core Batch Compiler (ecj-x.x.x.jar) component:

Eclipse Public License - v 1.0

THE ACCOMPANYING PROGRAM IS PROVIDED UNDER THE TERMS OF THIS ECLIPSE PUBLIC

LICENSE ("AGREEMENT"). ANY USE, REPRODUCTION OR DISTRIBUTION OF THE PROGRAM CONSTITUTES RECIPIENT'S ACCEPTANCE OF THIS AGREEMENT.

1. DEFINITIONS

"Contribution" means:

- a) in the case of the initial Contributor, the initial code and documentation distributed under this Agreement, and
- b) in the case of each subsequent Contributor:
- i) changes to the Program, and
- ii) additions to the Program;

where such changes and/or additions to the Program originate from and are distributed by that particular Contributor. A Contribution 'originates' from a Contributor if it was added to the Program by such Contributor itself or anyone acting on such Contributor's behalf. Contributions do not include additions to the Program which: (i) are separate modules of software distributed in conjunction with the Program under their own license agreement, and (ii) are not derivative works of the Program.

"Contributor" means any person or entity that distributes the Program.

"Licensed Patents" mean patent claims licensable by a Contributor which are necessarily infringed by the use or sale of its Contribution alone or when combined with the Program.

"Program" means the Contributions distributed in accordance with this Agreement.

"Recipient" means anyone who receives the Program under this Agreement, including all Contributors.

2. GRANT OF RIGHTS

- a) Subject to the terms of this Agreement, each Contributor hereby grants Recipient a non-exclusive, worldwide, royalty-free copyright license to reproduce, prepare derivative works of, publicly display, publicly perform, distribute and sublicense the Contribution of such Contributor, if any, and such derivative works, in source code and object code form.
- b) Subject to the terms of this Agreement, each Contributor hereby grants Recipient a non-exclusive, worldwide, royalty-free patent license under Licensed Patents to make, use, sell, offer to sell, import and otherwise transfer the Contribution of such Contributor, if any, in source code and object code form. This patent license shall apply to the combination of the Contribution and the Program if, at the time the Contribution is added by the Contributor, such addition of the Contribution causes such combination to be covered by the Licensed Patents. The patent license shall not apply to any other combinations which include the Contribution. No hardware per se is licensed hereunder.
- c) Recipient understands that although each Contributor grants the licenses to its Contributions set forth herein, no assurances are provided by any Contributor that the Program does not infringe the patent or other intellectual property rights of any other entity. Each Contributor disclaims any liability to Recipient for claims brought by any other entity based on infringement of intellectual property rights or otherwise. As a condition to exercising the rights and licenses granted hereunder, each Recipient hereby assumes sole responsibility to secure any other intellectual property rights needed, if any. For example, if a third party patent license is required to allow Recipient to



distribute the Program, it is Recipient's responsibility to acquire that license before distributing the Program.

d) Each Contributor represents that to its knowledge it has sufficient copyright rights in its Contribution, if any, to grant the copyright license set forth in this Agreement.

3. REQUIREMENTS

A Contributor may choose to distribute the Program in object code form under its own license agreement, provided that:

- a) it complies with the terms and conditions of this Agreement; and
- b) its license agreement:
- i) effectively disclaims on behalf of all Contributors all warranties and conditions, express and implied, including warranties or conditions of title and non-infringement, and implied warranties or conditions of merchantability and fitness for a particular purpose;
- ii) effectively excludes on behalf of all Contributors all liability for damages, including direct, indirect, special, incidental and consequential damages, such as lost profits;
- iii) states that any provisions which differ from this Agreement are offered by that Contributor alone and not by any other party; and
- iv) states that source code for the Program is available from such Contributor, and informs licensees how to obtain it in a reasonable manner on or through a medium customarily used for software exchange.

When the Program is made available in source code form:

- a) it must be made available under this Agreement; and
- b) a copy of this Agreement must be included with each copy of the Program.

Contributors may not remove or alter any copyright notices contained within the Program.

Each Contributor must identify itself as the originator of its Contribution, if any, in a manner that reasonably allows subsequent Recipients to identify the originator of the Contribution.

4. COMMERCIAL DISTRIBUTION

Commercial distributors of software may accept certain responsibilities with respect to end users, business partners and the like. While this license is intended to facilitate the commercial use of the Program, the Contributor who includes the Program in a commercial product offering should do so in a manner which does not create potential liability for other Contributors. Therefore, if a Contributor includes the Program in a commercial product offering, such Contributor ("Commercial Contributor") hereby agrees to defend and indemnify every other Contributor ("Indemnified Contributor") against any losses, damages and costs (collectively "Losses") arising from claims, lawsuits and other legal actions brought by a third party against the Indemnified Contributor to the extent caused by the acts or omissions of such Commercial Contributor in connection with its distribution of the Program in a commercial product offering. The obligations in this section do not apply to any claims or Losses relating to any actual or alleged intellectual property infringement. In order to qualify, an Indemnified Contributor must: a) promptly notify the Commercial



Contributor in writing of such claim, and b) allow the Commercial Contributor to control, and cooperate with the Commercial Contributor in, the defense and any related settlement negotiations. The Indemnified Contributor may participate in any such claim at its own expense.

For example, a Contributor might include the Program in a commercial product offering, Product X. That Contributor is then a Commercial Contributor. If that Commercial Contributor then makes performance claims, or offers warranties related to Product X, those performance claims and warranties are such Commercial Contributor's responsibility alone. Under this section, the Commercial Contributor would have to defend claims against the other Contributors related to those performance claims and warranties, and if a court requires any other Contributor to pay any damages as a result, the Commercial Contributor must pay those damages.

5. NO WARRANTY

EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, THE PROGRAM IS PROVIDED ON AN "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, EITHER EXPRESS OR IMPLIED INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR CONDITIONS OF TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Each Recipient is solely responsible for determining the appropriateness of using and distributing the Program and assumes all risks associated with its exercise of rights under this Agreement , including but not limited to the risks and costs of program errors, compliance with applicable laws, damage to or loss of data, programs or equipment, and unavailability or interruption of operations.

6. DISCLAIMER OF LIABILITY

EXCEPT AS EXPRESSLY SET FORTH IN THIS AGREEMENT, NEITHER RECIPIENT NOR ANY CONTRIBUTORS SHALL HAVE ANY LIABILITY FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING WITHOUT LIMITATION LOST PROFITS), HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OR DISTRIBUTION OF THE PROGRAM OR THE EXERCISE OF ANY RIGHTS GRANTED HEREUNDER, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

7. GENERAL

If any provision of this Agreement is invalid or unenforceable under applicable law, it shall not affect the validity or enforceability of the remainder of the terms of this Agreement, and without further action by the parties hereto, such provision shall be reformed to the minimum extent necessary to make such provision valid and enforceable.

If Recipient institutes patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Program itself (excluding combinations of the Program with other software or hardware) infringes such Recipient's patent(s), then such Recipient's rights granted under Section 2(b) shall terminate as of the date such litigation is filed.

All Recipient's rights under this Agreement shall terminate if it fails to comply with any of the material terms or conditions of this Agreement and does not cure such failure in a reasonable period of time after becoming aware of such noncompliance. If all Recipient's rights under this Agreement terminate, Recipient agrees to cease use and distribution of the Program as soon as reasonably practicable. However, Recipient's obligations under this Agreement and any licenses granted by Recipient relating to the Program shall continue and survive.

Everyone is permitted to copy and distribute copies of this Agreement, but in order to avoid inconsistency the Agreement is copyrighted and may only be

modified in the following manner. The Agreement Steward reserves the right to publish new versions (including revisions) of this Agreement from time to time. No one other than the Agreement Steward has the right to modify this Agreement. The Eclipse Foundation is the initial Agreement Steward. The Eclipse Foundation may assign the responsibility to serve as the Agreement Steward to a suitable separate entity. Each new version of the Agreement will be given a distinguishing version number. The Program (including Contributions) may always be distributed subject to the version of the Agreement under which it was received. In addition, after a new version of the Agreement is published, Contributor may elect to distribute the Program (including its Contributions) under the new version. Except as expressly stated in Sections 2(a) and 2(b) above, Recipient receives no rights or licenses to the intellectual property of any Contributor under this Agreement, whether expressly, by implication, estoppel or otherwise. All rights in the Program not expressly granted under this Agreement are reserved.

This Agreement is governed by the laws of the State of New York and the intellectual property laws of the United States of America. No party to this Agreement will bring a legal action under this Agreement more than one year after the cause of action arose. Each party waives its rights to a jury trial in any resulting litigation.

JavaScript Extension Toolkit (JET)

Vendor: Oracle Version: 14.1.14

Oracle JET 14.1.14

You may not use the identified files except in compliance with the Universal Permissive License (UPL), Version 1.0 (the "License.")

You may obtain a copy of the License at https://opensource.org/licenses/UPL. A copy of the license is also reproduced below.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.

See the License for the specific language governing permissions and limitations under the License.

Copyright (c) 2014, 2023 Oracle and/or its affiliates The Universal Permissive License (UPL), Version 1.0

Subject to the condition set forth below, permission is hereby granted to any person obtaining

a copy of this software, associated documentation and/or data (collectively the "Software"),

free of charge and under any and all copyright rights in the Software, and any and all patent

rights owned or freely licensable by each licensor hereunder covering either (i) the

Software as contributed to or provided by such licensor, or (ii) the Larger Works (as $defined\ below)$,

to deal in both

(a) the Software, and (b) any piece of software and/or hardware listed in the lrgrwrks.txt file if

one is included with the Software (each a Larger Work to which the Software is contributed by such licensors),

without restriction, including without limitation the rights to copy, create derivative

works of.

display, perform, and distribute the Software and make, use, sell, offer for sale, import, export,

have made, and have sold the Software and the Larger Work(s), and to sublicense the foregoing rights

on either these or other terms.

This license is subject to the following condition:

The above copyright notice and either this complete permission notice or at a minimum a reference

to the UPL must be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT

LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT.

IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR

WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH

THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

DO NOT TRANSLATE OR LOCALIZE.

Oracle elects to use only the GNU Lesser General Public License version 2.1 (LGPL) for any software where a choice of LGPL/GPL license versions are made available with the language indicating that LGPLv2.1/GPLv2 or any later version may be used, or where a choice of which version of the LGPL/GPL is applied is unspecified.

THIRD-PARTY COMPONENT FILE (path in the installation) (see license text reproduced below) ______ js/libs/chai/chai MTT js/libs/hammer/hammer js/libs/js-signals/signals. MIT js/libs/jquery/jquery js/libs/jquery/jquery-ui.custom. MIT js/libs/jquery/jqueryui-amd/core MTT js/libs/jquery/jqueryui-amd/draggable MIT js/libs/jquery/jqueryui-amd/mouse MIT js/libs/jquery/jqueryui-amdposition МТТ js/libs/jquery/jqueryui-amd/sortable MIT js/libs/jquery/jqueryui-amd/widget МТТ

js/libs/knockout/knockout MIT js/libs/knockout/knockout-mapping-latest.js

js/libs/oj/v14.1.14/min/ojcspexpressionevaluator (cspexpressionevaluator.js) MIT

js/libs/oj/v14.1.14/min/ojexpparser js/libs/oj/v14.1.14/min/ojknockout MIT

js/libs/oj/v14.1.14/min/ojselectcombobox. Apache 2.0

js/libs/oj/v14.1.14/ojtree MIT js/libs/oj/v14.1.14/ojL10n MTT

js/libs/proj4js/dist/proj4 Proj4js js/libs/require/require MIT js/libs/require/text MIT

js/libs/require-css/css.min MIT



LICENSE

scss/oj/v14.1.14/3rdparty/normalize/normalize.scss
js/libs/touchr/touchr.js
js/libs/preact/dist/preact.umd.js

MIT MIT MIT

Chai

https://github.com/chaijs/chai Copyright (c) 2017 Chai.js Assertion Library

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

expression-eval https://github.com/donmccurdy/expression-eval

Copyright (c) 2017 Don McCurdy

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

jsep https://github.com/soney/jsep
Copyright (c) 2013 Stephen Oney, https://ericsmekens.github.io/jsep/

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to

permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Knockout Fast Foreach

By: Brian M Hunt (C) 2015 | License: MIT

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

proj4js

http://proj4js.org/

Copyright (C) 2014 Mike Adair, Richard Greenwood, Didier Richard, Stephen Irons, Olivier Terral and Calvin Metcalf;

Licensed under the Proj4js license

require-css

https://github.com/guybedford/require-css

Copyright (C) 2013 Guy Bedford

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR

PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Hammer.JS

http://hammerjs.github.io/ Copyright (C) 2011-2017 by Jorik Tangelder (Eight Media)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Foundation Responsive Library http://foundation.zurb.com Copyright 2014, ZURB

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Normalize.scss

Copyright © Nicolas Gallagher and Jonathan Neal

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or

substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

RequireJS i18n http://github.com/requirejs/i18n for details Copyright (c) 2010-2011, The Dojo Foundation

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

jsTree http://jstree.com/

Copyright (c) 2012 Ivan Bozhanov (http://vakata.com)
Permission is hereby granted, free of charge, to any person obtaining a copy
of this software and associated documentation files (the "Software"), to deal
in the Software without restriction, including without limitation the rights
to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
copies of the Software, and to permit persons to whom the Software is
furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

select2.js

https://github.com/select2/select2

Copyright 2012 Igor Vaynberg

This software is licensed under the Apache License, Version 2.0 (the "Apache License") or the GNU

General Public License version 2 (the "GPL License"). You may choose either license to govern your use of this software only upon the condition that you accept all of the terms of either the Apache License or the GPL License.

You may obtain a copy of the Apache License and the GPL License at:

http://www.apache.org/licenses/LICENSE-2.0 http://www.gnu.org/licenses/gpl-2.0.html

Unless required by applicable law or agreed to in writing, software distributed under the Apache License or the GPL Licesnse is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR

CONDITIONS OF ANY KIND, either express or implied. See the Apache License and the GPL License for

the specific language governing permissions and limitations under the Apache License and the GPL License.

jQuery UI http://jqueryui.com
Includes: core.js, widget.js, mouse.js, position.js, draggable.js, sortable.js

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

jQuery JavaScript Library
http://jquery.com/
Copyright OpenJS Foundation and other contributors, https://openjsf.org/

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

JS Signals http://millermedeiros.github.com/js-signals/ Author: Miller Medeiros

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

RequireJS text

http://github.com/requirejs/text

Copyright jQuery Foundation and other contributors, https://jquery.org/

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

RequireJS

http://github.com/jrburke/requirejs Copyright jQuery Foundation and other contributors, https://jquery.org/

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:



The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Knockout JavaScript library
Copyright (c) 2010 Steven Sanderson, the Knockout.js team, and other contributors
http://knockoutjs.com/

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Preact.

The MIT License (MIT)
Copyright (c) 2015-present Jason Miller

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

The following applies to all products licensed under the Apache 2.0 License:

You may not use the identified files except in compliance with the Apache License, Version 2.0 (the "License.")

You may obtain a copy of the License at http://www.apache.org/licenses/LICENSE-2.0. A copy of the license is also reproduced below.

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.

See the License for the specific language governing permissions and limitations under the License.

Apache License Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.



"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not



pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify,



defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

The MIT License

Copyright (c) YEARS , NAMES

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Mike Adair madairATdmsolutions.ca Richard Greenwood richATgreenwoodmap.com Didier Richard didier.richardATign.fr Stephen Irons stephen.ironsATclear.net.nz Olivier Terral oterralATgmail.com Calvin Metcalf cmetcalfATappgeo.com

Copyright (c) 2014, Mike Adair, Richard Greenwood, Didier Richard, Stephen Irons, Olivier Terral and Calvin Metcalf

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

NT Technology: HERE Data

Vendor: Navigation Technologies

Version: All

ORACLE MAPS end users terms (https://maps.oracle.com/elocation/terms.html) AND NOTICES (http://maps.oracle.com/elocation/supplierterms.html) must

be used and provided to end users. This can be fulfilled by linking the terms to the map in your application or by adding the links to the terms

and condition to the product user guides. IN ADDITION, THE ORACLE MAPS CLOUD SERVICE ENTERPRISE HOSTING AND DELIVERY POLICIES

(https://www.oracle.com/assets/maps-cloud-hd-policies-2767907.pdf) must be referenced by all applications using the service.

This can be fulfilled by linking TO THE DOCUMENT OR PROVIDING A COPY OF THEM TO USERS WITH OTHER LICENSING MATERIALS.

Please contact Legal and/or the Spatial LOB with any questions. Please verify the links before inclusion.

Third-Party License Information for Graph Visualization Toolkit

E.1 Third-Party License Information for Graph Visualization Toolkit

MapLibre GL

Vendor: MapLibre Contributors

Version: 2.4.0

Copyright (c) 2020, MapLibre contributors

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of MapLibre GL JS nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Contains code from mapbox-gl-js v1.13 and earlier

Version v1.13 of mapbox-gl-js and earlier are licensed under a BSD-3-Clause license

Copyright (c) 2020, Mapbox

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Mapbox GL JS nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE,
EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Contains code from glfx.js

Copyright (C) 2011 by Evan Wallace

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal

in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Contains a portion of d3-color https://github.com/d3/d3-color

Copyright 2010-2016 Mike Bostock All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the author nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

------ Fourth-party information

== NAME OF DEPENDENCY 1
.@mapbox/geojson-rewind
== License
Copyright (c) 2020, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT,



INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

== DEPENDENCY 1 DEPENPENCIES
.get-stream
== License
MIT License

Copyright (c) Sindre Sorhus <sindresorhus@gmail.com> (https://sindresorhus.com)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

.minimist
== License
This software is released under the MIT license:

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 2
.@mapbox/jsonlint-lines-primitives
== License
MIT License
Copyright (C) 2012 Zachary Carter

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:



The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

== NAME OF DEPENDENCY 3

.@mapbox/mapbox-gl-supported

== License

BSD 3-Clause License

Copyright (c) 2017, Mapbox All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- (separator)

== NAME OF DEPENDENCY 4

.@mapbox/point-geometry

== License

Copyright (c) 2015, Mapbox <>

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------



== NAME OF DEPENDENCY 5
.@mapbox/tiny-sdf
BSD-2-Clause
Copyright (c) 2016-2022 Mapbox, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

-----(separator)-----

== NAME OF DEPENDENCY 6 .@mapbox/unitbezier BSD-2-Clause

Copyright (C) 2008 Apple Inc. All Rights Reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY APPLE INC. ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL APPLE INC. OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Ported from Webkit
http://svn.webkit.org/repository/webkit/trunk/Source/WebCore/platform/graphics/
UnitBezier.h
-----(separator)------

== NAME OF DEPENDENCY 7 .@mapbox/vector-tile

== License

Copyright (c) 2014, Mapbox

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Mapbox nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. == DEPENDENCY 7 DEPENPENCIES .@mapbox/point-geometry

== License

Copyright (c) 2015, Mapbox <>

-----(separator)-----

== NAME OF DEPENDENCY 8

.@mapbox/whoots-js

== License

ISC License

Copyright (c) 2017, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------

- == NAME OF DEPENDENCY 9
- .@types/geojson
- == License

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:



The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

- == NAME OF DEPENDENCY 10
- .@types/mapbox__point-geometry

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

- == NAME OF DEPENDENCY 11
- .@types/mapbox vector-tile

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE

- == DEPENDENCY 11 DEPENPENCIES
- .@types/geojson

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

.@types/mapbox point-geometry

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

.@types/pbf

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

-----(separator)------

== NAME OF DEPENDENCY 12

.@tvpes/pbf

This project is licensed under the MIT license.

Copyrights are respective of each contributor listed at the beginning of each definition file.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

----- (separator)

== NAME OF DEPENDENCY 13

.csscolorparser

(c) Dean McNamee <dean@gmail.com>, 2012.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

----- (separator) ------

== NAME OF DEPENDENCY 14

.earcut

ISC License

Copyright (c) 2016, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice

and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)-----

== NAME OF DEPENDENCY 15
.geojson-vt
ISC License

Copyright (c) 2015, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)-----

== NAME OF DEPENDENCY 16

.gl-matrix

Copyright (c) 2015-2021, Brandon Jones, Colin MacKenzie IV.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 17 .global-prefix

The MIT License (MIT)

Copyright (c) 2015-present, Jon Schlinkert.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:



The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

== DEPENDENCY 17 DEPENDENCIES

.ini

The ISC License

Copyright (c) Isaac Z. Schlueter and Contributors

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

The MIT License (MIT)

Copyright (c) 2014-2017, Jon Schlinkert.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

.which

The ISC License

Copyright (c) Isaac Z. Schlueter and Contributors

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES



WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

.isexe

The ISC License

Copyright (c) 2016-2022 Isaac Z. Schlueter and Contributors

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 18 .murmurhash-js

Copyright (c) 2011 Gary Court

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 19 .pbf
Copyright (c) 2017, Mapbox
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of pbf nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

== DEPENDENCY 19 DEPENPENCIES

.ieee754

Copyright 2008 Fair Oaks Labs, Inc.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 3. Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

.resolve-protobuf-schema
The MIT License (MIT)

Copyright (c) 2014 Mathias Buus

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

.protocol-buffers-schema
The MIT License (MIT)

Copyright (c) 2014 Mathias Buus



Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)-----

== NAME OF DEPENDENCY 20 .potpack

ISC License

Copyright (c) 2022, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 21
.quickselect
The MIT License

Copyright (c) 2014-2018 Google, Inc.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

-----(separator)-----

== NAME OF DEPENDENCY 22

.supercluster ISC License

Copyright (c) 2021, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF == DEPENDENCY 22 DEPENPENCIES

.kdbush

ISC License

Copyright (c) 2018, Vladimir Agafonkin

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

THIS SOFTWARE.-----(separator)------

== NAME OF DEPENDENCY 23

.tinyqueue

ISC License

Copyright (c) 2017, Vladimir Agafonkin

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

-----(separator)------

== NAME OF DEPENDENCY 24

.vt-pbf

The MIT License (MIT)

Copyright (c) 2015 Anand Thakker

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is



furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Contains geojson wrapper.js from https://github.com/mapbox/mapbox-gl-js

Copyright (c) 2014, Mapbox

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Mapbox GL JS nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS
"AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT
LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR
A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

== DEPENDENCY 24 DEPENPENCIES

.@mapbox/point-geometry

Copyright (c) 2015, Mapbox <>

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

.@mapbox/vector-tile

Copyright (c) 2014, Mapbox

All rights reserved.

.pbf

Copyright (c) 2017, Mapbox

All rights reserved.

.ieee754

Copyright 2008 Fair Oaks Labs, Inc.

 $. {\tt resolve-protobuf-schema}$

The MIT License (MIT)

Copyright (c) 2014 Mathias Buus



.protocol-buffers-schema
The MIT License (MIT)

Copyright (c) 2014 Mathias Buus

Iodash

Vendor: OpenJS Foundation

Version: 4.17.21

The MIT License

Copyright OpenJS Foundation and other contributors

Based on Underscore.js, copyright Jeremy Ashkenas, DocumentCloud and Investigative Reporters & Editors

This software consists of voluntary contributions made by many individuals. For exact contribution history, see the revision history available at https://github.com/lodash/lodash

The following license applies to all parts of this software except as documented below:

====

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

====

Copyright and related rights for sample code are waived via CCO. Sample code is defined as all source code displayed within the prose of the documentation.

CCO: http://creativecommons.org/publicdomain/zero/1.0/

Files located in the node_modules and vendor directories are externally maintained libraries used by this software which have their own licenses; we recommend you read them, as their terms may differ from the terms above.



lunr.js

Vendor: Oliver Nightingale

Version: 2.3.9

Copyright (C) 2013 by Oliver Nightingale

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Clipboard

Vendor: Zeno Rocha

Version: 2.0.11

Clipboard 2.0.11 (MIT)

MIT License

Copyright (c) Zeno Rocha

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

----- Fourth-party dependencies ------

4th party dependency: good-listener (MIT)

4th party dependency: select (MIT)

4th party dependency: delegate (MIT) (dependency of good-listener)



MIT License

Copyright (c) Zeno Rocha

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

4th party dependency: tiny-emitter (MIT)

The MIT License (MIT)

Copyright (c) 2017 Scott Corgan

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

DOMPurify

Vendor: Mario Heiderich

Version: 3.0.3

DOMPurify

Copyright 2023 Dr.-Ing. Mario Heiderich, Cure53

 ${\tt DOMPurify}$ is free software; you can redistribute it and/or modify it under the terms of either:

- a) the Apache License Version 2.0, or
- b) the Mozilla Public License Version 2.0



Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Mozilla Public License, version 2.0

1. Definitions

1.1. "Contributor"

means each individual or legal entity that creates, contributes to the creation of, or owns Covered Software.

1.2. "Contributor Version"

means the combination of the Contributions of others (if any) used by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"

means Covered Software of a particular Contributor.

1.4. "Covered Software"

means Source Code Form to which the initial Contributor has attached the notice in Exhibit A, the Executable Form of such Source Code Form, and Modifications of such Source Code Form, in each case including portions thereof.

1.5. "Incompatible With Secondary Licenses"

- a. that the initial Contributor has attached the notice described in Exhibit B to the Covered Software; or
- b. that the Covered Software was made available under the terms of version 1.1 or earlier of the License, but not also under the terms of a Secondary License.

1.6. "Executable Form"

means any form of the work other than Source Code Form.

1.7. "Larger Work"

means a work that combines Covered Software with other material, in a separate file or files, that is not Covered Software.

1.8. "License"



means this document.

1.9. "Licensable"

means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently, any and all of the rights conveyed by this License.

1.10. "Modifications"

means any of the following:

- a. any file in Source Code Form that results from an addition to, deletion from, or modification of the contents of Covered Software; or
- b. any new file in Source Code Form that contains any Covered Software.

1.11. "Patent Claims" of a Contributor

means any patent claim(s), including without limitation, method, process, and apparatus claims, in any patent Licensable by such Contributor that would be infringed, but for the grant of the License, by the making, using, selling, offering for sale, having made, import, or transfer of either its Contributions or its Contributor Version.

1.12. "Secondary License"

means either the GNU General Public License, Version 2.0, the GNU Lesser General Public License, Version 2.1, the GNU Affero General Public License, Version 3.0, or any later versions of those licenses.

1.13. "Source Code Form"

means the form of the work preferred for making modifications.

1.14. "You" (or "Your")

means an individual or a legal entity exercising rights under this License. For legal entities, "You" includes any entity that controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. License Grants and Conditions

2.1. Grants

Each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license:

- a. under intellectual property rights (other than patent or trademark) Licensable by such Contributor to use, reproduce, make available, modify, display, perform, distribute, and otherwise exploit its Contributions, either on an unmodified basis, with Modifications, or as part of a Larger Work; and
- b. under Patent Claims of such Contributor to make, use, sell, offer for sale, have made, import, and otherwise transfer either its Contributions or its Contributor Version.



2.2. Effective Date

The licenses granted in Section 2.1 with respect to any Contribution become effective for each Contribution on the date the Contributor first distributes such Contribution.

2.3. Limitations on Grant Scope

The licenses granted in this Section 2 are the only rights granted under this License. No additional rights or licenses will be implied from the distribution or licensing of Covered Software under this License. Notwithstanding Section 2.1(b) above, no patent license is granted by a Contributor:

- a. for any code that a Contributor has removed from Covered Software; or
- b. for infringements caused by: (i) Your and any other third party's modifications of Covered Software, or (ii) the combination of its Contributions with other software (except as part of its Contributor Version): or
- c. under Patent Claims infringed by Covered Software in the absence of its Contributions.

This License does not grant any rights in the trademarks, service marks, or logos of any Contributor (except as may be necessary to comply with the notice requirements in Section 3.4).

2.4. Subsequent Licenses

No Contributor makes additional grants as a result of Your choice to distribute the Covered Software under a subsequent version of this License (see Section 10.2) or under the terms of a Secondary License (if permitted under the terms of Section 3.3).

2.5. Representation

Each Contributor represents that the Contributor believes its Contributions are its original creation(s) or it has sufficient rights to grant the rights to its Contributions conveyed by this License.

2.6. Fair Use

This License is not intended to limit any rights You have under applicable copyright doctrines of fair use, fair dealing, or other equivalents.

2.7. Conditions

Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted in Section 2.1.

3. Responsibilities

3.1. Distribution of Source Form

All distribution of Covered Software in Source Code Form, including any Modifications that You create or to which You contribute, must be under the terms of this License. You must inform recipients that the Source Code Form of the Covered Software is governed by the terms of this License, and how they can obtain a copy of this License. You may not attempt to alter or restrict the recipients' rights in the Source Code Form.



3.2. Distribution of Executable Form

If You distribute Covered Software in Executable Form then:

- a. such Covered Software must also be made available in Source Code Form, as described in Section 3.1, and You must inform recipients of the Executable Form how they can obtain a copy of such Source Code Form by reasonable means in a timely manner, at a charge no more than the cost of distribution to the recipient; and
- b. You may distribute such Executable Form under the terms of this License, or sublicense it under different terms, provided that the license for the Executable Form does not attempt to limit or alter the recipients' rights in the Source Code Form under this License.

3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice, provided that You also comply with the requirements of this License for the Covered Software. If the Larger Work is a combination of Covered Software with a work governed by one or more Secondary Licenses, and the Covered Software is not Incompatible With Secondary Licenses, this License permits You to additionally distribute such Covered Software under the terms of such Secondary License(s), so that the recipient of the Larger Work may, at their option, further distribute the Covered Software under the terms of either this License or such Secondary License(s).

3.4. Notices

You may not remove or alter the substance of any license notices (including copyright notices, patent notices, disclaimers of warranty, or limitations of liability) contained within the Source Code Form of the Covered Software, except that You may alter any license notices to the extent required to remedy known factual inaccuracies.

3.5. Application of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Software. However, You may do so only on Your own behalf, and not on behalf of any Contributor. You must make it absolutely clear that any such warranty, support, indemnity, or liability obligation is offered by You alone, and You hereby agree to indemnify every Contributor for any liability incurred by such Contributor as a result of warranty, support, indemnity or liability terms You offer. You may include additional disclaimers of warranty and limitations of liability specific to any jurisdiction.

4. Inability to Comply Due to Statute or Regulation

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Software due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be placed in a text file included with all distributions of the Covered Software under this License. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Termination



- 5.1. The rights granted under this License will terminate automatically if You fail to comply with any of its terms. However, if You become compliant, then the rights granted under this License from a particular Contributor are reinstated (a) provisionally, unless and until such Contributor explicitly and finally terminates Your grants, and (b) on an ongoing basis, if such Contributor fails to notify You of the non-compliance by some reasonable means prior to 60 days after You have come back into compliance. Moreover, Your grants from a particular Contributor are reinstated on an ongoing basis if such Contributor notifies You of the non-compliance by some reasonable means, this is the first time You have received notice of non-compliance with this License from such Contributor, and You become compliant prior to 30 days after Your receipt of the notice.
- 5.2. If You initiate litigation against any entity by asserting a patent infringement claim (excluding declaratory judgment actions, counter-claims, and cross-claims) alleging that a Contributor Version directly or indirectly infringes any patent, then the rights granted to You by any and all Contributors for the Covered Software under Section 2.1 of this License shall terminate.
- 5.3. In the event of termination under Sections 5.1 or 5.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or Your distributors under this License prior to termination shall survive termination.

6. Disclaimer of Warranty

Covered Software is provided under this License on an "as is" basis, without warranty of any kind, either expressed, implied, or statutory, including, without limitation, warranties that the Covered Software is free of defects, merchantable, fit for a particular purpose or non-infringing. The entire risk as to the quality and performance of the Covered Software is with You. Should any Covered Software prove defective in any respect, You (not any Contributor) assume the cost of any necessary servicing, repair, or correction. This disclaimer of warranty constitutes an essential part of this License. No use of any Covered Software is authorized under this License except under this disclaimer.

7. Limitation of Liability

Under no circumstances and under no legal theory, whether tort (including negligence), contract, or otherwise, shall any Contributor, or anyone who distributes Covered Software as permitted above, be liable to You for any direct, indirect, special, incidental, or consequential damages of any character including, without limitation, damages for lost profits, loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses, even if such party shall have been informed of the possibility of such damages. This limitation of liability shall not apply to liability for death or personal injury resulting from such party's negligence to the extent applicable law prohibits such limitation. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion and limitation may not apply to You.

8. Litigation

Any litigation relating to this License may be brought only in the courts of a jurisdiction where the defendant maintains its principal place of business and such litigation shall be governed by laws of that jurisdiction, without reference to its conflict-of-law provisions. Nothing in this Section shall prevent a party's ability to bring cross-claims or counter-claims.



9. Miscellaneous

This License represents the complete agreement concerning the subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not be used to construe this License against a Contributor.

10. Versions of the License

10.1. New Versions

Mozilla Foundation is the license steward. Except as provided in Section 10.3, no one other than the license steward has the right to modify or publish new versions of this License. Each version will be given a distinguishing version number.

10.2. Effect of New Versions

You may distribute the Covered Software under the terms of the version of the License under which You originally received the Covered Software, or under the terms of any subsequent version published by the license steward.

10.3. Modified Versions

If you create software not governed by this License, and you want to create a new license for such software, you may create and use a modified version of this License if you rename the license and remove any references to the name of the license steward (except to note that such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary Licenses If You choose to distribute Source Code Form that is Incompatible With Secondary Licenses under the terms of this version of the License, the notice described in Exhibit B of this License must be attached.

Exhibit A - Source Code Form License Notice

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at http://mozilla.org/MPL/2.0/.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

Exhibit B - "Incompatible With Secondary Licenses" Notice

This Source Code Form is "Incompatible With Secondary Licenses", as defined by the Mozilla Public License, v. 2.0.



Apache License Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.



- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

You must give any other recipients of the Work or Derivative Works a copy of this License: and

You must cause any modified files to carry prominent notices stating that You changed the files; and

You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks



associated with Your exercise of permissions under this License.

- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

D3

Vendor: Michael Bostock

Version: 7.4.4

Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on commander, license follows (The MIT License)

Copyright (c) 2011 TJ Holowaychuk <tj@vision-media.ca>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED 'AS IS', WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY



CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Depends on d3-array, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-axis, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-brush, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-chord, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND

FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-color, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-contour, license follows Copyright 2012-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-delaunay, license follows Copyright 2018-2021 Observable, Inc. Copyright 2021 Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-dispatch, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.



THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-drag, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-dsv, license follows Copyright 2013-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-ease, license follows Copyright 2010-2021 Mike Bostock Copyright 2001 Robert Penner All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the author nor the names of contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND

ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Depends on d3-fetch, license follows Copyright 2016-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-force, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-format, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-geo, license follows Copyright 2010-2021 Mike Bostock



Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

This license applies to GeographicLib, versions 1.12 and later.

Copyright 2008-2012 Charles Karney

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Depends on d3-hierarchy, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-interpolate, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER



TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-path, license follows Copyright 2015-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-polygon, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-quadtree, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-random, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT,



INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-scale, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-scale-chromatic, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Apache-Style Software License for ColorBrewer software and ColorBrewer Color Schemes

Copyright 2002 Cynthia Brewer, Mark Harrower, and The Pennsylvania State University

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Apache License Version 2.0, January 2004 http://www.apache.org/licenses/

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that



control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

- 2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
- 3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
- 4. Redistribution. You may reproduce and distribute copies of the Work or Derivative



Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:

You must give any other recipients of the Work or Derivative Works a copy of this License; and

You must cause any modified files to carry prominent notices stating that You changed the files; and

You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

- 5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.
- 6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
- 7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
- 8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
- 9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own



behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Depends on d3-selection, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-shape, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-time, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-time-format, license follows



Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-timer, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-transition, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on d3-zoom, license follows Copyright 2010-2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.



Depends on delaunator, license follows

ISC License

Copyright (c) 2017, Mapbox

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on iconv-lite, license follows Copyright (c) 2011 Alexander Shtuchkin

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Depends on internmap, license follows Copyright 2021 Mike Bostock

Permission to use, copy, modify, and/or distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS" AND THE AUTHOR DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY SPECIAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Depends on robust-predicates, license follows
This is free and unencumbered software released into the public domain.

Anyone is free to copy, modify, publish, use, compile, sell, or

distribute this software, either in source code form or as a compiled binary, for any purpose, commercial or non-commercial, and by any means.

In jurisdictions that recognize copyright laws, the author or authors of this software dedicate any and all copyright interest in the software to the public domain. We make this dedication for the benefit of the public at large and to the detriment of our heirs and successors. We intend this dedication to be an overt act of relinquishment in perpetuity of all present and future rights to this software under copyright law.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

For more information, please refer to http://unlicense.org

Depends on rw, license follows Copyright (c) 2014-2016, Michael Bostock All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * The name Michael Bostock may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL MICHAEL BOSTOCK BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Depends on safer-buffer, license follows MIT License

Copyright (c) 2018 Nikita Skovoroda <chalkerx@gmail.com>

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is



furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.



Index

A	L
administrator dashboard for the graph server,	labels and properties for SQL property graphs,
aggregations in GRAPH_TABLE, 5-10	loading graph into graph server (PGX)
APEX Graph Visualization plug-in, 8-1	PGQL property graphs, 10-1
architecture models, 1-3	SQL property graphs, 6-1
Autonomous database graph client, 12-7	log management in the graph server (PGX), 29-1
D	M
DBMS_METADATA package, 4-13	memory consumption by the graph server, 24-1 memory usage dashboard, 16-3
E	mixed property types, 4-8
edge graph element tables, 4-4	0
edge table keys for SQL property graphs, 4-4 enforced mode, 4-8	operators
emorced mode, 4-0	EDGE ID, 5-9
•	GRAPH_TABLE operator, 5-1
G	VERTEX ID, 5-9
graph pattern, 5-2	OPG4J shell, 12-4
graph server (PGX) and client	OPG4Py shell, 12-6
installation, 14-1	Oracle Graph clients
workflow, 14-1	Java client, 14-32
graph visualization application, 1	from Oracle Graph Server and Client
embedding graph visualization library, 22-1	downloads, 14-32
running the web application, 14-41	on Maven Central, 14-34
using the graph visualization application, 21-1	Python client, 14-37
visualizing graph queries on SQL property	from Oracle Graph server and Client
graphs, <i>21-5</i>	downloads, 14-38
visualizing PGQL queries	from PyPI, 14-37
graphs in the graph	in embedded mode, 14-40
server(PGX), 21-2	upgrade, 14-38
PGQL property graphs, 21-2	Oracle Graph Server (PGX)
graphs	configuration
administrator dashboard for the graph server, 16-4	graph server configuration parameters in server.conf file, 15-2
	runtime configuration parameters in
J	pgx.conf file, 23-1
	connecting to the graph server, 15-6
Jupyter Notebook, 12-2	installation, 14-2
	deploy to Apache Tomcat, 14-9
	deploy to Oracle WebLogic server, 14-10
	deploying behind a load balancer, 25-1
	rpm, <i>14-4</i>



Oracle Graph Server (PGX) (continued) kerberos enabled authentication, 14-28 learn about the graph server, 1-6 log management, 29-1 starting the graph server, 15-1 using the graph server, 1 working with files, 28-1	REST endpoints for the graph server (continued) v2 (continued) get user, 19-9 refresh an authentication token, 19-2 retrieve ansynchronous query result, 19-12 run a PGQL query, 19-4 run a PGQL query asynchronously, 19-9
DCOL (Branarty Craph Quary Language) 12.1	S
PGQL (Property Graph Query Language), 13-1 PGQL property graphs, 1	sessions
creating graphs, 9-1	administrator dashboard for the graph server,
GraphSON file import, 9-9	16-4
metadata tables, <i>9-4</i>	setting up TLS (Transport layer Security), 14-42
privileges, 9-8	using self-signed server certificate, 14-46
quick start, 11-1	using self-signed server keystore, 14-43
PgxML for Graphs, 17-1	SQL Developer
DeepWalk Algorithm, 17-2	querying PGQL property graphs, 12-21
Pg2vec Algorithm, 17-142	querying SQL property graphs, 5-29
Supervised GraphWise Algorithm, 17-15	SQL graph queries, 5-1
Unsupervised GraphWise Algorithm, 17-77,	aggregate functions, 5-10
17-126	at specific SCN, 5-12
property graph architecture, 1-3	complex path patterns, 5-8 graph pattern, 5-2
introduction, 1-1	variable length path pattern, 5-8
Property Graph Query Language (PGQL), 13-1	SQL property graphs, 1
rioporty Graph Quary Language (1 GQL), 10 1	create a SQL property graph, 4-1
D	drop a SQL property graph, 4-15
R	granting privileges, 4-11
REST endpoints for the graph server, 19-1	metadata tables, 4-12
v1	quick start, 3-2
cancel an asynchronous query execution,	rename a SQL property graph, 4-15
19-23	revalidate a SQL property graph, 4-15
check asynchronous query completion,	SQL graph queries, 5-1
19-20	examples, 5-13
get graphs, 19-15	using JSON columns, 4-16 visualization using APEX Graph Visualization
get user, 19-18	plug-in, 8-1
login, 19-14 logout, 19-19	SQLcl, 12-19
retrieve ansynchronous query result,	subgraph loading for PGQL property graphs,
19-20	10-10
run a PGQL query, 19-16	subgraph loading for SQL property graphs, 6-7
run a PGQL query asynchronously, 19-19	
v2	Т
cancel an asynchronous query execution,	·
19-14	trusted mode, 4-8
check asynchronous query completion, 19-11	tuning SQL property graphs, 5-26
get an authentication token, 19-1 get graphs for a driver, 19-4	V
get the database version, 19-8	vertex graph element tables, 4-4 vertex table keys for SQL property graphs, 4-4