

Oracle® Construction and Engineering

Integrate Oracle Primavera Cloud Resource and Project Data with Primavera P6 EPPM



G32693-03
March 2026



Oracle Construction and Engineering Integrate Oracle Primavera Cloud Resource and Project Data with Primavera P6 EPPM,

G32693-03

Copyright © 2025, 2026, Oracle and/or its affiliates.

Primary Author: Oracle Corporation

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

About This Content

1 About This Accelerator

Introduction	1
Functional Integration Flows	1
Delivered Integrations	3
Data Mapping	4
System and Access Requirements	4

2 Before You Install the Accelerator

Configure Oracle Primavera Cloud	1
Configure Primavera P6 EPPM	1

3 Install and Configure the Accelerator

Install the Accelerator	1
Configure the Oracle Primavera Cloud Connection	1
Configure the Oracle Primavera P6 EPPM Connection	1

4 Activate and Run the Integrations

Run the P6 to Oracle Primavera Cloud Resource Sync Integration	1
Run the P6 to Oracle Primavera Cloud Role Sync Integration	2
Run the P6 to Oracle Primavera Cloud Resource Role Sync Integration	2
Run the P6 to Oracle Primavera Cloud Project Schedule Sync Integration	3
Run the Oracle Primavera Cloud to P6 Project Schedule Sync Integration	4
Run the Oracle Primavera Cloud to P6 Project Task Sync Integration	5
Run the P6 to Oracle Primavera Cloud Project Risk Sync Integration	6
Monitor the Integrations	7
Monitor from the Project	7
Monitor from Global Observability	7

About This Content

This document describes how to install, configure, and run this accelerator in Oracle Integration 3.

Related Resources

See these Oracle resources:

- Oracle Cloud at <https://www.oracle.com/cloud/>
- *Using Integrations in Oracle Integration 3*
- *Using the Oracle Mapper with Oracle Integration 3*
- Oracle Integration documentation
- [Oracle Primavera Cloud documentation](#)
- [Oracle Primavera P6 EPPM documentation](#)

Conventions

The following text conventions are used in this document.

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

1

About This Accelerator

Use this accelerator to integrate Oracle Primavera Cloud resource and project data with Primavera P6 EPPM.

Note

This accelerator is available as **Oracle Primavera Cloud — Primavera P6 EPPM | Integrate Resource and Project Data** in the Integration store.


Introduction

The integrations delivered in this accelerator are helpful for customers who are migrating and transitioning from Primavera P6 EPPM to Oracle Primavera Cloud. Using these integrations, customers can synchronize their data in stages, by migrating portions of their teams, data, projects, and/or processes, instead of migrating everything all at once. This allows customers to phase in the use of Oracle Primavera Cloud. This is especially helpful for navigating change management and acclimating an organization to Oracle Primavera Cloud - particularly for organizations that have been using Primavera P6 EPPM for many years.

In addition, customers may choose to use Primavera P6 EPPM and Oracle Primavera Cloud together as a single, cohesive, and highly integrated best-of-breed solution for different use cases, and these integrations help to facilitate this approach. For example, customers may continue to perform their organization's scheduling in Primavera P6 EPPM, but they onboard their vendors for consuming vendor schedule updates in Oracle Primavera Cloud and/or performing task management with their vendors in Oracle Primavera Cloud. Organizations might also perform risk management in Oracle Primavera Cloud with schedule data from Primavera P6 EPPM, and/or they might perform their portfolio capital planning in Oracle Primavera Cloud along with schedule data from Primavera P6 EPPM.

Functional Integration Flows

The integration between Oracle Primavera Cloud and Primavera P6 EPPM, managed through Oracle Integration, synchronizes key project management elements across both platforms. Customers enhance standard objects with custom metadata — codes or configured fields in Oracle Primavera Cloud/user defined fields (UDFs) in Primavera P6 EPPM — to capture organization-specific information across projects, activities, WBS, resources, assignments, and risks. Incorporating these fields is vital for supporting advanced reporting, process customization, and unique business workflows.

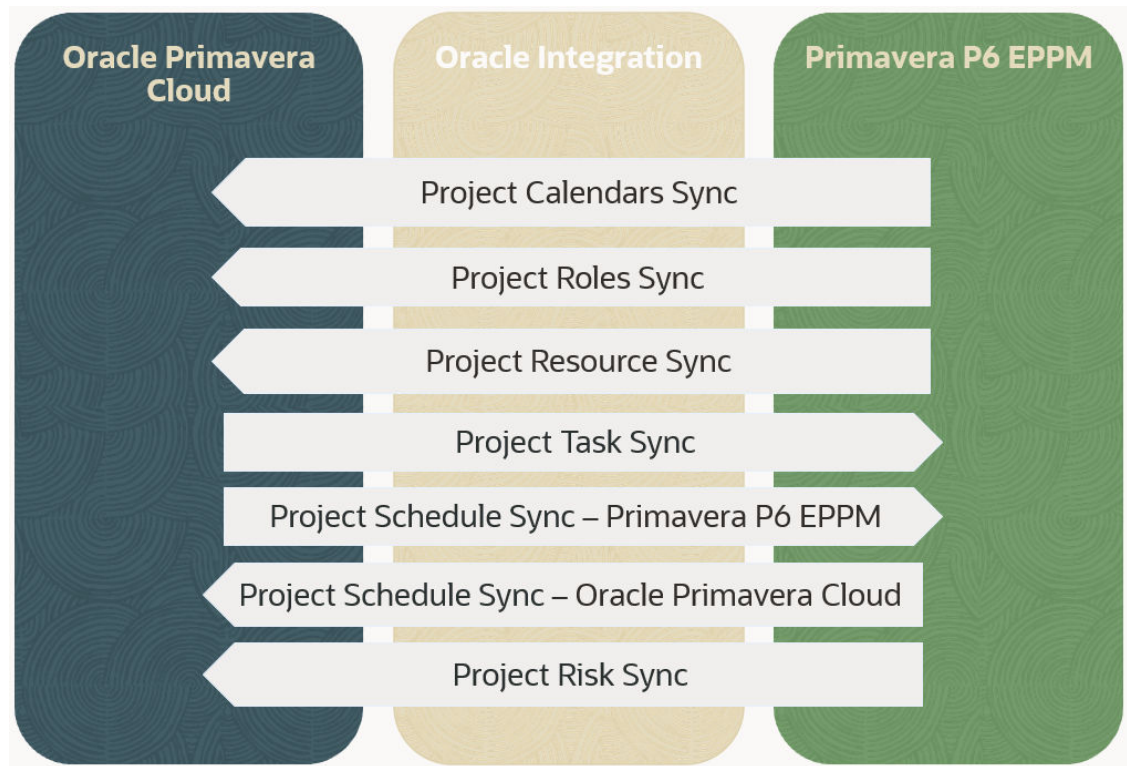

1. Project Calendars Sync

- Synchronizes calendar definitions such as work patterns and exceptions from Primavera P6 EPPM to Oracle Primavera Cloud.
- Ensures that schedule calculations and resource allocation rules remain consistent.
- Changes in the source system are reflected in the target system through synced integrations.

2. Project Roles Sync

- Transfers role definitions and attributes, enabling consistent role-based planning and costing.
- Updates triggered upon creation or modification of roles in Primavera P6 EPPM; propagated changes ensure accurate project staffing and reporting in Oracle Primavera Cloud.
- Handles custom field mappings as required by business rules.

3. Project Resources Sync

- Maintains an up-to-date, centralized resource pool by synchronizing updates made in Primavera P6 EPPM with Oracle Primavera Cloud.
- Ensures resource definitions, attributes, and availability are consistent for assignment and budgeting.
- Validation and error management handled by Oracle Integration promotes data integrity.

4. Project Task Sync

- Pushes lean construction and field task definitions from Oracle Primavera Cloud into Primavera P6 EPPM.
- Ensures alignment of collaborative, field-driven work planning with master project schedules.
- Integration triggers and validations ensure tasks are consistently mapped and reflected.

5. Project Schedule Sync

- Synchronizes schedules, including WBS, activities, logic, and dates, between the two systems.
- Oracle Integration manages custom scheduling attributes and error handling.

6. Project Risk Sync

- Transfers risk registers and associated data from Primavera P6 EPPM into Oracle Primavera Cloud.
- Aligns risk tracking, reporting, and mitigation planning between platforms.
- Custom mappings and validations ensure accurate representation of risk data in Oracle Primavera Cloud.

① Note

Changes to resource or role availability and pricing made at the workspace level are not automatically propagated to projects within that workspace or to child workspaces. These updates can be applied manually from the Resource List or Role List pages, or by enabling the application setting that synchronizes all resource and role availability and pricing from the workspace level to all associated projects. Please note that synchronizing resources and roles at the workspace level will not immediately update this information at the project level in Oracle Primavera Cloud.

Delivered Integrations

This accelerator delivers a project that includes several integrations.

Each integration is designed to be run independently of the others, so you can run whichever integrations you need.

Global level integrations:

- **P6 to Oracle Primavera Cloud Resource Sync:** Used to sync an Oracle Primavera Cloud workspace with resource and calendar data from Primavera P6 EPPM.
- **P6 to Oracle Primavera Cloud Role Sync:** Used to sync an Oracle Primavera Cloud workspace with role data from Primavera P6 EPPM.
- **P6 to Oracle Primavera Cloud Resource Role Sync:** Used to sync an Oracle Primavera Cloud workspace with resource, role, and calendar data from Primavera P6 EPPM.

Project level integrations:

- **P6 to Oracle Primavera Cloud Project Schedule Sync:** Used to sync a project from Primavera P6 EPPM to Oracle Primavera Cloud with project schedule data, UDFs, and codes.
- **Oracle Primavera Cloud to P6 Project Schedule Sync:** Used to sync a project from Oracle Primavera Cloud to Primavera P6 EPPM with project schedule data, UDFs, and codes.
- **Oracle Primavera Cloud to P6 Project Task Sync:** Used to sync a project from Oracle Primavera Cloud to Primavera P6 EPPM with WBS, activity, task, UDFs, and codes.
- **P6 to Oracle Primavera Cloud Project Risk Sync:** Used to sync a project from Primavera P6 EPPM to Oracle Primavera Cloud with risk data, such as risk matrices, risk thresholds, and activity risks.

To use these integrations, you need to install the accelerator and configure the connections, then activate the integrations you want to use, update the integration properties for those integrations, and finally run the integrations.

Data Mapping

Data mapping spreadsheets describe which fields in Oracle Primavera Cloud map to which fields in Primavera P6 EPPM.

Click the link below to download a zip file that contains the data mapping sheets for these integrations:

[Data Mapping Sheets](#)

The zip file includes the following data mapping sheets:

- OPC_P6_Project_Schedule_Sync.xlsx
- OPC_P6_Project_Task_Sync.xlsx
- P6_OPC_Project_Risk_Sync.xlsx
- P6_OPC_Project_Schedule_Sync.xlsx
- P6_OPC_Resource_Role_Sync.xlsx
- P6_OPC_Resource_Sync.xlsx
- P6_OPC_Role_Sync.xlsx

System and Access Requirements

- Oracle Integration 3
- Oracle Primavera Cloud, and an Oracle Primavera Cloud user account with administrative privileges
- Primavera P6 EPPM, and a Primavera P6 EPPM user account with administration role

2

Before You Install the Accelerator

You must perform the following configuration tasks on your Oracle Primavera Cloud and Primavera P6 EPPM instances before you can connect to these external systems using Oracle Integration and use the delivered integrations.

Configure Oracle Primavera Cloud

To configure Oracle Primavera Cloud for this integration, complete the initial setup outlined below:

- **Create an integration user account (recommended):**

You can create an integration user account in Oracle Primavera Cloud to connect with Oracle Integration and manage integrations. Specify the integration account email address in the integration properties to receive integration notifications.

Creating an integration account is optional but recommended to keep track of the data modified through integrations and to avoid operational issues (for example, user lockouts or user lifecycle changes). For details, see [Setting up an Integration User Account](#).

- **Create or use an existing workspace:**

Workspaces represent the hierarchical structure of your organization's businesses, projects, or processes.

Create a new workspace or use an existing one to integrate Oracle Primavera Cloud activities, assignments, roles, and resources with Primavera P6 EPPM. For details, see [Add a Workspace](#).

- **Create or use an existing project:**

A project is a formalized plan undertaken to create a service, product, or result. Projects may consist of various other details, including activities and assignments.

Create a new project or use an existing one to integrate its activities, assignments, roles, and resources with Primavera P6 EPPM. For details, see [Add a Project](#).

Configure Primavera P6 EPPM

To configure Primavera P6 EPPM for this integration, complete the initial setup outlined below:

- **Create an integration user account:**

You can create an integration user account in Primavera P6 EPPM to connect with Oracle Integration and manage integrations with Oracle Primavera Cloud.

Creating an integration account is optional but recommended to keep track of the data modified through integrations and to avoid operational issues (for example, user lockouts or user lifecycle changes). For details, see [Creating User Accounts for P6 EPPM](#).

- **Create an EPS location:**

Enterprise project structure (EPS) elements represent the hierarchical positions of all the projects in your database. You can create sibling EPSs to represent those that are hierarchically equal, or child EPSs to represent those that are subordinate. You must

create the EPS structure before synchronizing Primavera P6 EPPM and Oracle Primavera Cloud projects. See [Creating EPS Elements](#)

- **Add a project:**

You must add at least one project in Primavera P6 EPPM before synchronizing Primavera P6 EPPM and Oracle Primavera Cloud projects. See [Creating Projects](#).

- **Create user-defined fields:**

User-defined fields (UDFs) allow you to create and maintain data specific to your organization. Create project UDFs before synchronizing Primavera P6 EPPM and Oracle Primavera Cloud projects. See [About User Defined Fields](#) and [Creating Project UDFs](#).

- **Create and assign codes:**

Codes help you track different projects based on attributes they share. You must create and assign codes to your Primavera P6 EPPM projects before synchronizing Primavera P6 EPPM and Oracle Primavera Cloud projects. See [Creating Project Codes](#) and [Assigning Project Codes](#).

3

Install and Configure the Accelerator

On your Oracle Integration instance, install the accelerator to deploy the project. Once installed, you can configure the delivered connections.

Install the Accelerator

1. On the Oracle Integration Home page, in the **Get Started** section, click **Browse store**.
2. Search for this accelerator:
Oracle Primavera Cloud — Primavera P6 EPPM | Integrate Resource and Project Data
3. After you find the accelerator, click **Get** on the accelerator card.
A message confirms that the accelerator was successfully installed, and the accelerator card shows **In Use**.
4. Click **Configure**  on the accelerator card.
The project workspace opens, displaying all the resources of the accelerator.

Configure the Oracle Primavera Cloud Connection

1. In the **Connections** section, click **Actions** ... on the connection, then select **Edit**.
2. In the **Properties** section, do the following:
 - In the **Connection URL** field, enter the URL of your Oracle Primavera Cloud instance.
For example: `https://primavera.oraclecloud.com`
3. In the **Security** section, do the following:
 - a. In the **Security policy** field, select **Oracle Primavera Cloud Login**.
 - b. In the **Username** and **Password** fields, enter the user name and password of your Oracle Primavera Cloud account, or an Oracle Primavera Cloud integration user account.
4. In the **Access type** section, select **Public gateway**.
5. Click **Test** to ensure that your connection is successfully configured.
A message confirms if your test is successful.
6. Click **Save**. If prompted, click **Save** again.
7. To return to the project workspace, click **Go back** .

Configure the Oracle Primavera P6 EPPM Connection

1. In the **Connections** section, click **Actions** ... on the connection, then select **Edit**.

2. In the **Properties** section, do the following:
 - In the **Connection URL** field, enter the URL of your Primavera P6 EPPM instance.
For example: `https://p6.oraclecloud.com/`
3. In the **Security** section, do the following:
 - a. In the **Security Policy** field, select **OAuth**.
 - b. In the **Username** and **Password** fields, enter the user name and password of the integration user account.
4. In the **Access type** section, select **Public gateway**.
5. Click **Test** to ensure that your connection is successfully configured.
A message confirms if your test is successful.
6. Click **Save**. If prompted, click **Save** again.
7. To return to the project workspace, click **Go back**  .

4

Activate and Run the Integrations

After you install the accelerator and configure the connections, you can run the integrations in this accelerator.

Each integration in this accelerator is designed to be run independently of the others.

For each integration you want to run, do the following:

1. First, activate the integration.
2. Then, update the integration properties.
3. Finally, run the integration, either manually or using a schedule.

The following procedures describe how to run each integration manually. To learn how to schedule an integration to run at a specific date, time, and frequency, see [Define the Integration Schedule](#).

Run the P6 to Oracle Primavera Cloud Resource Sync Integration

1. Go to the **Integrations** section of the project workspace.
2. Activate the integration.
 - a. Click **Actions**  next to the integration, then select **Activate**.
 - b. In the **Activate integration** panel, select an appropriate **Tracing level** (*Production*, *Audit*, or *Debug*), then click the **Activate** button.

A message confirms that the integration has been activated. Refresh the page to view the updated status of the integration.

You can change the tracing level later by selecting **Actions**, and then **Configure activation**.

3. Update integration properties.
 - a. Click **Actions**  next to the integration, then select **Update property values**.
 - b. In the **Update property values** panel, do the following:
 - i. Click to expand the **SaveDataWhenError** property, then in the **New value** field, enter either "Yes" or "No", depending on whether or not you want data to be saved to Oracle Primavera Cloud if there are errors on sync.

If no value is specified, the default value is used. The default value is "Yes".
 - ii. Click **Submit**.
4. Run the integration.
 - a. Click **Actions**  next to the integration, then select **Run**.
 - b. On the **Configure and run** page, do the following:
 - i. In the **WorkspaceCode** field, specify the Oracle Primavera Cloud workspace location.

- ii. Click **Run**.

You have now successfully submitted the integration to be run.

Run the P6 to Oracle Primavera Cloud Role Sync Integration

1. Go to the **Integrations** section of the project workspace.
2. Activate the integration.
 - a. Click **Actions** ■■■ next to the integration, then select **Activate**.
 - b. In the **Activate integration** panel, select an appropriate **Tracing level** (*Production*, *Audit*, or *Debug*), then click the **Activate** button.

A message confirms that the integration has been activated. Refresh the page to view the updated status of the integration.

You can change the tracing level later by selecting **Actions**, and then **Configure activation**.
3. Update integration properties.
 - a. Click **Actions** ■■■ next to the integration, then select **Update property values**.
 - b. In the **Update property values** panel, do the following:
 - i. Click to expand the **SaveDataWhenError** property, then in the **New value** field, enter either "Yes" or "No", depending on whether or not you want data to be saved to Oracle Primavera Cloud if there are errors on sync.

If no value is specified, the default value is used. The default value is "Yes".
 - ii. Click **Submit**.
4. Run the integration.
 - a. Click **Actions** ■■■ next to the integration, then select **Run**.
 - b. On the **Configure and run** page, do the following:
 - i. In the **WorkspaceCode** field, specify the Oracle Primavera Cloud workspace location.
 - ii. Click **Run**.

You have now successfully submitted the integration to be run.

Run the P6 to Oracle Primavera Cloud Resource Role Sync Integration

1. Go to the **Integrations** section of the project workspace.
2. Activate the integration.
 - a. Click **Actions** ■■■ next to the integration, then select **Activate**.
 - b. In the **Activate integration** panel, select an appropriate **Tracing level** (*Production*, *Audit*, or *Debug*), then click the **Activate** button.

A message confirms that the integration has been activated. Refresh the page to view the updated status of the integration.

You can change the tracing level later by selecting **Actions**, and then **Configure activation**.

3. Update integration properties.
 - a. Click **Actions** . . . next to the integration, then select **Update property values**.
 - b. In the **Update property values** panel, do the following:
 - i. Click to expand the **SaveDataWhenError** property, then in the **New value** field, enter either "Yes" or "No", depending on whether or not you want data to be saved to Oracle Primavera Cloud if there are errors on sync.

If no value is specified, the default value is used. The default value is "Yes".
 - ii. Click **Submit**.
4. Run the integration.
 - a. Click **Actions** . . . next to the integration, then select **Run**.
 - b. On the **Configure and run** page, do the following:
 - i. In the **WorkspaceCode** field, specify the Oracle Primavera Cloud workspace location.
 - ii. Click **Run**.

You have now successfully submitted the integration to be run.

Run the P6 to Oracle Primavera Cloud Project Schedule Sync Integration

1. Go to the **Integrations** section of the project workspace.
2. Activate the integration.
 - a. Click **Actions** . . . next to the integration, then select **Activate**.
 - b. In the **Activate integration** panel, select an appropriate **Tracing level** (*Production*, *Audit*, or *Debug*), then click the **Activate** button.

A message confirms that the integration has been activated. Refresh the page to view the updated status of the integration.

You can change the tracing level later by selecting **Actions**, and then **Configure activation**.
3. Update integration properties.
 - a. Click **Actions** . . . next to the integration, then select **Update property values**.
 - b. In the **Update property values** panel, do the following:
 - i. Click to expand the **SaveDataWhenError** property, then in the **New value** field, enter either "Yes" or "No", depending on whether or not you want data to be saved to Oracle Primavera Cloud if there are errors on sync.

If no value is specified, the default value is used. The default value is "Yes".
 - ii. Click to expand the **IncludeUDFs** property, then in the **New value** field, enter the object names of the UDFs you want to include in the sync. They must be comma separated and inside quotation marks. Possible values are: None, Project, WBS, Activity, Assignment, Risk.

For example: "Project,Activity,Risk"

If no value is specified, the default value is used. The default value is "None".
 - iii. Click to expand the **IncludeCodes** property, then in the **New value** field, enter the object names of the codes you want to include in the sync. They must be comma

separated and inside quotation marks. Possible values are: None, Project, Activity, Resource.

For example: "Project, Activity"

If no value is specified, the default value is used. The default value is "None".

iv. Click **Submit**.

4. Run the integration.

a. Click **Actions** next to the integration, then select **Run**.

b. On the **Configure and run** page, do the following:

i. In the **WorkspaceCode** field, specify the Oracle Primavera Cloud workspace location.

ii. In the **ProjectCode** field, specify the Primavera P6 EPPM project filter.

iii. Click **Run**.

You have now successfully submitted the integration to be run.

Run the Oracle Primavera Cloud to P6 Project Schedule Sync Integration

1. Go to the **Integrations** section of the project workspace.

2. Activate the integration.

a. Click **Actions** next to the integration, then select **Activate**.

b. In the **Activate integration** panel, select an appropriate **Tracing level** (*Production*, *Audit*, or *Debug*), then click the **Activate** button.

A message confirms that the integration has been activated. Refresh the page to view the updated status of the integration.

You can change the tracing level later by selecting **Actions**, and then **Configure activation**.

3. Update integration properties.

a. Click **Actions** next to the integration, then select **Update property values**.

b. In the **Update property values** panel, do the following:

i. Click to expand the **SaveDataWhenError** property, then in the **New value** field, enter either "Yes" or "No", depending on whether or not you want data to be saved to Primavera P6 EPPM if there are errors on sync.

If no value is specified, the default value is used. The default value is "Yes".

ii. Click to expand the **EPSId** property, then in the **New value** field, enter the Primavera P6 EPPM EPS location (EPS ID).

iii. Click to expand the **IncludeUDFs** property, then in the **New value** field, enter the object names of the UDFs you want to include in the sync. They must be comma separated and inside quotation marks. Possible values are: None, Project, WBS, Activity, Assignment, Risk.

For example: "Project, Activity, Risk"

If no value is specified, the default value is used. The default value is "None".

- iv. Click to expand the **IncludeCodes** property, then in the **New value** field, enter the object names of the codes you want to include in the sync. They must be comma separated and inside quotation marks. Possible values are: None, Project, Activity, Resource.

For example: "Project,Activity"

If no value is specified, the default value is used. The default value is "None".

- v. Click **Submit**.

4. Run the integration.

- a. Click **Actions** ■■■ next to the integration, then select **Run**.
- b. On the **Configure and run** page, do the following:
 - i. In the **ProjectCode** field, enter the Primavera P6 EPPM project filter.
 - ii. In the **WorkspaceCode** field, enter the Oracle Primavera Cloud workspace location.
 - iii. Click **Run**.

You have now successfully submitted the integration to be run.

Run the Oracle Primavera Cloud to P6 Project Task Sync Integration

- 1. Go to the **Integrations** section of the project workspace.
- 2. Activate the integration.
 - a. Click **Actions** ■■■ next to the integration, then select **Activate**.
 - b. In the **Activate integration** panel, select an appropriate **Tracing level** (*Production*, *Audit*, or *Debug*), then click the **Activate** button.

A message confirms that the integration has been activated. Refresh the page to view the updated status of the integration.

You can change the tracing level later by selecting **Actions**, and then **Configure activation**.

- 3. Update integration properties.
 - a. Click **Actions** ■■■ next to the integration, then select **Update property values**.
 - b. In the **Update property values** panel, do the following:
 - i. Click to expand the **SaveDataWhenError** property, then in the **New value** field, enter either "Yes" or "No", depending on whether or not you want data to be saved to Primavera P6 EPPM if there are errors on sync.

If no value is specified, the default value is used. The default value is "Yes".
 - ii. Click to expand the **EPSId** property, then in the **New value** field, enter the Primavera P6 EPPM EPS location (EPS ID).
 - iii. Click to expand the **IncludeUDFs** property, then in the **New value** field, enter the object names of the UDFs you want to include in the sync. They must be comma separated and inside quotation marks. Possible values are: None, Project, WBS, Activity, Assignment, Risk.

For example: "Project,Activity,Risk"

If no value is specified, the default value is used. The default value is "None".

- iv. Click to expand the **IncludeCodes** property, then in the **New value** field, enter the object names of the codes you want to include in the sync. They must be comma separated and inside quotation marks. Possible values are: None, Project, Activity, Resource.

For example: "Project,Activity"

If no value is specified, the default value is used. The default value is "None".

- v. Click **Submit**.

4. Run the integration.

- a. Click **Actions** ■■■ next to the integration, then select **Run**.
- b. On the **Configure and run** page, do the following:
 - i. In the **ProjectCode** field, enter the Primavera P6 EPPM project filter.
 - ii. In the **WorkspaceCode** field, enter the Oracle Primavera Cloud workspace location.
 - iii. Click **Run**.

You have now successfully submitted the integration to be run.

Run the P6 to Oracle Primavera Cloud Project Risk Sync Integration

- 1. Go to the **Integrations** section of the project workspace.
- 2. Activate the integration.
 - a. Click **Actions** ■■■ next to the integration, then select **Activate**.
 - b. In the **Activate integration** panel, select an appropriate **Tracing level** (*Production*, *Audit*, or *Debug*), then click the **Activate** button.

A message confirms that the integration has been activated. Refresh the page to view the updated status of the integration.

You can change the tracing level later by selecting **Actions**, and then **Configure activation**.

- 3. Update integration properties.
 - a. Click **Actions** ■■■ next to the integration, then select **Update property values**.
 - b. In the **Update property values** panel, do the following:

- i. Click to expand the **SaveDataWhenError** property, then in the **New value** field, enter either "Yes" or "No", depending on whether or not you want data to be saved to Oracle Primavera Cloud if there are errors on sync.

If no value is specified, the default value is used. The default value is "Yes".

- ii. Click to expand the **IncludeUDFs** property, then in the **New value** field, enter the object names of the UDFs you want to include in the sync. They must be comma separated and inside quotation marks. Possible values are: None, Project, WBS, Activity, Assignment, Risk.

For example: "Project,Activity,Risk"

If no value is specified, the default value is used. The default value is "None".

- iii. Click to expand the **IncludeCodes** property, then in the **New value** field, enter the object names of the codes you want to include in the sync. They must be comma

separated and inside quotation marks. Possible values are: None, Project, Activity, Resource.

For example: "Project,Activity"

If no value is specified, the default value is used. The default value is "None".

iv. Click **Submit**.

4. Run the integration.

a. Click **Actions** next to the integration, then select **Run**.

b. On the **Configure and run** page, do the following:

i. In the **WorkspaceCode** field, specify the Oracle Primavera Cloud workspace location.

ii. In the **ProjectCode** field, specify the Primavera P6 EPPM project filter.

iii. Click **Run**.

You have now successfully submitted the integration to be run.

Monitor the Integrations

You can monitor instances and errors directly within the project workspace and also from the global observability pages.

Monitor from the Project

1. In the project workspace, click **Observe**.

2. Click **Instances** to see all runs.

You can filter by **Status** (for example, *Succeeded* or *Errored*) and **Time window** (time range).

Click an instance to open the activity stream, which shows step-by-step execution and faults.

3. Use the **Errors** panel to review failures and take action (resubmit or discard) where available.

Related Topics

- Monitor Integrations in a Project

Monitor from Global Observability

Use global observability for cross-project monitoring of health, performance, and errors.

1. In the navigation pane, click **Observability**.

2. Click **Dashboards** to review instance trends, error rates, and performance across projects.

Related Topics

- Monitor Integrations During Runtime