

Oracle® Banking Digital Experience

Anomaly Model Detection Configuration

Guide



Innovation Release 25.1.1.0.0

G47480-01

October 2025

ORACLE®

Copyright © 2006, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface

Cloud specific Configurations	i
Audience	i
Documentation Accessibility	i
Critical Patches	i
Diversity and Inclusion	ii
Conventions	ii
Related Resources	ii
Screenshot Disclaimer	ii
Acronyms and Abbreviations	ii

1 Host Notifications

1.1 Purpose of the Document	2
1.2 Key Features of the System	2

2 Prerequisites

2.1 Configure Bus Service	1
2.2 OBAPI Configuration Guide	3

3 Model Definition Overview

3.1 Key Features	1
------------------	---

4 Use Case Setup

4.1 Fields	1
------------	---

5 Model Metrics

5.1 Features	1
--------------	---

6	Model Monitoring	
6.1	Fields	1
7	Supply Chain Finance	
7.1	Model Build Section	1
7.2	Model Output Section	1
8	View Debug Logs	
8.1	Steps	1
9	Conclusion	
	Index	

Preface

- [Cloud specific Configurations](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Critical Patches](#)
- [Diversity and Inclusion](#)
- [Conventions](#)
- [Related Resources](#)
- [Screenshot Disclaimer](#)
- [Acronyms and Abbreviations](#)

Cloud specific Configurations

Following additional configurations are required if OBDX and OBVAM are being hosted on cloud:

1. In OBRH, enable Eureka instance for OBVAM service provider.

Audience

This document is intended for the following audience:

- Customers
- Partners

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at [Critical Patches, Security Alerts and](#)

[Bulletins](#). All critical patches should be applied in a timely manner to ensure effective security, as strongly recommended by [Oracle Software Security Assurance](#).

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Related Resources

For more information on any related features, refer to the following documents:

- Oracle Banking Digital Experience Installation Manuals
- Oracle Banking Digital Experience Licensing Manuals

Screenshot Disclaimer

Personal information used in the interface or documents is dummy and does not exist in the real world. It is only for reference purposes.

Acronyms and Abbreviations

The list of the acronyms and abbreviations used in this guide are as follows:

Table 1 Acronyms and Abbreviations

Abbreviation	Description
OBDX	Oracle Banking Digital Experience

1

Host Notifications

In order to listen to any Host events and trigger subsequent alerts in OBAPI for the same, please follow the below steps as part of extensibility:

Out-of-Box Notification Alert Support:

Update the output of the following script:

```
SELECT * FROM digx_fw_config_all_b WHERE prop_id LIKE 'structure-  
createdAndAuthorized@%' AND category_id='KAFKA_CONFIG';
```

New Notification Alert Support:

1. Get the Avro schema format for the notification to be consumed from the host. Ensure that the deserialized objects based on the Avro are present in the class-path.
2. Create a new consumer class that implements the **IKafkaConsumable** interface. Consumers implementing this interface will always consume messages from Kafka topics.

Override Methods:

- **topicName():** Override this method to specify the name of the topic the consumer should listen to. Returns String.
Example: structure-createdAndAuthorized
 - **consumerGroup():** Override this method to specify the consumer group name. Returns String.
 - **enableSeparateConsumerGroupsPerServer():**
 - a. When true, each instance of the consumer on each server creates its own consumer group.
 - b. When false, all instances of this consumer across all servers share the same consumer group. Default is false.
 - **run():** Responsible for initiating the message consumption process. Within this method, the consume method is called with an instance of **IMessageProcessor** (*created as part of point 4*) to handle the processing of each consumed message.
 - **OOTB Reference:**
com.ofss.digx.kafka.liquiditymanagement.consumer.structure.StructureMessageConsumer
3. Create a file named com.ofss.digx.infra.events.kafka.consumer.**IConsumer** in resources/META-INF/services and provide the entry for the consumer class.
 4. Create a new class implementing com.ofss.digx.infra.events.processor.**IMessageProcessor** for writing business logic. This class will be used from the consumer and listener classes and should be included in the service jar of the module.
- #### **Override Methods:**
- **process(K key, V data):** Processes messages from the consumer. The out-of-box host alert service (Eg: com.ofss.digx.app.liquiditymanagement.service.hostalerts.HostAlertService) should be invoked from this method.
key: The key object associated with the message.

data: The data to be processed

OOTB Reference:

com.ofss.digx.app.liquiditymanagement.processor.structure.StructureMessageProcess
or

5. Kafka consumer configurations can be maintained in `DIGX_FW_CONFIG_ALL_B` with `category_id` set to `KAFKA_CONFIG`. For configurations specific to a topic, `prop_id` can be specified as `TOPIC_NAME@CONFIGURATION`.

Example: `structure-createdAndAuthorized@bootstrap.servers`

6. Configure a subscription based OBAPI alert specific for the new notification configured. Post maintaining subscription for the new OBAPI alert, subscribed users will receive OBAPI alerts specific to the notification.

- [Purpose of the Document](#)
- [Key Features of the System](#)

1.1 Purpose of the Document

This user manual provides step-by-step instructions for managing and configuring anomaly detection models for the following use cases:

- **Login Data**
- **Payment Data**

The system is designed to detect anomalies in login activities and payment transactions, ensuring security and fraud prevention. By leveraging machine learning techniques, it helps identify unusual patterns that may indicate unauthorized access attempts or fraudulent transactions.

1.2 Key Features of the System

- **Automated Anomaly Detection:** The system automatically flags suspicious login attempts and payment activities.
- **Customizable Model Settings:** Users can define and adjust various model parameters, including sensitivity, error metrics, and data sources.
- **Real-time Monitoring:** The system enables continuous tracking and drift detection to ensure model effectiveness over time.
- **Debugging and Logging:** Provides detailed logs for troubleshooting.
- **User-Friendly Interface:** Simplifies model setup, evaluation, and maintenance through intuitive screens and action buttons.


2


Prerequisites

- [Configure Bus Service](#)
- [OBAPI Configuration Guide](#)

2.1 Configure Bus Service

Before defining models, configure the Bus Service by inserting the required App ID and Bus Service URL:

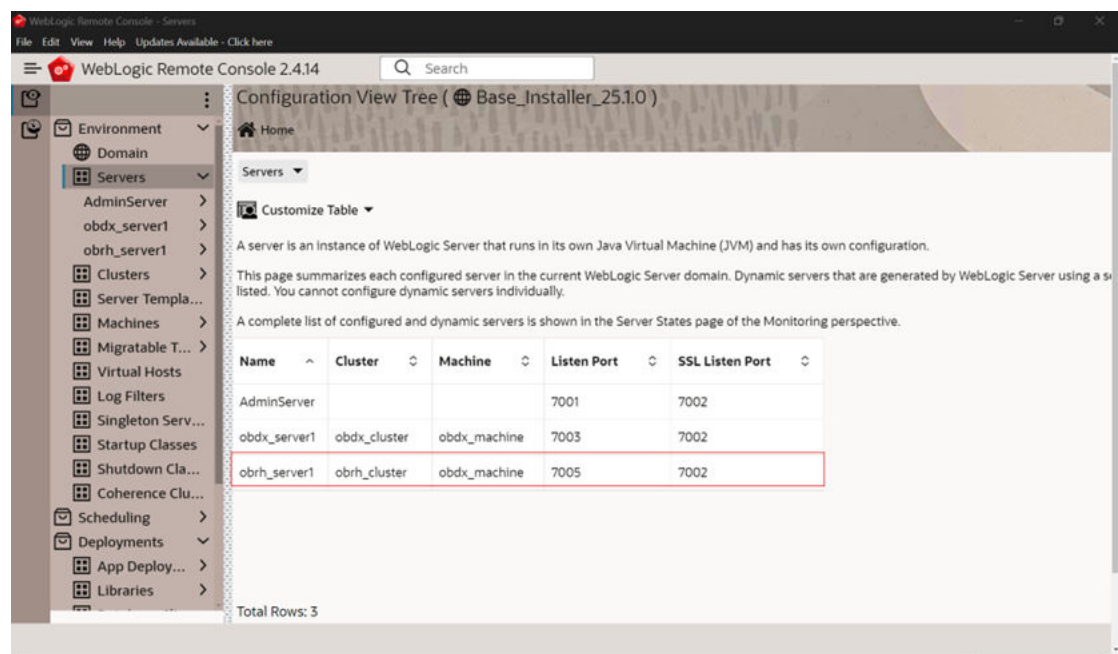


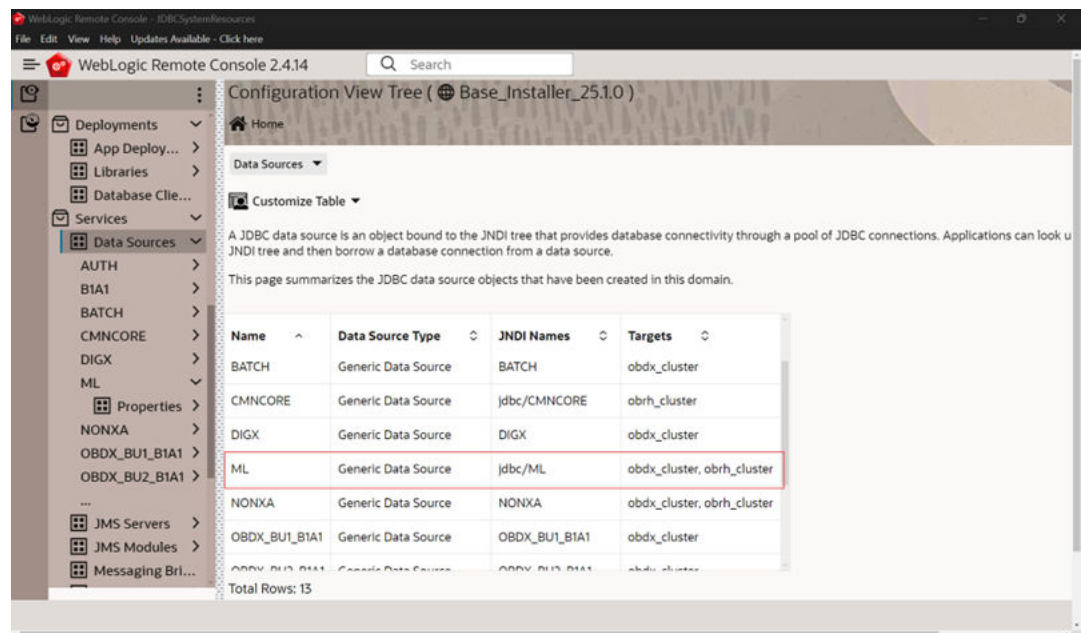**Steps:**

1. Make sure **ML** Data source exists with the respective targets displayed above.
2. If ML doesn't exist, create ML schema in database and execute the following SQL queries.

```
OBDX_Installer/installables/OBDX/BASE/25.1.0.0.0/obdx_obrh/db/ml/
grants.sql
```

3. Insert your OBMA_PROD, APP_ID & BUS_SERVICE (Add respective to your WebLogic)

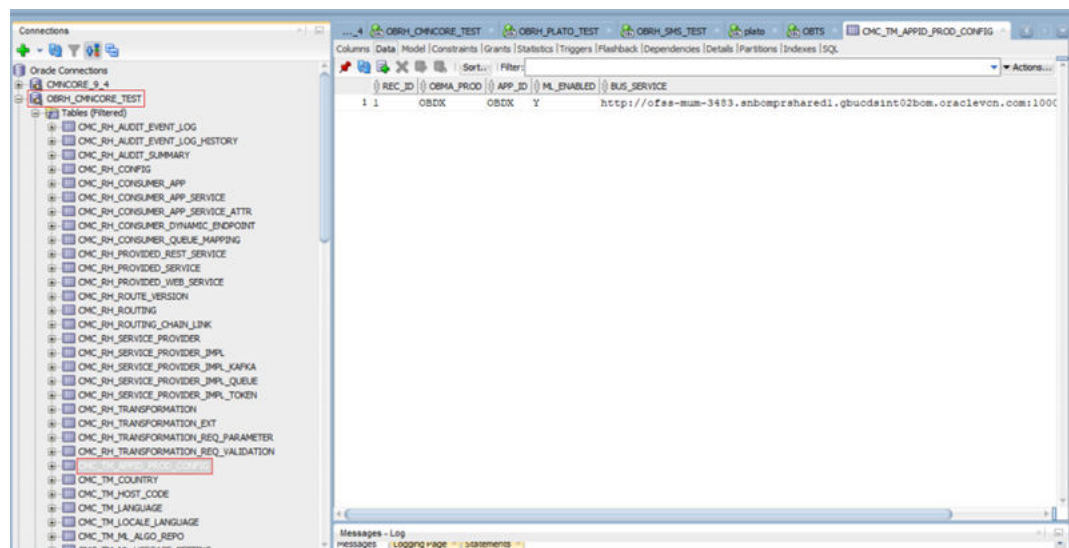**Steps:**

1. Connect to your database.
2. Navigate to Commoncore (CMNCORE) Schema.


3. Insert your OBMA_PROD, APP_ID & BUS_SERVICE (Add respective to your WebLogic)Example:

```
INSERT INTO CMC_TM_APPID_PROD_CONFIG (REC_ID, OBMA_PROD, APP_ID,
ML_ENABLED, BUS_SERVICE)
VALUES ('1', 'OBDX', 'OBDX', 'Y',
'http://ofss-mum-3483.snbomprshared1.gbucdsint02bom.oraclevcn.com:10002/
digx-ml-indb');
```

2.2 OBAPI Configuration Guide

Steps for Role Maintenance and Machine Learning Selection

1. Navigate to Role Maintenance.
2. Select the User Type as admin.
3. Go to Administrator Maintenance.
4. Select Machine Learning.

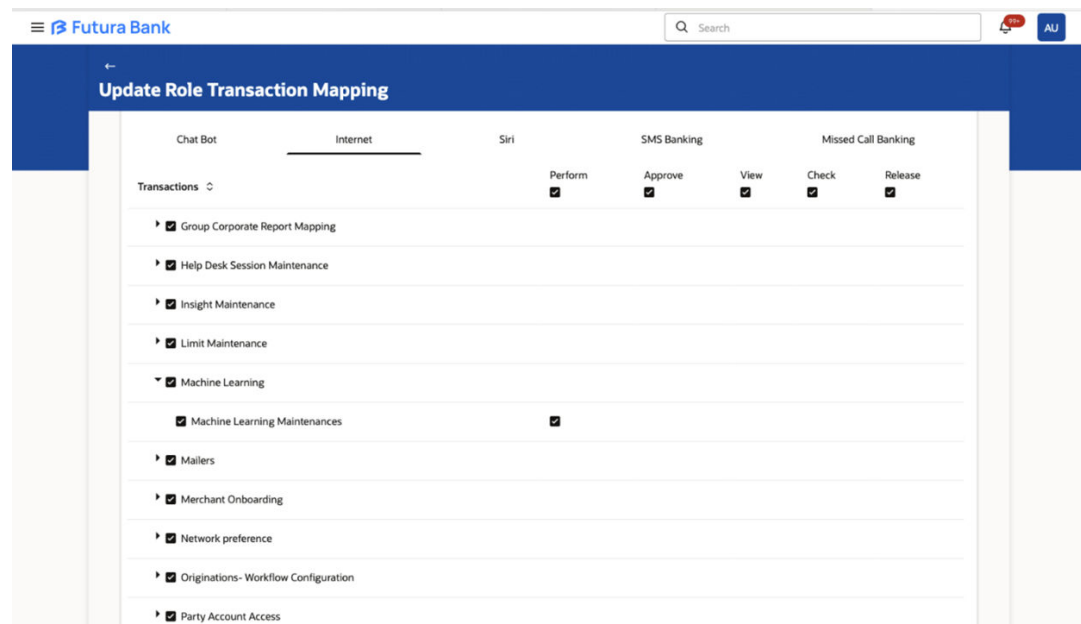

Steps for Security Authentication in Admin

1. Access the Admin Panel.
2. Navigate to Security Authentication.
3. Select the Enterprise Role.
4. Set up Two-Factor Authentication (2FA) as OTP for the desired transaction:
 - Login
 - Internal Transfer

Steps to Make a Database Entry into DIGX_FW_CONFIG_ALL_B table for the Desired Transaction

1. Identify the Task ID for the transaction.

2. Map the Task ID to the prop_id column based on the transaction type:
 - PC_CM_ME → Login
 - PC_F_CRNSFTV2 → Own Account Transfer
3. Insert the entry into the database with the corresponding task_id and prop_id.
4. You can add other task codes for desired transactions.

Example query:

```
Insert into DIGX_FW_CONFIG_ALL_B

( PROP_ID, CATEGORY_ID, PROP_VALUE, FACTORY_SHIPPED_FLAG, PROP_COMMENTS, SUMMARY_
TEXT, CREATED_BY,
CREATION_DATE, LAST_UPDATED_BY, LAST_UPDATED_DATE, OBJECT_STATUS, OBJECT_VERSIO
N_NUMBER,
EDITABLE, CATEGORY_DESCRIPTION)
values
('PC_F_CRNSFTV2', 'TwoFactorAuthenticationRuleEvaluator', 'ANOMALY_RULE', 'N',
null,
'External transactions repository adapter
class', 'ofssuser', sysdate, 'ofssuser', sysdate, 'Y', 1, 'N', null);
```

Steps to Update OBRH Configuration

1. Navigate to the Service Consumers Section.
2. Select OBDX_TRUNK.
3. Go to the Service Providers Section.
4. Select OBDX_ML_PROJECTION.
5. Edit the Host and Port to match your required host and port settings.
6. Save the changes and ensure proper connectivity.

The screenshot displays the Oracle OBAPI Configuration Guide interface. On the left, the 'Service Consumers' section is visible, showing a list of consumers. The 'OBDX_ML_PROJECTION' consumer is selected, and its details are shown below. The 'Implementations' section shows a table with one implementation: 'OBDX_ML_PROJECTION...'. The 'Edit Implementation' dialog is open, showing the 'Implementation Details (1/4)' tab. The dialog contains the following fields:

- Implementation Name:** OBDX_ML_PROJECTION_Default
- Implementation Description:** Default Implementation
- Implementation Type:** Default
- Default:** ☒
- Eureka Instance:** ☐
- Single Tenant:** ☐
- Scheme:** http
- Service Name:** xxxxx
- Host:** 100.76.154.191
- Port:** 1777
- Use WSDL details (scheme, host and port) for SOAP service invocation:** ☐

The 'Next Step' button is visible at the bottom right of the dialog.



3

Model Definition Overview

- [Key Features](#)

3.1 Key Features

The Model Definition screen displays a list of configured anomaly detection models.

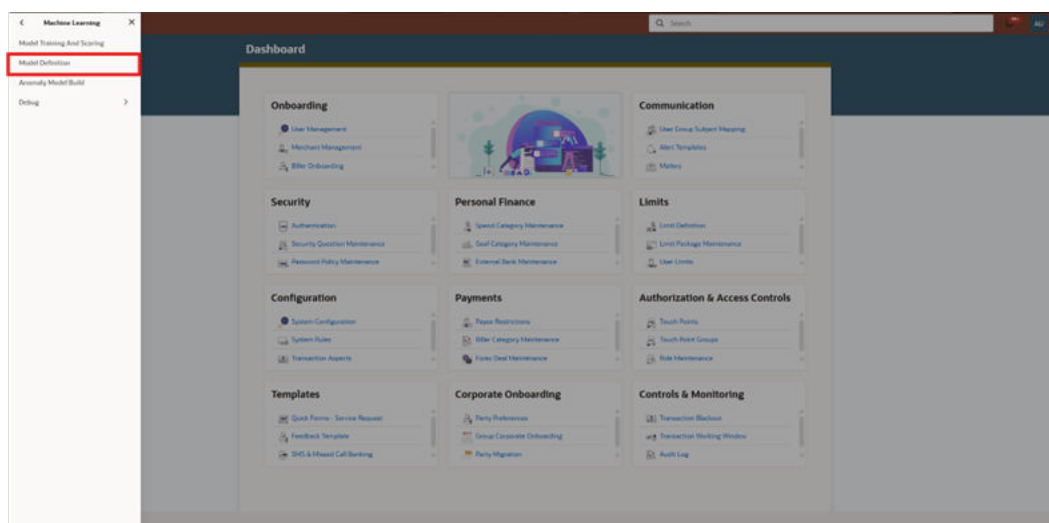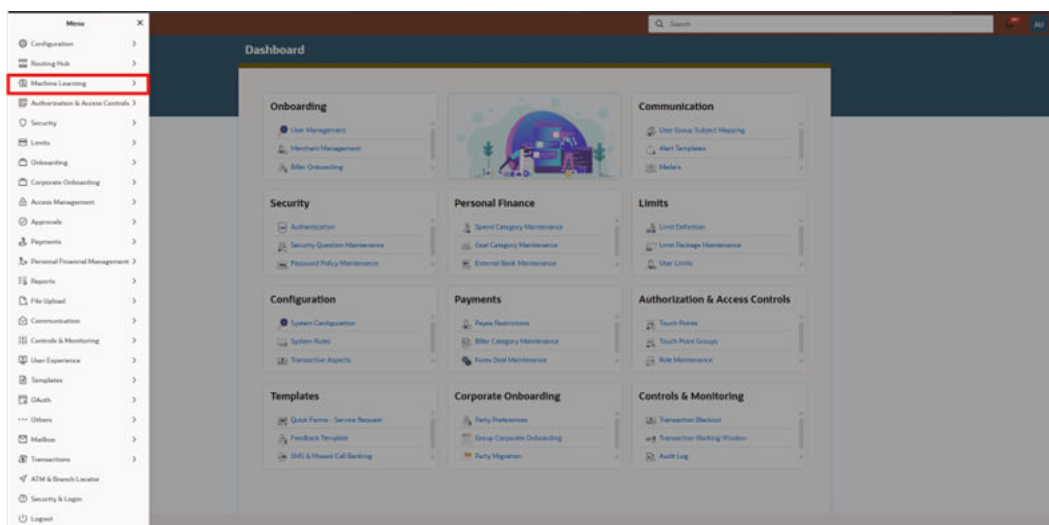

1. Use Case Cards

- Each card represents an anomaly detection model.
- Displays:

- Use Case Name (e.g., OBDX_ANOMALY_PAYMENT, OBDX_ANOMALY_LOGIN)
- Model Number (Versioning)
- Correlation Status (Y/N)
- Authorized / Unauthorized Status

2. Navigation Controls

- Scroll through models using pagination.

3. Action Buttons

- **Add New Model:** Create a new model.
- **Refresh:** Update the model list.
- **Settings/Options:** Manage, edit, or delete models.

4

Use Case Setup

- [Fields](#)

4.1 Fields

This section allows users to define basic model details.

The screenshot shows the 'Model Definition' window with three tabs: 'Use Case Setup', 'Model Metrics', and 'Model Monitoring'. The 'Use Case Setup' tab is active and contains several sections: 'Use Case Name' (a text field with a 'Required' label), 'Description' (a text area with a 'Required' label), 'Use Case Type' (a dropdown menu with 'Select Use Case Type' and a 'Required' label), 'Training and Scoring' (containing 'Product Processor' with a dropdown 'Select Product Processor' and a 'Required' label, 'Training Data Source' with a dropdown 'Select Training Data Source' and a 'Required' label, 'Unique Case Identifier' with a dropdown 'Select Unique Case ID' and a 'Required' label, 'Target Columns' with a dropdown 'Select Target Columns' and a 'Required' label, 'Positive Target Value' with a dropdown 'Select Positive Target Value' and a 'Required' label, and 'Reference Data Source' with a text field and a 'Required' label), and 'Model Partitioning' (containing 'Partition Column Name' with a dropdown 'Select Partition Column' and a 'Required' label, 'Selected Algorithm' (a dropdown menu), and 'Model Error Metrics' with a dropdown 'Select Model Error Metric'). At the bottom right are buttons for 'Cancel' and 'Save'.

- **Use Case Name:**
 - Enter a unique name for the model.
 - Example: "Login_Anomaly_Model" or "Payment_Fraud_Detection"
 - **(Required)** – This field must be filled to proceed.
- **Description:**
 - Provide a summary of the model's purpose.
 - Example: "Detects unusual login attempts based on user behaviour patterns."
- **Use Case Type:**
 - Select the type of use case as **Anomaly_Detection**.
 - Options may **Regression & Classification**, or any other specific use cases.
 - **(Required)**
- **Product Processor:**
 - **Select** the system or processor that will handle training.
 - Example: "OBDX"
 - **(Required)**
- **Training Data Source:**
 - Specify the dataset used to train the anomaly detection model.

- The dataset **must include** the target column (i.e., the column indicating whether an instance is anomalous or normal).
- Example: A CSV file or database table containing past login records.
- **(Required)**
- **Inference Data Source:**
 - Specify the dataset used when making predictions.
 - Unlike the training dataset, this dataset **should not** include the target column.
 - Example: "Live payment transaction records without labels."
 - **(Required)**
- **Unique Case Identifier:**
 - Select the column in the dataset that uniquely identifies each record.
 - Example: "User_ID" for login data or "Transaction_ID" for payment data.
 - **(Required)**
- **Target Column:**
 - Select the column that defines whether a transaction/login attempt is an anomaly.
 - Example: A column labelled "Anomaly_Flag" where 1 indicates an anomaly and 0 indicates normal behaviour.
 - **(Required)**
- **Positive Target Value:**
 - Specify the value that represents an anomaly.
 - Example: If "1" indicates fraud or an unauthorized login, set "1" as the positive target value.
- **Tablespace:**
 - 1. Define the storage location for the model's data within the system.
- **Partition Column Names:**
 - Select the columns used for partitioning the dataset.
 - Example: "Date" to separate records by time period.
- **Selected Algorithm:**
 - Choose the machine learning algorithm to be used.
 - Example: ALGO_SUPPORT_VECTOR_MACHINES, ALGO_NEURAL_NETWORK etc.
- **Model Error Statistic:**
 - Select an error metric to evaluate the model's accuracy.
 - Example: F1 Score, Precision-Recall, or AUC-ROC.
- **Correlation Button:**
 - Clicking this button will analyse relationships between features and the target variable.
 - Helps in understanding the significance of different input features.
- **Cost Matrix Button:**

- Allows users to define cost-sensitive learning, useful for reducing false positives or false negatives.
 - **(Optional)**
- **Save Button:**
 - 1. Saves the model configuration.
- **Cancel Button:**
 - Exits without saving any changes.

5

Model Metrics

- [Features](#)

5.1 Features

This section provides model evaluation metrics.



- **Model Partitions:**
 - Select different dataset partitions for viewing metrics.
 - **(Not Required)**
- **Metrics Table:**
 - Displays various performance evaluation metrics once the model is trained.
 - Initially, this table is empty until training is complete.
- **Save Button:**
 1. Saves any updates made to the displayed metrics.
- **Cancel Button:**
 - Exits without saving changes.


6

Model Monitoring

- [Fields](#)

6.1 Fields

Allows users to define model monitoring parameters.

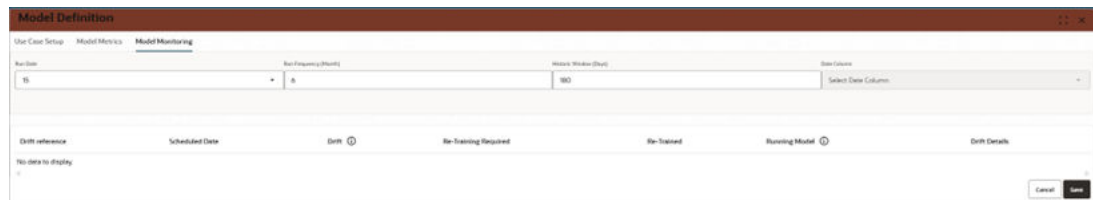The screenshot shows a web application window titled "Model Definition" with a sub-tab "Model Monitoring". The interface includes several configuration fields: "Run Date" with a dropdown menu showing "15", "Run Frequency (Months)" with a dropdown menu showing "6", "Historic Window (Days)" with a dropdown menu showing "90", and a "Date Column" dropdown menu with the text "Select Date Column". Below these fields is a table with columns: "Drift reference", "Scheduled Date", "Drift", "Re-Training Required", "Re-Trained", "Running Model", and "Drift Details". The table currently displays "No data to display". At the bottom right of the window are "Cancel" and "Save" buttons.

- **Run Date:**
 - A dropdown to select the scheduled monitoring run date.
- **Run Frequency (Months):**
 - Defines how often the model should be monitored.
 - Make sure training data consists data in range of frequency(For an instance if you set 180 days, then the training data should have data ranging in last 180 days)
 - Example: Every **6 months** or **quarterly**.
- **Historic Window (Days):**
 - Specifies how much past data should be considered for anomaly monitoring.
 - Example: "Last 90 days."
- **Date Column:**
 - The column used for time-based tracking of anomalies.
- **Drift Reference:**
 - Displays data drift detection results.
 - **Initially empty** but fills once monitoring is active.
- **Scheduled Date:**
 - Displays the next scheduled model monitoring date.
- **Drift:**
 - Shows whether significant changes in data distribution have been detected.
- **Re-Training Required:**
 - Indicates if the model requires retraining due to data drift or performance decline.
- **Re-Trained:**
 - Displays whether the model has been successfully retrained.

- **Running Model:**
 - Shows the status of the currently active model version.
- **Drift Details:**
 - Provides additional information on detected data drift and its impact on model performance.
- **Save Button:**
 - Saves the monitoring configuration settings.
- **Cancel Button:**
 - Exits without saving any changes.

7

Supply Chain Finance

- [Model Build Section](#)
- [Model Output Section](#)

7.1 Model Build Section

- **Use Case Name:** Select predefined use case (OBDX_ANOMALY_PAYMENT or OBDX_ANOMALY_LOGIN)
- **Sensitivity:** Define anomaly detection sensitivity (default: 0.01)
- **Build Button:** Start model training



7.2 Model Output Section

- **Calculated Sensitivity:** Display computed sensitivity
- **Solver:** Show optimization method used
- **Converge:** Indicate if model reached an optimal solution

8

View Debug Logs

This section allows users to retrieve debug logs for model diagnostics.

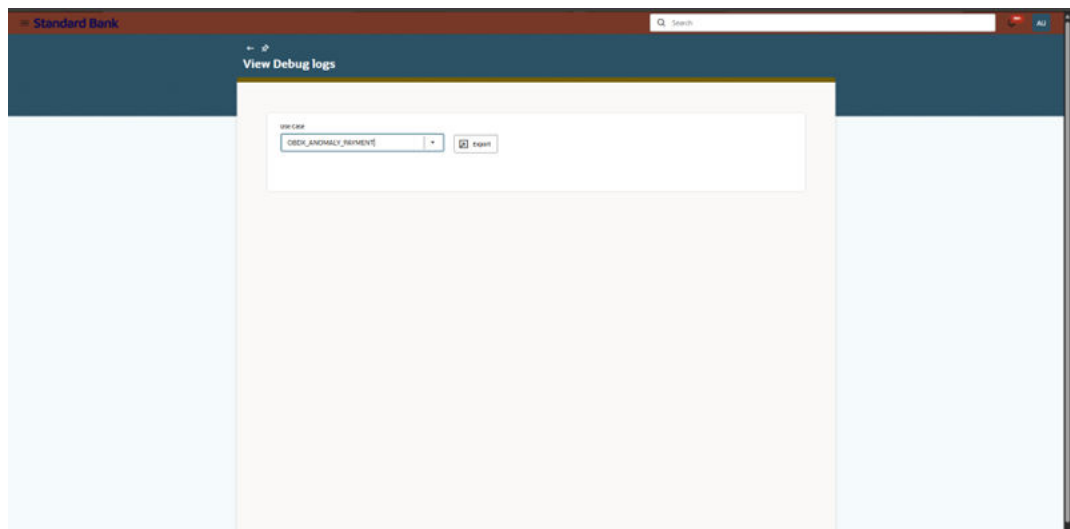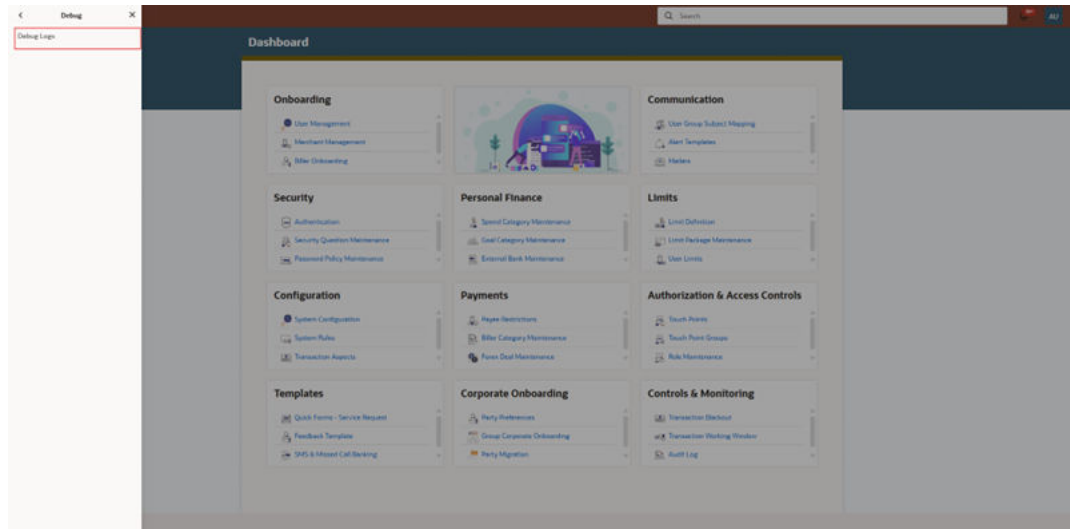

- [Steps](#)

8.1 Steps

- **Select Use Case:** Choose between OBDX_ANOMALY_PAYMENT or OBDX_ANOMALY_LOGIN.
- **Export Logs:** Click the **Export** button to download logs.

9

Conclusion

This user manual provides a detailed guide on setting up, managing, and monitoring anomaly detection models for login and payment data. Follow the outlined steps to ensure accurate anomaly detection and security monitoring.

Index

C

Cloud specific Configurations, [i](#)
Conclusion, [1](#)
Configure Bus Service, [1](#)

F

Features, [1](#)
Fields, [1](#), [1](#)

K

Key Features, [1](#)
Key Features of the System, [2](#)

M

Model Build Section, [1](#)
Model Definition Overview, [1](#)
Model Metrics, [1](#)
Model Monitoring, [1](#)
Model Output Section, [1](#)

O

OBAPI Configuration Guide, [3](#)

P

Prerequisites, [1](#)
Purpose of the Document, [2](#)

S

Steps, [1](#)

U

Use Case Setup, [1](#)

V

View Debug Logs, [1](#)