

# Oracle® Banking Liquidity Management

## Pre-Installation Guide



Release 14.8.0.0.0  
G28870-03  
April 2025

ORACLE®

Copyright © 2018, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## Preface

---

|                             |    |
|-----------------------------|----|
| Purpose                     | iv |
| Audience                    | iv |
| Documentation Accessibility | iv |
| Critical Patches            | iv |
| Diversity and Inclusion     | v  |
| Related Resources           | v  |
| Acronyms and Abbreviations  | v  |

## 1 Installation Process

---

|     |                                                        |     |
|-----|--------------------------------------------------------|-----|
| 1.1 | Oracle Banking Microservices Architecture Installation | 1-2 |
| 1.2 | Security Management System Installation                | 1-3 |
| 1.3 | Common Core Installation                               | 1-3 |
| 1.4 | File Upload Setup                                      | 1-4 |

## A Annexure

---

## Index

---

# Preface

- [Purpose](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Critical Patches](#)
- [Diversity and Inclusion](#)
- [Related Resources](#)
- [Acronyms and Abbreviations](#)

## Purpose

This guide describes the order (sequence) in which the user must proceed with the installation process.

## Audience

This guide is intended for WebLogic admin or ops-web team who are responsible for installing the OFSS banking products.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### **Access to Oracle Support**

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at [Critical Patches](#), [Security Alerts and Bulletins](#). All critical patches should be applied in a timely manner to ensure effective security, as strongly recommended by [Oracle Software Security Assurance](#).

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

## Related Resources

For more information on any related features, refer to the following documents:

- *Common Core Services Installation Guide*
- *Oracle Banking Microservices Platform Foundation Installation Guide*
- *Security Management System Services Installation Guide*
- *Configuration and Deployment Guide*
- *Oracle Banking Liquidity Management Installation Guide*

## Acronyms and Abbreviations

The list of the acronyms and abbreviations that you are likely to find in the guide are as follows:

**Table 1 Acronyms and Abbreviations**

| Acronyms | Abbreviations                         |
|----------|---------------------------------------|
| LDAP     | Lightweight Directory Access Protocol |
| OSDC     | Oracle Software Delivery Cloud        |
| SMS      | Security Management System            |

# 1

## Installation Process

This topic describes the installation sequence for Oracle Banking Liquidity Management application.

### Execution order of Installation Manual

Oracle Banking Liquidity Management installation is executed in the below sequence:

- *Oracle Banking Microservices Platform Foundation Installation Guide*
- *Security Management System Services Installation Guide*
- *Common Core Services Installation Guide*
- *Oracle Banking Liquidity Management Installation Guide*

### Prerequisite

The OSDC package consists of the following zip files. Before proceeding with the installation, unzip the files into the same common folder.

- OBLM\_{release number}\_1of7.zip
- OBLM\_{release number}\_2of7.zip
- OBLM\_{release number}\_3of7.zip
- OBLM\_{release number}\_4of7.zip
- OBLM\_{release number}\_5of7.zip
- OBLM\_{release number}\_6of7.zip
- OBLM\_{release number}\_7of7.zip



#### Note:

For the release number, refer to the OSDC file available as a part of the release.

### Software Prerequisite List

The list of software prerequisites are as follows:

- Oracle Database Enterprise Edition
- Oracle WebLogic Server Standard Edition
- LDAP server
- Apache Kafka
- Apache ZooKeeper (Embedded with Kafka)
- Conductor server



**Note:**

For the software version details, refer to **Release Notes**.

The common services required by Oracle Banking Liquidity Management application are listed below.

- [Oracle Banking Microservices Architecture Installation](#)
- [Security Management System Installation](#)
- [Common Core Installation](#)
- [File Upload Setup](#)

## 1.1 Oracle Banking Microservices Architecture Installation

### List of Services

The lists of Oracle Banking Microservices Architecture Services to be installed for Oracle Banking Liquidity Management. Deployments to be done in the same order.



**Note:**

Conductor-server should be deployed prior to plato-orch-service.

- plato-config-service
- plato-discovery-service
- plato-api-gateway
- plato-ui-config-service
- plato-api-gateway-router
- plato-batch-server
- plato-feed-services
- conductor-server
- plato-orch-service
- plato-report-services
- plato-coherence-server
- plato-regional-configurator-services
- plato-archival-services
- plato-fast-data-transfer-service



**Note:**

For further details on deployments, refer to **Oracle Banking Microservices Platform Foundation Installation Guide**.

### Domain Configuration

Copy the below files from the OSDC path to Oracle Banking Microservices Architecture <domain>/bin folder.

- pre\_deployment\_setup\setUserOverrides.sh



#### Note:

For providing the property values, refer to [Annexure](#) section of this document.

## 1.2 Security Management System Installation

### List of Services

The lists of Security Management System Service to be installed for Oracle Banking Liquidity Management.

- sms-core-services

### Domain Configuration

Copy the below files from the OSDC path to <domain>/bin folder.

- pre\_deployment\_setup\setUserOverrides.sh



#### Note:

For further details on deployments, refer to **Security Management System Service Installation Guide** for installing Security Management System Service

## 1.3 Common Core Installation

### List of Services

The lists of Common Core Services to be installed in order for Oracle Banking Liquidity Management.

- cmc-account-services
- cmc-base-services
- cmc-branch-services
- cmc-businessoverrides-services
- cmc-charges-calculation-services
- cmc-currency-services
- cmc-datasegment-services
- cmc-screenclass-services
- cmc-resourceclass-services

- cmc-customer-services
- cmc-external-chart-account
- cmc-external-system-services
- cmc-external-virtual-account-services
- cmc-obrh-services
- cmc-obrh-kafka-consumer
- cmc-resource-segment-orchestrator-service
- cmc-settlements-services
- cmc-txn-code-services

### Domain Configuration

Copy the below files from the OSDC path to <domain>/bin folder.

- pre\_deployment\_setup\setUserOverrides.sh



#### Note:

For further details on deployments, refer to **Common Core Service Installation Guide** for installing the Common Core services.

## 1.4 File Upload Setup

The folders are to be created with application user for file upload to work.

### 1. Feed Upload Folder


- Create LM\_FILEUPLOAD under /scratch folder
- Create a Folder (ex: - feedUpload) under /LM\_FILEUPLOAD folder
- Create all sub folders as in the screen shot and all Sub folders should have full access.

**Figure 1-1 File Upload**



Place the files to be uploaded under this folder.

Figure 1-2 Feed upload

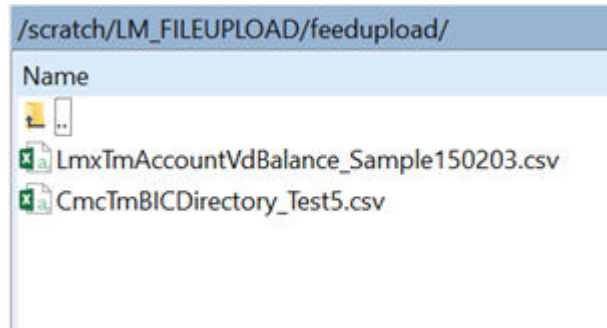

Make sure the Properties table has the below value inserted based on the path configured for Feed upload.

Figure 1-3 Properties Table

| ID  | APPLICATION         | PROFILE | LABEL | KEY                   | VALUE                             |
|-----|---------------------|---------|-------|-----------------------|-----------------------------------|
| 124 | plato-feed-services | jdbcc   | jdbcc | feed.upload.directory | /scratch/LM_FILEUPLOAD/feedupload |

For the entries present under the “feed\_name” column in plato\_tm\_feed table as shown below, the entries in plato\_tm\_feed\_processor\_headers should be updated with the appropriate branch code and user id.

Figure 1-4 PLATO\_TM\_FEED Table

| ID                                   | FEED_NAME                 | FEED_DESCRIPTION          | CHAR_SIZE | MAX_PROCESS | DELIMITER_ID | HEADER_ROW                             |
|--------------------------------------|---------------------------|---------------------------|-----------|-------------|--------------|----------------------------------------|
| f33a1346-07f5-44d0-82a4-dcbd52c0bc91 | CmcTmCountry              | CmcTmCountry              | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc30 | LmxTmAccountVdBalance     | LmxTmAccountVdBalance     | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc38 | LmxTmInterfaceMaster      | LmxTmInterfaceMaster      | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc12 | ICSpecialCondition        | ICSpecialCondition Input  | 10        | N           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc20 | CmcTmBICDirectory         | CmcTmBICDirectory         | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc40 | CmcTmCurrencyDefinition   | CmcTmCurrencyDefinition   | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc00 | CmcTmCoreAccount          | CmcTmCoreAccount          | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc50 | CmcTmCoreCustomer         | CmcTmCoreCustomer         | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc80 | CmcTmCurrencyExchangeRate | CmcTmCurrencyExchangeRate | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc60 | CmcTmCurrencyHoliday      | CmcTmCurrencyHoliday      | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc36 | LmxTmAccount              | LmxTmAccount              | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc31 | LmxTmCustomer             | LmxTmCustomer             | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc32 | LmxTmBankParameters       | LmxTmBankParameters       | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc33 | LmxTmBranchParameters     | LmxTmBranchParameters     | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc34 | LmxTmCountryParameters    | LmxTmCountryParameters    | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc35 | LmxTmCurrencyParameters   | LmxTmCurrencyParameters   | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc37 | LmxTmCurrencyCutoff       | LmxTmCurrencyCutoff       | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc10 | CmcTmBranchLocalHoliday   | CmcTmBranchLocalHoliday   | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc70 | CoreBank                  | CoreBank                  | 10        | Y           |              | 1PLAIN RECORD PROCESSOR                |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc90 | CoreBranch                | CoreBranch                | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |
| f33a1346-07f5-44d0-82a4-dcbd52c0bc39 | LmxTmSweepInstruction     | LmxTmSweepInstruction     | 10        | Y           |              | 1DISCRIMINATOR PARENT RECORD PROCESSOR |

Figure 1-5 PLATO\_TM\_FEED\_PROCESSOR\_HEADERS Table

| ID                                   | PLATO_TM_FEED_ID                     | HEADER_KEY | HEADER_VALUE |
|--------------------------------------|--------------------------------------|------------|--------------|
| a33a1346-07f5-44d0-82a4-acbd12c0bc31 | f33a1346-07f5-44d0-82a4-dcbd52c0bc91 | appId      | CMNCORE      |
| a33a1346-07f5-44d0-82a4-acbd12c0bc32 | f33a1346-07f5-44d0-82a4-dcbd52c0bc91 | userId     | LMADMIN2     |
| a33a1346-07f5-44d0-82a4-acbd12c0bc33 | f33a1346-07f5-44d0-82a4-dcbd52c0bc91 | branchCode | LMB          |

# A

## Annexure

### Oracle Banking Microservices Architecture

The below properties have fixed values and should not be changed.

**Table A-1 Oracle Banking Microservices Architecture - Property Values (Fixed Values)**

| Serial Number | Property                               | Value                                                                                                                            |
|---------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| 1             | flywayTask                             | migrate                                                                                                                          |
| 2             | flyway.enabled                         | true                                                                                                                             |
| 3             | spring.flyway.enabled                  | false                                                                                                                            |
| 4             | plato-config.flyway.domain.locations   | db/migration/domain/plato, db/migration/domain/sms, db/migration/domain/cmc, db/migration/domain/oblm, db/migration/domain/vamlm |
| 5             | plato-feed-services.jndi               | jdbc/PLATOFEED                                                                                                                   |
| 6             | plato-batch-server.jndi                | jdbc/PLATOBATCH                                                                                                                  |
| 7             | plato.jndi                             | jdbc/PLATO                                                                                                                       |
| 8             | plato-config.jndi                      | jdbc/PLATO                                                                                                                       |
| 9             | plato-sec.jndi                         | jdbc/PLATO_SECURITY                                                                                                              |
| 10            | plato-ui-config.jndi                   | jdbc/PLATO_UI_CONFIG                                                                                                             |
| 11            | platoorch.domain.jndi                  | jdbc/PLATO-O                                                                                                                     |
| 12            | plato-config.db.jndi                   | jdbc/PLATO                                                                                                                       |
| 13            | sms.jndi                               | jdbc/sms                                                                                                                         |
| 14            | cmncore.jndi                           | jdbc/CMNCORE                                                                                                                     |
| 15            | lrt.jndi                               | jdbc/LRT                                                                                                                         |
| 16            | lmc.jndi                               | jdbc/LMC                                                                                                                         |
| 17            | lmd.jndi                               | jdbc/LMD                                                                                                                         |
| 18            | lmx.jndi                               | jdbc/LMX                                                                                                                         |
| 19            | lmm.jndi                               | jdbc/LMM                                                                                                                         |
| 20            | lmp.jndi                               | jdbc/LMP                                                                                                                         |
| 21            | lma.jndi                               | jdbc/LMA                                                                                                                         |
| 22            | lms.jndi                               | jdbc/LMS                                                                                                                         |
| 23            | lmr.jndi                               | jdbc/LMR                                                                                                                         |
| 24            | lmg.jndi                               | jdbc/LMG                                                                                                                         |
| 25            | icl.jndi                               | jdbc/ICL                                                                                                                         |
| 26            | vamlmchg.jndi                          | jdbc/VAMLMCHG                                                                                                                    |
| 27            | plato-api-gateway.pswd.validation.flag | Y                                                                                                                                |
| 28            | plato-api-gateway.min.pswd.length      | 8                                                                                                                                |
| 29            | plato-api-gateway.max.pswd.length      | 12                                                                                                                               |
| 30            | plato-api-gateway.min.pswd.age         | 1                                                                                                                                |

**Table A-1 (Cont.) Oracle Banking Microservices Architecture - Property Values (Fixed Values)**

| Serial Number | Property                                            | Value                                                                                                      |
|---------------|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| 31            | plato-api-gateway.max.pswd.age                      | 90                                                                                                         |
| 32            | plato-api-gateway.upper.char.flag                   | Y                                                                                                          |
| 33            | plato-api-gateway.upper.char.count                  | 2                                                                                                          |
| 34            | plato-api-gateway.lower.char.flag                   | Y                                                                                                          |
| 35            | plato-api-gateway.lower.char.count                  | 2                                                                                                          |
| 36            | plato-api-gateway.special.char.flag                 | Y                                                                                                          |
| 37            | plato-api-gateway.special.char.count                | 1                                                                                                          |
| 38            | plato-api-gateway.numeric.char.flag                 | Y                                                                                                          |
| 39            | plato-api-gateway.numeric.char.count                | 1                                                                                                          |
| 40            | actuator.endpoint                                   | prometheus,health                                                                                          |
| 41            | plato-api-gateway.enableAudit                       | true                                                                                                       |
| 42            | sms.placeholderReplacement                          | true                                                                                                       |
| 43            | sms.showUnlockClearUser                             | Y                                                                                                          |
| 44            | domain.placeholderReplacement                       | true                                                                                                       |
| 45            | plato.batch.server.conductor.timeout                | 60                                                                                                         |
| 46            | spring.main.allow-circular-references               | true                                                                                                       |
| 47            | user.hierarchyLevel                                 | 4                                                                                                          |
| 48            | user.reporteesHierarchyLevel                        | 4                                                                                                          |
| 49            | plato-edp-services.edp.obrh.userId                  | UserId to be used to invoke obrh service from within edp service                                           |
| 50            | plato-edp-services.edp.obrh.branchCode              | <BRANCH CODE><br>BranchCode to be used to invoke obrh service from within edp service.                     |
| 51            | plato.batch.server.tas.processor.hostname           | Not applicable for onprem. Can be null<br>Give the tas-processor-service hostname for cloud.               |
| 52            | plato.batch.server.tas.processor.port               | <server port><br>Not applicable for onprem. Can be null.<br>Give the tas-processor-service port for cloud. |
| 53            | plato-arch-services.server.port                     | <server port>                                                                                              |
| 54            | plato-dynamic-data-services.server.port             | <server port>                                                                                              |
| 55            | plato-fast-data-transfer-service.server.port        | <server port>                                                                                              |
| 56            | <b>spring.main.allow-bean-definition-overriding</b> | <b>true</b>                                                                                                |
| 57            | <b>platobatch.db.jndi</b>                           | <b>jdbc/PLATO</b>                                                                                          |
| 58            | <b>plato-api-gateway.loadCacheOnStartUp</b>         | <b>true</b>                                                                                                |
| 59            | <b>conductor.metrics-prometheus.enabled</b>         | <b>true</b>                                                                                                |
| 60            | <b>conductor.oracle.flywayEnabled</b>               | <b>true</b>                                                                                                |
| 61            | <b>oblm-arch.jndi</b>                               | <b>jdbc/LM_ARCH</b>                                                                                        |
| 62            | <b>oblm-purge.jndi</b>                              | <b>jdbc/LM_PURGE</b>                                                                                       |

**Table A-1 (Cont.) Oracle Banking Microservices Architecture - Property Values (Fixed Values)**

| Serial Number | Property                                     | Value |
|---------------|----------------------------------------------|-------|
| 63            | oblm-maintenance-services.loadCacheOnStartUp | true  |

**Note:**

For the complete properties of Oracle Banking Microservices Architecture file, refer to the folder `/pre_deployment_setup/setUserOverrides.sh` under OSDC zip. The user must provide appropriate values for the key which are not listed in the above table.

**Table A-2 Oracle Banking Microservices Architecture Domain - Property Table (Appropriate Values)**

| Serial Number | Property                                     | Value                                                                                      |
|---------------|----------------------------------------------|--------------------------------------------------------------------------------------------|
| 1             | api-gateway.schemas                          | <API-GATEWAY schema>                                                                       |
| 2             | plato-batch-server.schemas                   | <PLATO-BATCH-SERVER schema>                                                                |
| 3             | plato-config.schemas                         | <PLATO-CONFIG schema>                                                                      |
| 4             | plato-feed-ref.schemas                       | <PLATO-FEED-REF schema>                                                                    |
| 5             | plato-feed-services.schemas                  | <PLATO-REF-SERVICES schema>                                                                |
| 6             | platoorch.domain.schemas                     | <PLATO-ORCH schema>                                                                        |
| 7             | platoui.schemas                              | <PLATO-UI schema>                                                                          |
| 8             | platoui-config.schemas                       | <PLATO-UI-CONFIG schema>                                                                   |
| 9             | plato-ui-config.schemas                      | <PLATO-UI-CONFIG schema>                                                                   |
| 10            | kafka.brokers                                | "host:port" for the kafka brokers                                                          |
| 11            | kafka.zknodes                                | "host:port" for the zookeeper nodes.                                                       |
| 12            | kafka.security.protocol                      | security protocol for kafka<br>Eg: SASL_SSL                                                |
| 13            | kafka.truststore.location                    | truststore location<br>Eg: /scratch/work_area/<br>securityKeys/<br>OBLMclientTrust_142.jks |
| 14            | kafka.truststore.password                    | ciphred password of the trustore<br>Eg: {cipher>Password                                   |
| 15            | kafka.binder.configuration.sasl.mechanism    | <appropriate value>                                                                        |
| 16            | kafka.binder.configuration.security.protocol | <appropriate value>                                                                        |
| 17            | kafka.binder.jaas.loginModule                | <appropriate value>                                                                        |
| 18            | kafka.binder.jaas.options.password           | <appropriate value>                                                                        |
| 19            | kafka.binder.jaas.options.username           | <appropriate value>                                                                        |

**Table A-2 (Cont.) Oracle Banking Microservices Architecture Domain - Property Table (Appropriate Values)**

| Serial Number | Property                                         | Value                                       |
|---------------|--------------------------------------------------|---------------------------------------------|
| 20            | kafka.broker.password                            | <appropriate value>                         |
| 21            | kafka.broker.username                            | <appropriate value>                         |
| 22            | kafka.ssl.truststore.location                    | <appropriate value>                         |
| 23            | kafka.ssl.truststore.password                    | <appropriate value>                         |
| 24            | plato.orchestrator.enableSubWfDynamicAllocation  | Enabling dynamic Allocation for subWorkflow |
| 25            | plato.conductor.logging.level                    | Default - DEBUG                             |
| 26            | plato.feed.feed.system.objectStore.stripeName    | Default - feeds                             |
| 27            | plato.feed.feed.protocol                         | Default - http                              |
| 28            | plato.feed.feed.dateFormat                       | Default - yyyy-MM-dd                        |
| 29            | plato.feed.feed.commitFrequency                  | Default - 1000                              |
| 30            | plato.feed.fss.filestore.protocol                | Default - http                              |
| 31            | plato.feed.fss.filestore.host                    | Default - 127.0.0.1                         |
| 32            | plato.feed.fss.filestore.port                    | Default - 8080                              |
| 33            | plato.feed.fss.filestore.contextRoot             | Default - filestore/private                 |
| 34            | plato.feed.fss.filestream.protocol               | Default - http                              |
| 35            | plato.feed.fss.filestream.host                   | Default - 127.0.0.1                         |
| 36            | plato.feed.fss.filestream.port                   | Default - 8081                              |
| 37            | plato.feed.fss.filestream.contextRoot            | Default - filestream/private                |
| 38            | plato.feed.fss.auth.bearerToken                  | Default - unset                             |
| 39            | plato.feed.fss.par.upload.description            | Default - fileupload                        |
| 40            | plato.feed.fss.par.storageDirective              | xxx                                         |
| 41            | plato.feed.fss.stripe.service.tag                | Default - feed-services                     |
| 42            | feed.system.approverId                           | Default approver id for auto approval       |
| 43            | plato.feed.fss.bearerTokenPath                   | xxx                                         |
| 44            | plato.feed.fss.bearerTokenFileName               | dummyToken                                  |
| 45            | plato.alerts.protocol                            | https                                       |
| 46            | plato.alerts.namespace                           | <environment>                               |
| 47            | plato.alerts.email.client.port                   | <port>                                      |
| 48            | plato.multitenant.emailClient.from.email         | <environment>                               |
| 49            | plato.feed.emailClient.from.email                | <environment>                               |
| 50            | alerts.protocol                                  | xxx                                         |
| 51            | alerts.service.name                              | xxx                                         |
| 52            | alerts.namespace                                 | <environment>                               |
| 53            | alerts.email.client.port                         | <port>                                      |
| 54            | plato-regional-configurator-services.server.port | <REGIONAL_CONFIGURATOR_SERVICE_PORT>        |
| 55            | plato-regional-configurator-services.db.jndi     | jdbc/OBRC                                   |
| 56            | plato-regional-configurator-services.schemas     | OBRC                                        |

**Table A-2 (Cont.) Oracle Banking Microservices Architecture Domain - Property Table (Appropriate Values)**

| Serial Number | Property                                              | Value                                                                                                                                                                       |
|---------------|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 57            | plato-regional-configurator-services.locations        | <ul style="list-style-type: none"> <li>• “db/migration/domain/obrc” (By default)</li> <li>• “db/migration/domain/obrc, db/migration/domain &lt;YOUR DOMAINS&gt;”</li> </ul> |
| 58            | plato-apigateway-router.server.port                   | <APIGATEWAY_ROUTER_PORT>                                                                                                                                                    |
| 59            | router.protocol                                       | <ROUTER_PROTOCOL>                                                                                                                                                           |
| 60            | router.meadmin.port                                   | <ROUTER_PORT>                                                                                                                                                               |
| 61            | plato.eventhub.consumer.maxPollInterval               | <MAX INTERVAL VALUE>                                                                                                                                                        |
| 62            | plato.eventhub.consumer.maxPollRecords                | <MAX RECORD VALUE>                                                                                                                                                          |
| 63            | tangosol.coherence.clusterportproperty                | 7574                                                                                                                                                                        |
| 64            | plato.placeholderReplacement                          | true                                                                                                                                                                        |
| 65            | plato.dataload.fss.filestore.protocol                 | xxx                                                                                                                                                                         |
| 66            | plato.dataload.fss.filestore.host                     | xxx                                                                                                                                                                         |
| 67            | plato.dataload.fss.filestore.port                     | xxx                                                                                                                                                                         |
| 68            | plato.dataload.fss.filestore.contextRoot              | xxx                                                                                                                                                                         |
| 69            | plato.dataload.fss.filestream.protocol                | xxx                                                                                                                                                                         |
| 70            | plato.dataload.fss.filestream.host                    | xxx                                                                                                                                                                         |
| 71            | plato.dataload.fss.filestream.port                    | xxx                                                                                                                                                                         |
| 72            | plato.dataload.fss.filestream.contextRoot             | xxx                                                                                                                                                                         |
| 73            | plato.dataload.fss.par.upload.description             | xxx                                                                                                                                                                         |
| 74            | plato.dataload.fss.par.storageDirective               | xxx                                                                                                                                                                         |
| 75            | plato.dataload.fss.stripe.service.tag                 | xxx                                                                                                                                                                         |
| 76            | plato.dataload.system.objectStore.stripeName          | xxx                                                                                                                                                                         |
| 77            | plato.dataload.fss.bearerTokenPath                    | xxx                                                                                                                                                                         |
| 78            | plato.dataload.fss.bearerTokenFileName                | xxx                                                                                                                                                                         |
| 79            | dataload.job.corePoolSize                             | 800                                                                                                                                                                         |
| 80            | dataload.job.maxPoolSize                              | 800                                                                                                                                                                         |
| 81            | dataload.job.queueCapacity                            | 800                                                                                                                                                                         |
| 82            | dataload.job.gridSize                                 | 800                                                                                                                                                                         |
| 83            | datamigration.protocol                                | xxx                                                                                                                                                                         |
| 84            | datamigration.host                                    | xxx                                                                                                                                                                         |
| 85            | datamigration.port                                    | xxx                                                                                                                                                                         |
| 86            | datamigration.contextRoot                             | xxx                                                                                                                                                                         |
| 87            | batch.appld                                           | PLATOCONFIG                                                                                                                                                                 |
| 88            | plato.batch.appld                                     | PLATOCONFIG                                                                                                                                                                 |
| 89            | job.abandon.duration                                  | 60                                                                                                                                                                          |
| 90            | dataload.protocol                                     | xxx                                                                                                                                                                         |
| 91            | plato.dataload.framework.eureka.client.connectTimeout | 1000                                                                                                                                                                        |
| 92            | plato.dataload.framework.eureka.client.readTimeout    | 1000                                                                                                                                                                        |
| 93            | plato-feed-services.plato.feed.fss.bearerTokenPath    | xxx                                                                                                                                                                         |

**Table A-2 (Cont.) Oracle Banking Microservices Architecture Domain - Property Table (Appropriate Values)**

| Serial Number | Property                                                        | Value                                                                                                                        |
|---------------|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| 94            | userLoginId.minLength                                           | 5                                                                                                                            |
| 95            | platoui-placeholderReplacement                                  | true                                                                                                                         |
| 96            | EncryptionFlag                                                  | true - new encoding/decoding logic will be applied(more secure)<br>OR<br>false - old encoding/decoding logic will be applied |
| 97            | eureka.client.serviceUrl.defaultZone                            | xxx                                                                                                                          |
| 98            | kafka.ssl.endpoint.identification.algorithm                     | https                                                                                                                        |
| 99            | kafka.default.producer.sync                                     | TRUE                                                                                                                         |
| 100           | kafka.default.producer.configuration.max.block.ms               | 5000                                                                                                                         |
| 101           | kafka.binder.replication-factor                                 | 3                                                                                                                            |
| 102           | kafka.binder.required-acks                                      | all                                                                                                                          |
| 103           | edp.schemas                                                     | xxx                                                                                                                          |
| 104           | edp.db.jndi                                                     | xxx                                                                                                                          |
| 105           | plato-edp-services.server.port                                  | <server port>                                                                                                                |
| 106           | plato.schema                                                    | xxx                                                                                                                          |
| 107           | feed.system.timePeriod                                          | 100                                                                                                                          |
| 108           | plato.services.entityservices.port                              | <sms-port>                                                                                                                   |
| 109           | <b>domain.eventhub.broker.hosts</b>                             | <b>xxx</b>                                                                                                                   |
| 110           | <b>domain.eventhub.zookeeper.hosts</b>                          | <b>xxx</b>                                                                                                                   |
| 111           | <b>spring.zipkin.baseUrl</b>                                    | <b>xxx</b>                                                                                                                   |
| 112           | <b>saml.userId.field</b>                                        | <b>xyz</b>                                                                                                                   |
| 113           | <b>cmc-branch-services.localHolidayPropogation.sync.enabled</b> | <b>y</b>                                                                                                                     |
| 114           | <b>plato-arch.schemas</b>                                       | <b>&lt;Plato Archival Schema&gt;</b>                                                                                         |
| 115           | <b>plato-fdt.schemas</b>                                        | <b>&lt;Plato Archival Schema&gt;</b>                                                                                         |

**Domain**

The below properties have fixed values and should not be changed.

**Table A-3 Domain - Property Values (Fixed Values)**

| Serial Number | Property                                 | Value   |
|---------------|------------------------------------------|---------|
| 1             | flywayTask                               | migrate |
| 2             | flyway.enabled                           | true    |
| 3             | spring.flyway.enabled                    | false   |
| 4             | flyway.domain.ignoreMissingMigrations    | true    |
| 5             | flyway.domain.outOfOrder                 | true    |
| 6             | spring.cloud.loadbalancer.ribbon.enabled | false   |
| 7             | deploy.environment                       | onPrem  |

**Table A-3 (Cont.) Domain - Property Values (Fixed Values)**

| Serial Number | Property                                     | Value |
|---------------|----------------------------------------------|-------|
| 8             | spring.main.allow-bean-definition-overriding | true  |

Provide the appropriate values for the following fields.

**Table A-4 Domain - Property Values (Appropriate Values)**

| Serial Number | PROPERTY                                                     | VALUE                                                                                                 |
|---------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| 1             | spring.cloud.config.uri                                      | <config service uri>                                                                                  |
| 2             | apigateway.url                                               | <apigateway url>                                                                                      |
| 3             | service.logging.environment                                  | <environment> example: DEV, TEST                                                                      |
| 4             | service.logging.path                                         | <application debug logs path>                                                                         |
| 5             | user.mapping.required                                        | <User mapping required>                                                                               |
| 6             | feed.recordLevelApprovalReqd                                 | <true or false>                                                                                       |
| 7             | conductor.properties                                         | Path to /config.properties                                                                            |
| 8             | INTEGRATION.ENABLED                                          | true or false                                                                                         |
| 9             | cmc-account-services.loadCacheOnStartup                      | true or false                                                                                         |
| 10            | cmc-advice-services.loadCacheOnStartup                       | true or false                                                                                         |
| 11            | cmc-base-services.loadCacheOnStartup                         | true or false                                                                                         |
| 12            | cmc-branch-services.loadCacheOnStartup                       | true or false                                                                                         |
| 13            | cmc-customer-services.loadCacheOnStartup                     | true or false                                                                                         |
| 14            | cmc-resourceclass-services.loadCacheOnStartup                | true or false                                                                                         |
| 15            | cmc-corebanking-adapter-service.loadCacheOnStartup           | true or false                                                                                         |
| 16            | cmc-external-virtual-account-services.loadCacheOnStartup     | true or false                                                                                         |
| 17            | cmc-currency-services.loadCacheOnStartup                     | true or false                                                                                         |
| 18            | cmc-external-chart-account-services.loadCacheOnStartup       | true or false                                                                                         |
| 19            | cmc-resource-segment-orchestrator-service.loadCacheOnStartup | true or false                                                                                         |
| 20            | cmc-external-deposit-account-services.loadCacheOnStartup     | true or false                                                                                         |
| 21            | cmc-screenclass-services.loadCacheOnStartup                  | true or false                                                                                         |
| 22            | cmc-facilities-services.loadCacheOnStartup                   | true or false                                                                                         |
| 23            | cmc-charges-calculation-services.loadCacheOnStartup          | true or false                                                                                         |
| 24            | sms-core-services.loadCacheOnStartup                         | true or false                                                                                         |
| 25            | cmc-interest-rate-services.server.port                       | <server port>                                                                                         |
| 26            | cmc-external-deposit-account-services.server.port            | <server port>                                                                                         |
| 27            | fcubsUserId                                                  | Specify the UserId to communicate with fcubs. It is used for external pricing for Charge calculation. |

**Table A-4 (Cont.) Domain - Property Values (Appropriate Values)**

| Serial Number | PROPERTY                                                   | VALUE                                                                                                                                 |
|---------------|------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| 28            | fcubsSource                                                | Specify the Source<br>It is used for external pricing for Charge calculation.                                                         |
| 29            | fcubsBranch                                                | Specify the Branch<br>It is used for external pricing for Charge calculation.                                                         |
| 30            | cmc-interest-rate-services.loadCacheOnStartUp              | false                                                                                                                                 |
| 31            | cmc-limits-collaterals-services.server.host                | xxx                                                                                                                                   |
| 32            | cmc-limits-collaterals-services.server.port                | <server port>                                                                                                                         |
| 33            | cmc-limits-collaterals-services.server.protocol            | xxx                                                                                                                                   |
| 34            | cmc-limits-collaterals-services.server.contextRoot         | xxx                                                                                                                                   |
| 35            | cmc-opds-services.isAsyncLoggingEnabled                    | false                                                                                                                                 |
| 36            | cmc-opds-services.ischargesAsyncLoggingEnabled             | false                                                                                                                                 |
| 37            | cmc-sla-services.server.port                               | <server port>                                                                                                                         |
| 38            | cmc-txn-code-services.loadCacheOnStartUp=                  | false                                                                                                                                 |
| 39            | cmc-opds-services.DbLogEnabled                             | false                                                                                                                                 |
| 40            | cmc-external-chart-account-services.batch.partition.count  | 10                                                                                                                                    |
| 41            | cmc-external-chart-account-services.batch.thread.pool.size | 10                                                                                                                                    |
| 42            | cmc-external-chart-account-services.batch.txn.fetch.size   | 1000                                                                                                                                  |
| 43            | cmc-external-chart-account-services.batch.txn.validation   | false                                                                                                                                 |
| 44            | cmc-external-chart-account-services.batch.commit.frequency | 100                                                                                                                                   |
| 45            | cmc-external-chart-account-services.batch.handoff.txn.size | 100                                                                                                                                   |
| 46            | cmc-transactioncontroller-services.loadCacheOnStartUp      | false                                                                                                                                 |
| 47            | cmc-mis-services.loadCacheOnStartUp                        | This is the placeholder to load the coherence cache for cmc-mis-services at server start up.<br>Possible values: true/false.          |
| 48            | checklistmanagement-services.loadCacheOnStartUp            | This is the placeholder to load the coherence cache for checklistmanagement-services at server start up. Possible values: true/false. |
| 49            | applicationcategory-services.loadCacheOnStartUp            | This is the placeholder to load the coherence cache for applicationcategory-services at server start up. Possible values: true/false. |

**Table A-4 (Cont.) Domain - Property Values (Appropriate Values)**

| Serial Number | PROPERTY                                         | VALUE                                                                                                                                  |
|---------------|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| 50            | cmc-mailnotification-services.loadCacheOnStartUp | This is the placeholder to load the coherence cache for cmc-mailnotification-services at server start up. Possible values: true/false. |
| 51            | cmc-ml-genai-admin-services.server.port          | <server port>                                                                                                                          |
| 52            | cmc.locations                                    | db/migration/cmc                                                                                                                       |
| 53            | opds.rules.localInvocation                       | false                                                                                                                                  |
| 54            | <b>cmc.branch.branchCodeLength</b>               | <b>xxx</b>                                                                                                                             |

**Table A-5 LM Domain - Property Table (Appropriate Values)**

| Serial Number | Property                                   | Value                                                                                                                      |
|---------------|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| 1             | icl.schemas                                | <ICL schema>                                                                                                               |
| 2             | lma.schemas                                | <LMA schema>                                                                                                               |
| 3             | lmc.schemas                                | <LMC schema>                                                                                                               |
| 4             | lmd.schemas                                | <LMD schema>                                                                                                               |
| 5             | lmg.schemas                                | <LMG schema>                                                                                                               |
| 6             | lmm.schemas                                | <LMM schema>                                                                                                               |
| 7             | lmp.schemas                                | <LMP schema>                                                                                                               |
| 8             | lmr.schemas                                | <LMR schema>                                                                                                               |
| 9             | lms.schemas                                | <LMS schema>                                                                                                               |
| 10            | lmx.schemas                                | <LMX schema>                                                                                                               |
| 11            | lrt.schemas                                | <LRT schema>                                                                                                               |
| 12            | vamlmchg.schemas                           | <CHG schema>                                                                                                               |
| 13            | icl.server.port                            | <server port>                                                                                                              |
| 14            | lma.server.port                            | <server port>                                                                                                              |
| 15            | lmc.server.port                            | <server port>                                                                                                              |
| 16            | lmd.server.port                            | <server port>                                                                                                              |
| 17            | lmg.server.port                            | <server port>                                                                                                              |
| 18            | lmm.server.port                            | <server port>                                                                                                              |
| 19            | lmp.server.port                            | <server port>                                                                                                              |
| 20            | lmr.server.port                            | <server port>                                                                                                              |
| 21            | lms.server.port                            | <server port>                                                                                                              |
| 22            | lmx.server.port                            | <server port>                                                                                                              |
| 23            | vamlm-chg-services.server.port             | <server port>                                                                                                              |
| 24            | vamlmchg.deploymentType                    | "lmchg" for LM Standalone deployment<br>"vamchg" for VAM Standalone deployment<br>"codeployed" for Co-deployed environment |
| 25            | oblm-structure-services.loadCacheOnStartUp | false                                                                                                                      |

Table A-5 (Cont.) LM Domain - Property Table (Appropriate Values)

| Serial Number | Property                                                   | Value                                                                             |
|---------------|------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 26            | oblm.report.sweepSummary.enabled                           | true/false based on the environment. By default, it is false.                     |
| 27            | oblm.report.sweepSummary.directory                         | <REPORTS PATH><br>Directory path for sweep summary report for Mizuho report.      |
| 28            | oblm.investmentFilePath                                    | <FILE PATH><br>Directory path for investment file for Mizuho.                     |
| 29            | oblm-arch.schemas                                          | <OBLM Archival schema>                                                            |
| 30            | oblm-purge.schemas                                         | <OBLM Purge schema>                                                               |
| 31            | maxConnTotal                                               | This is for Rest Template pool connection configuration.<br>Default value: 10     |
| 32            | maxConnPerRoute                                            | This is for Rest Template pool connection configuration.<br>Default value: 80     |
| 33            | connectTimeout                                             | This is for Rest Template pool connection configuration.<br>Default value: 300000 |
| 34            | readTimeout                                                | This is for Rest Template pool connection configuration.<br>Default value: 300000 |
| 35            | connectionRequestTimeout                                   | This is for Rest Template pool connection configuration.<br>Default value: 300000 |
| 36            | oblm-maintenance-services.asyncExecutor.asyncCorePoolSize  | Core pool size for async execution, with a default value of 10                    |
| 37            | oblm-maintenance-services.asyncExecutor.asyncMaxPoolSize   | Max pool size for async execution, with a default value of 25                     |
| 38            | oblm-maintenance-services.asyncExecutor.asyncQueueCapacity | Queue capacity for async execution with a default value of 30                     |
| 39            | vlc.schemas                                                | VAMLMCHG                                                                          |
| 40            | oblm-arch.jndi                                             | jdbc/LM_ARCH                                                                      |
| 41            | oblm-purge.jndi                                            | jdbc/LM_PURGE                                                                     |

Table A-6 IC Domain - Property Table (Appropriate Values)

| Serial Number | Property                  | Value             |
|---------------|---------------------------|-------------------|
| 1             | obic.schemas              | <OBLM-IC schema>  |
| 2             | obvamic.schemas           | <OBVAM-IC schema> |
| 3             | ddaic.schemas             | xxx               |
| 4             | obic.bodBatch.server.port | <server port>     |
| 5             | obic.chgCalc.server.port  | <server port>     |
| 6             | obic.config.server.port   | <server port>     |

**Table A-6 (Cont.) IC Domain - Property Table (Appropriate Values)**

| Serial Number | Property                       | Value           |
|---------------|--------------------------------|-----------------|
| 7             | obic.extAdapter.server.port    | <server port>   |
| 8             | obic.intaccr.server.port       | <server port>   |
| 9             | obic.intAccting.server.port    | <server port>   |
| 10            | obic.intAlloc.server.port      | <server port>   |
| 11            | obic.intBatch.server.port      | <server port>   |
| 12            | obic.intcalc.server.port       | <server port>   |
| 13            | obic.intInput.server.port      | <server port>   |
| 14            | obic.intliqd.server.port       | <server port>   |
| 15            | obic.intresolve.server.port    | <server port>   |
| 16            | obic.maint.server.port         | <server port>   |
| 17            | obic.maintq.server.port        | <server port>   |
| 18            | obic.onlq.server.port          | <server port>   |
| 19            | obic.server.port               | <server port>   |
| 20            | obic.intradaySchedulerReqd     | <Y or N>        |
| 21            | obvamic.bodBatch.server.port   | <server port>   |
| 22            | obvamic.chgCalc.server.port    | <server port>   |
| 23            | obvamic.config.server.port     | <server port>   |
| 24            | obvamic.extAdapter.server.port | <server port>   |
| 25            | obvamic.intaccr.server.port    | <server port>   |
| 26            | obvamic.intAccting.server.port | <server port>   |
| 27            | obvamic.intAlloc.server.port   | <server port>   |
| 28            | obvamic.intBatch.server.port   | <server port>   |
| 29            | obvamic.intcalc.server.port    | <server port>   |
| 30            | obvamic.intInput.server.port   | <server port>   |
| 31            | obvamic.intliqd.server.port    | <server port>   |
| 32            | obvamic.intresolve.server.port | <server port>   |
| 33            | obvamic.maint.server.port      | <server port>   |
| 34            | obvamic.maintq.server.port     | <server port>   |
| 35            | obvamic.onlq.server.port       | <server port>   |
| 36            | obvamic.server.port            | <server port>   |
| 37            | obvamic.intradaySchedulerReqd  | <Y or N>        |
| 38            | obvamic.eodSchedulerReqd       | <true or false> |
| 39            | obvamic.intradaySchedulerReqd  | <true or false> |
| 40            | ddaic.bodBatch.server.port     | <server port>   |
| 41            | ddaic.extAdapter.server.port   | <server port>   |
| 42            | ddaic.intaccr.server.port      | <server port>   |
| 43            | ddaic.intAccting.server.port   | <server port>   |
| 44            | ddaic.intAlloc.server.port     | <server port>   |
| 45            | ddaic.intBatch.server.port     | <server port>   |
| 46            | ddaic.intCalc.server.port      | <server port>   |
| 47            | ddaic.intInput.server.port     | <server port>   |
| 48            | ddaic.intliqd.server.port      | <server port>   |

**Table A-6 (Cont.) IC Domain - Property Table (Appropriate Values)**

| Serial Number | Property                                             | Value                                                         |
|---------------|------------------------------------------------------|---------------------------------------------------------------|
| 49            | ddaic.intresolve.server.port                         | <server port>                                                 |
| 50            | ddaic.maint.server.port                              | <server port>                                                 |
| 51            | ddaic.maintq.server.port                             | <server port>                                                 |
| 52            | ddaic.onlq.server.port                               | <server port>                                                 |
| 53            | dda-ic.server.port                                   | <server port>                                                 |
| 54            | obic-maintenance-services.loadCacheOnStartUp         | true/false based on the environment. By default, it is false. |
| 55            | obic-interest-calc-services.tenantkey.enabled        | true/false based on the environment. By default, it is false. |
| 56            | obic-interest-accrual-services.tenantkey.enabled     | true/false based on the environment. By default, it is false. |
| 57            | obic-intchg-accting-services.tenantkey.enabled       | true/false based on the environment. By default, it is false. |
| 58            | obic-online-liquidation-services.tenantkey.enabled   | true/false based on the environment. By default, it is false. |
| 59            | obic-interest-liquidation-services.tenantkey.enabled | true/false based on the environment. By default, it is false. |
| 60            | <b>obic.intraday.server.port</b>                     | <b>&lt;server port&gt;</b>                                    |
| 61            | <b>obic.extrp.server.port</b>                        | <b>&lt;server port&gt;</b>                                    |

**Table A-7 OBRH Domain - Property Table (Appropriate Values)**

| Serial Number | Property                       | Value                                                                                                       |
|---------------|--------------------------------|-------------------------------------------------------------------------------------------------------------|
| 1             | obrh.truststore.path           | Default - null<br>If set, it will be considered<br>Eg: obrh.truststore.path=/scratch/obrh/truststore/ts.jks |
| 2             | obrh.truststore.password       | Default - null<br>If set, it will be considered<br>Eg: obrh.truststore.password=password                    |
| 3             | obrh.server.isJavaEE           | Default - true<br>true for weblogic deployment<br>false for tomcat deployment                               |
| 4             | obrh.taskexecutor.corepoolsize | Default - 50<br>If set, it will be considered<br>Eg: obrh.taskexecutor.corepoolsiz<br>e=100                 |
| 5             | obrh.taskexecutor.maxpoolsize  | Default - 50<br>If set, it will be considered<br>Eg: obrh.taskexecutor.maxpoolsiz<br>e=100                  |

**Table A-7 (Cont.) OBRH Domain - Property Table (Appropriate Values)**

| Serial Number | Property                           | Value                                                                                                     |
|---------------|------------------------------------|-----------------------------------------------------------------------------------------------------------|
| 6             | obrh.taskexecutor.queuecapacity    | Default - 100<br>If set, it will be considered<br>Eg:<br>obrh.taskexecutor.queuecapacity=200              |
| 7             | obrh.factory-shipped-data.readonly | Default - false<br>If set, it will be considered<br>Eg: obrh.factory-shipped-data.readonly=true           |
| 8             | obrh.keystore.password.encoded     | Default - false<br>If set, it will be considered<br>Eg:<br>obrh.keystore.password.encoded=true            |
| 9             | obrh.usekeystore                   | Default - false<br>If set, it will be considered<br>Eg: obrh.usekeystore=true                             |
| 10            | obrh.keystore.path                 | Default - null<br>If set, it will be considered<br>Eg: obrh.keystore.path=/scratch/obrh/truststore/ts.jks |
| 11            | obrh.keystore.password             | Default - null<br>If set, it will be considered<br>Eg:<br>obrh.keystore.password=password                 |
| 12            | obrh.keystore.alias                | Default - null<br>If set, it will be considered<br>Eg: obrh.keystore.alias=alias                          |
| 13            | obrh.keystore.aliaspassword        | Default - null<br>If set, it will be considered<br>Eg:<br>obrh.keystore.aliaspassword=password            |
| 14            | obrh.audit.type                    | Default - KAFKA<br>Value can be <Default/KAFKA/OFF/LOG><br>Eg: obrh.audit.type=OFF                        |
| 15            | obrh.alerts.enabled                | Default: false<br><true or false><br>Eg: obrh.alerts.enabled=true                                         |

**Table A-7 (Cont.) OBRH Domain - Property Table (Appropriate Values)**

| Serial Number | Property                                   | Value                                                                                            |
|---------------|--------------------------------------------|--------------------------------------------------------------------------------------------------|
| 16            | obrh.provider.exception.statuscodes        | Comma seperated error codes<br>Eg:<br>obrh.provider.exception.statuscodes=404,500                |
| 17            | obrh.ssl.protocol                          | Default - TLS<br>If set, it will be considered<br>Eg:<br>obrh.ssl.protocol=TLSv1.2               |
| 18            | cmc-obrh-services.audit.retention.days     | Number of days for retention policy<br>Eg: cmc-obrh-services.audit.retention.days=7              |
| 19            | cmc-obrh-services.audit.retention.archival | <Y or N><br>Y for archiving<br>N for purging<br>Eg: cmc-obrh-services.audit.retention.archival=N |
| 20            | obrh.import.overwrite                      | Default: false<br><true or false><br>Eg:<br>obrh.import.overwrite=true                           |
| 21            | cmc-obrh-jms-consumer.connectionFactory    | <JMS_CONN_FACTORY_JNDI>                                                                          |
| 22            | cmc-obrh-jms-consumer.queue                | <JMS_CONN_QUEUE_JNDI>                                                                            |
| 23            | cmc-obrh-jms-consumer.server.port          | <server port>                                                                                    |
| 24            | cmc-obrh-services.loadCacheOnStartup       | false                                                                                            |

For the complete properties of domain file, refer to the folder `/pre_deployment_setup/setUserOverrides.sh` under OSDC zip.

**Note:**

For Conductor Properties, refer to **Conductor Installation** section in **Oracle Banking Microservices Platform Foundation Installation Guide**.

**SSL Setup Configuration**

The environment set up would be SSL-enabled by default.

The below placeholders would have to be configured into JVM for SSL/Non-SSL setup in Oracle Banking Microservices Architecture domain.

**Table A-8 SSL Setup Configuration**

| Key                                        | Default Value - On Premise | Default Value - Cloud | Purpose                                                                                                   |
|--------------------------------------------|----------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------|
| <code>\${apigateway.protocol}</code>       | https                      | https                 | Only for API gateway protocol. It must be <b>https only</b> .                                             |
| <code>\${eureka.protocol}</code>           | https                      | http                  | For inter-service communication protocol. Values can be <b>http</b> or <b>https</b> .                     |
| <code>\${prefer.ip.address.enabled}</code> | false                      | false                 | For prefer IP address flag, it must be <b>false</b> only.                                                 |
| <code>\${nonsecure.port.enabled}</code>    | false                      | true                  | For disabling inter-service communication on non-secure port. Values can be <b>false</b> or <b>true</b> . |
| <code>\${secure.port.enabled}</code>       | true                       | false                 | For allowing inter-service calls on secure port. Values can be <b>false</b> or <b>true</b> .              |

**Note:**

`${apigateway.protocol}` should be set as https/http in Oracle Banking Liquidity Management domain irrespective of the SSL/Non-SSL configuration.

# Index

## I

---

Installation Process, [1-1](#)