

# Oracle Banking Trade Finance

## Approot Object Conversion Utility



Release 14.8.0.0.0  
G29250-01  
April 2025

ORACLE®

Oracle Banking Trade Finance Approot Object Conversion Utility, Release 14.8.0.0.0

G29250-01

Copyright © 2007, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## Preface

---

Purpose	iv
Audience	iv
Documentation Accessibility	iv
Critical Patches	iv
Diversity and Inclusion	iv
Conventions	v
Related Resources	v
Screenshot Disclaimer	v

## 1 Application Root Object Conversion

---

1.1 Pre-requisites	1-1
1.2 Application Root - PDB Model Configuration	1-1

# Preface

- [Purpose](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Critical Patches](#)
- [Diversity and Inclusion](#)
- [Conventions](#)
- [Related Resources](#)
- [Screenshot Disclaimer](#)

## Purpose

This guide helps you to quickly get acquainted with the process involved in object conversion in Approot.

## Audience

This guide is intended for anyone responsible for installing Oracle Banking Application.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### **Access to Oracle Support**

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

## Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at [Critical Patches, Security Alerts and Bulletins](#). All critical patches should be applied in a timely manner to ensure effective security, as strongly recommended by [Oracle Software Security Assurance](#).

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to

build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

## Related Resources

For more information, see these Oracle Banking Trade Finance resources:

- [Oracle Banking Trade Finance Release Notes](#)
- [Oracle Banking Trade Finance Install & Upgrade](#)

## Screenshot Disclaimer

Personal information used in the interface or documents is dummy and does not exist in the real world. It is only for reference purposes.

# 1

## Application Root Object Conversion

- [Pre-requisites](#)  
This topic provides systematic instructions for pre-requisites.
- [Application Root - PDB Model Configuration](#)  
To build the application for setup using the installer, follow the steps given below.

### 1.1 Pre-requisites

This topic provides systematic instructions for pre-requisites.

The below steps has to be completed in a sequential order before using this utility.

1. CDB is created with 18c database and 'Application Template PDB' is created under this CDB and the OBTObjects are loaded.
2. Application root creation followed by application seed creation.
3. Application installation version 1.0 has to be done in approot with user being made explicit. [Application\\_Installation.sql](#)


### 1.2 Application Root - PDB Model Configuration

To build the application for setup using the installer, follow the steps given below.

1. Double-click 'FCUBSInstaller.bat' batch file to launch Oracle Banking Trade Finance Installer. The following screen is displayed. Select **Utilities** option, configuration mode as "**Application Root**" and click '**Next**' button.



2. Select '**Approot object Conversion**' in Utility Screen and click **Next** as shown below:

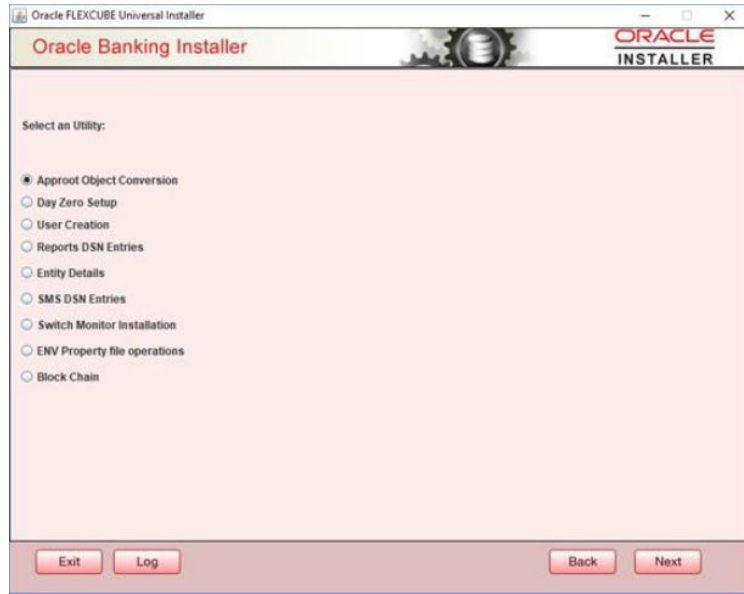

3. In the Approot object conversion screen, enter application name and Approot Schema details.

Options of conversion include:

- **Shared Application**
- **Shared Application and User Authentication**
- **Shared Application and Shared Data – Default**
- **Shared Application and Shared Data – Custom**

#### **Shared Application**

1. When '**Shared Application**' is selected, there will not be any common data and only application is shared.
2. After selecting the radio button, user will have to input the Application name and the Application root schema details where the conversion has to be applied and click on '**Test Connection**'.
3. When Application name is not inputted, error will be displayed to input the same. User has to make sure that application name is the one mentioned in pre-requisites with installation done for version 1.0.
4. Once the Connection is successful, '**Finish**' button will be enabled and the object conversion will be completed at this step.
5. Execution will take few minutes and post completion, a dialog box displays '**Compilation Success**' message in the front end.

[Application\\_Installation.sql](#)

Oracle FLEXCUBE Universal Installer

## Oracle Banking Installer

Object conversion for Application root

Enter Application Name

Provide Application root Schema details

Name	Value
Username	installer
Password	*****
Service Name	testdb
IP Address	10.10.10.10
Port	1521
TNS Connect Descriptor	testdb

[Test Connection](#)

Select Option for conversion

- ☒ Shared Application
- ☐ Shared Application and User Authentication
- ☐ Shared Application and Shared Data - Default
- ☐ Shared Application and Shared Data - Custom

[Exit](#) [Log](#) [Back](#) [Finish](#)

[Application\\_PDB\\_Creation.sql](#)

### Shared Application and User Authentication

1. When **'Shared Application and User authentication'** is selected, only user authentication related data will be shared along with a shared application,
2. After selecting the radio button, user will have to input the Application name and Application root schema details where the conversion has to be applied and click on **'Test Connection'**.
3. When Application name is not inputted, error will be displayed to input the same. User has to make sure that application name is the one mentioned in pre-requisites with installation done for version 1.0.
4. Once the Connection is successful, **'Finish'** button will be enabled and the object conversion will be completed at this step.
5. Execution will take few minutes and post completion, a dialog box displays **'Compilation Success'** message in the front end.



Oracle FLEXCUBE Universal Installer

## Oracle Banking Installer

Object conversion for Application root

Enter Application Name

Provide Application root Schema details

Name	Value
Username	installer
Password	*****
Service Name	testdb
IP Address	10.10.10.10
Port	1521
TNS Connect Descriptor	testdb

[Test Connection](#)

Select Option for conversion

☐ Shared Application  
☒ Shared Application and User Authentication  
☐ Shared Application and Shared Data - Default  
☐ Shared Application and Shared Data - Custom

[Exit](#)
[Log](#)
[Back](#)
[Finish](#)

[Application\\_Template\\_PDB\\_Creation.sql](#)

### Shared Application & Shared Data - Default

1. When Shared Application & Shared Data - Default is selected, all the function groups listed will be installed in the application root.
2. After selecting the Radio button, user will have to input the Application name and Application root schema details where the conversion has to applied and click on '**Test Connection**'.
3. When Application name is not inputted, error will be displayed to input the same. User has to make sure that application name is the one mentioned in pre-requisites with installation done for version 1.0.
4. Once the Connection is successful, '**Finish**' button will be enabled and the object conversion will be completed at this step.
5. Execution will take few minutes and post completion, a dialog box displays '**Compilation Success**' message in the front end.

Oracle FLEXCUBE Universal Installer

Oracle Banking Installer

ORACLE  
INSTALLER

Object conversion for Application root

Enter Application Name

Provide Application root Schema details

Name	Value
Username	installer
Password	*****
Service Name	testdb
IP Address	10.10.10.10
Port	1521
TNS Connect Descriptor	testdb

Test Connection

Select Option for conversion

☐ Shared Application

☐ Shared Application and User Authentication

☒ Shared Application and Shared Data - Default

☐ Shared Application and Shared Data - Custom

Exit Log Back Finish

### Shared Application & Shared Data - Custom

1. When Shared Application & Shared Data – Custom is selected, all the function groups listed will be installed in the application root.
2. After selecting the Radio button, user will have to input the Application name and Application root schema details where the conversion has to be applied and click on 'Test Connection'.
3. When Application name is not inputted, error will be displayed to input the same. User has to make sure that application name is the one mentioned in pre-requisites with installation done for version 1.0.
4. Once the Connection is successful, 'Next' button will be enabled to take through the steps of movement of function ids to pdbs.
5. After selecting the Radio button, user will have to input the Application name and Application root schema details where the conversion has to be applied and click on 'Test Connection'.
6. Once the Connection is successful, 'Finish' button will be enabled to continue with the next steps of object conversion.

[Approot\\_AppSeed\\_sync.sql](#)

Object conversion for Application root

Enter Application Name

Provide Application root Schema details

Name	Value
Username	installer
Password	*****
Service Name	testdb
IP Address	10.10.10.10
Port	1521
TNS Connect Descriptor	testdb

[Test Connection](#)


Select Option for conversion

☐ Shared Application  
☐ Shared Application and User Authentication  
☐ Shared Application and Shared Data - Default  
☒ Shared Application and Shared Data - Custom

[Exit](#)
[Log](#)
[Back](#)
[Finish](#)

[Aproot\\_PDB\\_Sync.sql](#)

7. In the Next Screen, user can opt-out the entities which are not required to be the candidates of aproot and those function ids will be moved to PDB.
8. There will be two multiblocks available.
  - a. First multiblock will list the details of function groups which are the Aproot candidates.
  - b. Second multiblock will list the function ids corresponding to each of the function group in the first block.
9. Second multiblock will have the check box '**Move to PDB**' against each function ID.

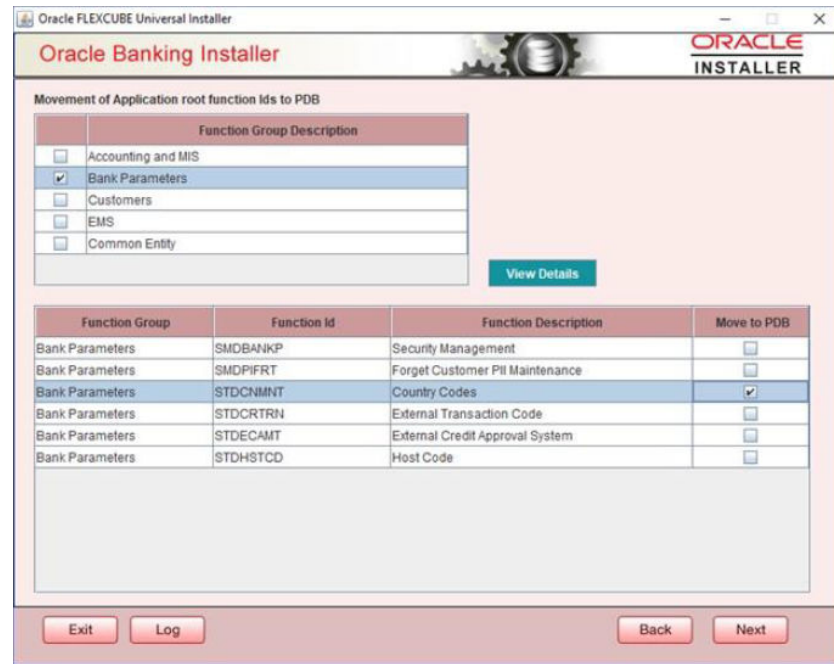

Oracle FLEXCUBE Universal Installer

### Oracle Banking Installer

Movement of Application root function ids to PDB

Function Group	Function Id	Function Description	Move to PDB
<input type="checkbox"/> Accounting and MIS			
<input checked="" type="checkbox"/> Bank Parameters			
<input type="checkbox"/> Customers			
<input type="checkbox"/> EMS			
<input type="checkbox"/> Common Entity			


[View Details](#)

Function Group	Function Id	Function Description	Move to PDB
Bank Parameters	SMDANKP	Security Management	<input type="checkbox"/>
Bank Parameters	SMDPIFRT	Forget Customer PII Maintenance	<input type="checkbox"/>
Bank Parameters	STDCNMNT	Country Codes	<input checked="" type="checkbox"/>
Bank Parameters	STDCRTRN	External Transaction Code	<input type="checkbox"/>
Bank Parameters	STDECAMT	External Credit Approval System	<input type="checkbox"/>
Bank Parameters	STDHSTCD	Host Code	<input type="checkbox"/>

Exit Log Back Next

10. User can select more than one function group and the respective function ids will also be appended to the second multiblock against the function group on click of 'View Details' button.
11. Once the selection is completed, 'Next' button has to be clicked to move to the next screen where the complete list of function ids.
12. The dependent function ids of the selected functions opted to move to PDB will be listed in the below section.

[fn\\_error\\_handler.sql](#)

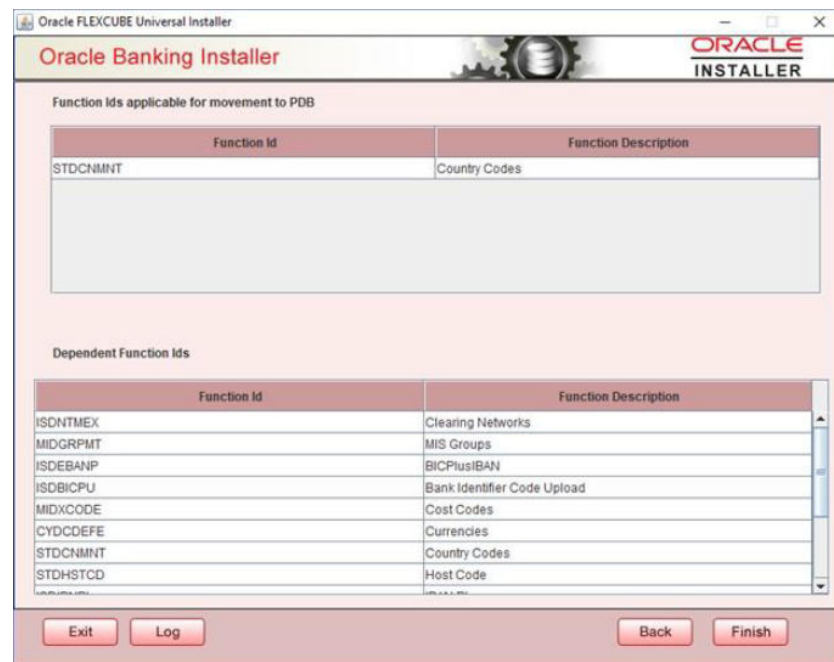

Oracle FLEXCUBE Universal Installer

### Oracle Banking Installer

Function Ids applicable for movement to PDB

Function Id	Function Description
STDCNMNT	Country Codes

Dependent Function Ids

Function Id	Function Description
ISDNTMEX	Clearing Networks
MIDGRPMT	MIS Groups
ISDEBANP	BICPlusIBAN
ISDBICPU	Bank Identifier Code Upload
MIDXCODE	Cost Codes
CYDCDEFE	Currencies
STDCNMNT	Country Codes
STDHSTCD	Host Code

Exit Log Back Finish

13. Object conversion can be completed by clicking on the **Finish** button.
14. Execution will take few minutes and post completion, a dialog box displays '**Compilation Success**' message in the front end.

# Application Installation

## Purpose

It is used for application installation.

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application PDB Configuration
SPOOL "&SPOOL_PATH"
/* Inputs are recieved */
/* Connect CDB as sys user */
accept P_CDB_USER Prompt 'Enter CDB Schema Username: '
accept P_CDB_PWD Prompt 'Enter CDB Schema Password: '
accept P_CDB_HOST Prompt 'Enter CDB Schema Host: '
accept P_CDB_PORT Prompt 'Enter CDB Schema Port: '
accept P_APPROOT_NAME Prompt 'Enter Application Root Name: '
accept P_APPLICATION_NAME Prompt 'Enter application name to be installed: '
accept P_COMMON_USER Prompt 'Enter Common User Name: '

/* Connecting to Application Root As SYSDBA*/
conn &P_CDB_USER/&P_CDB_PWD@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)
(HOST=&P_CDB_HOST) (PORT=&P_CDB_PORT))) (CONNECT_DATA=(SERVER=DEDICATED)
(SERVICE_NAME=&P_APPROOT_NAME))) as sysdba;

alter pluggable database application &P_APPLICATION_NAME begin install '1.0';
    exec dbms_pdb.set_user_explicit('&P_COMMON_USER');
alter pluggable database application &P_APPLICATION_NAME end install;

SET ERRORLOGGING OFF
SPOOL OFF
```

---

# Application\_PDB\_Creation

## Purpose

It is used in the application PDB creation.

## Syntax

/\* Pre-requisites: Step 2 on application root and application seed has to be completed.\*/

```
SET VERIFY ON SET HEAD ON SET FEEDBACK 1 SET ARRAY 1 SET LINESIZE 10000
SET PAGESIZE 50000 SET LONG 10000 SET ECHO ON SET TRIMSPOOL ON SET
COLSEP ';' SET SERVEROUT OFF clear screen SPOOL ON SET SQLBLANKLINES ON SET
SERVEROUTPUT ON SET ERRORLOGGING ON SET ECHO ON prompt Welcome to
Application PDB Configuration SPOOL "&SPOOL_PATH" /* Inputs are recieved */ /* Connect
Approot as sys user */ accept P_CDB_USER Prompt 'Enter CDB Username: ' accept
P_CDB_PWD Prompt 'Enter CDB Password: ' accept P_CDB_HOST Prompt 'Enter CDB Host:
' accept P_CDB_PORT Prompt 'Enter CDB Port: ' accept P_CDB_NAME Prompt 'Enter CDB
Schema Name: ' accept P_DB_MOUNTED_PATH Prompt 'Enter Approot mounted path for
approot application seed creation: [Eg: /scratch/db1800dat]' accept P_APPROOT_NAME
Prompt 'Enter Application Root Name: ' accept P_APPPDB_NAME Prompt 'Please provide
name for Application PDB Name -- Application Root associated PDB: ' /* Connecting to
Application Root As SYSDBA*/ conn &P_CDB_USER/
&P_CDB_PWD@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)
(HOST=&P_CDB_HOST)(PORT=&P_CDB_PORT)))
(CONNECT_DATA=(SERVER=DEDICATED)(SERVICE_NAME=&P_APPROOT_NAME))) as
sysdba; /* Creating Application Associated PDB*/ CREATE pluggable database
&P_APPPDB_NAME FROM &P_APPROOT_NAME$SEED
file_name_convert=('&P_DB_MOUNTED_PATH/&P_CDB_NAME/
SEED&P_APPROOT_NAME/', '&P_DB_MOUNTED_PATH/&P_APPROOT_NAME/
&P_APPPDB_NAME/'); ALTER pluggable database &P_APPPDB_NAME OPEN; SET
ERRORLOGGING OFF SPOOL OFF
```

# Application\_Template\_PDB\_Creation

## Purpose

This script is used for application template PDB creation.

## Syntax

```
(SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Template PDB Configuration
SPOOL "&SPOOL_PATH"
/* CDB sys user name and password to be given */
accept P_CDB_USER Prompt 'Enter CDB Schema Username: [Eg: sys]'
accept P_CDB_PWD Prompt 'Enter CDB Schema Password: [Eg: PASSWORD]'
accept P_CDB_HOST Prompt 'Enter CDB Schema Host: [Eg: fcubs.in.oracle.com]'
accept P_CDB_PORT Prompt 'Enter CDB Schema Port: [Eg: 1521]'
accept P_CDB_NAME Prompt 'Enter CDB Service Name: [Eg: FCUBSCDB]'
accept P_DB_MOUNTED_PATH Prompt 'Enter CDB mounted path: [Eg: /scratch/
db1800dat]'

accept P_APP_TEMPLATE_PDB Prompt 'Enter Name for Application Template PDB to
be created: [Eg: pdbfcubs]'
accept P_COMMON_USER Prompt 'Enter Common Username to be created: [Eg: fcubs]'
accept P_COMMON_USER_PWD Prompt 'Enter Pwd for Common User : [Eg: fcubs]'
accept P_COMMON_TSPACE Prompt 'Enter TableSpace Name :[Eg: fcubs]'

/* Connecting to CDB as sysdba */
CONN &P_CDB_USER/&P_CDB_PWD@&P_CDB_NAME AS sysdba;

create pluggable database &P_APP_TEMPLATE_PDB ADMIN USER sourceadmin
IDENTIFIED BY sourceadmin file_name_convert=('pdbseed','&P_APP_TEMPLATE_PDB');

alter pluggable database &P_APP_TEMPLATE_PDB open;
alter pluggable database &P_APP_TEMPLATE_PDB save state;

/*connecting to template pdb as sysdba */
conn &P_CDB_USER/&P_CDB_PWD@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)
(HOST=&P_CDB_HOST) (PORT=&P_CDB_PORT))) (CONNECT_DATA=(SERVER=DEDICATED)
```



---

```
(SERVICE_NAME=&P_APP_TEMPLATE_PDB))) as sysdba;
create tablespace &P_COMMON_USER datafile '&P_DB_MOUNTED_PATH/&P_CDB_NAME/
&P_APP_TEMPLATE_PDB/&P_COMMON_TSPACE..dbf' size 100M autoextend on next 10M
maxsize 30000M;
```

```
CREATE USER &P_COMMON_USER IDENTIFIED BY &P_COMMON_USER_PWD default
tablespace &P_COMMON_USER quota unlimited on &P_COMMON_USER;
```

```
grant execute on dbms_sql to &P_COMMON_USER;
grant execute on dbms_lock to &P_COMMON_USER;
grant execute on dbms_job to &P_COMMON_USER;
grant execute on dbms_alert to &P_COMMON_USER;
grant execute on dbms_refresh to &P_COMMON_USER;
grant execute on dbms_pipe to &P_COMMON_USER;
grant execute on dbms_shared_pool to &P_COMMON_USER;
grant execute on dbms_application_info to &P_COMMON_USER;
grant execute on utl_file to &P_COMMON_USER;
grant select on v_$process to &P_COMMON_USER;
grant select on v_$session to &P_COMMON_USER;
grant select on v_$instance to &P_COMMON_USER;
grant select on v_$timer to &P_COMMON_USER;
grant select on v_$database to &P_COMMON_USER;
grant select on v_$parameter to &P_COMMON_USER;
grant select on v_$nls_parameters to &P_COMMON_USER;
grant select on dba_jobs_running to &P_COMMON_USER;
grant create session to &P_COMMON_USER;
grant create synonym to &P_COMMON_USER;
grant create view to &P_COMMON_USER;
grant create sequence to &P_COMMON_USER;
grant create table to &P_COMMON_USER;
grant create procedure to &P_COMMON_USER;
grant create trigger to &P_COMMON_USER;
grant create type to &P_COMMON_USER;
grant create library to &P_COMMON_USER;
grant create database link to &P_COMMON_USER;
grant create any synonym to &P_COMMON_USER;
grant select on dba_jobs to &P_COMMON_USER;
grant create database link to &P_COMMON_USER;
grant create materialized view to &P_COMMON_USER;
grant execute on dbms_aq to &P_COMMON_USER;
grant execute on dbms_aqadm to &P_COMMON_USER;
grant execute on dbms_job to &P_COMMON_USER;
grant execute on dbms_lock to &P_COMMON_USER;
grant execute on dbms_pipe to &P_COMMON_USER;
grant execute on dbms_refresh to &P_COMMON_USER;
grant execute on dbms_qls to &P_COMMON_USER;
create public synonym dbms_shared_pool for sys.dbms_shared_pool;
grant execute on dbms_shared_pool to &P_COMMON_USER;
grant execute on dbms_sql to &P_COMMON_USER;
grant execute on utl_file to &P_COMMON_USER;
grant select on SYS.TRANSPORT_SET_VIOLATIONS to &P_COMMON_USER;
grant create evaluation context to &P_COMMON_USER;
grant create rule to &P_COMMON_USER;
grant create job to &P_COMMON_USER;
grant create rule set to &P_COMMON_USER;
grant exp_full_database to &P_COMMON_USER;
```

---

```
grant alter tablespace to &P_COMMON_USER;
grant manage tablespace to &P_COMMON_USER;
grant execute on DBMS_FILE_TRANSFER to &P_COMMON_USER;
grant execute on SYS.DBMS_TTS to &P_COMMON_USER;
grant execute on SYS.DBMS_DATAPUMP to &P_COMMON_USER;
grant JAVAUSERPRIV to &P_COMMON_USER;
grant execute on dbms_scheduler to &P_COMMON_USER;
create public synonym UTL_RECOMP for sys.UTL_RECOMP;
grant execute on UTL_RECOMP to &P_COMMON_USER;
grant execute on DBMS_MONITOR to &P_COMMON_USER;
grant select on dba_directories to &P_COMMON_USER;
grant execute on DBMS_CCRYPTO to &P_COMMON_USER;
grant select on gv_$session to &P_COMMON_USER;
grant create any directory to &P_COMMON_USER;
grant select on SYS.DBA_SCHEDULER_RUNNING_JOBS to &P_COMMON_USER;
grant execute on sys.dbms_redact to &P_COMMON_USER;
grant SELECT on sys.redaction_policies to &P_COMMON_USER;
grant SELECT on sys.redaction_columns to &P_COMMON_USER;
grant SELECT on sys.redaction_values_for_type_full to &P_COMMON_USER;
grant create session,connect,resource to &P_COMMON_USER;
grant SELECT ON dba_applications to &P_COMMON_USER;
grant SELECT ON dba_app_versions to &P_COMMON_USER;
grant dba to &P_COMMON_USER;

SET ECHO OFF
clear screen
spool off
```

---

# Approot\_AppSeed\_Sync.sql

## Purpose

Application Root - PDB Model Configuration

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application PDB Configuration
SPOOL "&SPOOL_PATH"
/* Inputs are received */
accept P_APPROOT_USER Prompt 'Enter Approot Schema Username: '
accept P_APPROOT_PWD Prompt 'Enter Approot Schema Password: '
accept P_APPROOT_HOST Prompt 'Enter Approot Schema Host: '
accept P_APPROOT_PORT Prompt 'Enter Approot Schema Port: '
accept P_APPROOT_NAME Prompt 'Enter Application Root Name: '

accept P_APPLICATION_NAME Prompt 'Enter application name to be upgraded for
object conversion: '

/*Connecting to Application seed*/
conn &P_APPROOT_USER/
&P_APPROOT_PWD@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)
(HOST=&P_APPROOT_HOST) (PORT=&P_APPROOT_PORT))) (CONNECT_DATA=(SERVER=DEDICATED)
(SERVICE_NAME=&P_APPROOT_NAME$SEED)));

/*Synching object conversion to application seed */
alter pluggable database application &P_APPLICATION_NAME sync;

SET ERRORLOGGING OFF
SPOOL OFF
```

# Approot\_PDB\_Sync

## Purpose

Check the approot PDB Sync.

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application PDB Sync
SPOOL "&SPOOL_PATH"
/* Inputs are received */
accept P_PDB_USER Prompt 'Enter PDB Schema Username: '
accept P_PDB_PWD Prompt 'Enter PDB Schema Password: '
accept P_PDB_HOST Prompt 'Enter PDB Schema Host: '
accept P_PDB_PORT Prompt 'Enter PDB Schema Port: '

accept P_PDB_NAME Prompt 'Enter the PDB name to be synched: '
accept P_APPLICATION_NAME Prompt 'Enter the application name: '

/*Connecting to pdb */
conn &P_PDB_USER/&P_PDB_PWD@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)
(HOST=&P_PDB_HOST) (PORT=&P_PDB_PORT))) (CONNECT_DATA=(SERVER=DEDICATED)
(SERVICE_NAME=&P_PDB_NAME)));

/*Synching the application with pdbs */
alter pluggable database application &P_APPLICATION_NAME sync;

SET ERRORLOGGING OFF
SPOOL OFF
```

---

# fn\_error\_handler

## Purpose

This script is used as error handler.

## Syntax

```
create table log_error
(Err      VARCHAR2(2000)
,DT        DATE)
/

CREATE OR REPLACE NONEDITIONABLE FUNCTION fn_error_handler(octcode    IN
NUMBER,
errcode    IN NUMBER,
statement  IN VARCHAR2,
resync     IN NUMBER)
RETURN NUMBER AUTHID CURRENT_USER
is
retcode NUMBER := DBMS_PDB_APP_CON.SYNC_ERROR_NOT_OK;
PROCEDURE prLog (pErr VARCHAR2)
IS
PRAGMA AUTONOMOUS_TRANSACTION;
BEGIN
INSERT INTO log_error
VALUES (pErr,SYSDATE);
COMMIT;
END prLog;
BEGIN
prLog('fn: '||errcode);
IF errcode IN
(24344,6512,65297,65272,65274,4045,1,2264,1430,1434,955,4063,942,4043,65215,22
60,904,4023,6510,4097,6508,4088
,2261,44201,2437,22859,12006,1418,21700,980
,1720,1449,1036,2443,2441          --Added Newly on 08-Sep-2020
,22275,1024,12003,                --Added Newly on 24-Nov-2020
1439,6550                        --Added Newly on 24-Nov-2020 --recheck 1439
some column datatype will have to be corrected
) THEN
retcode := DBMS_PDB_APP_CON.SYNC_ERROR_OK_ALWAYS;
END IF;
prLog('ret: '||retcode);
RETURN retcode;
END;
/
```