

# Oracle Banking Trade Finance

## Multi-Tenant Patch-set Deployment



Release 14.7.3.0.0

F94039-01

February 2024

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Oracle Banking Trade Finance Multi-Tenant Patch-set Deployment, Release 14.7.3.0.0

F94039-01

Copyright © 2024, Oracle and/or its affiliates.

Primary Authors: (primary author), (primary author)

Contributing Authors: (contributing author), (contributing author)

Contributors: (contributor), (contributor)

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

# Contents

## 1 Overview of Applications in an Application Container

---

1.1	Managing Applications in an Application Container	1-1
1.2	Application Maintenance	1-1
1.2.1	Application Installation	1-2
1.2.2	Application Upgrade	1-2

## 2 Patch-set Application Steps

---

2.1	Application Upgrade	2-1
2.1.1	Purpose	2-1
2.1.2	Steps to be Followed	2-1
2.1.2.1	Start Application Upgrade	2-2
2.1.2.2	Compiling Incremental Units	2-2
2.1.2.3	Recompilation of invalids	2-3
2.1.2.4	End Application upgrade	2-3
2.1.2.5	Start Application upgrade	2-3
2.1.2.6	Application Root Objects Conversion for New Objects	2-3
2.1.2.7	Application Root Objects Conversion for Existing Objects	2-4
2.1.2.8	Recompilation of Invalids	2-4
2.1.2.9	End Application Upgrade	2-4
2.1.3	Purpose	2-5
2.1.4	Steps to be Followed	2-5

## 3 Step by Step Execution

---

3.1	Pre-Requisites	3-1
3.2	Patch-set Application Step by Step with Screenshots	3-2

## Index

---

# 1

## Overview of Applications in an Application Container

- [Managing Applications in an Application Container](#)  
In an application container, an application is the named, versioned set of application common objects stored in the application root. In this context, “application” means “application back-end.” Application common objects include user accounts, tables, PL/SQL packages, and so on. An application can be shared with the application PDBs that belong to the application root.
- [Application Maintenance](#)  
Application maintenance refers to installing, uninstalling, upgrading, or patching an application.

### 1.1 Managing Applications in an Application Container

In an application container, an application is the named, versioned set of application common objects stored in the application root. In this context, “application” means “application back-end.” Application common objects include user accounts, tables, PL/SQL packages, and so on. An application can be shared with the application PDBs that belong to the application root.

On performing application changes, application PDBs can synchronize with the application in the application root. The application container also manages the versions of the application and the patches to the application:

- While installing an application, user must specify the application version number.
- While upgrading an application, user must specify the old application version number and the new application version number.

As the application evolves, the application container maintains all of the versions that are applied.

### 1.2 Application Maintenance

Application maintenance refers to installing, uninstalling, upgrading, or patching an application.

Perform application installation, upgrade, and patching operations using an ALTER PLUGGABLE DATABASE APPLICATION statement.

The basic steps for application maintenance are as follows:

1. Log in to the application root.
2. Begin the operation with an ALTER PLUGGABLE DATABASE APPLICATION ... BEGIN statement in the application root.
3. Execute the application maintenance statements.

4. End the operation with an ALTER PLUGGABLE DATABASE APPLICATION ... END statement.

These statements can be issued in the same user session or in different user sessions.

- [Application Installation](#)

- [Application Upgrade](#)

An application upgrade is a major change to an installed application.

## 1.2.1 Application Installation

An application installation is the initial creation of a master application definition. A typical installation creates user accounts, tables, and PL/SQL packages.

Refer **Multi-Tenant\_Deployment.pdf** for more details on the application installation.

## 1.2.2 Application Upgrade

An application upgrade is a major change to an installed application.


Typically, an upgrade changes the physical architecture of the application. For example, an upgrade might add new tables, and packages, or alter the definitions of existing objects.


To upgrade the application, specify the following in the ALTER PLUGGABLE DATABASE APPLICATION statement:

- Name of the application
- Old application version number
- New application version number

During an application upgrade, the application remains available. To make this availability possible, Oracle Database clones the application root.

The following figure gives an overview of the application upgrade process.

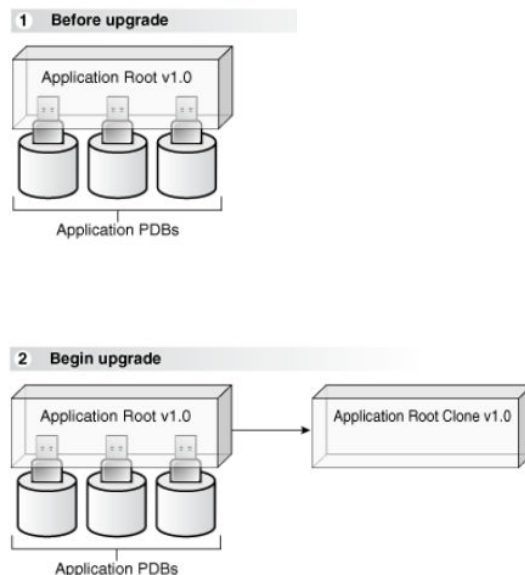

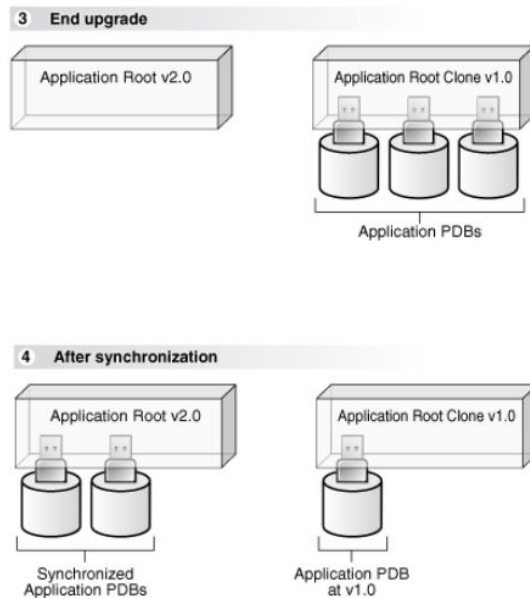

When an application is upgraded, Oracle Database automatically clones the application root.

During the upgrade, application PDBs point to the clone and applications continue to run during the upgrade. Application PDBs can perform DML on metadata-linked tables and views and query data-linked tables.

After the upgrade, the application root clone remains and continues to support any application PDB that still uses the pre-upgrade version of the application in the clone.

Application PDBs that are resynchronized are pointed to the upgraded application root. Application PDBs that are not synchronized might continue to use the clone.

# 2

## Patch-set Application Steps

Multi entity application root/PDB based setup has to be available to perform 18c database application upgrade for applying the patch-set. Refer Multi-Tenant\_Deployment.docx for the deployment and installation steps.

Patch-set can be applied by following below steps in sequential order, and detail of each steps explained as separate sections subsequently.

- Application Upgrade
- Synchronize application PDBs

### **Patch-set Deployment Pre-requisites:**

- Download the required patch-set zip file and unzip it in a local path.
- Verify whether the property files (fcubs.properties and env.properties) have the application root schema details where the application is available, if not update the approot schema details through installer (Refer OBTF\_Property\_File\_Creation.docx for more details) and re-generate the files.
- Make sure to set the flag PATCHSET\_INSTALLATION to 'Y'.
- [Application Upgrade](#)

## 2.1 Application Upgrade

- [Purpose](#)  
Major changes to an application constitute application upgrades. During the upgrade, Oracle Database automatically clones the application root and the application PDBs point to the clone.
- [Steps to be Followed](#)
- [Purpose](#)
- [Steps to be Followed](#)

### 2.1.1 Purpose

Major changes to an application constitute application upgrades. During the upgrade, Oracle Database automatically clones the application root and the application PDBs point to the clone.

Application upgrade can be performed in the application root only, and application PDBs applies the changes in the upgrade when they synchronize with the application.

### 2.1.2 Steps to be Followed

Below steps to be followed to initiate application upgrade:

- Start Application upgrade

- Compiling Incremental Units
- Recompilation of invalids
- End Application upgrade
- Start Application upgrade
- Application Root objects conversion for new objects
- Application Root objects conversion for existing objects
- Recompilation of invalids
- End Application upgrade
- [Start Application Upgrade](#)  
An ALTER PLUGGABLE DATABASE APPLICATION statement has to be issued to upgrade an application in the application root.
- [Compiling Incremental Units](#)
- [Recompilation of invalids](#)
- [End Application upgrade](#)
- [Start Application upgrade](#)
- [Application Root Objects Conversion for New Objects](#)
- [Application Root Objects Conversion for Existing Objects](#)
- [Recompilation of Invalids](#)
- [End Application Upgrade](#)

### 2.1.2.1 Start Application Upgrade

An ALTER PLUGGABLE DATABASE APPLICATION statement has to be issued to upgrade an application in the application root.

Each upgrade must be associated with an application name, starting version number, and ending version number.

- The common user must have the DBA privilege, and the privilege must be commonly granted in the application root.
- The application root must be in open read/write.
- Run the below script for initiating an application upgrade. This will initiate the application from current version to the next version (patch-set version).

#### [Start\\_Upgrade](#)

Input sample for the script:

<b>Spool Path</b>	<< Any local path>>
<b>Application next version</b>	14.4.0.0.0

### 2.1.2.2 Compiling Incremental Units

Patch-set objects have to be loaded using bat file [E.g.: SMSDBCompileRun.bat, TFDDBCompileRun.bat] by silent installer for respective product processor.



Compile the incremental SMS units using `/INSTALLER/SOFT/SMSDBCompileRun.sh` for UNIX installations or `/INSTALLER/SOFT/SMSDBCompileRun.bat` for Windows installations.

Compile the incremental OBTF units using `/INSTALLER/SOFT/TFDBCompileRun.sh` for UNIX installations or `/INSTALLER/SOFT/TFDBCompileRun.bat` for Windows installations.

### 2.1.2.3 Recompilation of invalids

As the sharing property of most of the objects are modified other than NONE, recompilation of objects is not allowed outside an application.

Recompilation of objects will be initiated inside the application upgrade for sanity with zero invalids with the below script:

[Recompilation of invalids](#)

### 2.1.2.4 End Application upgrade

Application upgrade can be performed in the application root only and end of the upgrade is performed with an ALTER PLUGGABLE DATABASE APPLICATION END UPGRADE statement.

Run the below script for ending an application upgrade for patch-set.

[End Application upgrade](#)

And run the invalid script by connecting to the common user in approot outside the upgrade.

[Invalid Recompilation Outside Upgrade.](#)

### 2.1.2.5 Start Application upgrade

Run the below script for initiating another application upgrade for object conversion. This will initiate the application from current version to the next version (patch-set version).

[Start Application upgrade](#)

Input sample for the script:

<b>Spool Path</b>	<< Any local path>>
<b>Application next version</b>	14.4.0.0.0

### 2.1.2.6 Application Root Objects Conversion for New Objects

As part of patch-set when there are new tables added which has to be converted as DL or when there is a new function id which is identified to be an approot function is provided, otherwise no conversion will happen as part of this step

Below script takes care of converting the new DL objects during patch-set based on the deployment model of the application during installation.

[New Object Conversion](#)

Input sample for the script:

<b>Spool Path</b>	<< Any local path>>
-------------------	---------------------

<b>Application next version</b>	14.4.0.0.0
---------------------------------	------------

## 2.1.2.7 Application Root Objects Conversion for Existing Objects

### Various Sharing types of objects during installation:

- A static table will hold the information of selected table sharing as Data link. Other tables will be treated as Meta Data Link
- Sharing of object types such as INDEX, LOB, TABLE PARTITION, SEQUENCE, and DYNAMIC PACKAGES will remain as NONE.
- All other object types such as Packages, Procedures, Functions, and Synonyms would be converted as Meta Data Link sharing.

### Sharing during upgrade:

Sharing of existing database objects will remain the same.

Below script takes care of converting the modified MDL objects when there is a re-creation [objects with Create or Replace command during creation] happens during patch-set.

[Application Root Objects Conversion](#)

Input sample for the script:

<b>Spool Path</b>	<< Any local path>>
<b>Application next version</b>	14.4.0.0.0

When there are new tables introduced as part of patch-set which has to be converted into DL will be done separately. The recommendation for the same will be provided as part of patch-set instructions for this case.

## 2.1.2.8 Recompilation of Invalids

As the sharing property of most of the objects are modified other than NONE, recompilation of objects is not allowed outside an application.

Recompilation of objects will be initiated inside the application upgrade for sanity with zero invalids with the below script:

[Recompilation of Invalids](#)

## 2.1.2.9 End Application Upgrade

Application upgrade can be performed in the application root only and end of the upgrade is performed with an ALTER PLUGGABLE DATABASE APPLICATION END UPGRADE statement.

Run the below script for ending an application upgrade for patch-set.

[End Application Upgrade](#)

And run the invalid script by connecting to the common user in a prompt outside the upgrade.

[Invalids\\_Recompilation\\_Outside\\_Upgrade](#)

## 2.1.3 Purpose

Synchronizing an application updates the application in the application PDB to the latest version in the application root. When an application is upgraded in an application root, an application PDB that belongs to the application root is not changed until it is synchronized.

Application PDBs synchronize with an application by running an ALTER PLUGGABLE DATABASE statement with the SYNC clause.

## 2.1.4 Steps to be Followed

### **Prerequisites**

- The current user must have ALTER PLUGGABLE DATABASE system privilege.
- Ensure that the current container is the application PDB.
- Run an ALTER PLUGGABLE DATABASE APPLICATION statement with the SYNC clause.
- Run the below script to synchronize the PDBs with the latest application changes in the application root.

[PDB\\_Sync](#)

# 3

## Step by Step Execution

- [Pre-Requisites](#)  
This topic provides systematic instructions for pre-requisites.
- [Patch-set Application Step by Step with Screenshots](#)  
This topic provides systematic instructions to patch-set application step by step with screenshots.

### 3.1 Pre-Requisites

This topic provides systematic instructions for pre-requisites.

1. Before applying the patch-set, we have to make sure the release is updates with the base version of the patch-set.

For Example, If the first patch-set of 14.2 is yet to applied, the release has to be updated as '14.2.0.0.0'. It can be verified with the below queries.

```
select param_name, param_val from CSTB_PARAM WHERE PARAM_NAME = 'RELEASE';  
select module_group_id, release from SMTB_MODULES_GROUP;
```

2. Another significant parameter is the values of application name and deployment type in CSTB\_PARAM.

This value will be updated from the installer during Aproot Object Conversion utility as part of deployment.

```
select param_name, param_val from cstb_param where PARAM_NAME in ('MULTI_TENANT_APP_NAME', 'MULTI_TENANT_DEPLOYMENT_MODEL');
```

The Application name of multi-tenant deployment will be stored in CSTB\_PARAM as

Param_Name	Param_Val
MULTI_TENANT_APP_NAME	OBTF

The type of object conversion will be stored in CSTB\_PARAM as

Param_Name	Param_Val
MULTI_TENANT_DEPLOYMENT_MODEL	SA (or) SAUA (or) SASDD (or) SASDC

SA □ Shared Application

SAUA □ Shared Application User Authentication

SASDD □ Shared Application Shared Data - Default

SASDC □ Shared Application Shared Data – Custom

(Optional) Enter the result of the procedure here.

## 3.2 Patch-set Application Step by Step with Screenshots

This topic provides systematic instructions to patch-set application step by step with screenshots.

### 1. Start Application upgrade

- a. Login into the Apropot Schema as Common user.
- b. Run `01_Start_Upgrade.sql` for initiating the application upgrade.
- c. User input has to be inputted for the below:

<b>Spool Path</b>	<< Any local path>>
<b>Application next version</b>	14.4.0.0.0

- d. Script will be executed as in the screen shot below and keep the SQL Plus session open for upcoming steps.

### Execution Screenshot:

```

C:\app\client\grbalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> SPOOL ON
SQL> SET SQLBLANKLINES ON
SQL> SET SERVEROUTPUT ON
SQL> SET ERRORLOGGING ON
SQL> SET ECHO ON
SQL> prompt Welcome to Application PDB Configuration
Welcome to Application PDB Configuration
SQL> SPOOL "&SPOOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\VAVALS\01spool.txt
SQL>
SQL> DECLARE
  2   l_app_name          VARCHAR2(128);
  3   l_app_currver      VARCHAR2(38);
  4   l_sql              VARCHAR2(256);
  5 BEGIN
  6
  7   BEGIN
  8     SELECT app_name
  9     INTO l_app_name
10     FROM dba_applications
11     WHERE app_implicit <= 'y'
12     AND app_name = (SELECT param_val FROM cstb_param WHERE Param_name = 'MULTI_TENANT_APP_NAME');
13   EXCEPTION
14     WHEN NO_DATA_FOUND THEN
15       dbms_output.put_line('Error Nodata--->||SQLERRM);
16     WHEN OTHERS THEN
17       dbms_output.put_line('Error others--->||SQLERRM);
18   END;
19   SELECT MAX(app_version)
20   INTO l_app_currver
21   FROM dba_app_versions
22   WHERE app_name = l_app_name;
23
24   l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name || ' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '&APPLICATION_NEXTVER' ||''';
25   dbms_output.put_line('l_sql: ' || l_sql);
26   EXECUTE IMMEDIATE l_sql;
27
28   l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
29   dbms_output.put_line('l_sql: ' || l_sql);
30   EXECUTE IMMEDIATE l_sql;
31
32 EXCEPTION
33   WHEN OTHERS THEN

```

```

C:\app\client\prdbalac\product\18.0.0\client_1\bin\sqlplus.exe
14      WHEN NO_DATA_FOUND THEN
15          dbms_output.put_line('Error Nodata-->'||SQLERRM);
16      WHEN OTHERS THEN
17          dbms_output.put_line('Error others-->'||SQLERRM);
18      END;
19      SELECT MAX(app_version)
20      INTO l_app_currver
21      FROM dba_app_versions
22      WHERE app_name = l_app_name;
24      l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '&P_APPLICATION_NEXTVER' ||'''';
25      dbms_output.put_line('l_sql: ' || l_sql);
26      EXECUTE IMMEDIATE l_sql;
27
28      l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
29      dbms_output.put_line('l_sql: ' || l_sql);
30      EXECUTE IMMEDIATE l_sql;
31
32  EXCEPTION
33  WHEN OTHERS THEN
34      dbms_output.put_line('Error -->'||SQLERRM);
35  END;
36  /
enter value for p_application_nextver: 14.2.0.0.2
14 24:      l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '&P_APPLICATION_NEXTVER' ||'''';
new 24:      l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '14.2.0.0.2' ||'''';
l_sql: ALTER PLUGGABLE DATABASE APPLICATION FCUBS BEGIN UPGRADE '14.2.0.0.1' TO '14.2.0.0.2'
l_sql: ALTER SYSTEM SET DEFAULT_SHARING = NONE
PL/SQL procedure successfully completed.
SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>

```

## 2. Compiling Incremental Units

- a. Make sure that the fcubs.properties and env.properties are updated with aproot schema details.
- b. Run the <Product Processor>DBCompileRun.bat from <Patchset>\INSTALLER\SOFT directory. DDL Compilation, Object Compilation and Static Data load will be done.

### For Example: OBTF INSTALLATION

First load SMS objects first and then OBTF objects. i.e. Run SMSDBCompileRun.bat and after SMS object loading is completed, then initiate OBTF compilation Run TFDBCompileRun.bat

## 3. Recompilation of invalids

- a. Login into the Aproot Schema as Common user
- b. Run 03\_Invalids\_Recompilation.sql **for recompiling the invalids during application upgrade.**
- c. No user input is required for this step.
- d. Script will be executed as in the screen shot below and keep the SQL Plus session open for upcoming steps.

### Execution Screenshot:

```

C:\app\client\primalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application Upgrade Invalids Recompilation
Welcome to Application Upgrade Invalids Recompilation
SQL> SPOOL %$SPOOL_PATH
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\05Spool.txt
SQL>
SQL> DECLARE
  2   inval_cnt NUMBER := 0;
  3 BEGIN
  4   WHILE inval_cnt < 3 LOOP
  5     --SCRIPT
  6     FOR J IN (Select 'alter ' || object_type || ' ' || object_name || ' compile' invalidobject1
  7              FROM user_objects
  8              WHERE status = 'INVALID'
  9              AND object_type IN ('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER')
 10             )
 11     LOOP
 12       DBMS_OUTPUT.PUT_LINE(chr(10));
 13       EXECUTE IMMEDIATE J.invalidobject1;
 14     END LOOP;
 15     inval_cnt := inval_cnt + 1;
 16   END LOOP;
 17 END;
 18 /

PL/SQL procedure successfully completed.
SQL>
SQL> DECLARE

```

```

C:\app\client\primalac\product\18.0.0\client_1\bin\sqlplus.exe

PL/SQL procedure successfully completed.
SQL> select count(*) From user_objects where status = 'INVALID';
COUNT(*)
-----
         0
1 row selected.

SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>
SQL>
SQL>
SQL>
SQL>

```

#### 4. End Application upgrade

- a. Login into the Aaproot Schema as Common user.
- b. Run 06\_End\_Upgrade.sql for recompiling the invalids during application upgrade.
- c. No user input is required for this step.
- d. Script will be executed as in the screen shot below.

**Execution Screenshot:**

```

C:\app\client\pribala\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application PDB Configuration
Welcome to Application PDB Configuration
SQL> SPOOL &SPOOL_PATH
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\VA\AILS\06Spool.txt
SQL>
SQL> DECLARE
2     l_app_name  VARCHAR2(128);
3     l_sql       VARCHAR2(256);
4 BEGIN
5     BEGIN
6         SELECT app_name
7             INTO l_app_name
8             FROM dba_applications
9             WHERE app_implicit <> 'Y'
10            AND app_name = (SELECT param_val FROM cstab_param WHERE param_name = 'MULTI_TENANT_APP_NAME');
11    EXCEPTION
12    WHEN NO_DATA_FOUND THEN
13        dbms_output.put_line('Error1 Nodata-->'||SQLERRM);
14    WHEN OTHERS THEN
15        dbms_output.put_line('Error1 others-->'||SQLERRM);
16    END;
17    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name || ' END UPGRADE ';
18    dbms_output.put_line('l_sql: ' || l_sql);
19    EXECUTE IMMEDIATE l_sql;
20
21
22 EXCEPTION
23 WHEN OTHERS THEN
24     DBMS_OUTPUT.PUT_LINE('Error -->'||SQLERRM);
25 END;
26 /
l_sql: ALTER PLUGGABLE DATABASE APPLICATION FCUBS END UPGRADE
PL/SQL procedure successfully completed.

SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>

```

**5. Start Application upgrade**

- a. Login into the Aproot Schema as Common user.
- b. Run 05\_Start\_Upgrade.sql for initiating the application upgrade.
- c. User input has to be inputted for the below:

<b>Spool Path</b>	<< Any local path>>
<b>Application next version</b>	14.4.0.0.0

- d. Script will be executed similar to step 1 above and keep the SQL Plus session open for upcoming steps.

**6. Application Root objects conversion for new objects**

- a. Login into the Aproot Schema as Common user.
- b. Run 06\_New\_Object\_Conversion.sql for converting new aproot objects added during patch-set as DL
- c. User input has to be inputted for the below:

<b>Spool Path</b>	<< Any local path>>
<b>Application next version</b>	HUBUSER (common user name)

**Execution Screenshot:**



```

C:\app\client\pribalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application PDB Configuration
Welcome to Application PDB Configuration
SQL> SPOOL %$POOL_PATH
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\025pool.txt
SQL>
SQL> DECLARE
2   l_count NUMBER;
3   l_app_deployment VARCHAR2(30);
4 BEGIN
5   SELECT count(*)
6     INTO l_count
7     FROM user_objects
8     WHERE sharing = 'NONE' --to get the new set of DL approot objects if any
9     AND object_name IN (SELECT DISTINCT a.object_name
10                        FROM cstm_approot_objects a
11                        WHERE sharing = 'DL'
12                        AND UPPER(object_type) = 'TABLE'
13                        AND EXISTS (SELECT 1
14                                   FROM user_objects b
15                                   WHERE b.object_name = a.object_name)
16                        AND EXISTS (SELECT 1
17                                   FROM cstm_approot_functions_menu c
18                                   WHERE c.function_id = a.function_id
19                                   AND c.modifiable IN ('Y', 'S'));
20   dbms_output.put_line('l_count: ' || l_count);
21   IF l_count > 0 THEN
22     dbms_output.put_line('New DL objects are available');
23     SELECT param_val
24       INTO l_app_deployment
25     FROM cstb_param
26     WHERE param_name = 'MULTI_TENANT_DEPLOYMENT_MODEL';
27     dbms_output.put_line('l_app_deployment: ' || l_app_deployment);
28
29     IF l_app_deployment IS NOT NULL AND l_app_deployment = 'SAUA' THEN
30       UPDATE satts_menu menu
31         SET menu.approot_flg = 'Y'
32         WHERE menu.function_id IN
33           (SELECT function_id
34            FROM cstm_approot_functions_menu
35            WHERE modifiable = 'S'
36            UNION
37            SELECT summary_fn_id
38            FROM cstm_approot_functions_menu
39            WHERE modifiable = 'S'
40            AND summary_fn_id IS NOT NULL) --SMS function id 'S'

```

```

cttion_id
90
91
92
93     LOOP
94       DBMS_OUTPUT.PUT_LINE(chr(10));
95       EXECUTE IMMEDIATE l_sqlobject;
96       DBMS_OUTPUT.PUT_LINE(l_sqlobject);
97     END LOOP;
98   EXCEPTION
99     WHEN OTHERS THEN
100      DBMS_OUTPUT.PUT_LINE('Error --->'||SQLERRM);
101   END;
102 ELSE
103   dbms_output.put_line('No new DL objects available');
104 END IF;
105 EXCEPTION
106   WHEN OTHERS THEN
107     dbms_output.put_line('Error --->'||SQLERRM);
108 END;
109 /
Enter value for p_approot_user: HUBUSER
old 77:      FOR I IN (SELECT 'BEGIN ' || chr(10) || 'DBMS_PDB.SET_DATA_LINKED('&P_APPROOT_USER'' ' ||
new 77:      FOR I IN (SELECT 'BEGIN ' || chr(10) || 'DBMS_PDB.SET_DATA_LINKED('HUBUSER'' ' ||
l_count: 1
New DL objects are available
l_app_deployment: SASAU

BEGIN
DBMS_PDB.SET_DATA_LINKED('HUBUSER','CSTM_CHECK2',1);
EXCEPTION
WHEN OTHERS then
DBMS_OUTPUT.PUT_LINE('ERROR ->' || SQLERRM);
END;

PL/SQL procedure successfully completed.

SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>

```

**7. Application Root objects conversion for existing objects**

- a. Login into the Approot Schema as Common user.
- b. Run 07\_Object\_Conversion.sql for initiating the application upgrade.
- c. User input has to be inputted for the below:

<b>Spool Path</b>	<< Any local path>>
<b>Application next version</b>	HUBUSER (common user name)

**Execution Screenshot:**

```

C:\app\client\prdbalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> SET SERVEROUTPUT ON
SQL> SET ERRORLOGGING ON
SQL> SET ECHO ON
SQL> prompt Welcome to Upgrade object conversion
Welcome to Upgrade object conversion
SQL> SPOOL "&SPOOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\045pool.txt
SQL>
SQL> DECLARE
  2   l_app_name          VARCHAR2(128);
  3 BEGIN
  4   BEGIN
  5     SELECT app_name
  6     INTO l_app_name
  7     FROM dba_applications
  8     WHERE app_implicit <> 'Y'
  9     AND app_name = (SELECT param_val FROM cstab_param WHERE Param_name = 'MULTI_TENANT_APP_NAME');
 10  EXCEPTION
 11  WHEN NO_DATA_FOUND THEN
 12    dbms_output.put_line('Error1 Nodata-->'||SQLERRM);
 13  WHEN OTHERS THEN
 14    dbms_output.put_line('Error1 others-->'||SQLERRM);
 15  END;
 16
 17  FOR I IN (SELECT 'BEGIN ' || chr(10) ||
 18             'DBMS_PDB.SET_METADATA_LINKED('&P_APPROOT_USER'' || ',' || chr(10) ||
 19             'Object_Name || ',' || Namespace || ');' || chr(10) ||
 20             'EXCEPTION ' || chr(10) || 'WHEN OTHERS then ' || chr(10) ||
 21             'DBMS_OUTPUT.PUT_LINE(''ERROR ->' || SQLERRM);' ||
 22             chr(10) || 'END;' sqlobject
 23           FROM user_objects
 24           WHERE sharing = 'NONE'
 25           AND object_type NOT IN ('INDEX', 'LOB', 'TABLE PARTITION', 'SEQUENCE')
 26           AND (object_name NOT LIKE '%*%')
 27           AND (created_appid = (select app_id from dba_applications where app_name = l_app_name) OR
 28              modified_appid = (select app_id from dba_applications where app_name = l_app_name)) ) LOOP
 29    DBMS_OUTPUT.PUT_LINE(chr(10));
 30    EXECUTE IMMEDIATE I.sqlobject;
 31  END LOOP;
 32  EXCEPTION
 33  WHEN OTHERS THEN
 34    DBMS_OUTPUT.PUT_LINE('Error ->'||SQLERRM);
 35  END;
 36 /

```

```

C:\app\client\prdbalac\product\18.0.0\client_1\bin\sqlplus.exe
  5     SELECT app_name
  6     INTO l_app_name
  7     FROM dba_applications
  8     WHERE app_implicit <> 'Y'
  9     AND app_name = (SELECT param_val FROM cstab_param WHERE Param_name = 'MULTI_TENANT_APP_NAME');
 10  EXCEPTION
 11  WHEN NO_DATA_FOUND THEN
 12    dbms_output.put_line('Error1 Nodata-->'||SQLERRM);
 13  WHEN OTHERS THEN
 14    dbms_output.put_line('Error1 others-->'||SQLERRM);
 15  END;
 16
 17  FOR I IN (SELECT 'BEGIN ' || chr(10) ||
 18             'DBMS_PDB.SET_METADATA_LINKED('&P_APPROOT_USER'' || ',' || chr(10) ||
 19             'Object_Name || ',' || Namespace || ');' || chr(10) ||
 20             'EXCEPTION ' || chr(10) || 'WHEN OTHERS then ' || chr(10) ||
 21             'DBMS_OUTPUT.PUT_LINE(''ERROR ->' || SQLERRM);' ||
 22             chr(10) || 'END;' sqlobject
 23           FROM user_objects
 24           WHERE sharing = 'NONE'
 25           AND object_type NOT IN ('INDEX', 'LOB', 'TABLE PARTITION', 'SEQUENCE')
 26           AND (object_name NOT LIKE '%*%')
 27           AND (created_appid = (select app_id from dba_applications where app_name = l_app_name) OR
 28              modified_appid = (select app_id from dba_applications where app_name = l_app_name)) ) LOOP
 29    DBMS_OUTPUT.PUT_LINE(chr(10));
 30    EXECUTE IMMEDIATE I.sqlobject;
 31  END LOOP;
 32  EXCEPTION
 33  WHEN OTHERS THEN
 34    DBMS_OUTPUT.PUT_LINE('Error ->'||SQLERRM);
 35  END;
 36 /
Enter value for p_approot_user: HUBUSER
old 18:          'DBMS_PDB.SET_METADATA_LINKED('&P_APPROOT_USER'' || ',' || chr(10) ||
new 18:          'DBMS_PDB.SET_METADATA_LINKED(''HUBUSER'' || ',' || chr(10) ||

PL/SQL procedure successfully completed.
SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>

```

## 8. Recompilation of invalids

- a. Login into the Approot Schema as Common user.
- b. Run 08\_Invalids\_Recompilation.sql for recompiling the invalids during application upgrade.
- c. No user input is required for this step.
- d. Script will be executed as in the screen shot below and keep the SQL Plus session open for upcoming steps.

Execution Screenshot:

```

C:\app\client\prdbalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application Upgrade Invalids Recompilation
Welcome to Application Upgrade Invalids Recompilation
SQL> SPOOL '%%SPOOL_PATH'
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Review\Attachment\AVAILS\055pool.txt
SQL>
SQL> DECLARE
  2   inval_cnt NUMBER := 0;
  3 BEGIN
  4   WHILE inval_cnt < 3 LOOP
  5     --SCRIPT
  6     FOR j IN (select 'alter ' || object_type || ' ' || object_name || ' compile' invalidobject1
  7              FROM user_objects
  8              WHERE status = 'INVALID'
  9              AND object_type IN ('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER')
  10             )
  11     LOOP
  12       DBMS_OUTPUT.PUT_LINE(chr(10));
  13       EXECUTE IMMEDIATE j.invalidobject1;
  14     END LOOP;
  15     inval_cnt := inval_cnt + 1;
  16   END LOOP;
  17 END;
  18 /

PL/SQL procedure successfully completed.
SQL>
SQL> DECLARE

```

```

C:\app\client\prdbalac\product\18.0.0\client_1\bin\sqlplus.exe

PL/SQL procedure successfully completed.
SQL> select count(*) From user_objects Where status = 'INVALID';
COUNT(*)
-----
         0
1 row selected.

SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>
SQL>
SQL> _

```

**9. End Application upgrade**

- a. Login into the Apropot Schema as Common user.
- b. Run 06\_End\_Upgrade.sql for recompiling the invalids during application upgrade.
- c. No user input is required for this step.
- d. Script will be executed as that of step 4.

**10. Synchronize application PDBs**

- a. Login into the PDB Schema as Common user. For each PDB, this steps has to be done individually.
- b. Run 07\_PDB\_Sync.sql for synching the application upgrade with PDBs.
- c. No user input is required for this step.
- d. Script will be executed as in the screen shot below.

## Execution Screenshot:

```
C:\app\client\pribala\product\18.0.0\client_1\bin\sqlplus.exe
SQL> SPOOL ON
SQL> SET SQLBLANKLINES ON
SQL> SET SERVEROUTPUT ON
SQL> SET ERRORLOGGING ON
SQL> SET ECHO ON
SQL> prompt Welcome to Application PDB Sync
Welcome to Application PDB Sync
SQL> SPOOL '&SPOOL_PATH'
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\085pool.txt
SQL>
SQL> DECLARE
  2   l_app_name  VARCHAR2(128);
  3   l_sql      VARCHAR2(256);
  4 BEGIN
  5
  6   BEGIN
  7       SELECT app_name
  8             INTO l_app_name
  9             FROM dba_applications
10            WHERE app_implicit <> 'Y';
11   EXCEPTION
12     WHEN NO_DATA_FOUND THEN
13       dbms_output.put_line('Error1 Nodata-->'||SQLERRM);
14     WHEN OTHERS THEN
15       dbms_output.put_line('Error1 others-->'||SQLERRM);
16   END;
17   l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name || ' SYNC ';
18   dbms_output.put_line('l_sql: ' || l_sql);
19   EXECUTE IMMEDIATE l_sql;
20 EXCEPTION
21   WHEN OTHERS THEN
22     dbms_output.put_line('Error -->'||SQLERRM);
23 END;
24 /
l_sql: ALTER PLUGGABLE DATABASE APPLICATION FCUBS SYNC
PL/SQL procedure successfully completed.
SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>
```

---

# 01\_Start\_Upgrade

This script is used for initiating an application upgrade. This will initiate the application from current version to the next version (patch-set version).

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade initiation
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name    VARCHAR2(128);
    l_app_currver VARCHAR2(30);
    l_sql         VARCHAR2(256);
BEGIN

    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y'
            AND app_name = (SELECT param_val FROM cstb_param WHERE
Param_name = 'MULTI_TENANT_APP_NAME');
        EXCEPTION
            WHEN NO_DATA_FOUND THEN
                dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
            WHEN OTHERS THEN
                dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;

    BEGIN
        SELECT MAX(app_version)
            INTO l_app_currver
            FROM dba_app_versions
            WHERE app_name = l_app_name;
        EXCEPTION
```

---

```

        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error2 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error2 others--->'||SQLERRM);
    END;

    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN
    UPGRADE '''|| l_app_currver || ''' TO '''|| '&P_APPLICATION_NEXTVER' ||'''';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

    l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('Error --->'||SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF

```

---

# Recompilation of invalids

Recompilation of objects will be initiated inside the application upgrade for sanity with zero invalids with the below script:

## Syntax

```
/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
        FOR J IN (Select 'alter ' || object_type || ' ' || object_name
|| ' compile' invalidobject1,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NOT NULL
                AND object_type IN
('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER','MATERIALIZED VIEW'))
        LOOP
            BEGIN
                l_object_name := j.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE J.invalidobject1;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('failed for -->' ||
l_object_name);
            END;
        END LOOP;
    END LOOP;
END;
```

```

        END LOOP;
        inval_cnt := inval_cnt + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
DECLARE
    inval_cnt1        NUMBER := 0;
    l_object_name     VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package ' || object_name || ' compile body'
invalidobject2,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NOT NULL
                AND object_type IN ('PACKAGE BODY'))
        LOOP
            BEGIN
                l_object_name := k.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE k.invalidobject2;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
select count(*) From user_objects Where status = 'INVALID';

SET ERRORLOGGING OFF
SPOOL OFF

```



---

# End Application upgrade

This script is run for ending an application upgrade for patch-set.

## Pre-requisites:

Step 3 on Application associated pdb creation is completed

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application end Upgrade
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name    VARCHAR2(128);
    l_sql         VARCHAR2(256);
BEGIN
    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y'
            AND app_name = (SELECT param_val FROM cstb_param WHERE
param_name = 'MULTI_TENANT_APP_NAME');
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;
    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||'
END UPGRADE ';
    dbms_output.put_line('l_sql: ' || l_sql);

    EXECUTE IMMEDIATE l_sql;
```

---

```
EXCEPTION
WHEN OTHERS THEN
    DBMS_OUTPUT.PUT_LINE('Error --->'||SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF
```

---

# End Application upgrade

This script runs the invalid script by connecting to the common user in approot outside the upgrade.

## Syntax

```
/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
        FOR J IN (Select 'alter ' || object_type || ' ' || object_name
|| ' compile' invalidobject1,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN
('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER','MATERIALIZED VIEW'))
        LOOP
            BEGIN
                l_object_name := j.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE J.invalidobject1;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('failed for -->' ||
l_object_name);
            END;
        END LOOP;
    END LOOP;
END;
```

```

        END LOOP;
        inval_cnt := inval_cnt + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
DECLARE
    inval_cnt1        NUMBER := 0;
    l_object_name     VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package ' || object_name || ' compile body'
invalidobject2,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN ('PACKAGE BODY'))
        LOOP
            BEGIN
                l_object_name := k.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE k.invalidobject2;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
select count(*) From user_objects Where status = 'INVALID';

SET ERRORLOGGING OFF
SPOOL OFF

```

---

# Start Application upgrade

This script is run to initiate another application upgrade for object conversion.

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade initiation
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name    VARCHAR2(128);
    l_app_currver VARCHAR2(30);
    l_sql         VARCHAR2(256);
BEGIN

    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y'
            AND app_name = (SELECT param_val FROM cstb_param WHERE
Param_name = 'MULTI_TENANT_APP_NAME');
        EXCEPTION
            WHEN NO_DATA_FOUND THEN
                dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
            WHEN OTHERS THEN
                dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;

    BEGIN
        SELECT MAX(app_version)
            INTO l_app_currver
            FROM dba_app_versions
            WHERE app_name = l_app_name;
        EXCEPTION
            WHEN NO_DATA_FOUND THEN
```

---

```
        dbms_output.put_line('Error2 Nodata--->'||SQLERRM);
    WHEN OTHERS THEN
        dbms_output.put_line('Error2 others--->'||SQLERRM);
END;

    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN
UPGRADE '''|| l_app_currver || ''' TO '''|| '&P_APPLICATION_NEXTVER' ||'''';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

    l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('Error --->'||SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF
```

---

# Application Root objects conversion for new objects

This script is used in converting the new DL objects during patch-set based on the deployment model of the application during installation.

## Syntax

```
/*      Script      for      Shared      Object      Conversion      for      patch-
set      */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Upgrade New object Conversion
SPOOL      "&SPOOL_PATH"

DECLARE
    l_count          NUMBER;
    l_app_deployment VARCHAR2(30);
BEGIN
    SELECT count(*)
        INTO l_count
        FROM user_objects
        WHERE sharing = 'NONE' --to get the new set of DL approot objects
        if any
        AND object_name IN
            (SELECT DISTINCT a.object_name
             FROM cstm_approot_objects a
             WHERE sharing = 'DL'
             AND UPPER(object_type) = 'TABLE'
             AND EXISTS (SELECT 1
                        FROM user_objects b
                        WHERE b.object_name = a.object_name)
             AND EXISTS (SELECT 1
                        FROM cstm_approot_functions_menu c
                        WHERE c.function_id = a.function_id
                        AND c.modifiable IN ('Y', 'S')));
    dbms_output.put_line('l_count:      ' || l_count);
```

```

IF l_count > 0 THEN
    dbms_output.put_line('New DL objects are available');
    SELECT param_val
    INTO l_app_deployment
    FROM cstb_param
    WHERE param_name = 'MULTI_TENANT_DEPLOYMENT_MODEL';
    dbms_output.put_line('l_app_deployment: '||l_app_deployment);

    IF l_app_deployment IS NOT NULL AND l_app_deployment = 'SAUA' THEN
        UPDATE smtb_menu menu
        SET menu.aproot_flg = 'Y'
        WHERE menu.function_id IN
            (SELECT function_id
             FROM cstm_aproot_functions_menu
             WHERE modifiable = 'S'
            UNION
            SELECT summary_fn_id
             FROM cstm_aproot_functions_menu
             WHERE modifiable = 'S'
             AND summary_fn_id IS NOT NULL) --SMS function id 'S'
            AND menu.aproot_flg <> 'Y'; --excluding the already modified
    aproot function ids in menu.
    ELSIF l_app_deployment IS NOT NULL AND l_app_deployment = 'SASDD'
    THEN
        UPDATE smtb_menu menu
        SET menu.aproot_flg = 'Y'
        WHERE menu.function_id IN
            (SELECT function_id
             FROM cstm_aproot_functions_menu
            UNION
            SELECT summary_fn_id
             FROM cstm_aproot_functions_menu
             WHERE summary_fn_id IS NOT NULL)
            AND menu.aproot_flg <> 'Y'; --excluding the already modified
    aproot function ids in menu.
    ELSIF l_app_deployment IS NOT NULL AND l_app_deployment = 'SASDC'
    THEN
        /*Assumption new table cstm_aproot_menu_custom_movedtopdb will be
        available
        and is populated with the function ids which are moved to PDB as
        part of custom deployment
        It has 2 columns FUNCTION_ID and SUMMARY_FN_ID*/

        UPDATE smtb_menu menu
        SET menu.aproot_flg = 'Y'
        WHERE menu.function_id IN
            (SELECT function_id
             FROM cstm_aproot_functions_menu
            UNION
            SELECT summary_fn_id
             FROM cstm_aproot_functions_menu
             WHERE summary_fn_id IS NOT NULL)
            AND menu.function_id NOT IN --excluding the function ids
    moved to PDB already.

```



```

        (SELECT function_id
           FROM cstm_aproot_menu_movedtopdb
        UNION
        SELECT summary_fn_id
           FROM cstm_aproot_menu_movedtopdb
           WHERE summary_fn_id IS NOT NULL)
        AND menu.aproot_flg <> 'Y'; --excluding the already
modified aproot function ids in menu.
    END IF;

    BEGIN
        FOR I IN (SELECT 'BEGIN ' || chr(10) ||
'DBMS_PDB.SET_DATA_LINKED('&P_APPROOT_USER'' || ', '' ' ||
                        Object_Name || ', ' || Namespace || '); '
|| chr(10) ||
                        'EXCEPTION ' || chr(10) ||
                        'WHEN OTHERS THEN ' || chr(10) ||
                        'DBMS_OUTPUT.PUT_LINE(''ERROR ->'' ||
SQLERRM); ' ||
                        chr(10) || 'END;' sqlobject
        FROM user_objects
        WHERE sharing = 'NONE' --to get the new set of DL
aproot objects if any
            AND object_name IN
            (SELECT DISTINCT a.object_name
              FROM cstm_aproot_objects a
              WHERE sharing = 'DL'
                AND UPPER(object_type) = 'TABLE'
                AND EXISTS (SELECT 1
                           FROM user_objects b
                           WHERE b.object_name =
a.object_name)
                AND EXISTS
            (SELECT 1
              FROM cstm_aproot_functions_menu
c
                WHERE c.function_id =
a.function_id
                AND c.modifiable IN ('Y',
'S')))) LOOP
            DBMS_OUTPUT.PUT_LINE(chr(10));
            EXECUTE IMMEDIATE I.sqlobject;
            DBMS_OUTPUT.PUT_LINE(I.sqlobject);
        END LOOP;
    EXCEPTION
        WHEN OTHERS THEN
            DBMS_OUTPUT.PUT_LINE('Error --->' || SQLERRM);
    END;
ELSE
    dbms_output.put_line('No new DL objects available');
END IF;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('Error --->' || SQLERRM);

```

---

```
END;  
/
```

```
SET ERRORLOGGING OFF  
SPOOL OFF
```

---

# Object\_Conversion

## Purpose

This script is used for converting the modified MDL objects when there is a re-creation [objects with Create or Replace command during creation] happens during patch-set

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Upgrade object conversion
SPOOL "&SPOOL_PATH"
BEGIN
    FOR I IN (SELECT 'BEGIN ' || chr(10) ||

'DBMS_PDB.SET_METADATA_LINKED('&P_APPROOT_USER' || ', ' ||
                                Object_Name || ', ' || Namespace || '); ' ||
chr(10) ||
                                'EXCEPTION ' || chr(10) || 'WHEN OTHERS then '
|| chr(10) ||
                                'DBMS_OUTPUT.PUT_LINE(''ERROR ->' || SQLERRM);
' ||
                                chr(10) || 'END;' sqlobject
                                FROM user_objects
                                WHERE sharing = 'NONE'
                                AND object_type NOT IN ('INDEX', 'LOB', 'TABLE
PARTITION', 'SEQUENCE', 'JOB', 'MATERIALIZED VIEW', 'MATERIALIZED VIEW
LOG')
                                AND application = 'Y'
                                AND (object_name,object_type) NOT IN (SELECT
object_name,object_type
                                FROM
cstm_approot_objects
                                WHERE
function_id = 'DYNAMIC'
                                AND
sharing =
```

---

```
'NONE'
)
    ) LOOP
      dbms_output.put_line(chr(10));
      EXECUTE IMMEDIATE I.sqlobject;
      dbms_output.put_line(I.sqlobject);
    END LOOP;
EXCEPTION
WHEN OTHERS THEN
  dbms_output.put_line('Error --->'||SQLERRM);
END;
/
SET ERRORLOGGING OFF
SPOOL OFF
```

---

# Invalids\_Recompilation\_Inside\_Upgrade

## Purpose

This script is used to initiate the recompilation of objects inside the application upgrade for sanity.

## Syntax

```
/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
        FOR J IN (Select 'alter ' || object_type || ' ' || object_name
|| ' compile' invalidobject1,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NOT NULL
                AND object_type IN
('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER','MATERIALI
ZED VIEW'))
        LOOP
            BEGIN
                l_object_name := j.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE J.invalidobject1;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('failed for -->' ||
```

```

l_object_name);
        END;
    END LOOP;
    inval_cnt := inval_cnt + 1;
END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
DECLARE
    inval_cnt1          NUMBER := 0;
    l_object_name       VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package '|| object_name||' compile body'
invalidobject2,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NOT NULL
                AND object_type IN ('PACKAGE BODY'))
        LOOP
            BEGIN
                l_object_name := k.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE k.invalidobject2;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
select count(*) From user_objects Where status = 'INVALID';

SET ERRORLOGGING OFF
SPOOL OFF

```

---

# End\_Upgrade

## Purpose

This script is run for ending an application upgrade for patch-set.

## Syntax

```
/* Pre-requisites: Step 3 on Application associated pdb creation is
completed */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application end Upgrade
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name VARCHAR2(128);
    l_sql VARCHAR2(256);
BEGIN
    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y'
            AND app_name = (SELECT param_val FROM cstb_param WHERE
param_name = 'MULTI_TENANT_APP_NAME');
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;
    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||'
END UPGRADE ';
    dbms_output.put_line('l_sql: ' || l_sql);

    EXECUTE IMMEDIATE l_sql;
```

---

```
EXCEPTION
WHEN OTHERS THEN
    DBMS_OUTPUT.PUT_LINE('Error --->' || SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF
```



---

# Invalids\_Recompilation\_Outside\_Upgrade. sql

## Purpose

This script is run for invalid script by connecting to the common user in approot outside the upgrade.

## Syntax

```
/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
        FOR J IN (Select 'alter ' || object_type || ' ' || object_name
|| ' compile' invalidobject1,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN
('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER','MATERIALI
ZED VIEW'))
        LOOP
            BEGIN
                l_object_name := j.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE J.invalidobject1;
            EXCEPTION
```

```

                WHEN OTHERS THEN
                    dbms_output.put_line('failed for -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt := inval_cnt + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
DECLARE
    inval_cnt1          NUMBER := 0;
    l_object_name       VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package ' || object_name || ' compile body'
invalidobject2,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN ('PACKAGE BODY'))
        LOOP
            BEGIN
                l_object_name := k.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE k.invalidobject2;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
select count(*) From user_objects Where status = 'INVALID';

SET ERRORLOGGING OFF
SPOOL OFF

```

---

# PDB\_Sync

## Purpose

This script is run to synchronize the PDBs with the latest application changes in the application root.

## Syntax

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application PDB Sync
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name VARCHAR2(128);
    l_sql VARCHAR2(256);
BEGIN
    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y';
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;
    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||'
SYNC ';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

EXCEPTION
WHEN OTHERS THEN
    dbms_output.put_line('Error --->'||SQLERRM);
END;
```

---

/

SET ERRORLOGGING OFF  
SPOOL OFF

# Glossary

# Index

## A

---

Application Upgrade, [1-2](#)

## P

---

Pre-Requisites, [3-1](#)