

Oracle® Fusion Middleware

Developing Persistence Architectures Using Oracle TopLink Database Web Services



14c (14.1.2.0.0)
G17427-01
December 2024

ORACLE®

G17427-01

Copyright © 2014, 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface

Audience	v
Documentation Accessibility	v
Diversity and Inclusion	v
Related Documents	vi
Conventions	vi

1 EclipseLink DBWS Overview

Understanding XML-to-Relational Mapping (XRM)	1-1
Configuration	1-2
XML Schema Definition	1-4
Understanding the DBWS Builder File Properties	1-5
Creating EclipseLink DBWS Services	1-6
Creating EclipseLink DBWS Services Using the DBWSBuilder Utility	1-8
Creating an EclipseLink DBWS Service from a Database Table	1-9
Creating an EclipseLink DBWS Service from a SQL Statement	1-9
Creating an EclipseLink DBWS Service from a Stored Procedure	1-10
Customizing an EclipseLink DBWS Service	1-11
Performing Simple Customization	1-11
Performing Intermediate Customization	1-12
Performing Advanced Customization	1-13
Using DBWSBuilder API	1-13
Using the DBWS Design Time Component	1-15

2 Creating DBWS Services

Creating EclipseLink DBWS Service from a Database Table	2-1
Generated EclipseLink DBWS service descriptor	2-3
SOAP Messaging	2-4
Using an EclipseLink SessionCustomizer	2-4
Example	2-5
Advanced Customization	2-5
Using Existing EclipseLink ORM and OXM Mappings	2-6

Creating a DBWS Service from SQL Statements	2-7
Creating from Results Sets from Custom SQL SELECT Statements	2-7
Generated EclipseLink DBWS Service Descriptor	2-8
Creating based on Schema-formatted Results from Custom SQL SELECT Statements	2-11
Additional information at Design Time	2-11
Understanding Issues and Limitations	2-12
Creating from a Stored Procedure	2-13
Example	2-13
Creating from a Stored Function	2-14
Example	2-14
Creating from a Stored Procedure with complex PL/SQL arguments	2-15
Example	2-15
Creating from a Stored Function with complex PL/SQL arguments	2-17
Example	2-17
Creating from an Overloaded PL/SQL Stored Procedure	2-19
Example	2-19

3 Advanced Methods of Accessing DBWS DesignTime API

Integrating with JDeveloper	3-1
Using DBWSBuilder with Ant	3-1
Example	3-1
Using with javac	3-2

Index

Preface

Oracle TopLink provides specific annotations (*Oracle TopLink extensions*) in addition to supporting the standard Java Persistence Architecture (JPA) annotations. You can use these Oracle TopLink extensions to take advantage of Oracle TopLink's extended functionality and features within your JPA entities.

TopLink uses (and includes) EclipseLink as its default JPA provider.

Audience

This document is intended for application developers who want to develop applications using Oracle TopLink with Java Persistence Architecture (JPA). This document does not include details about related common tasks, but focuses on Oracle TopLink functionality.

Developers should be familiar with the concepts and programming practices of

- Java SE and Java EE.
- Java Persistence Architecture 2.2 specification (<http://jcp.org/en/jsr/detail?id=338>)
- EclipseLink (<http://www.eclipse.org/eclipselink>)
- Eclipse IDE (<http://www.eclipse.org>)

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Related Documents

For more information, see the following documents:

- *Understanding Oracle TopLink*
- *Java API Reference for Oracle TopLink*
- *Release Notes for Oracle TopLink*
- EclipseLink Documentation Center at <http://www.eclipse.org/eclipselink/documentation/>

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

1

EclipseLink DBWS Overview

This chapter introduces and describes EclipseLink DBWS which provides Java EE-compliant, client-neutral access to relational database artifacts via a Web service. EclipseLink DBWS extends EclipseLink's core capabilities while leveraging its existing ORM and OXM components.

EclipseLink DBWS includes two parts

- A **design-time** component, the `DBWSBuilder` command-line utility, that generates the necessary deployment artifacts.
- A **runtime provider** component that takes a service descriptor (along with related deployment artifacts) and realizes it as a JAX-WS 2.0 Web service. The runtime provider uses EclipseLink to bridge between the database and the XML SOAP Messages used by Web service clients.

An EclipseLink DBWS service may include any number of the following **operations**:

1. `insert` – inserts into the database persistent entities described by an XML document.
2. `update` – updates database persistent entities described by an XML document.
3. `delete` – removes from the database persistent entities described by an XML document.
4. `query` – retrieves from the database persistent entities described by an XML document.

Selection criteria for Query operations can be specified by:

- custom SQL `SELECT` statement
- Stored Procedure invocation
- EclipseLink Named Query (that can use the complete range of EclipseLink ORM Expression Framework APIs)
- JP-QL

The XML documents used by an **operation** conform to an XML Schema Definition (`.xsd` file).


This chapter includes the following sections:

- [Understanding XML-to-Relational Mapping \(XRM\)](#)
- [Understanding the DBWS Builder File Properties](#)
- [Creating EclipseLink DBWS Services](#)
- [Using the DBWS Design Time Component](#)

Understanding XML-to-Relational Mapping (XRM)

EclipseLink's ORM and OXM features provides the basis for a powerful bridge between a database's relational structure(s) and XML's hierarchical structure.

Figure 1-1 EclipseLink XR Architecture

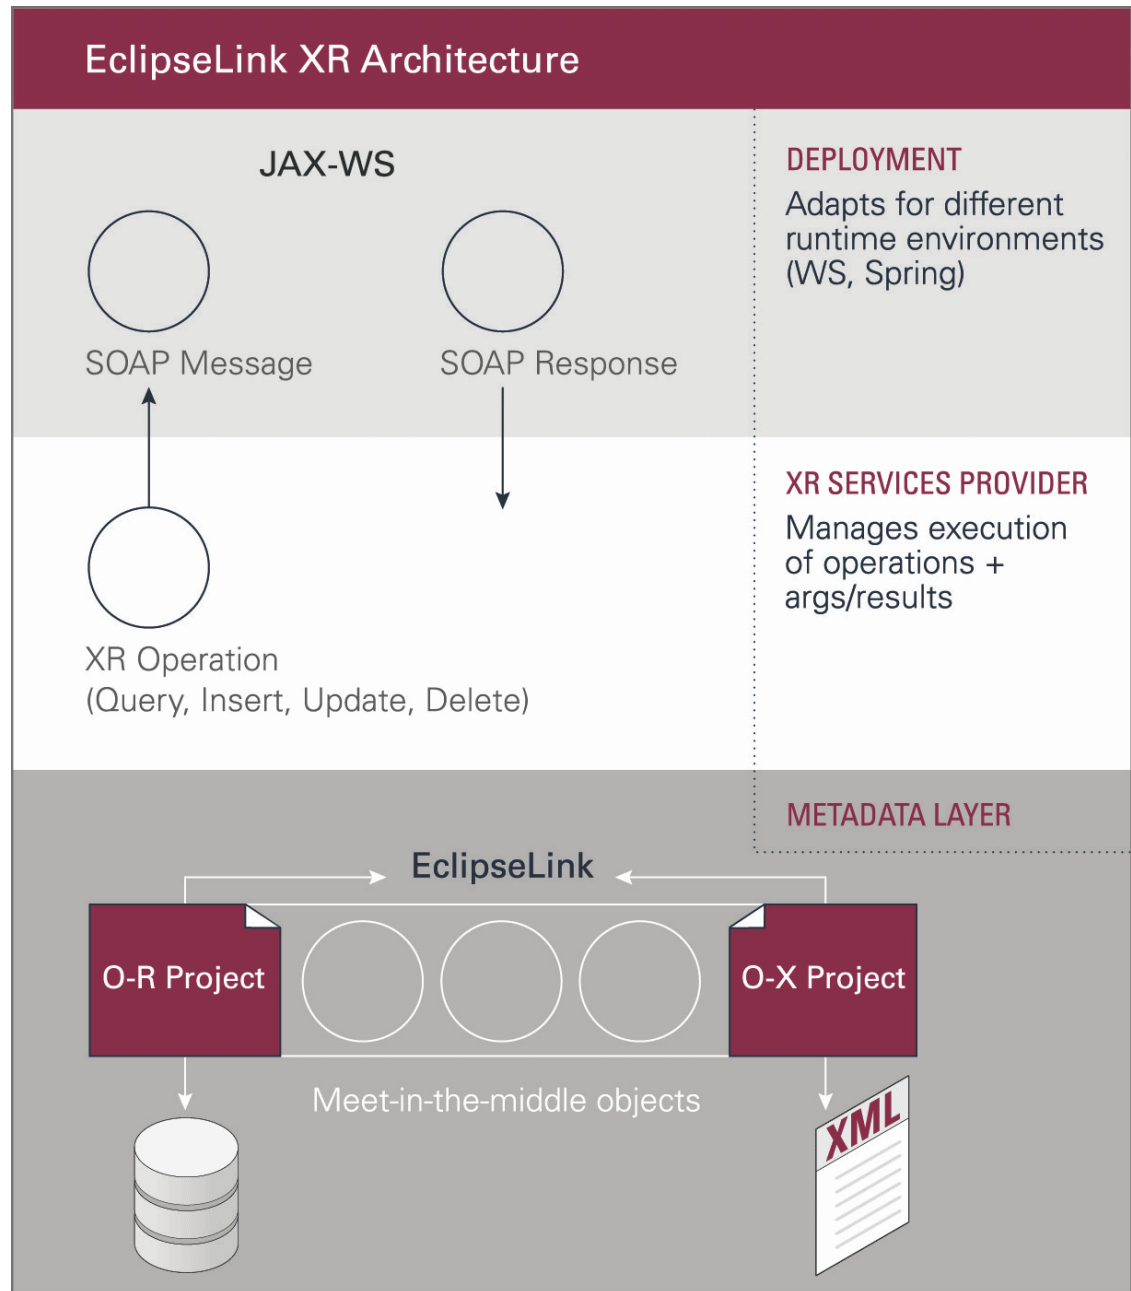

Configuration

A typical EclipseLink DBWS service is packaged in an archive (.jar or .war file) with a service descriptor file `eclipselink-dbws.xml` in the `META-INF` directory (or `WEB-INF/classes/META-INF` when packaged in a .war file). To bridge the relational database and XML worlds, an EclipseLink `sessions.xml` (`eclipselink-dbws-sessions.xml`) points to two Eclipse projects: one for the ORM side, the other for the OXM side. The service also requires an XML Schema Definition file `eclipselink-dbws-schema.xsd` which in conjunction with the OXM project, specifies how information from the database is to be "shaped" into XML documents.

Figure 1-2 Typical EclipseLink DBWS Service Files**Note:**

Not all files are displayed.

The EclipseLink DBWS service descriptor file, `eclipselink-dbws.xml`, is easy to read, with minimal required information and simple defaults for omitted fields. This allows for auto-generation by a utility or manual editing. [Example 1-1](#) illustrates a sample DBWS service descriptor file.

[Table 1-1](#) describes the elements of the EclipseLink DBWS service descriptor file.

Table 1-1 EclipseLink DBWS Service Descriptor File Elements

Element	Description	Required?	Default
name	Name of the EclipseLink DBWS service.	Yes, set by the <code>projectName</code> property in the <code>DBWSBuilder</code> .	None
sessions-file	Name of the EclipseLink sessions.xml file.	No	<code>eclipselink-dbws-sessions.xml</code>
Any of the following: • insert • update • delete • query	Service operations	At least one operation	None

Example 1-1 Example DBWS Service descriptor file

```

<?xml version="1.0" encoding="UTF-8"?>
<dbws
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  >
  
```

```

<name>example</name>
<sessions-file>example-dbws-sessions.xml</sessions-file>
<query>
  <name>countEmployees
  <result>
    <type>xsd:int</type>
  </result>
  <sql><!--[CDATA[select count(*) from EMP]]--></sql>
</query>
</dbws>

```

XML Schema Definition

The EclipseLink DBWS service schema file `eclipselink-dbws-schema.xsd` can be created by hand, or auto-generated by the design-time `DBWSBuilder` utility that derives XML element-tag names from Database metadata (column names, types, nullable, and so on).

The `DBWSBuilder` utility will not generate an XML Schema Definition when the information returned by a query operation has no pre-determined structure, such as:

- a `resultSet` from a custom SQL **query operation**
- the results from a Stored Procedure **query operation**
- the row-count from an **update operation**

In these cases, the EclipseLink DBWS runtime provider uses information only available at the time of query execution to build the XML document:

Example 1-2 Example Simple XML Format (SXF) document

Element tag names are direct copies of table's column names.

```

<?xml version = '1.0' encoding = 'UTF-8'?>
<simple-xml-format>
  <simple-xml>
    <EMPNO>7788</EMPNO>
    <ENAME>SCOTT</ENAME>
    <JOB>ANALYST</JOB>
    <MGR>7566</MGR>
    <HIREDATE>1987-04-19T00:00:00.000-0400</HIREDATE>
    <SAL>3000</SAL>
    <DEPTNO>20</DEPTNO>
  </simple-xml>
  <simple-xml>
    <EMPNO>7369</EMPNO>
    <ENAME>SMITH</ENAME>
    <JOB>CLERK</JOB>
    <MGR>7902</MGR>
    <HIREDATE>1980-12-17T00:00:00.000-0400</HIREDATE>
    <SAL>800</SAL>
    <DEPTNO>20</DEPTNO>
  </simple-xml>
</simple-xml-format>

```

These XML documents are "dumb," as they cannot be validated against any pre-determined schema - or more accurately, only the following very *permissive* "sequence-of-any" schema can validate such documents:

Example 1-3 Simple XML Format Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  >
  <xsd:complexType name="simple-xml-format">
    <xsd:sequence>
      <xsd:any minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:schema>
```

The element tags `simple-xml-format` and `simple-xml` can be customized by setting the appropriate properties on an **operation**.

Understanding the DBWS Builder File Properties

Use the `<property>` element in the DBWS Builder XML file to define the necessary server properties, as shown in [Example 1-4](#)

See [Example 1-5](#) and [Example 1-6](#) for additional samples of a DBWS Builder XML file.

[Table 1-2](#) defines the valid `<property>` values:

Table 1-2 DBWS Builder File Properties

Property	Description
projectName	Name of the DBWS project. Default = myProject
logLevel	Defines the amount and detail TopLink writes to the log. Valid values: off, severe, warning, info (default), config, fine, fine, finest, and all. See in "logging.level" in <i>Java Persistence API (JPA) Extensions Reference for Oracle TopLink</i> for details.
username	Username used to log into the database.
password	Password of the username used to log into the database.
url	Database URL.
driver	Database driver.
platformClassname	Specify the database platform. This must be a fully qualified class name that extends DatabasePlatform. Default = org.eclipse.persistence.platform.database.OraclePlatform
targetNamespace	The target namespace value applied to generated types. Default = urn:projectName
orSessionCustomizerClassName	Name of the session customizer applied to the ORM session. See in "session.customizer" in <i>Java Persistence API (JPA) Extensions Reference for Oracle TopLink</i> for details.

Table 1-2 (Cont.) DBWS Builder File Properties

Property	Description
oxSessionCustomizerClassName	Name of the session customizer applied to the OXM session. See in "session.customizer" in <i>Java Persistence API (JPA) Extensions Reference for Oracle TopLink</i> for details.
dataSource	JNDI name of the data source, as defined on the target application server.
wsdlLocationURI	Location URI value, set in generated WSDL. Default = REPLACE_WITH_ENDPOINT_ADDRESS

Example 1-4 Sample DBWS Builder XML file

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">procedure_test</property>
    <property name="logLevel">off</property>
    <property name="username">myName</property>
  ...
  </properties>
  ...
```

Creating EclipseLink DBWS Services

You can generate a WAR file containing the EclipseLink DBWS service descriptor along with all required deployment artifacts for a JAX-WS 2.0 Web service (WSDL, XML schema, `web.xml`, EclipseLink object-relational mapping (ORM) and object-XML mapping (OXM) native project XML files, and so on).

Figure 1-3 Contents of WAR File

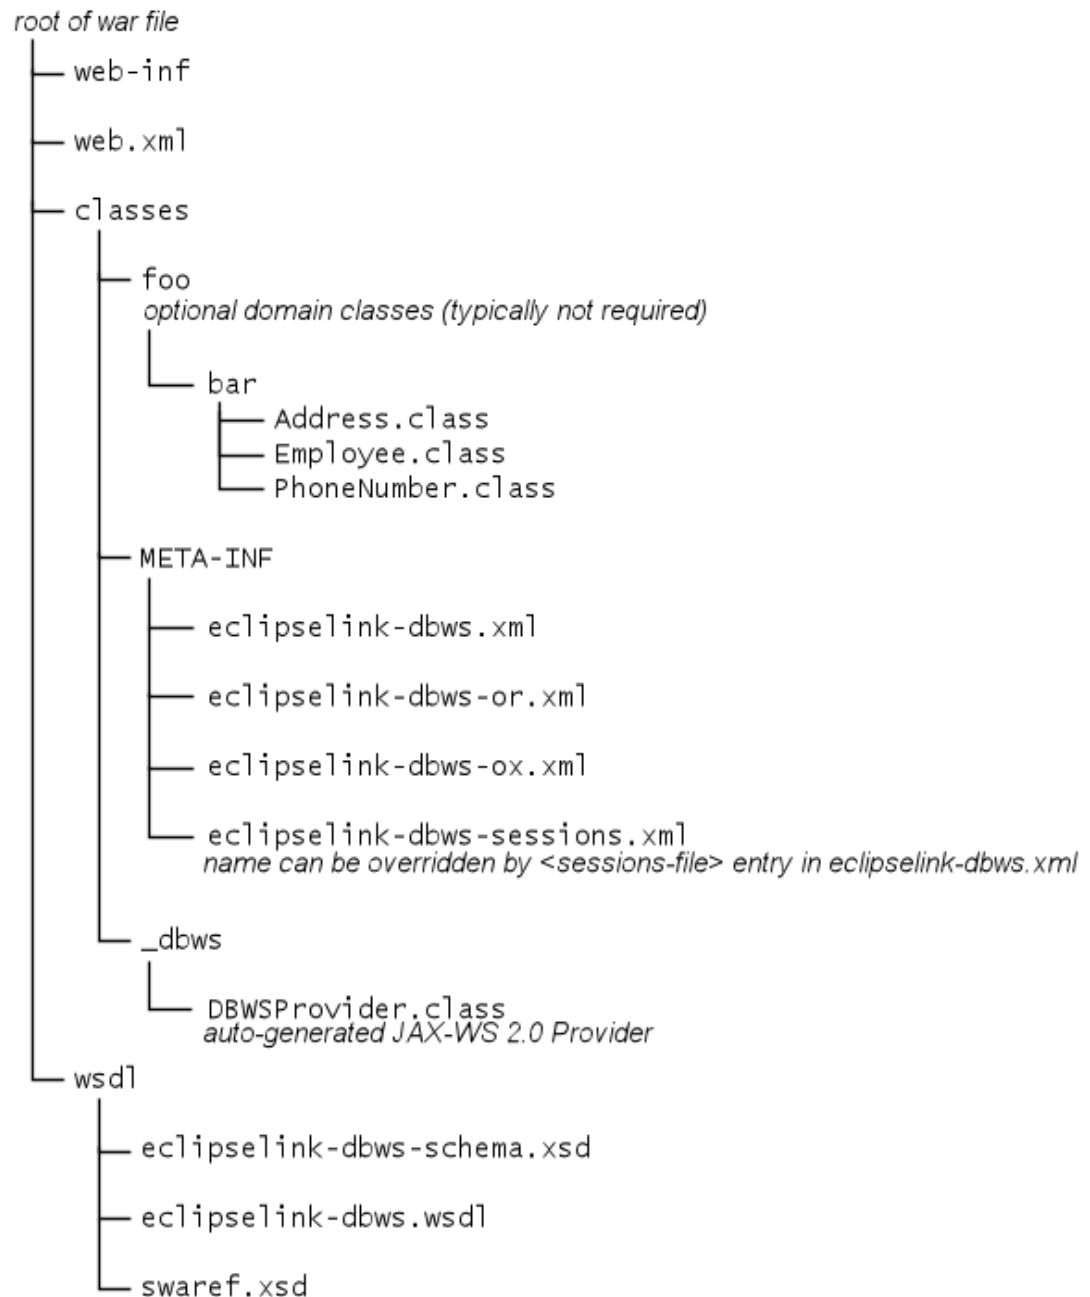


Table 1-3 EclipseLink DBWS Service .war File Contents

File	Description
web.xml	The Web application deployment file, required for deployment as a JAX-WS Web service. See JSR-109 for details.
eclipselink-dbws.xml	The EclipseLink DBWS service descriptor file, described in Table 1-1 .

Table 1-3 (Cont.) EclipseLink DBWS Service .war File Contents

File	Description
eclipselink-dbws-or.xml	The EclipseLink ORM project XML file. For more information, see "Introduction to Relational Projects" http://wiki.eclipse.org/Introduction_to_Relational_Projects_%28ELUG%29 .
eclipselink-dbws-ox.xml	The EclipseLink OXM project XML file. For more information, see "Introduction to XML Projects" http://wiki.eclipse.org/Introduction_to_XML_Projects_%28ELUG%29 .
eclipselink-dbws-sessions.xml	The EclipseLink sessions.xml file for the EclipseLink DBWS service. This file contains references to the EclipseLink ORM and OXM project XML files. For more information, see "Introduction to EclipseLink Sessions" http://wiki.eclipse.org/Introduction_to_EclipseLink_Sessions_%28ELUG%29 .
eclipselink-dbws-schema.xsd	Contains XML type definitions for operation arguments and return types. The DBWSBuilder utility automatically generates this file from database metadata to derive element-tag names and types.
eclipselink-dbws.wsdl	Contains entries for all operations in the EclipseLink DBWS service, required for deployment as a JAX-WS Web service. See JSR-109 for details (http://jcp.org/en/jsr/detail?id=337).
swaref.xsd	Contains XML type definitions for SOAP attachments, optional

Note that the files `swaref.xsd` and `web.xml` have names and content determined by their roles in Web deployment and cannot be changed.

The deployable `.war` file has been verified to work with the Oracle WebLogic Server 14.1.1 JavaEE container.

An alternate deployable JAR file has been verified to work as a JavaSE 8 EndPoint. See <https://docs.oracle.com/javase/8/docs/api/javax/xml/ws/Endpoint.html>.

Creating EclipseLink DBWS Services Using the DBWSBuilder Utility

This section describes how to create EclipseLink DBWS services using the `DBWSBuilder` utility.

You can use the EclipseLink DBWS design-time utility `DBWSBuilder` to create deployment files. `DBWSBuilder` is a Java application that processes the operations described in an EclipseLink DBWS builder XML file to produce all the required deployment artifacts.

**Note:**

See http://wiki.eclipse.org/EclipseLink/UserGuide/DBWS/Overview/EclipseLink_DBWSBuilder_File_%28ELUG%29 for a listing of the properties of the DBWSBuilder file.

Be sure to set the following environment variables in the <ECLIPSELINK_HOME>\bin\setenv.cmd (or setenv.sh file) before invoking DBWSBuilder:

- JAVA_HOME
- DRIVER_CLASSPATH

There are script files provided for invoking DBWSBuilder. They are located in the <ECLIPSELINK_HOME>\utils\dbws directory. The scripts are dbwsbuilder.cmd for Windows usage, and dbwsbuilder.sh for other operating systems. Run the dbwsbuilder.cmd (or dbwsbuilder.sh) script without any arguments to display the help information

Using DBWSBuilder, you can generate an EclipseLink DBWS service from the following sources:

- an existing relational database table;
- one or more SQL SELECT statements;
- a stored procedure.

Creating an EclipseLink DBWS Service from a Database Table

You can create an EclipseLink DBWSBuilder XML file with a <table> query operation, as follows:

Example 1-5 Sample DBWSBuilder XML File

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">table_test</property>
    ... database properties ...
  </properties>
  <table
    schemaPattern="%"
    tableNamePattern="dbws_crud"
  />
</dbws-builder>
```

For more information, see "[Creating EclipseLink DBWS Service from a Database Table](#)".

Creating an EclipseLink DBWS Service from a SQL Statement

You can create an EclipseLink DBWS builder XML file with a <sql> query operation, as follows:

Example 1-6 Sample DBWS Builder XML File

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">sql_test</property>
```

```

    ... database properties ...
  </properties>
  <sql name="employeeInfo" simpleXMLFormatTag="employee-info" xmlTag="aggregate-counts">
    <text>
      <![CDATA[select count(*) as "COUNT", max(SAL) as "MAX-Salary" from EMP]]>
    </text>
  </sql>
</dbws-builder>

```

Using Parameter Binding

The SQL `SELECT` statement for a `<sql>` operation may have parameters that must be bound to a datatype from the `eclipselink-dbws-schema.xsd`, or to any of the basic XSD datatypes. The SQL `SELECT` string uses JDBC-style `?` markers to indicate the position of the argument. The `<sql>` operation uses nested `<binding>` elements to match the datatype to the parameters. The order in which `<binding>` elements are defined must match the order of `?` markers in the SQL string:

```

<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">sql_binding_test</property>
    ... database properties ...
  </properties>
  <sql name="findEmpByName" isCollection="true" isSimpleXMLFormat="true">
    <text>
      <![CDATA[select * from EMP where EMPNO = ? and LAST_NAME = ?]]>
    </text>
    <binding name="EMPNO" type="xsd:int"/>
    <binding name="LAST_NAME" type="xsd:string"/>
  </sql>
</dbws-builder>

```

The argument named **EMPNO** is bound to an integer type, while the argument named **LAST_NAME** is bound to a string type.

For more information, see ["Creating a DBWS Service from SQL Statements"](#).

Creating an EclipseLink DBWS Service from a Stored Procedure

You can create an EclipseLink DBWS builder XML File with a `<procedure>` query operation, as shown in [Example 1-7](#).

Example 1-7 Using a `<procedure>` Query

```

<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">procedure_test</property>
    ... database properties ...
  </properties>
  <procedure
    returnType="empType"
    catalogPattern="SOME_PKG"
    schemaPattern="SCOTT"
    procedurePattern="GetEmployeeByEMPNO_DEPTNO"/>
  </procedure>
</dbws-builder>

```

For more information, see ["Creating from a Stored Procedure"](#).

Customizing an EclipseLink DBWS Service

There are a number use-cases that require an EclipseLink DBWS Service to be customized. The use-cases can be subdivided into the following categories:

- Simple – changing an `<element-tag>` to an "attribute";
- Intermediate – customizing the EclipseLink ORM or OXM projects;
- Advanced – manually generating all required deployment artifacts.

Performing Simple Customization

By default, DBWSBuilder-generated `eclipselink-dbws-schema.xsd` file derives `<element-tag>` names from the database table metadata, as shown in [Example 1-8](#).

Example 1-8 DBWSBuilder-generated eclipselink-dbws-schema.xsd File

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  >
  <xsd:complexType name="empType">
    <xsd:sequence>
      <xsd:element name="empno" type="xsd:int" xsi:nil="false"/>
      <xsd:element name="ename" type="xsd:string" xsi:nil="true"/>
      <xsd:element name="job" type="xsd:string" xsi:nil="true"/>
      <xsd:element name="mgr" type="xsd:int" minOccurs="0" xsi:nil="true"/>
      <xsd:element name="hiredate" type="xsd:dateTime" xsi:nil="true"/>
      <xsd:element name="sal" type="xsd:decimal" xsi:nil="true"/>
      <xsd:element name="comm" type="xsd:int" minOccurs="0" xsi:nil="true"/>
      <xsd:element name="deptno" type="xsd:int" xsi:nil="true"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:schema>
```

Use the `NamingConventionTransformer` to change an `<element>` tag to an attribute, as shown in [Example 1-9](#).

Example 1-9 Converting to an Attribute

```
public interface NamingConventionTransformer {

    public enum ElementStyle {
        ELEMENT, ATTRIBUTE, NONE
    };

    public String generateSchemaName(String tableName);

    public String generateElementAlias(String originalElementName);

    public ElementStyle styleForElement(String originalElementName);
}
```

For more information, see "Naming Convention for schema elements" in the EclipseLink documentation: <http://wiki.eclipse.org/EclipseLink/Examples/DBWS/DBWSIntermediateAttribute>.

Performing Intermediate Customization

The primary reason to use an EclipseLink `SessionCustomizer` is to enable programmatic access to the EclipseLink API. Using this API, you can retrieve the object-relational or object-XML mapping descriptors from the session, and then use these descriptors to add, change, or delete mappings. You could also consider turning off the session cache, or changing the transaction isolation level of the database connection.

The following example shows how to implement a
`org.eclipse.persistence.config.SessionCustomizer`:

```
package some.java.package;

import org.eclipse.persistence.config.SessionCustomizer;
import org.eclipse.persistence.sessions.Session;
import org.eclipse.persistence.sessions.DatabaseLogin;

public class MySessionCustomizer implements SessionCustomizer {

    public MySessionCustomizer() {
    }

    public void customize(Session session) {
        DatabaseLogin login = (DatabaseLogin)session.getDataSourceLogin();
        login.setTransactionIsolation(DatabaseLogin.TRANSACTION_READ_UNCOMMITTED);
    }
}
```

In the `DBWSBuilder` builder XML file, specify if the customization applies to the ORM project or the OXM project, as the following example shows:

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">customize_test</property>
    ...
  </property>
  name="orSessionCustomizerClassName">some.java.package.MyORSessionCustomizer</property>
```

or

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">customize_test</property>
    ...
  </property>
  name="oxSessionCustomizerClassName">some.java.package.MyOXSessionCustomizer</property>
```

For more information, see "Session Customization" in the EclipseLink documentation: http://wiki.eclipse.org/Introduction_to_EclipseLink_Sessions_%28ELUG%29#Session_Customization.

For more information, see "Sessions" in *Understanding Oracle TopLink*

Performing Advanced Customization

You can customize an EclipseLink DBWS service by creating your own `project.xml` and `sessions.xml` files. Using your preferred utility, you can do the following:

- map your objects to your relational database in an EclipseLink relational project;
- map your objects to your XML schema in an EclipseLink XML project;
- create an EclipseLink `sessions.xml` file that references both projects.

In this way, you can control all aspects of the relational and XML mapping. This approach is best when you want to customize most or all details. See "[Using Existing EclipseLink ORM and OXM Mappings](#)" for more information.

Using DBWSBuilder API


The EclipseLink DBWS design-time utility, `DBWSBuilder`, is a Java application that generates EclipseLink DBWS files and assembles them into deployable archives.

It is normally invoked from the command-line via its main method:

```
prompt > dbwsbuilder.cmd -builderFile {path_to_builder.xml} -stageDir {path_to_stageDir}
-packageAs {packager}
```

The given builder XML file ([Example 1-10](#)) is parsed by the OXM Project `org.eclipse.persistence.tools.dbws.DBWSBuilderModelProject` producing model objects that represent properties and `<table>` operations. Thus the public class `org.eclipse.persistence.tools.dbws.DBWSBuilder` can be populated programmatically through property setters (i.e. `setDriver()`, `setUrl()`) - table; SQL operations via `addSqlOperation()`.

The packager specified on the command-line is represented by a class that implements the `org.eclipse.persistence.tools.dbws.DBWSPackager` interface. There is a hierarchy of concrete implementations of this interface, shown in [Figure 1-4](#):

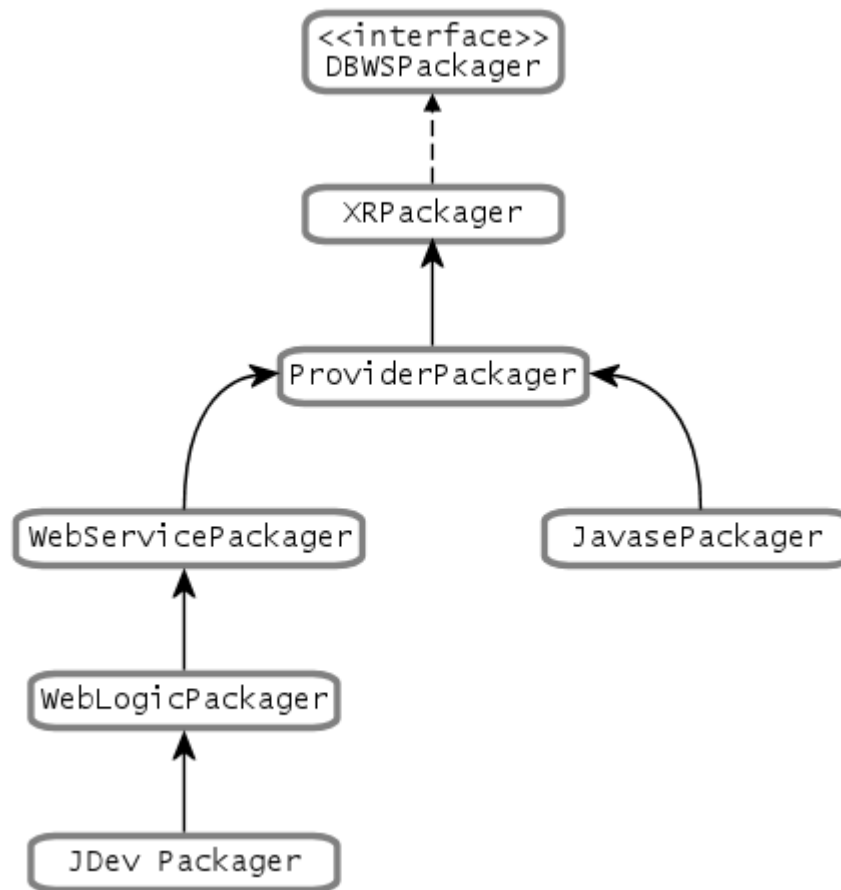Figure 1-4 Hierarchy of Concrete Implementation

The primary responsibility of a DBWSPackager is to provide `java.io.OutputStream`'s for the output generated by DBWSBuilder:

Example 1-10 Sample Builder XML File

```

<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">test</property>
    <property name="driver">oracle.jdbc.OracleDriver</property>
    <property name="password">tiger</property>
    <property name="url">jdbc:oracle:thin:@localhost:1521:ORCL</property>
    <property name="username">scott</property>
  </properties>
  <table
    catalogPattern="%"
    schemaPattern="SCOTT"
    tableNamePattern="EMP"
  />
</dbws-builder>

```

Example 1-11 Sample DBWSPackager

```

// call-backs for stream management
public OutputStream getSchemaStream() throws FileNotFoundException;

```

```

public void closeSchemaStream(OutputStream schemaStream);

public OutputStream getSessionsStream(String sessionsFileName) throws
FileNotFoundException;
public void closeSessionsStream(OutputStream sessionsStream);

public OutputStream getServiceStream() throws FileNotFoundException;
public void closeServiceStream(OutputStream serviceStream);

public OutputStream getOrStream() throws FileNotFoundException;
public void closeOrStream(OutputStream orStream);

public OutputStream getOxStream() throws FileNotFoundException;
public void closeOxStream(OutputStream oxStream);

public OutputStream getWSDLStream() throws FileNotFoundException;
public void closeWSDLStream(OutputStream wsdlStream);

public OutputStream getSWARefStream() throws FileNotFoundException;
public void closeSWARefStream(OutputStream swaRefStream);

public OutputStream getWebXmlStream() throws FileNotFoundException;
public void closeWebXmlStream(OutputStream webXmlStream);

public OutputStream getProviderClassStream() throws FileNotFoundException;
public void closeProviderClassStream(OutputStream codeGenProviderStream);

public OutputStream getProviderSourceStream() throws FileNotFoundException;
public void closeProviderSourceStream(OutputStream sourceProviderStream);

```

Once all the model objects have been built, the builder is invoked either through the `start()` method, or alternatively via the `build(...)` method, which overrides the streams from the `DBWSPackager`, allowing the streams to be managed externally to the packager:

```

public void start() ...

public void build(OutputStream dbwsSchemaStream, OutputStream dbwsSessionsStream,
    OutputStream dbwsServiceStream, OutputStream dbwsOrStream, OutputStream
dbwsOxStream,
    OutputStream swaRefStream, OutputStream webXmlStream, OutputStream wsdlStream,
    OutputStream codeGenProviderStream, OutputStream sourceProviderStream, Logger
logger) ...

```

Using the DBWS Design Time Component

You can use the EclipseLink DBWS design-time utility `DBWSBuilder` to create deployment files. `DBWSBuilder` is a Java application that processes the operations described in an EclipseLink DBWS builder XML file to produce all the required deployment artifacts.

Be sure to set the following environment variables in the

<ECLIPSELINK_HOME>\utils\dbws\setenv.cmd (or setenv.sh file) before invoking `DBWSBuilder`:

- `JAVA_HOME`
- `DRIVER_CLASSPATH`

There are script files provided for invoking `DBWSBuilder`. They are located in the <ECLIPSELINK_HOME>\utils\dbws directory. The scripts are `dbwsbuilder.cmd` for Windows usage, and `dbwsbuilder.sh` for other operating systems.

Using DBWSBuilder, you can generate an EclipseLink DBWS service from the following sources:

- an existing relational database table. See "[Creating an EclipseLink DBWS Service from a Database Table](#)".
- one or more SQL SELECT statements. See "[Creating an EclipseLink DBWS Service from a SQL Statement](#)".
- a stored procedure. See "[Creating an EclipseLink DBWS Service from a Stored Procedure](#)".
- a stored function . See "[Creating from a Stored Function](#)".

Example 1-12 DBWSBuilder usage

```
prompt > dbwsbuilder.cmd -builderFile {path_to_dbws_builder.xml} -stageDir
{path_to_stageDir}
-packageAs[:archive_flag - archive, noArchive, ignore] {packager} [additional args]
Available packagers:
-packageAs:[default=not supported] jdev
-packageAs:[default=archive] javase [jarFilename]
-packageAs:[default=archive] wls [warFilename]
-packageAs:[default=archive] glassfish [warFilename]
-packageAs:[default=archive] jboss [warFilename]
-packageAs:[default=archive] war [warFilename]
-packageAs:[default=archive] was [warFilename]
-packageAs:[default=not supported] eclipse
```

2

Creating DBWS Services

This chapter describes how to create EclipseLink DBWS services. This chapter includes the following sections:

- [Creating EclipseLink DBWS Service from a Database Table](#)
- [Using an EclipseLink SessionCustomizer](#)
- [Creating a DBWS Service from SQL Statements](#)
- [Creating from a Stored Procedure](#)
- [Creating from a Stored Function](#)
- [Creating from a Stored Function with complex PL/SQL arguments](#)
- [Creating from an Overloaded PL/SQL Stored Procedure](#)

Creating EclipseLink DBWS Service from a Database Table

You can create a web service that exposes a database table's CRUD (**C**reate/**R**ead[findByPK and findAll]/**U**ppdate/**D**ele) operations. EclipseLink supports this for any table or multiple tables (use patterns supporting % for catalog, schema or table names) on any database on which the JDBC driver reliably and accurately delivers the table's metadata via the JDBC metadata APIs (`java.sql.DatabaseMetaData`).

EclipseLink uses the `DBWSBuilder` utility to generate a DBWS XML schema, using the following rules:

- table name ==> translate any characters not supported by XML ==> translate to_lowercase ==> add suffix 'Type' ==> top-level complex type in .xsd file
- column name ==> translate any characters not supported by XML¹ ==> translate to_lowercase ==> becomes `<element-tag> name`
 - All columns are expressed as elements
 - BLOB columns are automatically mapped to `xsd:base64Binary`
 - `xsd:base64Binary` elements can be included in-line to the XML document, or handled as binary attachments (SwaRef or MTOM style).

[Example 2-1](#) uses the **EMP** table ([Table 2-1](#)) from the Oracle **scott** database schema:

Table 2-1 Sample EMP Table

OWNER	TABLE_NAME	COLUMN_NAME	DATA_TYPE	DATA_LENGTH	DATA_PRECISION	DATA_SCALE	NULLABLE?
SCOTT	EMP	EMPNO	NUMBER	22	4	0	N
SCOTT	EMP	ENAME	VARCHAR2	10	(null)	(null)	Y

¹ Same algorithm documented as part of the SQL/X (a.k.a. SQL/XML:2003) specification.

Table 2-1 (Cont.) Sample EMP Table

OWNER	TABLE_NAME	COLUMN_NAME	DATA_TYPE	DATA_LENGTH	DATA_PRECISION	DATA_SCALE	NULLABLE?
SCOTT	EMP	JOB	VARCHAR2	9	(null)	(null)	Y
SCOTT	EMP	MGR	NUMBER	22	4	0	Y
SCOTT	EMP	HIREDATE	DATE	7	(null)	(null)	Y
SCOTT	EMP	SAL	NUMBER	22	7	2	Y
SCOTT	EMP	COMM	NUMBER	22	7	2	Y
SCOTT	EMP	DEPTNO	NUMBER	22	2	0	Y

Example 2-1 Example

The DBWSBuilder utility requires a DBWS configuration file as input, as shown here:

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">emp</property>
    ... database properties
  </properties>
  <table
    catalogPattern="%"
    tableNamePattern="EMP"
  />
</dbws-builder>
```

Use this command to execute the DBWSBuilder:

```
prompt > dbwsbuilder.cmd -builderFile dbws-builder.xml -stageDir output_directory -
packageAs wls emp.war
```

where

- dbws-builder.xml is the DBWS configuration file (as shown previously)
- output_directory is the output directory for the generated files
- -packageAs is the platform on which the web service will be deployed

The DBWSBuilder-generated eclipselink-dbws-schema.xsd file derives <element-tag> names from the Database table metadata in [Table 2-1](#):

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  >
  <xsd:complexType name="empType">
    <xsd:sequence>
      <xsd:element name="empno" type="xsd:int" xsi:nil="false"/>
      <xsd:element name="ename" type="xsd:string" xsi:nil="true"/>
      <xsd:element name="job" type="xsd:string" xsi:nil="true"/>
      <xsd:element name="mgr" type="xsd:int" minOccurs="0" xsi:nil="true"/>
      <xsd:element name="hiredate" type="xsd:dateTime" xsi:nil="true"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:schema>
```

```

        <xsd:element name="sal" type="xsd:decimal" xsi:nil="true"/>
        <xsd:element name="comm" type="xsd:int" minOccurs="0" xsi:nil="true"/>
        <xsd:element name="deptno" type="xsd:int" xsi:nil="true"/>
    </xsd:sequence>
</xsd:complexType>
</xsd:schema>

```

Generated EclipseLink DBWS service descriptor

The CRUD operations are illustrated in the generated EclipseLink DBWS service descriptor (eclipselink-dbws.xml) file, as shown here:

Example 2-2 Sample CRUD Operations

```

<?xml version="1.0" encoding="UTF-8"?>
<dbws xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:ns1="urn:emp" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
    <name>emp</name>
    <sessions-file>eclipselink-dbws-sessions.xml</sessions-file>
    <update>
        <name>update_empType</name>
        <parameter>
            <name>theInstance</name>
            <type>ns1:empType</type>
        </parameter>
    </update>
    <insert>
        <name>create_empType</name>
        <parameter>
            <name>theInstance</name>
            <type>ns1:empType</type>
        </parameter>
    </insert>
    <query>
        <name>findByPrimaryKey_empType</name>
        <parameter>
            <name>id</name>
            <type>xsd:decimal</type>
        </parameter>
        <result>
            <type>ns1:empType</type>
        </result>
        <named-query>
            <name>findByPrimaryKey</name>
            <descriptor>empType</descriptor>
        </named-query>
    </query>
    <delete>
        <name>delete_empType</name>
        <parameter>
            <name>theInstance</name>
            <type>ns1:empType</type>
        </parameter>
    </delete>
    <query>
        <name>findAll_empType</name>
        <result isCollection="true">
            <type>ns1:empType</type>
        </result>
        <named-query>
            <name>findAll</name>

```

```

        <descriptor>empType</descriptor>
    </named-query>
</query>
</dbws>

```

SOAP Messaging

The following SOAP Message invokes the `<findAll_empType>` operation for the **emp** DBWS service:

```

<?xml version="1.0" encoding="UTF-8"?>
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/">
  <env:Body>
    <findAll_empType xmlns="urn:empService" xmlns:urn="urn:emp"/>
  </env:Body>
</env:Envelope>

```

returning:

```

<?xml version="1.0" encoding="utf-16"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/">
  <SOAP-ENV:Header />
  <SOAP-ENV:Body>
    <srvc:findAll_empTypeResponse xmlns="urn:emp" xmlns:svrc="urn:empService">
      <svrc:result>
        <empType>
          <empno>7369</empno>
          <ename>SMITH</ename>
          <job>CLERK</job>
          <mgr>7902</mgr>
          <hiredate>1980-12-17T00:00:00.0-05:00</hiredate>
          <sal>800</sal>
          <deptno>20</deptno>
        </empType>
        <empType>
          <empno>7499</empno>
          <ename>ALLEN</ename>
          <job>SALESMAN</job>
          <mgr>7698</mgr>
          <hiredate>1981-02-20T00:00:00.0-05:00</hiredate>
          <sal>1600</sal>
          <comm>300</comm>
          <deptno>30</deptno>
        </empType>
        ....
      </svrc:result>
    </srvc:findAll_empTypeResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

Using an EclipseLink SessionCustomizer

When using an `EclipseLink SessionCustomizer` with DBWS, you can access to the EclipseLink API to retrieve the OR (object-relational) or OX (object-XML) mapping descriptors from the session. You can then use the descriptors to add, change, or delete mappings.

For more information, see "Session Customization in the EclipseLink documentation: http://wiki.eclipse.org/Introduction_to_EclipseLink_Sessions_%28ELUG%29#Session_Customization

For more information, see "Sessions" in *Understanding Oracle TopLink*.

Example

This example illustrates how to implement an EclipseLink SessionCustomizer:

```
package some.java.package;

import org.eclipse.persistence.config.SessionCustomizer;
import org.eclipse.persistence.sessions.Session;
import org.eclipse.persistence.sessions.DatabaseLogin;

public class MySessionCustomizer implements SessionCustomizer {

    public MySessionCustomizer() {
    }

    public void customize(Session session) {
        DatabaseLogin login = (DatabaseLogin)session.getDatasourceLogin();
        // enable 'dirty' reads
        login.setTransactionIsolation(DatabaseLogin.TRANSACTION_READ_UNCOMMITTED);
    }
}
```

In the DBWSBuilder configuration file, you must use the `orSessionCustomizerClassName` or `oxSessionCustomizerClassName` to specify if the customization applies to the ORM or ORX project (respectively), as shown here:

Example 2-3 ORM Project

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">customize_test</property>
    ...
    <property
name="orSessionCustomizerClassName">some.java.package.MyORSessionCustomizer</property>
```

Example 2-4 ORX Project

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">customize_test</property>
    ...
    <property
name="oxSessionCustomizerClassName">some.java.package.MyOXSessionCustomizer</property>
```

Advanced Customization

You can further customize an EclipseLink DBWS service by creating your own EclipseLink `project.xml` and `sessions.xml` files. Using your preferred utility, you can:

- map your objects to your relational database in an EclipseLink relational project
- map your objects to your XML schema in an EclipseLink XML project
- create an EclipseLink `sessions.xml` file that references both projects.

In this way, you can control all aspects of the relational and XML mapping. This approach is best when you want to customize most or all details.

In [Example 2-5](#), a DBWS service is constructed from existing EclipseLink project maps with identical case-sensitive aliases (for Descriptors that are common between the projects).



Note:

When building a DBWS web service in this way (that is, without the `DBWSBuilder` Utility) be sure to create all the necessary deployment artifacts.

Example 2-5 Sample DBWS Service

```
<?xml version="1.0" encoding="UTF-8"?>
<object-persistence version="Eclipse Persistence Services - some version (some build
date)" xmlns="http://www.eclipse.org/eclipselink/xsds/persistence" xmlns:xsd="http://
www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:eclipselink="http://www.eclipse.org/eclipselink/xsds/persistence">
  <name>SomeORProject</name>
  <class-mapping-descriptors>
    <class-mapping-descriptor xsi:type="relational-class-mapping-descriptor">
      <class>some.package.SomeClass</class>
      <alias>SomeAlias</alias>
    ...
  ...

<?xml version="1.0" encoding="UTF-8"?>
<object-persistence version="Eclipse Persistence Services - some version (some build
date)" xmlns="http://www.eclipse.org/eclipselink/xsds/persistence" xmlns:xsd="http://
www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:eclipselink="http://www.eclipse.org/eclipselink/xsds/persistence">
  <name>SomeOXProject</name>
  <class-mapping-descriptor xsi:type="xml-class-mapping-descriptor">
    <class>some.package.SomeClass</class>
    <alias>SomeAlias</alias>
  ...
  ...
```

Using Existing EclipseLink ORM and OXM Mappings

A DBWS service may be constructed using pre-existing EclipseLink ORM and OXM maps (both Project classes and Project deployment XML are supported) with identical case-sensitive aliases for Descriptors that are common between the projects.

When building a DBWS web service in this way (that is, without the `DBWSBuilder` Utility) be sure to create all the necessary deployment artifacts

Example 2-6 Using an ORM Map

```
<?xml version="1.0" encoding="UTF-8"?>
<object-persistence version="Eclipse Persistence Services - some version (some build
date)" xmlns="http://www.eclipse.org/eclipselink/xsds/persistence" xmlns:xsd="http://
```

```

www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:eclipselink="http://www.eclipse.org/eclipselink/xsds/persistence">
  <name>SomeORProject</name>
  <class-mapping-descriptors>
    <class-mapping-descriptor xsi:type="relational-class-mapping-descriptor">
      <class>some.package.SomeClass</class>
      <alias>SomeAlias</alias>
    ...

```

Example 2-7 Using an OXM Map

```

<?xml version="1.0" encoding="UTF-8"?>
<object-persistence version="Eclipse Persistence Services - some version (some build
date)" xmlns="http://www.eclipse.org/eclipselink/xsds/persistence" xmlns:xsd="http://
www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:eclipselink="http://www.eclipse.org/eclipselink/xsds/persistence">
  <name>SomeOXProject</name>
  <class-mapping-descriptor xsi:type="xml-class-mapping-descriptor">
    <class>some.package.SomeClass</class>
    <alias>SomeAlias</alias>
  ...

```

Creating a DBWS Service from SQL Statements

This section includes information on:

- [Creating from Results Sets from Custom SQL SELECT Statements](#)
- [Creating based on Schema-formatted Results from Custom SQL SELECT Statements](#)

Creating from Results Sets from Custom SQL SELECT Statements

EclipseLink DBWS can create a Web service that exposes the results of executing custom SQL `SELECT` statements, without exposing the actual SQL. There is no metadata to determine the structure of the returned data -- the Simple XML Format schema is used.

The SQL `SELECT` statements targeted for this service are in the `DBWSBuilder` builder XML file, as shown here:

Use this command to create the web service:

```

prompt > dbwsbuilder.cmd -builderFile dbws-builder.xml -stageDir output_directory -
packageAs wls testSql.war

```

where

- `dbws-builder.xml` is the DBWS builder XML configuration file, as shown previously
- `output_directory` is the output directory for the generated files
- `-packageAs` the platform on which the web service will be deployed

The generated `eclipselink-dbws-schema.xsd` file is the schema for the Simple XML format:

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
>

```

```

<xsd:complexType name="simple-xml-format">
  <xsd:sequence>
    <xsd:any minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
</xsd:schema>

```

The element tags `simple-xml-format` and `simple-xml` are customized in the SQL operations. For example, `<simple-xml-format> = <aggregate-info>`, `<simple-xml> = <count-and-max-salary>`.

Example 2-8 Sample DBWSBuilder XML File

```

<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">testSql</property>
    ... database properties
  </properties>
  <sql
    name="count"
    simpleXMLFormatTag="aggregate-info"
    xmlTag="count"
  >
    <text><![CDATA[select count(*) from EMP]]></text>
  </sql>
  <sql
    name="countAndMaxSalary"
    simpleXMLFormatTag="aggregate-info"
    xmlTag="count-and-max-salary"
  >
    <text><![CDATA[select count(*) as "COUNT", max(SAL) as "MAX-Salary" from EMP]]></
text>
  </sql>
</dbws-builder>

```

Generated EclipseLink DBWS Service Descriptor

The SQL operations are included in the DBWS service descriptor file (`eclipselink-dbws.xml`) created by EclipseLink, as well as the settings to alter the default Simple XML Format `<element-tag> name`.

Example 2-9 Sample XML File

```

<?xml version="1.0" encoding="UTF-8"?>
<dbws xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:ns1="urn:testSql"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <name>testSql</name>
  <sessions-file>eclipselink-dbws-sessions.xml</sessions-file>
  <query>
    <name>count</name>
    <result>
      <type>simple-xml-format</type>
      <simple-xml-format>
        <simple-xml-format-tag>aggregate-info</simple-xml-format-tag>
        <simple-xml-tag>count</simple-xml-tag>
      </simple-xml-format>
    </result>
  <sql>
    <![CDATA[select count(*) from EMP]]>

```

```

    </sql>
  </query>
  <query>
    <name>countAndMaxSalary</name>
    <result>
      <type>simple-xml-format</type>
      <simple-xml-format>
        <simple-xml-format-tag>aggregate-info</simple-xml-format-tag>
        <simple-xml-tag>count-and-max-salary</simple-xml-tag>
      </simple-xml-format>
    </result>
    <sql>
      <![CDATA[select count(*) as "COUNT", max(SAL) as "MAX-Salary" from EMP]]>
    </sql>
  </query>
</dbws>

```

SOAP Messaging

The following SOAP Message invokes the `<count>` operation for the `testSql` DBWS service:

```

<?xml version="1.0" encoding="UTF-8"?>
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/">
  <env:Body>
    <count xmlns="urn:testSqlService" xmlns:urn="urn:testSql"/>
  </env:Body>
</env:Envelope>

```

returning:

```

<?xml version="1.0" encoding="utf-16"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/">
  <SOAP-ENV:Header />
  <SOAP-ENV:Body>
    <srvc:countResponse xmlns:srvc="urn:testSqlService">
      <srvc:result>
        <aggregate-info xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="simple-xml-format">
          <count>
            <COUNT_x0028__x002A__x0029_>14</COUNT_x0028__x002A__x0029_>
          </count>
        </aggregate-info>
      </srvc:result>
    </srvc:countResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

Note:

You should be aware of the `resultSet` for `select count(*)`; the characters `'(, '*'` and `)` are not valid for XML element tags and are replaced by the well-known transformation, which documented as part of the SQL/X specification (SQL/XML:2003).

Custom SQL as Sub-operation of Table-based Web Service

The "SOAP Messaging" operation returns unstructured data. However, it is possible to nest such operations within the context of a Table-based operation; then, the nested operations can be configured to re-use the schema element type of the parent table and return structured data:

```
<dbws-builder>
  <properties>
    <property name="projectName">empSql</property>
    ... database properties
  </properties>
  <table
    catalogPattern="%"
    tableNamePattern="EMP"
  >
    <sql
      name="findEmpByName"
      isCollection="true"
      returnType="empType"
    >
      <text><![CDATA[select * from EMP where ENAME like ?]]></text>
      <binding name="ENAME" type="xsd:string"/>
    </sql>
  </table>
</dbws-builder>
```

The generated EclipseLink DBWS service descriptor `eclipselink-dbws.xml` file:

Example 2-10 Sample `eclipselink-dbws.xml` File

```
<dbws xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:ns1="urn:testSql"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <name>empSql</name>
  <sessions-file>eclipselink-dbws-sessions.xml</sessions-file>
  <update>
    <name>update_empType</name>
    <parameter>
      <name>theInstance</name>
      <type>ns1:empType</type>
    </parameter>
  </update>
  ...
  <query>
    <name>findEmpByName</name>
    <parameter>
      <name>ENAME</name>
      <type>xsd:string</type>
    </parameter>
    <result isCollection="true">
      <type>ns1:empType</type>
    </result>
    <sql>
      <![CDATA[select * from EMP where ENAME like #ENAME]]>
    </sql>
  </query>
</dbws>
```

Creating based on Schema-formatted Results from Custom SQL SELECT Statements

EclipseLink can also create a web service in which the "shape" of the returned result is determined at design-time, not runtime. Normally, the custom SQL `SELECT` statement returns `java.sql.ResultSets` and the `java.sql.ResultSetMetaData` APIs (`getColumnCount`, `getColumnLabel`, `getColumnType`, etc.) can be used to determine the name and datatype of the returned information.

EclipseLink DBWS uses the Simplified XML Format (SXF) to create an XML document to describe the `ResultSet`'s information. However, because this document can change arbitrarily, the SXF schema is extremely "loose" – the use of `xsd:any` places virtually no restriction on the document.

Example 2-11 Sample Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  >
  <xsd:complexType name="simple-xml-format">
    <xsd:sequence>
      <xsd:any minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:schema>
```

Example 2-12 Instance document:

```
<source lang="xml">
<?xml version = '1.0' encoding = 'UTF-8'?>
<simple-xml-format>
  <simple-xml>
    <EMPNO>7788</EMPNO>
    <ENAME>SCOTT</ENAME>
    <JOB>ANALYST</JOB>
    <MGR>7566</MGR>
    <HIREDATE>1987-04-19</HIREDATE>
    <SAL>3000</SAL>
    <DEPTNO>20</DEPTNO>
  </simple-xml>
  <simple-xml>
    <EMPNO>7369</EMPNO>
    <ENAME>SMITH</ENAME>
    <JOB>CLERK</JOB>
    <MGR>7902</MGR>
    <HIREDATE>1980-12-17</HIREDATE>
    <SAL>800</SAL>
    <DEPTNO>20</DEPTNO>
  </simple-xml>
</simple-xml-format>
```

Additional information at Design Time

As indicated previously, the `java.sql.ResultSetMetaData` APIs provide enough information, if available at design-time, from which you could generate a schema, as shown here:

Example 2-13 Sample Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema" targetNamespace="urn:emp"
xmlns="urn:emp" elementFormDefault="qualified">
  <xsd:complexType name="empType">
    <xsd:sequence>
      <xsd:element name="empno" type="xsd:decimal"/>
      <xsd:element name="ename" type="xsd:string" minOccurs="0" nillable="true"/>
      <xsd:element name="job" type="xsd:string" minOccurs="0" nillable="true"/>
      <xsd:element name="mgr" type="xsd:decimal" minOccurs="0" nillable="true"/>
      <xsd:element name="hiredate" type="xsd:date" minOccurs="0" nillable="true"/>
      <xsd:element name="sal" type="xsd:decimal" minOccurs="0" nillable="true"/>
      <xsd:element name="comm" type="xsd:decimal" minOccurs="0" nillable="true"/>
      <xsd:element name="deptno" type="xsd:decimal" minOccurs="0" nillable="true"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:element name="empType" type="empType"/>
</xsd:schema>
```

The DBWS sql operation is enhanced with an additional SQL statement that is executed at design-time -- the statement will not return any rows (such as when the `WHERE` clause evaluates to `false` in [Example 2-14](#)):

Example 2-14 Executing Additional SQL Statements

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <properties>
    <property name="projectName">emp</property>
    ...
  </properties>
  <sql
    name="Semployees"
    isCollection="false"
    returnType="empType"
  >
    <statement><![CDATA[select * from EMP where ENAME like 'S%']]></statement>
    <build-statement><![CDATA[select * from EMP where 0=1]]></build-statement>
  </sql>
</dbws-builder>
```

Understanding Issues and Limitations

Be aware of the following limitation:

- [Repeated labels](#)
- [Compatible column label sets](#)

Repeated labels

Valid SQL allows multiple identical columns. For example, consider the following SQL:

```
SELECT ENAME, ENAME FROM EMP WHERE LIKE 'S%'
```

ENAME	ENAME
SMITH	SMITH

ENAME	ENAME
...	...
SCOTT	SCOTT

In this example, a `SELECT` statement that uses `UNION` could return a set of column labels where a label is repeated.

`DBWSBuilder` maintains a list of "already processed columns" and will throw an exception when it detects a duplicate.

Compatible column label sets

The runtime and design-time SQL statements **must** return compatible column label sets. EclipseLink performs no pre-processing to ensure that the column sets are the same; the error will be detected at runtime when the service is invoked.

Creating from a Stored Procedure

EclipseLink DBWS can create a Web service that exposes a Stored Procedure (or multiple procedures). Because it is not possible to determine the structure of the returned data from the Stored Procedure's metadata, EclipseLink uses the Simple XML Format schema. The EclipseLink DBWS runtime produces an XML document that is simple and "human-readable."

EclipseLink DBWS supports any combination of `IN`, `OUT` and `IN OUT` arguments. Additionally, EclipseLink also supports procedures in packages that are overloaded (that is, the same name but different parameters).

Example

This example uses the following Stored Procedure:

```
DROP PROCEDURE TESTECHO;
CREATE OR REPLACE PROCEDURE TESTECHO(T IN VARCHAR2, U OUT VARCHAR2) AS
BEGIN
    U := CONCAT(T, '-test');
END;
```

The `DBWSBuilder` utility requires a DBWS configuration XML file as input, as shown here:

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">testEcho</property>
    ... database properties
  </properties>
  <procedure
    name="testEcho"
    procedurePattern="TESTECHO"
    isSimpleXMLFormat="true"
  />
</dbws-builder>
```

Execute the `DBWSBuilder`, as shown here:

```
prompt > dbwsbuilder.cmd -builderFile dbws-builder.xml -stageDir output_directory -  
packageAs wls testEcho.war
```

where

- dbws-builder.xml is the DBWS builder configuration XML file above
- output_directory is the output directory for the generated files
- -packageAs specifies the platform on which the web service will be deployed

The generated eclipselink-dbws-schema.xsd file is the schema for the Simple XML format, as shown here:

```
<?xml version="1.0" encoding="UTF-8"?>  
<xsd:schema  
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"  
  >  
  <xsd:complexType name="simple-xml-format">  
    <xsd:sequence>  
      <xsd:any minOccurs="0"/>  
    </xsd:sequence>  
  </xsd:complexType>  
</xsd:schema>
```

You can customize the simple-xml-format and simple-xml tags by setting the appropriate properties on an SQL operation.

Creating from a Stored Function

EclipseLink DBWS can create a Web service that exposes a simple Stored Function.

Example

In this example, the following stored function will be used:

```
DROP FUNCTION TESTECHO;  
CREATE OR REPLACE FUNCTION TESTECHO(T IN VARCHAR2) RETURN VARCHAR2 IS retVal VARCHAR2  
BEGIN  
    retVal := CONCAT('test-' , T);  
    RETURN retVal;  
END TESTECHO;
```

The DBWSBuilder utility requires a DBWS configuration XML file as input, as shown here:

```
<?xml version="1.0" encoding="UTF-8"?>  
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">  
  <properties>  
    <property name="projectName">testEcho</property>  
    ... database properties  
  </properties>  
  <procedure  
    name="testEcho"  
    procedurePattern="TESTECHO"  
    returnType="xsd:string"  
  />  
</dbws-builder>
```

Execute the **DBWSBuilder**, as shown here:

```
prompt > dbwsbuilder.cmd -builderFile dbws-builder.xml -stageDir output_directory -
packageAs wls testEcho.war
```

where

- dbws-builder.xml is the DBWS builder configuration XML file above
- output_directory is the output directory for the generated files
- -packageAs the platform on which the web service will be deployed

Creating from a Stored Procedure with complex PL/SQL arguments

With TopLink, you can create a DBWS web service from a stored procedure that uses complex PL/SQL types as either an IN, OUT, or IN OUT argument.

Example

In this example, the following stored procedure is used:

```
PROCEDURE P1(OLDREC IN ARECORD, FOO IN VARCHAR2, AREC OUT ARECORD) IS BEGIN
AREC.T1 := ... some processing based upon OLDREC    AREC.T2 := ... AND FOO
AREC.T3 := ... END P1;
```

Type ARECORD is defined in the PL/SQL package SOMEPACKAGE as follows:

```
CREATE OR REPLACE PACKAGE SOMEPACKAGE AS
  TYPE TBL1 IS TABLE OF VARCHAR2(111) INDEX BY BINARY_INTEGER;
  TYPE TBL2 IS TABLE OF NUMBER INDEX BY BINARY_INTEGER;
  TYPE ARECORD IS RECORD (
    T1 TBL1,
    T2 TBL2,
    T3 BOOLEAN
  );
  PROCEDURE P1(OLDREC IN ARECORD, FOO IN VARCHAR2, AREC OUT ARECORD);
END SOMEPACKAGE;
```

Because PL/SQL record and collection types cannot be transported via JDBC, TopLink will generate an anonymous block of PL/SQL code that contains the functions to convert to and from JDBC and PL/SQL types. To be successful, each PL/SQL type or collection type that will appear in an IN, IN OUT, or OUT OF RETURN argument (or any PL/SQL record or collection type that is nested within these arguments) *must* have an equivalent JDBC type. The name of this type must be in the form <package name>_<type name>.

For this example, the following JDBC types are required:

```
CREATE OR REPLACE TYPE SOMEPACKAGE_TBL1 AS TABLE OF VARCHAR2(111)

CREATE OR REPLACE TYPE SOMEPACKAGE_TBL2 AS TABLE OF NUMBER

CREATE OR REPLACE TYPE SOMEPACKAGE_ARECORD AS OBJECT (
  T1 SOMEPACKAGE_TBL1,
  T2 SOMEPACKAGE_TBL2,
```

```
T3 BOOLEAN
)
```

The DBWSBuilder utility requires a DBWS configuration file as input.

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">testPLSQLProcedure</property>
    ... database properties
  </properties>
  <plsql-procedure
    name="plsqlprocedure"
    catalogPattern="SOMEPACKAGE"
    procedurePattern="P1"
  />
</dbws-builder>
```

Notice that `returnType` is set to `SOMEPACKAGE_ARECORD`. This value indicates a complex type in the generated EclipseLink DBWS schema (as shown below). In this case, it is constructed based on the contents of the `SOMEPACKAGE` package.

Execute the DBWSBuilder, as shown here:

```
prompt > dbwsbuilder.cmd -builderFile dbws-builder.xml -stageDir output_directory -
packageAs wls testPLSQLProcedure.war
```

where

- `dbws-builder.xml` is the DBWS builder configuration file (as shown previously).
- `output_directory` is the output directory for the generated files.
- `-packageAs` is the platform on which the web service will be deployed.

The generated `eclipselink-dbws-schema.xsd` file follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:plsqlprocedure" xmlns="urn:plsqlprocedure"
elementFormDefault="qualified">
  <xsd:complexType name="SOMEPACKAGE_TBL1">
    <xsd:sequence>
      <xsd:element name="item" type="xsd:string" maxOccurs="unbounded"
nillable="true"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="SOMEPACKAGE_TBL2">
    <xsd:sequence>
      <xsd:element name="item" type="xsd:decimal" maxOccurs="unbounded"
nillable="true"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="SOMEPACKAGE_ARECORD">
    <xsd:sequence>
      <xsd:element name="t1">
        <xsd:complexType>
          <xsd:sequence>
            <xsd:element name="item" type="xsd:string" maxOccurs="unbounded"
nillable="true"/>
          </xsd:sequence>
        </xsd:complexType>
      </xsd:element>
```

```

        <xsd:element name="t2">
            <xsd:complexType>
                <xsd:sequence>
                    <xsd:element name="item" type="xsd:decimal" maxOccurs="unbounded"
nillable="true"/>
                </xsd:sequence>
            </xsd:complexType>
        </xsd:element>
        <xsd:element name="t3" type="xsd:boolean" nillable="true"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="simple-xml-format">
    <xsd:sequence>
        <xsd:any minOccurs="0"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:element name="SOMEPACKAGE_TBL1" type="SOMEPACKAGE_TBL1"/>
<xsd:element name="SOMEPACKAGE_TBL2" type="SOMEPACKAGE_TBL2"/>
<xsd:element name="SOMEPACKAGE_ARECORD" type="SOMEPACKAGE_ARECORD"/>
</xsd:schema>

```

Creating from a Stored Function with complex PL/SQL arguments

Starting with EclipseLink 2.3, you can create a DBWS web service from a stored function that uses complex PL/SQL types as either an `IN` or return argument.

Example

In this example, the following stored function is used:

```

FUNCTION F1(OLDREC IN ARECORD, FOO IN VARCHAR2) RETURN ARECORD IS
    arec ARECORD; -- temp var
BEGIN
    arec.T1 := ... some processing based upon OLDREC
    arec.T2 := ... AND FOO
    arec.T3 := ...
    RETURN arec;
END F1;

```

Type `ARECORD` is defined in the PL/SQL package `SOMEPACKAGE` as follows:

```

CREATE OR REPLACE PACKAGE SOMEPACKAGE AS
    TYPE TBL1 IS TABLE OF VARCHAR2(111) INDEX BY BINARY_INTEGER;
    TYPE TBL2 IS TABLE OF NUMBER INDEX BY BINARY_INTEGER;
    TYPE ARECORD IS RECORD (
        T1 TBL1,
        T2 TBL2,
        T3 BOOLEAN
    );
    FUNCTION F1(OLDREC IN ARECORD, FOO IN VARCHAR2) RETURN ARECORD;
END SOMEPACKAGE;

```

Because PL/SQL types and collection types cannot be transported via JDBC, TopLink will generate an anonymous block of PL/SQL code that contains the functions to convert to and from JDBC and PL/SQL types. To be successful, each PL/SQL type or collection type that will

appear in an IN, IN OUT, or OUT OF RETURN argument (or any PL/SQL record or collection type that is nested within these arguments) *must* have an equivalent JDBC type. The name of this type must be in the form <package name>_<type name>.

For this example, the following JDBC types are required:

```
CREATE OR REPLACE TYPE SOMEPACKAGE_TBL1 AS TABLE OF VARCHAR2(111)

CREATE OR REPLACE TYPE SOMEPACKAGE_TBL2 AS TABLE OF NUMBER

CREATE OR REPLACE TYPE SOMEPACKAGE_ARECORD AS OBJECT (
    T1 SOMEPACKAGE_TBL1,
    T2 SOMEPACKAGE_TBL2,
    T3 BOOLEAN
)
```

The DBWSBuilder utility requires a DBWS configuration file as input.

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">testPLSQLFunction</property>
    ... database properties
  </properties>
  <plsql-procedure
    name="plsqlfunction"
    catalogPattern="SOMEPACKAGE"
    procedurePattern="F1"
    returnType="SOMEPACKAGE_ARECORD"
  />
</dbws-builder>
```

Notice that `returnType` is set to `SOMEPACKAGE_ARECORD`. This value indicates a complex type in the generated EclipseLink DBWS schema (as shown below). In this case, it is constructed based on the contents of the `SOMEPACKAGE` package.

Execute the DBWSBuilder, as shown here:

```
prompt > dbwsbuilder.cmd -builderFile dbws-builder.xml -stageDir output_directory -
packageAs wls testPLSQLFunction.war
```

where

- `dbws-builder.xml` is the DBWS builder configuration file (as shown previously).
- `output_directory` is the output directory for the generated files.
- `-packageAs` is the platform on which the web service will be deployed.

The generated `eclipselink-dbws-schema.xsd` file follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:plsqlfunction" xmlns="urn:plsqlfunction"
  elementFormDefault="qualified">
  <xsd:complexType name="SOMEPACKAGE_TBL1">
    <xsd:sequence>
      <xsd:element name="item" type="xsd:string" maxOccurs="unbounded"
        nillable="true"/>
    </xsd:sequence>
  </xsd:complexType>
```

```

    <xsd:complexType name="SOMEPACKAGE_TBL2">
      <xsd:sequence>
        <xsd:element name="item" type="xsd:decimal" maxOccurs="unbounded"
nillable="true"/>
      </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="SOMEPACKAGE_ARECORD">
      <xsd:sequence>
        <xsd:element name="t1">
          <xsd:complexType>
            <xsd:sequence>
              <xsd:element name="item" type="xsd:string" maxOccurs="unbounded"
nillable="true"/>
            </xsd:sequence>
          </xsd:complexType>
        </xsd:element>
        <xsd:element name="t2">
          <xsd:complexType>
            <xsd:sequence>
              <xsd:element name="item" type="xsd:decimal" maxOccurs="unbounded"
nillable="true"/>
            </xsd:sequence>
          </xsd:complexType>
        </xsd:element>
        <xsd:element name="t3" type="xsd:boolean" nillable="true"/>
      </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="simple-xml-format">
      <xsd:sequence>
        <xsd:any minOccurs="0"/>
      </xsd:sequence>
    </xsd:complexType>
    <xsd:element name="SOMEPACKAGE_TBL1" type="SOMEPACKAGE_TBL1"/>
    <xsd:element name="SOMEPACKAGE_TBL2" type="SOMEPACKAGE_TBL2"/>
    <xsd:element name="SOMEPACKAGE_ARECORD" type="SOMEPACKAGE_ARECORD"/>
  </xsd:schema>

```

Creating from an Overloaded PL/SQL Stored Procedure

Starting in release 2.3, EclipseLink DBWS can create a web service that exposes multiple PL/SQL stored procedures. Instead of specifying all the stored procedures within the DBWS builder file, you can specify a single procedure name and "overload" it with different parameters.



Note:

This feature requires a database, such as Oracle, that supports overloading.

Example

In this example, the stored procedure contains different parameters:

```

CREATE PROCEDURE P(SIMPLARRAY IN TBL1, FOO IN VARCHAR2) AS
BEGIN
  -- 2 arguments SIMPLARRAY and FOO
END P;
CREATE PROCEDURE P(SIMPLARRAY IN TBL1, FOO IN VARCHAR2, BAR IN VARCHAR2) AS

```

```
BEGIN
  -- (same name 'P') 3 arguments SIMPLARRAY, FOO and BAR
END P;
```

EclipseLink DBWS supports any combination of the IN, OUT and IN OUT arguments.

Type **TBL1** is defined in PL/SQL Package **SOMEPACKAGE** as follows:

```
CREATE OR REPLACE PACKAGE SOMEPACKAGE AS
  TYPE TBL1 IS TABLE OF VARCHAR2(111) INDEX BY BINARY_INTEGER;
  PROCEDURE P(SIMPLARRAY IN TBL1, FOO IN VARCHAR2);
  PROCEDURE P(SIMPLARRAY IN TBL1, FOO IN VARCHAR2, BAR IN VARCHAR2);
END SOMEPACKAGE;
```

The DBWSBuilder utility requires a DBWS configuration file as input, as shown here:

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">testOverloadedProcedure</property>
    ... database properties
  </properties>
  <plsql-procedure
    name="overloadedProcedure"
    catalogPattern="SOMEPACKAGE"
    procedurePattern="P"
  />
</dbws-builder>
```

Use this command to execute the DBWSBuilder:

```
prompt > dbwsbuilder.cmd -builderFile dbws-builder.xml -stageDir output_directory -
packageAs wls testEcho.war
```

where

- dbws-builder.xml – The DBWS configuration file (as shown previously)
- output_directory – The output directory for the generated files
- -packageAs – Specifies the platform on which the web service will be deployed

When generating queries and the WSDL in which overloaded procedures are used, a unique index identifies each procedure. The index starts at **1** and increments by one, for each overloaded procedure.

In this example, EclipseLink generates the following eclipselink-dbws.wsdl (Web Services Description Language):

```
<wsdl:definitions
  name="plsqloverloadService"
  targetNamespace="urn:plsqloverloadService"
  xmlns:ns1="urn:plsqloverload"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
  xmlns:tns="urn:plsqloverloadService"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
>
<wsdl:types>
```

```

        <xsd:schema elementFormDefault="qualified"
targetNamespace="urn:plsqloverloadService" xmlns:tns="urn:plsqloverloadService"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:import namespace="urn:plsqloverload" schemaLocation="eclipselink-dbws-
schema.xsd"/>
    <xsd:complexType name="p1ResponseType">
        <xsd:sequence>
            <xsd:element name="result">
                <xsd:complexType><xsd:sequence><xsd:any/></xsd:sequence></
xsd:complexType>
            </xsd:element>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="p1RequestType">
        <xsd:sequence>
            <xsd:element name="SIMPLARRAY" type="ns1:SOMEPACKAGE_TBL1"/>
            <xsd:element name="FOO" type="xsd:string"/>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="p2ResponseType">
        <xsd:sequence>
            <xsd:element name="result">
                <xsd:complexType><xsd:sequence><xsd:any/></xsd:sequence></
xsd:complexType>
            </xsd:element>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="p2RequestType">
        <xsd:sequence>
            <xsd:element name="SIMPLARRAY" type="ns1:SOMEPACKAGE_TBL1"/>
            <xsd:element name="FOO" type="xsd:string"/>
            <xsd:element name="BAR" type="xsd:string"/>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:element name="p2" type="tns:p2RequestType"/>
    <xsd:element name="p1" type="tns:p1RequestType"/>
    <xsd:element name="p1Response" type="tns:p1ResponseType"/>
    <xsd:element name="p2Response" type="tns:p2ResponseType"/>
    </xsd:schema>
</wsdl:types>
<wsdl:message name="p2Request"><wsdl:part name="p2Request" element="tns:p2"/></
wsdl:message>
<wsdl:message name="p2Response"><wsdl:part name="p2Response"
element="tns:p2Response"/></wsdl:message>
<wsdl:message name="p1Request"><wsdl:part name="p1Request" element="tns:p1"/></
wsdl:message>
<wsdl:message name="p1Response"><wsdl:part name="p1Response"
element="tns:p1Response"/></wsdl:message>
<wsdl:portType name="plsqloverloadService_Interface">
    <wsdl:operation name="p2">
        <wsdl:input message="tns:p2Request"/>
        <wsdl:output message="tns:p2Response"/>
    </wsdl:operation>
    <wsdl:operation name="p1">
        <wsdl:input message="tns:p1Request"/>
        <wsdl:output message="tns:p1Response"/>
    </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="plsqloverloadService_SOAP_HTTP"
type="tns:plsqloverloadService_Interface">
    <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="p2">

```

```
        <soap:operation soapAction="urn:plsqloverloadService:p2"/>
        <wsdl:input><soap:body use="literal"/></wsdl:input>
        <wsdl:output><soap:body use="literal"/></wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="p1">
        <soap:operation soapAction="urn:plsqloverloadService:p1"/>
        <wsdl:input><soap:body use="literal"/></wsdl:input>
        <wsdl:output><soap:body use="literal"/></wsdl:output>
    </wsdl:operation>
</wsdl:binding>
<wsdl:service name="plsqloverloadService">
    <wsdl:port name="plsqloverloadServicePort"
binding="tns:plsqloverloadService_SOAP_HTTP">
        <soap:address location="REPLACE_WITH_ENDPOINT_ADDRESS"/>
    </wsdl:port>
</wsdl:service>
</wsdl:definitions>
```

3

Advanced Methods of Accessing DBWS Designtime API

This chapter describes advanced methods of accessing the EclipseLink DBWS Designtime API.

This chapter includes the following sections:

- [Integrating with JDeveloper](#)
- [Using DBWSBuilder with Ant](#)

Integrating with JDeveloper

information pending, TBD

Using DBWSBuilder with Ant

With EclipseLink DBWS, you can invoke the `DBWSBuilder` from Apache Ant (<http://ant.apache.org/>) to generate the necessary files, compile, and package the application with additional Ant targets.

Example

This example illustrates how to use Ant to generate a deployable web archive. For this example, consider the following file layout:

<example-root>

dbws-builder.xml (see [Example 3-1](#)) build.xml (see [Example 3-2](#)) build.properties (see [Example 3-3](#))

lib eclipselink.jar eclipselink-dbwsutils.jar javax.servlet.jar
javax.wsdl.jar ojdbc6.jar org.eclipse.persistence.oracledbparser.jar

stage All generated artifacts will saved here, most importantly `simpletable.war`.

To run the DBWS builder in this example, simply type `ant` in the `<example-root>` directory. The builder packages the generated artifacts into the web archive (`simpletable.war`) in the `stage` directory. This `.war` file can then be deployed to WebLogic.

Example 3-1 Sample DBWS Builder File (dbws-builder.xml)

```
<?xml version="1.0" encoding="UTF-8"?>
<dbws-builder xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <properties>
    <property name="projectName">simpletable</property>
    ... database properties
  </properties>
```

```

    <table
      schemaPattern="SCOTT"
      tableNamePattern="SIMPLETABLE"
    />
  </dbws-builder>

```

Example 3-2 Sample Build XML File (build.xml)

```

<?xml version="1.0"?>
<project name="simpletable" default="build">
  <property file="${basedir}/build.properties"/>

  <path id="build.path">
    <fileset
      dir="{jlib.dir}"
      includes="eclipselink.jar
                eclipselink-dbwsutils.jar
                org.eclipse.persistence.oracledbparser.jar
                javax.wsdl.jar
                javax.servlet.jar
                ojdbc6.jar"
    >
  </fileset>
</path>

  <target name="build">
    <java
      classname="org.eclipse.persistence.tools.dbws.DBWSBuilder"
      fork="true"
      classpathRef="build.path"
    >
      <arg line="-builderFile ${dbws.builder.file} -stageDir ${stage.dir} -packageAs ${
server.platform} ${ant.project.name}.war"/>
    </java>
  </target>
</project>

```

Example 3-3 Sample Build Properties File (build.properties)

```

custom = true
build.sysclasspath=ignore

stage.dir=${basedir}/stage
jlib.dir=${basedir}/jlib
server.platform=wls
dbws.builder.file=dbws-builder.xml

```

Using with javac

Currently not supported. See https://bugs.eclipse.org/bugs/show_bug.cgi?id=386860

Fixed in 2.4.1 and 2.5

Starting with EclipseLink 2.4.1, you can invoke the `DBWSBuilder` from `javac` to generate the necessary files, compile, and package the application into a web archive that can be deployed to an active WebLogic instance.

The OXM project `org.eclipse.persistence.tools.dbws.DBWSBuilderModelProject` parses the builder XML file (`dbws-builder.xml`), producing model objects that represent properties,

table and procedure operations. You can also populate the public class `org.eclipse.persistence.tools.dbws.DBWSBuilder` programmatically, through property setters (such as `setDriver()` and `setUrl()`) and the operation setter `addOperation(OperationModel operation)`.

Example 3-4 illustrates how to configure `DBWSBuilder`.

Example 3-4 Using DBWSBuilder with javac

```
DBWSBuilder builder = new DBWSBuilder();

    // set properties
    builder.setProjectName("simpleSP");
    builder.setLogLevel("fine");
    builder.setUsername("SCOTT");
    builder.setPassword("TIGER");
    builder.setUrl("jdbc:oracle:thin:@localhost:1521:ORCL");
    builder.setDriver("oracle.jdbc.OracleDriver");

builder.setPlatformClassname("org.eclipse.persistence.platform.database.oracle.Oracle11Platform");

    // set table and procedure operations
    ProcedureOperationModel procOpModel = new ProcedureOperationModel();
    procOpModel.setName("VarcharTest");
    procOpModel.setCatalogPattern("TOPLEVEL");
    procOpModel.setProcedurePattern("VarcharSP");
    procOpModel.setReturnType("xsd:int");
    builder.addOperation(procOpModel);

    TableOperationModel tableOpModel = new TableOperationModel();
    tableOpModel.setSchemaPattern("%");
    tableOpModel.setTablePattern("SIMPLESP");
    // add nested procedure operation
    procOpModel = new ProcedureOperationModel();
    procOpModel.setName("GetAllTest");
    procOpModel.setCatalogPattern("TOPLEVEL");
    procOpModel.setProcedurePattern("GetAll");
    procOpModel.setIsCollection(true);
    procOpModel.setReturnType("simpleSPType");
    tableOpModel.addOperation(procOpModel);
    builder.addOperation(tableOpModel);

    // setup the web service packager
    XRPackager xrPackager = new JSR109WebServicePackager();
    xrPackager.setDBWSBuilder(builder);
    builder.setPackager(xrPackager);
    xrPackager.setSessionsFileName(builder.getSessionsFileName());
    xrPackager.setStageDir(new File("."));

    // generate the web archive
    builder.start();
```

Index