

Oracle® Solaris Cluster Data Service for Oracle PeopleSoft Enterprise Guide

Copyright © 2010, 2013, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Ce logiciel et la documentation qui l'accompagne sont protégés par les lois sur la propriété intellectuelle. Ils sont concédés sous licence et soumis à des restrictions d'utilisation et de divulgation. Sauf disposition de votre contrat de licence ou de la loi, vous ne pouvez pas copier, reproduire, traduire, diffuser, modifier, breveter, transmettre, distribuer, exposer, exécuter, publier ou afficher le logiciel, même partiellement, sous quelque forme et par quelque procédé que ce soit. Par ailleurs, il est interdit de procéder à toute ingénierie inverse du logiciel, de le désassembler ou de le décompiler, excepté à des fins d'interopérabilité avec des logiciels tiers ou tel que prescrit par la loi.

Les informations fournies dans ce document sont susceptibles de modification sans préavis. Par ailleurs, Oracle Corporation ne garantit pas qu'elles soient exemptes d'erreurs et vous invite, le cas échéant, à lui en faire part par écrit.

Si ce logiciel, ou la documentation qui l'accompagne, est concédé sous licence au Gouvernement des Etats-Unis, ou à toute entité qui délivre la licence de ce logiciel ou l'utilise pour le compte du Gouvernement des Etats-Unis, la notice suivante s'applique:

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

Ce logiciel ou matériel a été développé pour un usage général dans le cadre d'applications de gestion des informations. Ce logiciel ou matériel n'est pas conçu ni n'est destiné à être utilisé dans des applications à risque, notamment dans des applications pouvant causer des dommages corporels. Si vous utilisez ce logiciel ou matériel dans le cadre d'applications dangereuses, il est de votre responsabilité de prendre toutes les mesures de secours, de sauvegarde, de redondance et autres mesures nécessaires à son utilisation dans des conditions optimales de sécurité. Oracle Corporation et ses affiliés déclinent toute responsabilité quant aux dommages causés par l'utilisation de ce logiciel ou matériel pour ce type d'applications.

Oracle et Java sont des marques déposées d'Oracle Corporation et/ou de ses affiliés. Tout autre nom mentionné peut correspondre à des marques appartenant à d'autres propriétaires qu'Oracle.

Intel et Intel Xeon sont des marques ou des marques déposées d'Intel Corporation. Toutes les marques SPARC sont utilisées sous licence et sont des marques ou des marques déposées de SPARC International, Inc. AMD, Opteron, le logo AMD et le logo AMD Opteron sont des marques ou des marques déposées d'Advanced Micro Devices. UNIX est une marque déposée d'The Open Group.

Ce logiciel ou matériel et la documentation qui l'accompagne peuvent fournir des informations ou des liens donnant accès à des contenus, des produits et des services émanant de tiers. Oracle Corporation et ses affiliés déclinent toute responsabilité ou garantie expresse quant aux contenus, produits ou services émanant de tiers. En aucun cas, Oracle Corporation et ses affiliés ne sauraient être tenus pour responsables des pertes subies, des coûts occasionnés ou des dommages causés par l'accès à des contenus, produits ou services tiers, ou à leur utilisation.

Contents

Preface	7
1 Getting Started with Oracle Solaris Cluster HA for PeopleSoft Enterprise	11
Overview	11
Installing the Data Service Package	12
▼ How to Install HA for PeopleSoft Application Server Data Service Package	13
2 Installing and Configuring the HA for PeopleSoft Application Server	15
Overview	15
Planning the HA for PeopleSoft Application Server Installation and Configuration	16
Configuration Restrictions for HA for PeopleSoft Application Server	16
Configuration Requirements for HA for PeopleSoft Application Server	17
HA for PeopleSoft Application Server Data Service Configurations	18
Installing and Configuring the PeopleSoft Application Server Domain	21
▼ How to Enable the PeopleSoft Application Server Domain to Run in a Cluster	22
▼ How to Install PeopleSoft Application Server Software	22
Verifying Installation and Configuration of the PeopleSoft Application Server Domain	23
▼ How to Verify PeopleSoft Application Server Domain Installation and Configuration	23
Registering and Configuring HA for PeopleSoft Application Server	24
Tools for Registering and Configuring HA for PeopleSoft Application Server	24
▼ How to Register and Configure HA for PeopleSoft Application Server for Failover (<code>clsetup</code>)	24
▼ How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance (<code>clsetup</code>)	31
▼ How to Register and Configure HA for PeopleSoft Application Server for Failover (CLI)	38
▼ How to Remove a PeopleSoft Application Server Domain Resource From a Failover Resource Group	39

- ▼ How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance Configuration (CLI) 39
 - Verifying Installation and Configuration of the PeopleSoft Application Server Domain Resource 41
 - ▼ How to Verify HA for PeopleSoft Application Server Domain Resource Installation and Configuration 41
 - Tuning the HA for PeopleSoft Application Server Fault Monitor 42
 - Resource Properties 42
 - Probing Algorithm and Functionality 42
 - Operations of the PeopleSoft Application Server Probe 43
 - Debugging HA for PeopleSoft Application Server 44
 - ▼ How to Activate Debugging for HA for PeopleSoft Application Server 44
- 3 Installing and Configuring the HA for PeopleSoft Process Scheduler45**
 - Overview 45
 - Planning the HA for PeopleSoft Process Scheduler Installation and Configuration 46
 - Configuration Restrictions for the HA for PeopleSoft Process Scheduler 47
 - Configuration Requirements for the HA for PeopleSoft process scheduler 47
 - Configuration Options for the HA for PeopleSoft process scheduler 49
 - Installing and Configuring the PeopleSoft Process Scheduler Domain 49
 - ▼ How to Enable the PeopleSoft Process Scheduler Domain to Run in a Cluster 50
 - ▼ How to Install PeopleSoft Process Scheduler Software 51
 - Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain 51
 - ▼ How to Verify the PeopleSoft Process Scheduler Domain Installation and Configuration 51
 - Registering and Configuring HA for PeopleSoft Process Scheduler 52
 - ▼ How to Register and Configure HA for PeopleSoft Process Scheduler for Failover 52
 - ▼ How to Remove a PeopleSoft Process Scheduler Domain From a Failover Resource Group 53
 - Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain Resource 53
 - ▼ How to Verify PeopleSoft Process Scheduler Domain Resource Installation and Configuration 53
 - Tuning the HA for PeopleSoft Process Scheduler Fault Monitor 54
 - Resource Properties 54
 - Probing Algorithm and Functionality 54
 - Operations of the PeopleSoft Process Scheduler Probe 55

Debugging the HA for PeopleSoft Process Scheduler Fault Monitor	56
▼ How to Activate Debugging for HA for PeopleSoft Process Scheduler	56
A HA for PeopleSoft Application Server Extension Properties	57
ORCL.PeopleSoft_app_server Extension Properties	57
B HA for PeopleSoft Process Scheduler Extension Properties	59
ORCL.PeopleSoft_process_scheduler Extension Properties	59
Index	61

Preface

Oracle Solaris Cluster Data Service for Oracle PeopleSoft Enterprise Guide explains how to install and configure Oracle Solaris Cluster data services.

This document is intended for system administrators with extensive knowledge of Oracle software and hardware. Do not use this document as a planning or presales guide. Before reading this document, you should have already determined your system requirements and purchased the appropriate equipment and software.

The instructions in this book assume knowledge of the Oracle Solaris Operating System and expertise with the volume-manager software that is used with Oracle Solaris Cluster software.

Bash is the default shell for Oracle Solaris 11. Machine names shown with the Bash shell prompt are displayed for clarity.

Using UNIX Commands

This document contains information about commands that are specific to installing and configuring Oracle Solaris Cluster data services. The document does *not* contain comprehensive information about basic UNIX commands and procedures, such as shutting down the system, booting the system, and configuring devices. Information about basic UNIX commands and procedures is available from the following sources:

- Online documentation for the Oracle Solaris Operating System
- Oracle Solaris Operating System man pages
- Other software documentation that you received with your system

Typographic Conventions

The following table describes the typographic conventions that are used in this book.

TABLE P-1 Typographic Conventions

Typeface	Description	Example
AaBbCc123	The names of commands, files, and directories, and onscreen computer output	Edit your <code>.login</code> file. Use <code>ls -a</code> to list all files. <code>machine_name%</code> you have mail.
AaBbCc123	What you type, contrasted with onscreen computer output	<code>machine_name%</code> su Password:
<i>aabbcc123</i>	Placeholder: replace with a real name or value	The command to remove a file is <code>rm filename</code> .
<i>AaBbCc123</i>	Book titles, new terms, and terms to be emphasized	Read Chapter 6 in the <i>User's Guide</i> . <i>A cache</i> is a copy that is stored locally. Do <i>not</i> save the file. Note: Some emphasized items appear bold online.

Shell Prompts in Command Examples

The following table shows UNIX system prompts and superuser prompts for shells that are included in the Oracle Solaris OS. In command examples, the shell prompt indicates whether the command should be executed by a regular user or a user with privileges.

TABLE P-2 Shell Prompts

Shell	Prompt
Bash shell, Korn shell, and Bourne shell	\$
Bash shell, Korn shell, and Bourne shell for superuser	#
C shell	<code>machine_name%</code>
C shell for superuser	<code>machine_name#</code>

Related Documentation

Information about related Oracle Solaris Cluster topics is available in the documentation that is listed in the following table. All Oracle Solaris Cluster documentation is available at <http://www.oracle.com/technetwork/indexes/documentation/index.html>.

Topic	Documentation
Hardware installation and administration	<i>Oracle Solaris Cluster 4.1 Hardware Administration Manual</i> Individual hardware administration guides
Concepts	<i>Oracle Solaris Cluster Concepts Guide</i>
Software installation	<i>Oracle Solaris Cluster Software Installation Guide</i>
Data service installation and administration	<i>Oracle Solaris Cluster Data Services Planning and Administration Guide</i> and individual data service guides
Data service development	<i>Oracle Solaris Cluster Data Services Developer's Guide</i>
System administration	<i>Oracle Solaris Cluster System Administration Guide</i> <i>Oracle Solaris Cluster Quick Reference</i>
Software upgrade	<i>Oracle Solaris Cluster Upgrade Guide</i>
Error messages	<i>Oracle Solaris Cluster Error Messages Guide</i>
Command and function references	<i>Oracle Solaris Cluster Reference Manual</i> <i>Oracle Solaris Cluster Data Services Reference Manual</i> <i>Oracle Solaris Cluster Geographic Edition Reference Manual</i> <i>Oracle Solaris Cluster Quorum Server Reference Manual</i>
Compatible software	Oracle Solaris Cluster Compatibility Guide available at the Oracle Solaris Cluster Technical Resources page

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Getting Help

If you have problems installing or using Oracle Solaris Cluster, contact your service provider and provide the following information.

- Your name and email address (if available)
- Your company name, address, and phone number
- The model number and serial number of your systems
- The release number of the operating environment (for example, Oracle Solaris 11)
- The release number of Oracle Solaris Cluster (for example, Oracle Solaris Cluster 4.1)

Use the following commands to gather information about your system for your service provider.

Command	Function
<code>prtconf -v</code>	Displays the size of the system memory and reports information about peripheral devices
<code>psrinfo -v</code>	Displays information about processors
<code>pkg list</code>	Reports which packages are installed
<code>prtdiag -v</code>	Displays system diagnostic information
<code>/usr/cluster/bin/clnode show-rev -v</code>	Displays Oracle Solaris Cluster release and package version information for each node

Also have available the contents of the `/var/adm/messages` file.

Getting Started with Oracle Solaris Cluster HA for PeopleSoft Enterprise

This chapter provides an overview of data services for Oracle Solaris Cluster HA for PeopleSoft Application Server (HA for PeopleSoft application server) and Oracle Solaris Cluster HA for PeopleSoft Process Scheduler (HA for PeopleSoft process scheduler). The chapter also explains how to install and configure the data service package.

This chapter contains the following sections:

- [“Overview” on page 11](#)
- [“Installing the Data Service Package” on page 12](#)

Overview

The PeopleSoft application server data service provides orderly startup, shutdown, fault monitoring, and automatic failover of a PeopleSoft application server domain. The PeopleSoft process scheduler data service manages the start, shutdown, and fault monitoring of a specific process scheduler domain.

Use the information in this section to understand how HA for PeopleSoft Enterprise makes PeopleSoft Enterprise highly available.

HA for PeopleSoft Enterprise provides fault monitoring and automatic failover for the PeopleSoft Enterprise application to eliminate single points of failure in a PeopleSoft Enterprise system. Any PeopleSoft Enterprise application runs on the PeopleSoft Enterprise PeopleTools three-tier architecture. Oracle Solaris Cluster orchestrates the startup, shutdown, and failover of the PeopleSoft Enterprise PeopleTools components. The following table lists the data services that protect PeopleSoft Enterprise PeopleTools components in an Oracle Solaris Cluster configuration.

TABLE 1-1 Protection of PeopleSoft Enterprise PeopleTools components

PeopleSoft Enterprise PeopleTools Component	Protected By
Database server	The data service for the database that you are using, for example: <ul style="list-style-type: none"> ■ For the Oracle database, the data service is explained in the Oracle Solaris Cluster Data Service for Oracle Guide. ■ For the Oracle RAC database, the data service is explained in the Oracle Solaris Cluster Data Service for Oracle Real Application Clusters Guide.
Application server	The data service is HA for PeopleSoft Application Server. The resource type is ORCL.PeopleSoft_app_server. The data service is explained in this document, the Oracle Solaris Cluster Data Service for Oracle PeopleSoft Enterprise Guide .
Web server	The data service is explained in the Oracle Solaris Cluster Data Service for Oracle WebLogic Server Guide .
Process Scheduler	The data service is HA for PeopleSoft Process Scheduler. The resource type is ORCL.PeopleSoft_process_scheduler. The data service is explained in this document, the Oracle Solaris Cluster Data Service for Oracle PeopleSoft Enterprise Guide .

HA for PeopleSoft Enterprise requires that a functioning cluster with the initial cluster framework is already installed. See the [Oracle Solaris Cluster Software Installation Guide](#) for details on initial installation of clusters and data service software. You register HA for PeopleSoft Enterprise after you successfully install the basic components of Oracle Solaris Cluster and PeopleSoft Enterprise software.

For information about which version of PeopleSoft Enterprise software is compatible, see the [Oracle Solaris Cluster Compatibility Guide](#) available at the [Oracle Solaris Cluster Technical Resources](#) page.

Installing the Data Service Package

If you did not install the ha-cluster/data-service/peoplesoft package during your initial Oracle Solaris Cluster installation, perform this procedure to install the data services package. The package contains both HA for PeopleSoft Application Server and HA for PeopleSoft Process Scheduler software.

▼ How to Install HA for PeopleSoft Application Server Data Service Package

Perform this procedure on each cluster node where you want HA for PeopleSoft application server and HA for PeopleSoft process scheduler software to run.

- 1 On the cluster node or zone cluster node where you are installing the data service package, assume the root role.
- 2 Ensure that the `solaris` and `ha-cluster` publishers are valid.

```
# pkg publisher
PUBLISHER          TYPE    STATUS  URI
solaris            origin  online  solaris-repository
ha-cluster         origin  online  ha-cluster-repository
```

For information about setting the `solaris` publisher, see “Set the Publisher Origin to the File Repository URI” in *Copying and Creating Oracle Solaris 11.1 Package Repositories*.

- 3 Install the data services package for the PeopleSoft Application Server and PeopleSoft Process Scheduler software.

```
# pkg install ha-cluster/data-service/peoplesoft
```

- 4 Verify that the package installed successfully.

```
$ pkg info ha-cluster/data-service/peoplesoft
```

Installation is successful if output shows: State is Installed.

- 5 Perform any necessary updates to the Oracle Solaris Cluster software.

For instructions on updating single or multiple packages, see Chapter 11, “Updating Your Software,” in *Oracle Solaris Cluster System Administration Guide*.

Next Steps See Chapter 2, “Installing and Configuring the HA for PeopleSoft Application Server,” and Chapter 3, “Installing and Configuring the HA for PeopleSoft Process Scheduler.”

Installing and Configuring the HA for PeopleSoft Application Server

This chapter gives an overview of the HA for PeopleSoft application server and explains how to install and configure it.

This chapter contains the following sections:

- “Overview” on page 15
- “Planning the HA for PeopleSoft Application Server Installation and Configuration” on page 16
- “Installing and Configuring the PeopleSoft Application Server Domain” on page 21
- “Verifying Installation and Configuration of the PeopleSoft Application Server Domain” on page 23
- “Registering and Configuring HA for PeopleSoft Application Server” on page 24
- “Verifying Installation and Configuration of the PeopleSoft Application Server Domain Resource” on page 41
- “Tuning the HA for PeopleSoft Application Server Fault Monitor” on page 42
- “Debugging HA for PeopleSoft Application Server” on page 44

Overview

The HA for PeopleSoft application server data service provides orderly startup, shutdown, fault monitoring, and automatic failover of a PeopleSoft application server domain. The PeopleSoft application server component is protected by the HA for PeopleSoft application server data service.

The following table summarizes the tasks for installing and configuring HA for PeopleSoft application server and provides cross-references to detailed instructions for performing these tasks. Perform the tasks in the order that they are listed in the table.

TABLE 2-1 Tasks for Installing and Configuring HA for PeopleSoft application server

Task	Instructions
1. Plan the installation	“Planning the HA for PeopleSoft Application Server Installation and Configuration” on page 16
2. Install and configure the PeopleSoft application server domain	“Installing and Configuring the PeopleSoft Application Server Domain” on page 21
3. Verify the PeopleSoft application server installation and configuration	“Verifying Installation and Configuration of the PeopleSoft Application Server Domain” on page 23
4. Register and configure HA for PeopleSoft application server resources	“Registering and Configuring HA for PeopleSoft Application Server” on page 24
5. Verify the HA for PeopleSoft application server domain resource installation and configuration	“Verifying Installation and Configuration of the PeopleSoft Application Server Domain Resource” on page 41
6. Tune the HA for PeopleSoft application server fault monitor	“Tuning the HA for PeopleSoft Application Server Fault Monitor” on page 42
7. Debug the HA for PeopleSoft application server	“Debugging HA for PeopleSoft Application Server” on page 44

Planning the HA for PeopleSoft Application Server Installation and Configuration

This section contains the information you need to plan your HA for PeopleSoft application server installation and configuration.

Configuration Restrictions for HA for PeopleSoft Application Server

The configuration restrictions in the subsections that follow apply only to the HA for PeopleSoft application server.

For restrictions that apply to all data services, see the *Oracle Solaris Cluster 4.1 Release Notes*.



Caution – Your data service configuration might not be supported if you do not observe these restrictions.

- **Failover support only** - PeopleSoft application server can be configured only as a failover data service and not as a scalable data service.

- **Multiple application server domains** - The Oracle Solaris Cluster resource of resource type `ORCL.PeopleSoft_app_server` can manage exactly one PeopleSoft application server domain. To manage multiple PeopleSoft application server domains, configure multiple Oracle Solaris Cluster resources of resource type `ORCL.PeopleSoft_app_server`, each resource managing exactly one PeopleSoft application server domain.

Configuration Requirements for HA for PeopleSoft Application Server

Use the requirements in this section to plan the installation and configuration of the HA for PeopleSoft application server. These requirements apply to HA for PeopleSoft application server only. You must meet these requirements before you proceed with your HA for PeopleSoft application server installation and configuration.

Information about how to install PeopleSoft Enterprise PeopleTools version 8.52 is published in the [PeopleSoft PeopleTools 8.52 Install Documentation Library](#).

For requirements that apply to all data services, see [Chapter 1, “Planning for Oracle Solaris Cluster Data Services,” in *Oracle Solaris Cluster Data Services Planning and Administration Guide*](#).



Caution – Your data service configuration might not be supported if you do not adhere to these requirements.

- **UNIX user and group** - The UNIX user and group that are used to install, operate, and manage the PeopleSoft application server domain must exist on all cluster nodes where the corresponding resource for the PeopleSoft application server domain is configured to come online.
- **File systems** - The file systems used to store the required binaries and data for the PeopleSoft application server domain must be configured on highly available local file systems. If you choose to install the binaries on local storage, install and keep them identical on all the cluster nodes. The directory specified for `Psft_Cfg_Home` must reside on a highly available local file system, which needs to be accessible where the corresponding resource for the PeopleSoft application server domain comes online.

If you are setting up PeopleSoft application server in a multi-instance configuration, the PeopleSoft application server installation should be located on network attached storage (NAS) accessible to all the nodes running the server.

- **Environment variables** - In addition to the required environment variables that are explained in the PeopleSoft Enterprise PeopleTools installation guide, you must set up the following variables before you configure the PeopleSoft application server domain:
 - `SC_LHOSTNAME`
 - `LD_PRELOAD_32`

- LD_PRELOAD_64

Set SC_LHOSTNAME to the logical hostname under which the PeopleSoft application server domain must be reachable from the web tier. For more details, refer to the [libscho.st.so.1\(1\)](#) man page.

Set these environment variables for the profile of the user that operates the PeopleSoft application server domain. Ensure that the login for the user is noninteractive. If you invoke as user root, you must see these variables displayed in the psadmin command output:

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -env"
```

- **Database tier dependency** - If the database tier is deployed on the same global cluster, the resource for the PeopleSoft application server domain must define a strong resource dependency to the resources for the database instance and database listener. This ensures that the PeopleSoft application server domain will only try to start when the corresponding database is already operational. This configuration is required for a successful startup of the PeopleSoft application server domain. If the Oracle database is not managed through Oracle Solaris Cluster, you can also configure the database tier dependency by using the data service delivered as part of the Oracle External Proxy resource.
- **Database client network connection** - The database client used by the PeopleSoft application server domain configuration must be configured to connect to the network address that is managed by the cluster framework for the corresponding database server.


HA for PeopleSoft Application Server Data Service Configurations





Use the data service configurations in this section to plan the installation and configuration of the HA for PeopleSoft application server.

Failover Configurations

When the PeopleSoft software is installed in a traditional file system, a failover deployment requires a configuration where one failover resource group contains the PeopleSoft application server resource, the logical hostname resource, and the failover storage resource. This type of configuration is shown in the following figure.


FIGURE 2-1 PeopleSoft Application Server Configured for Failover with Traditional File Storage

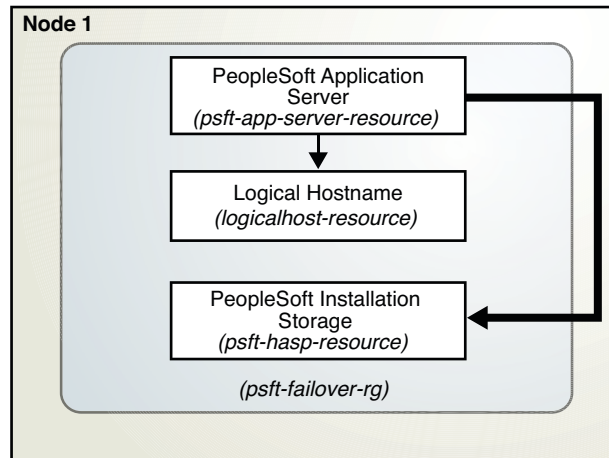

-  Denotes offline-restart dependency.
-  Denotes strong dependency.
-  Denotes a resource group.
-  Denotes a resource.

When the PeopleSoft software is installed on network attached storage (NAS), a failover resource group is configured with the logical hostname resource and PeopleSoft application server resource. A scalable resource group is configured with the NAS storage resource. Such a configuration is shown in the following figure.

FIGURE 2-2 PeopleSoft Application Server Configured for Failover with NAS

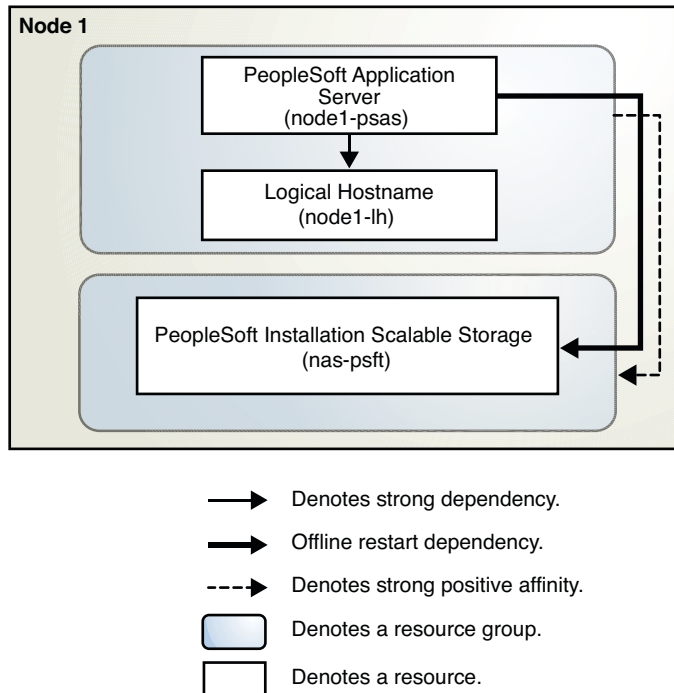


Multi-Instance Configuration

Multi-instance configuration is an application deployment topology where multiple instances of the same application provide an aggregation of services. This topology can be achieved independently of using a data service because you can manually start and stop the instances on the cluster nodes. When HA of such instances is required, you can enable a data service for the instances by creating multiple single-node resource groups or a few multi-master resource groups.

This example illustrates a multi-instance configuration using single-node resource groups. A single-node resource group is created for each of the PeopleSoft application server resources. Each resource group has a strong positive affinity on a storage resource group and a logical host resource group whose primary node is the node containing the PeopleSoft application server resource group.

FIGURE 2-3 PeopleSoft Application Server Configured as a Multi-Instance Application With Single-Node Resource Groups

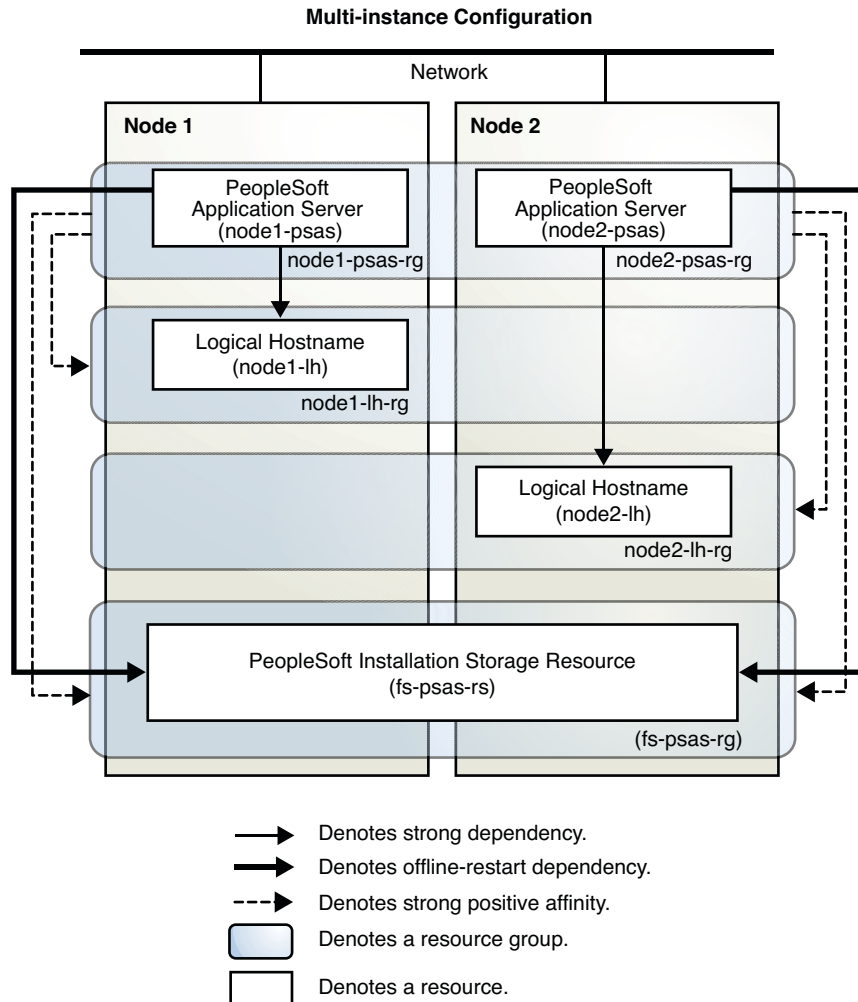

Installing and Configuring the PeopleSoft Application Server Domain

This section contains the procedures you need to install and configure a PeopleSoft application server domain as a cluster resource.

▼ How to Enable the PeopleSoft Application Server Domain to Run in a Cluster

Perform this procedure on one node of the cluster to configure storage and logical host resource groups.

Tip – The `clsetup` utility provides a wizard that can also be used to configure storage and logical host resource groups. See [“How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance \(clsetup\)”](#) on page 31

Before You Begin Ensure that the `/etc/netmasks` file has IP-address subnet and netmask entries for all logical hostnames. If necessary, edit the `/etc/netmasks` file to add any missing entries.

1 On a cluster node that will host the PeopleSoft application server domain, assume the root role that provides `solaris.cluster.modify` and `solaris.cluster.admin` RBAC authorization.

2 Register the `SUNW.HASStoragePlus` resource type.

```
# clresourcetype register SUNW.HASStoragePlus
```

3 Create a failover resource group.

```
# clresourcegroup create psft-failover-rg
```

4 Create a resource for the PeopleSoft application server domain file systems on shared storage.

```
# clresource create -g psft-failover-rg -t SUNW.HASStoragePlus \
-p FilesystemMountPoints=psft-mount-points psft-hasp-resource
```

5 Create a resource for the logical hostname that will be used by the web tier to connect to the PeopleSoft application server domain.

```
# clreslogicalhostname create -g psft-failover-rg \
-h logical-hostname logicalhost-resource
```

6 Enable the failover resource group that now includes the PeopleSoft application server domain disk storage and logical host resources.

```
# clresourcegroup online -eM -n current-node psft-failover-rg
```

▼ How to Install PeopleSoft Application Server Software

1 On the cluster member where the `psft-failover-rg` resource group is online, assume the root role.

- 2 Follow the instructions in the appropriate PeopleSoft documentation for your version of the product. Documentation for installing PeopleSoft Enterprise PeopleTools version 8.52 is published in the [PeopleSoft PeopleTools 8.52 Install Documentation Library](#).
When following these instructions, ensure that you observe the information in “[Configuration Requirements for HA for PeopleSoft Application Server](#)” on page 17.

Verifying Installation and Configuration of the PeopleSoft Application Server Domain

This section contains the procedure to verify successful installation and configuration of the PeopleSoft application server domain.

▼ How to Verify PeopleSoft Application Server Domain Installation and Configuration

- 1 Assume the root role and log in to the node that currently hosts the *psft-failover-rg* resource group.
- 2 Start the PeopleSoft application server domain.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -c boot -d Psft_Domain"
```
- 3 Verify the status of the PeopleSoft application server domain.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -c sstatus -d Psft_Domain"
```
- 4 Stop the PeopleSoft application server domain.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -c shutdown -d Psft_Domain"
```
- 5 Switch the PeopleSoft application server resource group to another cluster member.

```
# clresourcegroup switch -n node psft-failover-rg
```
- 6 Repeat all steps until you have tested all the potential nodes on which the PeopleSoft application server domain can run.

Registering and Configuring HA for PeopleSoft Application Server

This section contains the procedures to configure or unconfigure HA for PeopleSoft application server.

- [“Tools for Registering and Configuring HA for PeopleSoft Application Server” on page 24](#)
- [“How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance \(clsetup\)” on page 31](#)
- [“How to Register and Configure HA for PeopleSoft Application Server for Failover \(CLI\)” on page 38](#)
- [“How to Remove a PeopleSoft Application Server Domain Resource From a Failover Resource Group” on page 39](#)
- [“How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance Configuration \(CLI\)” on page 39](#)

Tools for Registering and Configuring HA for PeopleSoft Application Server

Oracle Solaris Cluster software provides the following tools for registering and configuring the HA for PeopleSoft application server in the global cluster or in a zone cluster:

- **The `clsetup(1CL)` utility.**

The `clsetup` utility provides a wizard for configuring the HA for PeopleSoft application server. This wizard reduces the possibility for configuration errors that might result from command syntax errors or omissions. This wizard also ensures that all required resources are created and that all required dependencies between resources are set.

For instructions for using the wizard, see [“How to Register and Configure HA for PeopleSoft Application Server for Failover \(clsetup\)” on page 24](#) and [“How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance \(clsetup\)” on page 31](#).

- **Oracle Solaris Cluster maintenance commands.** For instructions for using the commands, see [“How to Register and Configure HA for PeopleSoft Application Server for Failover \(CLI\)” on page 38](#) and [“How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance Configuration \(CLI\)” on page 39](#).

▼ How to Register and Configure HA for PeopleSoft Application Server for Failover (clsetup)

Use this procedure to configure the HA for PeopleSoft application server for failover. The `clsetup` utility includes a wizard to guide you through the creation of logical hostname

resources. The wizard creates multiple resource groups, each containing one logical hostname resource, with a different preferred node in each group.

Before You Begin Before you run `clsetup`, be sure that the following tasks have been performed:

- PeopleSoft application server software and agent packages are installed on the nodes of the cluster as described in “[Installing and Configuring the PeopleSoft Application Server Domain](#)” on page 21 and “[Installing the Data Service Package](#)” on page 12.
- All storage management software that you intend to use is installed and configured on all nodes where PeopleSoft application server is to run.
- Zone clusters where you intend to run PeopleSoft application server have been created.
- The logical hostnames that are to be made available by the resources have an entry in a name service database such as DNS.
- If you are using IP Network Multipathing (IPMP) groups, the groups are configured on the nodes where the logical hostname resources can be brought online.
- Any non-global zones that can master the resources are already configured on your cluster nodes.

1 Assume the root role on any cluster node.

2 Start the `clsetup` utility.

```
# /usr/cluster/bin/clsetup
```

The `clsetup` main menu is displayed.

3 Type the number for Data Services and press Return.

The Data Services menu is displayed.

4 Type the number for Logical Hostname and press Return.

5 Select the Global Cluster or Zone Cluster by typing the corresponding number and pressing Return.

If you specified a Zone Cluster, the `clsetup` utility displays a list of zone clusters.

If you specified a Global Cluster, the `clsetup` utility displays a list of tasks you need to complete. Continue to [Step 7](#).

6 If you specified a Zone Cluster, type the number that corresponds to the zone cluster where you want to configure the PeopleSoft application server and press Return.

The `clsetup` utility displays a list of tasks you need to complete.

7 Verify that you have met the prerequisites and press Return.

If you are configuring in a zone cluster, the zone cluster nodes are displayed.

If you are configuring in a global cluster, the global cluster nodes and zone nodes are displayed.

8 Select the nodes where you want to run the logical host resources.

- **To accept the default selection of all listed nodes, type a and press Return.**
- **To select a subset of the listed nodes, type the numbers of the nodes with a space or comma between the numbers. Then press Return.**

The `clsetup` utility prompts you for the logical host for the first node.

9 Type the name of the logical host to be used for the specified node and press Return.

The `clsetup` utility repeats the prompt for each node that you selected.

When you have finished specifying a logical host for each node, the wizard automatically generates names for the logical hostname resources and resource groups based on the logical hostnames you entered.

The wizard then displays a Select Resource Groups to Edit panel that shows a list of resource groups that are about to be created, with the ordered node list for each group. You can edit the names of these resource groups if you want.

Note – The nodes in each resource group cannot be altered in this panel. The wizard sets the preferred node name automatically and ensures that a different node is the preferred node for each group. If you need to change any information about the nodes, you must go back through the wizard by pressing the < key.

10 (Optional) If you want to edit the name of a resource group shown in the panel, type the number of a group you want to change and press Return.

The wizard displays a list of the names of the resource and resource group for the group you selected. From here you can separately edit these names.

- a. Type the number for the name you want to change and press Return.**
- b. Type the new name when prompted and press Return.**

The wizard displays the new names of the resource and resource group for the group you selected.

c. Type d when you are done editing the names.

The Select Resource Groups to Edit panel is displayed again with the new values of all the resource groups that are to be created.

11 Type d in the Select Resource Groups to Edit panel when you are done with editing.

The wizard displays the Review Configuration of Logical Hostname Resources panel to display the resource name, resource group name, node list, and logical hostname that will be created. The names are not editable here, but you can type < and press Return to go back to the previous panel to edit if you like.

12 In the Review Configuration of Logical Hostname Resources panel type c and Press Return to create the configuration.

When configuration is complete, the clsetup utility displays the commands that the utility ran to create the configuration.

Note – The clsetup utility rolls back the changes if it fails to complete the logical host configuration process.

13 Press Return to continue.

The clsetup utility returns you to the Data Services menu.

14 Type the number for PeopleSoft Enterprise Application Server and press Return.

The clsetup utility displays a list of options for the PeopleSoft application server location.

The next step is optional. You should skip to [Step 24](#) if you are not using HA for storage or you have previously configured HA for storage, either through the clsetup main menu or by using other commands.

15 Select the Global Cluster or Zone Cluster by typing the corresponding number and pressing Return.

If you specified a Zone Cluster, the clsetup utility displays a list of zone clusters.

If you specified a Global Cluster, the clsetup utility displays a list of tasks you need to complete. Continue to [Step 17](#).

16 If you specified a Zone Cluster, type the number that corresponds to the zone cluster where you want to configure the PeopleSoft application server and press Return.

The clsetup utility displays a list of components you need to configure.

17 (Optional) Type the number for Storage and press Return.

The clsetup utility prepares to start a wizard to guide you through the creation and configuration of storage resource groups for PeopleSoft application server.

Before you continue, make sure all the listed prerequisites have been met.

18 Verify that the prerequisites are met and press Return.

If you are configuring on a zone cluster, the `clsetup` utility displays the nodes available for you to select for storage resources to run.

If you are configuring on a global cluster, the `clsetup` utility displays the existing file system mount points.

19 If you are configuring on a zone cluster, select the nodes where the storage resources should run and press Return.

The `clsetup` utility displays the existing file system mount points.

20 Select the file system mount points for HA for PeopleSoft application server data files.

- **To select a subset of the listed file system mount points, type a comma-separated or space-separated list of the numbers that correspond to the file system mount point and press Return.**
- **To select all file system mount points in a particular order, type a comma-separated or space-separated ordered list of the numbers that correspond to the file system mount points and press Return.**

21 To confirm your selection of file system mount points, type `d` and press Return.

The `clsetup` utility displays a review panel where you can change the names of the objects that are about to be created.

22 If you want a different name for any resources or groups, change each name as follows.

a. Type the number for the name that you want to change and press Return.

The `clsetup` utility displays a screen where you can specify the new name.

b. At the `New Value` prompt, type the new name and press Return.

The `clsetup` utility returns you to the list of the names of the objects that the utility will create.

23 To confirm the names, type `d` and press Return.

The `clsetup` utility displays information about the configuration that the utility will create.

24 To create the configuration, type `c` and Press Return.

When configuration is complete, the `clsetup` utility displays the commands that the utility ran to create the configuration.

Note – The `clsetup` utility rolls back the changes if it fails to complete the storage configuration process.

25 Press Return to continue.

The `clsetup` utility returns you to the list of options for configuring the HA for PeopleSoft application server.

26 Type the number for PeopleSoft application server and press Return.

The utility displays a list of prerequisites for the creation of the PeopleSoft application server resource group.

27 Verify that you have met all the prerequisites and press Return.

The wizard lists all the local user names from the selected cluster so you can choose the user name that should run the PeopleSoft application server.

28 Type the number for the user name that should be used to run the PeopleSoft application server.

If you do not see the user name that you want, type `n` and press Return to see another page of user names. If you want to use the `psft` user, for example, it might be listed on the second page.

For better security, you should not run the server as the root user, but you are not prevented from doing so.

The `clsetup` utility then displays a panel for you to specify the PeopleSoft application server installation directory location.

29 Type the full path to the PeopleSoft application server directory that you want to use, and press Return.

The directory contains the PeopleSoft application server binaries and corresponds to the directory specified as `PS_HOME` when you installed the PeopleSoft software. The directory must be accessible from at least one cluster node if you are setting up a failover configuration, or from each cluster node if you are setting up a multi-instance configuration.

The `clsetup` utility then prompts you to enter the location of the domain directory. The value displayed is the directory specified as `PS_CFG_HOME` when you installed the PeopleSoft software. By default the domain directory is `${PSFT_USER_HOME}/psft/pt/${PT_VERSION}`.

30 If the domain directory path displayed is not correct, type the full path to the domain directory for the PeopleSoft application server and press Return.

The `clsetup` utility prompts for the configuration mode.

31 Type the number that corresponds to the Failover configuration mode and press Return.

In failover mode, the PeopleSoft application server instance runs only on a single node. If the fault monitor detects an error, it restarts the instance on the same node or starts an instance on another cluster node that is configured to master the PeopleSoft application server data service.

The `clsetup` utility displays a list of PeopleSoft application server domain configuration names that you can configure. The domain names are obtained from the domain directory that you specified.

32 Specify the domain where you want PeopleSoft application servers to run by doing one of the following:

- **Type the number for a domain in the list and press Return.**

When configuring failover mode you can select only one domain.

- **Type e and press Return, type the name of the domain that you want to use, and press Return.**

This option is useful if you want to use a domain that is not shown in the list.

The wizard displays the domain you have selected and you must type `yes` to confirm it is correct.

The `clsetup` utility then prompts for database information.

33 Type yes if the application server uses a database resource, or type no if it does not, and press Return.

If you specify `yes`, the utility searches for database resources and presents a numbered list of resources found and prompts you to select from the list.

- a. **Type the number of one or more database resources that should be used by the application, with commas or spaces between the numbers.**

- b. **Press Return.**

- c. **Type d and press Return.**

The utility displays a list of logical hostname resources for the application server domain.

34 Select the logical hostname resource that will run the application server domain:

- a. **Type the number of the logical hostname resource that should run the application server.**

- b. **Press Return.**

- c. **Type d and press Return.**

The `clsetup` utility displays a list of storage resources for PeopleSoft application server files.

35 Type the number of the storage resource you want to use for the PeopleSoft application server.

The `clsetup` utility displays a review panel that shows the storage resource group and application server domain that you have selected.

36 In the review panel, do one of the following:

- **To confirm creation of the resource groups, type `d` and press Return.**
- **To change the names of any resources or groups, type the number of the item in the list and press Return.**

The `clsetup` utility displays a new panel for changing the names. You can type the number for the name you want to change, and the utility prompts you to change the name.

Type `d` and press Return to confirm the new names.

The utility displays a review panel of the objects that it will create.

37 To create the configuration, type `c` and Press Return.

When configuration is complete, the `clsetup` utility displays the commands that the utility ran to create the configuration.

Note – The `clsetup` utility rolls back the changes if it fails to complete the database configuration process.

38 Press Return to continue.

The `clsetup` utility returns you to the list of options for configuring PeopleSoft application server.

39 Press Return to exit the wizard for configuring the PeopleSoft application server.

The `clsetup` utility returns to the Data Services Configuration menu.

40 (Optional) Type `q` and press Return repeatedly until you quit the `clsetup` utility.

If you prefer, you can leave the `clsetup` utility running while you perform other required tasks before using the utility again.

▼ **How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance (`clsetup`)**

Use this procedure to configure the HA for PeopleSoft application server for multiple instances. The `clsetup` utility includes a wizard to guide you through the creation of logical hostname

resources. The wizard creates multiple resource groups, each containing one logical hostname resource, with a different preferred node in each group.

Before You Begin Before you run `clsetup`, be sure that the following tasks have been performed:

- PeopleSoft application server software and agent packages are installed on the nodes of the cluster as described in “[Installing and Configuring the PeopleSoft Application Server Domain](#)” on page 21 and “[Installing the Data Service Package](#)” on page 12.
- All storage management software that you intend to use is installed and configured on all nodes where PeopleSoft application server is to run.
- Zone clusters where you intend to run PeopleSoft application server have been created.
- The logical hostnames that are to be made available by the resources have an entry in a name service database such as DNS.
- If you are using IP Network Multipathing (IPMP) groups, the groups are configured on the nodes where the logical hostname resources can be brought online.
- Any non-global zones that can master the resources are already configured on your cluster nodes.

1 Assume the root role on any cluster node.

2 Start the `clsetup` utility.

```
# /usr/cluster/bin/clsetup
```

The `clsetup` main menu is displayed.

3 Type the number for Data Services and press Return.

The Data Services menu is displayed.

4 Type the number for PeopleSoft Application Server and press Return.

The `clsetup` utility displays a list of options for the PeopleSoft application server location.

5 Select the Global Cluster or Zone Cluster by typing the corresponding number and pressing Return.

If you specified a Zone Cluster, the `clsetup` utility displays a list of zone clusters.

If you specified a Global Cluster, the `clsetup` utility displays a list of tasks you need to complete. Continue to [Step 7](#).

6 If you specified a Zone Cluster, type the number that corresponds to the zone cluster where you want to configure the PeopleSoft application server and press Return.

The `clsetup` utility displays a list of components to configure.

7 Type the number for Per Node Logical Hostname and press Return.

The utility displays a list of prerequisites for the creation of logical hostname resources.

8 Verify that you have met the prerequisites and press Return.

If you are configuring in a zone cluster, the zone cluster nodes are displayed.

If you are configuring in a global cluster, the global cluster nodes and zone nodes are displayed.

9 Select the nodes where you want to run the logical host resources.

- **To accept the default selection of all listed nodes, type a and press Return.**
- **To select a subset of the listed nodes, type the numbers of the nodes with a space or comma between the numbers. Then press Return.**

The `clsetup` utility prompts you for the logical host for the first node.

10 Type the name of the logical host to be used for the specified node and press Return.

The `clsetup` utility repeats the prompt for each node that you selected.

When you have finished specifying a logical host for each node, the wizard automatically generates names for the logical hostname resources and resource groups based on the logical hostnames you entered.

The wizard then displays a Select Resource Groups to Edit panel that shows a list of resource groups that are about to be created, with the ordered node list for each group. You can edit the names of these resource groups if you want.

Note – The nodes in each resource group cannot be altered in this panel. The wizard sets the preferred node name automatically and ensures that a different node is the preferred node for each group. If you need to change any information about the nodes, you must go back through the wizard by pressing the < key.

11 (Optional) If you want to edit the name of a resource group shown in the panel, type the number of a group you want to change and press Return.

The wizard displays a list of the names of the resource and resource group for the group you selected. From here you can separately edit these names.

a. Type the number for the name you want to change and press Return.**b. Type the new name when prompted and press Return.**

The wizard displays the new names of the resource and resource group for the group you selected.

c. Type d when you are done editing the names.

The Select Resource Groups to Edit panel is displayed again with the new values of all the resource groups that are to be created.

12 Type d in the Select Resource Groups to Edit panel when you are done with editing.

The wizard displays the Review Configuration of Logical Hostname Resources panel to display the resource name, resource group name, node list, and logical hostname that will be created. The names are not editable here, but you can type < and press Return to go back to the previous panel to edit if you like.

13 In the Review Configuration of Logical Hostname Resources panel type c and Press Return to create the configuration.

When configuration is complete, the clsetup utility displays the commands that the utility ran to create the configuration.

Note – The clsetup utility rolls back the changes if it fails to complete the logical host configuration process.

14 Press Return to continue.

The clsetup utility returns you to the list of options for configuring PeopleSoft application server.

The next step is optional. You should skip to [Step 24](#) if you are not using HA for storage or you have previously configured HA for storage, either through the clsetup main menu or by using other commands.

15 (Optional) Type the number for Storage and press Return.

The clsetup utility prepares to start a wizard to guide you through the creation and configuration of storage resource groups for PeopleSoft application server.

Before you continue, make sure all the listed prerequisites have been met.

16 Verify that the prerequisites are met and press Return.

If you are configuring on a zone cluster, the clsetup utility displays the nodes available for you to select for storage resources to run.

If you are configuring on a global cluster, the clsetup utility displays the existing file system mount points.

17 If you are configuring on a zone cluster, select the nodes where the storage resources should run and press Return.

The clsetup utility displays the existing file system mount points.

- 18 Select the file system mount points for HA for PeopleSoft application server data files.**
 - To select a subset of the listed file system mount points, type a comma-separated or space-separated list of the numbers that correspond to the file system mount point and press Return.
 - To select all file system mount points in a particular order, type a comma-separated or space-separated ordered list of the numbers that correspond to the file system mount points and press Return.
- 19 To confirm your selection of file system mount points, type d and press Return.**

The `clsetup` utility displays a review panel where you can change the names of the objects that are about to be created.
- 20 If you want a different name for any resources or groups, change each name as follows.**
 - a. Type the number for the name that you want to change and press Return.**

The `clsetup` utility displays a screen where you can specify the new name.
 - b. At the New Value prompt, type the new name and press Return.**

The `clsetup` utility returns you to the list of the names of the objects that the utility will create.
- 21 To confirm the names, type d and press Return.**

The `clsetup` utility displays information about the configuration that the utility will create.
- 22 To create the configuration, type c and Press Return.**

When configuration is complete, the `clsetup` utility displays the commands that the utility ran to create the configuration.

Note – The `clsetup` utility rolls back the changes if it fails to complete the storage configuration process.

- 23 Press Return to continue.**

The `clsetup` utility returns you to the list of options for configuring the HA for PeopleSoft application server.
- 24 Type the number for PeopleSoft application server and press Return.**

The utility displays a list of prerequisites for the creation of the PeopleSoft application server resource group.

25 Verify that you have met all the prerequisites and press Return.

The wizard lists all the local user names from the selected cluster so you can choose the user name that should run the PeopleSoft application server.

26 Type the number for the user name that should be used to run the PeopleSoft application server.

If you do not see the user name that you want, type **n** and press Return to see another page of user names. If you want to use the `psft` user, for example, it might be listed on the second page.

For better security, you should not run the server as the root user, but you are not prevented from doing so.

The `clsetup` utility then displays a panel for you to specify the PeopleSoft application server installation directory location.

27 Type the full path to the PeopleSoft application server directory that you want to use, and press Return.

The directory contains the PeopleSoft application server binaries and corresponds to the directory specified as `PS_HOME` when you installed the PeopleSoft software. The directory must be accessible from each cluster node when you are setting up a multi-instance configuration.

The `clsetup` utility then prompts you to enter the location of the domain directory. The value displayed is the directory specified as `PS_CFG_HOME` when you installed the PeopleSoft software. By default the domain directory is `${PSFT_USER_HOME}/psft/pt/${PT_VERSION}`.

28 If the domain directory path displayed is not correct, type the full path to the domain directory for the PeopleSoft application server and press Return.

The `clsetup` utility prompts for the configuration mode.

29 Type the number that corresponds to the multi-instance mode and press Return.

The `clsetup` utility displays a list of PeopleSoft application server domain configuration names that you can configure. The domain names are obtained from the domain directory that you specified.

30 Specify the domains where you want PeopleSoft application servers to run by doing one of the following:

▪ **Type the number of one or more domain in the list and press Return.**

You can select multiple domains by entering their numbers with spaces or commas in between.

▪ **Type e and press Return, type the name of the domain that you want to use, and press Return.**

This option is useful if you want to use a domain that is not shown in the list.

When you are configuring for multi-instance mode you can type the names of multiple domains. You can include domains that are shown in the list or not shown in the list. Type one domain name when prompted and press Return. Type additional domains names when prompted, one name at a time, in the same manner. When you have finished entering domain names, press Return at the prompt without typing anything else.

The wizard displays the list of domains you have selected and you must type yes to confirm they are correct.

The `clsetup` utility then prompts for database information.

31 Type yes if the application server uses a database resource, or type no if it does not, and press Return.

If you specify yes, the utility searches for database resources and presents a numbered list of resources found and prompts you to select from the list.

- a. **Type the number of one or more database resources that should be used by the application, with commas or spaces between the numbers.**
- b. **Press Return.**
- c. **Type d and press Return.**

The utility displays a list of logical hostname resources for the application server domain.

32 Select the logical hostname resources that will run the application server domains:

- a. **Type the number of a logical hostname resource that should run the application server.**
- b. **Press Return.**
- c. **Type d and press Return.**

The `clsetup` utility prompts you for the logical hostname for each of the selected domains.

When you have completed the logical hostname assignments, the `clsetup` utility displays a list of storage resources for PeopleSoft application server files.

The `clsetup` utility displays a list of storage resources for PeopleSoft application server files.

33 Type the number of the storage resource you want to use for the PeopleSoft application server.

The `clsetup` utility displays a review panel that shows the storage resource group and application server domain that you have selected.

34 In the review panel, do one of the following:

- **To confirm creation of the resource groups, type d and press Return.**

- **To change the names of any resources or groups, type the number of the item in the list and press Return.**

The `clsetup` utility displays a new panel for changing the names. You can type the number for the name you want to change, and the utility prompts you to change the name.

Type `d` and press Return to confirm the new names.

The utility displays a review panel of the objects that it will create.

35 To create the configuration, type `c` and Press Return.

When configuration is complete, the `clsetup` utility displays the commands that the utility ran to create the configuration.

Note – The `clsetup` utility rolls back the changes if it fails to complete the database configuration process.

36 Press Return to continue.

The `clsetup` utility returns you to the list of options for configuring PeopleSoft application server.

37 Press Return to exit the wizard for configuring the PeopleSoft application server.

The `clsetup` utility returns to the Data Services Configuration menu.

38 (Optional) Type `q` and press Return repeatedly until you quit the `clsetup` utility.

If you prefer, you can leave the `clsetup` utility running while you perform other required tasks before using the utility again.

▼ **How to Register and Configure HA for PeopleSoft Application Server for Failover (CLI)**

Before You Begin Install the data service package during your initial Oracle Solaris Cluster installation.

If you did not install the HA for PeopleSoft application server package as part of your initial Oracle Solaris Cluster installation, go to [“Installing the Data Service Package” on page 12](#).

- 1 On the cluster node that hosts the PeopleSoft application server domain, assume the root role that provides `solaris.cluster.modify` and `solaris.cluster.admin` RBAC authorization.**

- 2 Register the `ORCL.PeopleSoft_app_server` resource type.**

```
# clresource_type register ORCL.PeopleSoft_app_server
```

3 Create a PeopleSoft application server domain resource in the failover resource group.

```
# clresource create -g psft-app-failover-rg -d \
-t ORCL.PeopleSoft_app_server \
-p Psft_User=Psft-username -p Psft_Domain=Psft-domainname \
-p Psft_Home=Psft-home-directory -p Psft_Cfg_Home=Psft-config-home-directory \
-p resource_dependencies=logicalhostname-resource \
-p resource_dependencies_offline_restart=hasp-resource psft-app-server-resource
```

4 If the database tier is deployed on the same global cluster, configure a strong dependency to the resources for the database instance and database listener.

Do this even if the database tier is deployed in a different zone cluster of the same global cluster.

```
# clresource set -p resource_dependencies+=db-instance-resource,db-listener-resource \
psft-app-server-resource
```

5 Enable the PeopleSoft application server domain resource.

Repeat this step for each PeopleSoft application server domain instance, if multiple instances were created.

```
# clresource status
# clresource enable psft-app-server-resource
```

▼ How to Remove a PeopleSoft Application Server Domain Resource From a Failover Resource Group

- 1 Assume the root role that provides `solaris.cluster.modify` and `solaris.cluster.admin` RBAC authorizations.
- 2 Disable and remove the resource that is used by the HA for PeopleSoft application server data service.

```
# clresource disable psft-app-server-resource
# clresource delete psft-app-server-resource
```

▼ How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance Configuration (CLI)

This procedure shows how to use commands to create a PeopleSoft application server multi-instance configuration that uses single-node resource groups. This method is an alternative to using the `clsetup` wizard described in [“How to Register and Configure HA for PeopleSoft Application Server for Multi-Instance \(clsetup\)”](#) on page 31.

A single node resource group is created for each of the application server resources managing a domain. Each resource group has a strong positive affinity on storage resource group and a logical host resource group whose primary node is the node containing the application server resource group.

Note – These instructions assume a zone cluster. If you are configuring in the global cluster, omit the `-Z` option.

1 Create a logical host resource group.

```
# clresourcegroup create -Z zone-name \
-p nodelist=node1,node2,node3... \
logicalhost-resource-group
```

2 Create a logical hostname resource in the resource group for logical hostnames.

```
# clreslogicalhostname create -Z zone-name \
-g logicalhost-resource-group -h hostname \
logicalhost-resource
```

3 Bring the logical hostname resource group online.

```
# clresourcegroup online -emM -Z zone-name logicalhost-resource-group
```

4 Create a single-node resource group for an application server, with strong positive affinities for the logical host resource group and the storage resource group.

```
# clresourcegroup create -Z zone-name -p nodelist=node1 \
-p RG_affinities=++logicalhost-resource-group,++scalmnt-rg psft-app-server-rg
```

5 Set the logical hostname resource group Failback property.

```
# clresourcegroup set -p Failback=True -Z zone-name logicalhost-resource-group
```

6 Create the PeopleSoft application server resource and set its properties.

```
# clresource create -t ORCL.PeopleSoft_app_server:1 -g psft-app-server-rg \
-p Resource_dependencies=logicalhost-resource1,zone-1:rac-proxy-rs \
-p Resource_dependencies_offline_restart=storage1-rs,storage2-rs \
-p Psft_Home=/path/to/Psft/home/dir \
-p Psft_Cfg_Home=/path/to/Psft/cfg-home \
-p Psft_User=username \
-p Psft_Domain=Psft-domain psft-application-rs
```

Example 2-1 Commands for Configuring HA for PeopleSoft Application Server in a Single-Node Resource Group Multi-Instance Configuration

```
# clresourcegroup create -Z zone-2 \
-p nodelist=vzmoney1d,vzmoney2d,vzmoney3d,vzmoney4d money-9-rg

# clreslogicalhostname create -Z zone-2 -g money-9-rg -h money-9 money-9-rs

# clresourcegroup online -emM -Z zone-2 money-9-rg
```



```
# clresourcegroup create -Z zone-2 -p nodelist=vzmoney1d \
-p RG_affinities=++money-9-rg,++scalmnt-rg pse-PSEDB-rg

# clresourcegroup set -p Failback=True -Z zone-2 money-9-rg

# clresource create -Z zone-2 -t ORCL.PeopleSoft_app_server:1 -g pse-PSEDB-rg \
-p Resource_dependencies=money-9-rs,zone-1:rac-proxy-rs \
-p Resource_dependencies_offline_restart=scalmnt-crs03-rs,scalmnt-crs01-rs \
-p Psft_Home=/scalable/pse-app/PT8.52 \
-p Psft_Cfg_Home=/scalable/pse-app/psft/cfg-home \
-p Psft_User=psft -p Psft_Domain=PSEDB \
pse-PSEDB-rs
```

Verifying Installation and Configuration of the PeopleSoft Application Server Domain Resource

This section contains the procedure to verify successful installation and configuration of the PeopleSoft application server domain resource.

▼ How to Verify HA for PeopleSoft Application Server Domain Resource Installation and Configuration

- 1 Assume the root role and log in to the node that currently hosts the resource group that contains the PeopleSoft application server guest domain resource.
- 2 Switch the PeopleSoft application server domain resource group to another cluster member.

```
# clresourcegroup switch -n node psft-app-failover-rg
```
- 3 Verify the status of the PeopleSoft application server domain instance.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -c sstatus -d Psft_Domain"
```
- 4 Verify the status of the PeopleSoft application server domain resource.

```
# clresource status psft-app-server-resource
```
- 5 Repeat all steps until you have tested all the potential nodes on which the PeopleSoft application server domain can run.

Tuning the HA for PeopleSoft Application Server Fault Monitor

This section describes the HA for PeopleSoft application server fault monitor's probing algorithm or functionality, and states the conditions, messages, and recovery actions associated with unsuccessful probing.

- “Resource Properties” on page 42
- “Probing Algorithm and Functionality” on page 42
- “Operations of the PeopleSoft Application Server Probe” on page 43

For conceptual information about fault monitors, see the *Oracle Solaris Cluster Concepts Guide*.

Resource Properties

The HA for PeopleSoft application server fault monitor uses the resource properties that are specified in the resource type `ORCL.PeopleSoft_app_server`. Refer to the `r_properties(5)` man page for a list of general resource properties used. Refer to “`ORCL.PeopleSoft_app_server Extension Properties`” on page 57 for a specific list of resource properties for this resource type.

Probing Algorithm and Functionality

The HA for PeopleSoft application server is controlled by extension properties that control the probing frequency. The default values of these properties determine the preset behavior of the fault monitor and are suitable for most Oracle Solaris Cluster installations. You can modify this preset behavior by modifying the following settings:

- The interval between fault monitor probes (`Thorough_probe_interval`)
- The timeout for fault monitor probes (`Probe_timeout`)
- The number of times the fault monitor attempts to restart the resource (`Retry_count`)

The HA for PeopleSoft application server fault monitor checks the domain status within an infinite loop. During each cycle, the fault monitor checks the domain state and reports either a failure or success.

- If the fault monitor is successful, it returns to its infinite loop and continues the next cycle of probing and sleeping.
- If the fault monitor reports a failure, a request is made to the cluster to restart the resource. If the fault monitor reports another failure, another request is made to the cluster to restart the resource. This behavior continues whenever the fault monitor reports a failure. If successive restarts exceed the `Retry_count` within the `Thorough_probe_interval`, a request is made to fail over the resource group onto a different node.

Operations of the PeopleSoft Application Server Probe

The following explains the operations of the PeopleSoft application server probe:

- If the `control_app_server` script for the resource is still running with the start option the probe returns 100. This basically implements “wait for online” during start. Otherwise, the probe continues.
- If the output from `psadmin` for the boot option contains the string `ERROR:`, the probe returns 100 to indicate a failed start. Otherwise, the probe continues.
- If the output for the `psadmin -c sstatus -d ${Psft_Domain}` command contains the string `ERROR:`, the probe checks for the following specific message:

Can not find DBBL on master and backup nodes.

- If that string is detected, it assumes the critical BBL service has failed and tries to restart the BBL by sending the `bbc` command, using `tmadmin`. The probe returns 50, which puts the service into degraded mode. If on a subsequent probe the same error is detected, the return code is 50 again, which totals 100, resulting in a failed probe.
- If the specific error message is not matched, the probe immediately returns 100.
- If no error message is found, the probe continues.
- The probe checks whether at least one of each of the services that are defined as critical is running. The following services are regarded as critical:
 - BBL
 - PSAPPSRV
 - PSMONITORSRV
 - PSSAMSRV
 - PSWATCHSRV

If the probe does not detect that all of the critical services are running, the probe returns 100, otherwise it returns 0.

- If the PeopleSoft application server guest-domain resource is repeatedly restarted and subsequently exhausts the `Retry_count` within the `Retry_interval`, and if `Failover_enabled` is set to `TRUE`, a failover to another node is initiated for the resource group.

Debugging HA for PeopleSoft Application Server

The HA for PeopleSoft application server has an extension property named `debug_level`. This extension property enables you to activate debugging for PeopleSoft application server guest-domain resources.

▼ How to Activate Debugging for HA for PeopleSoft Application Server

Perform this procedure to activate debugging.

Note – To deactivate debugging, repeat all steps in this procedure with the following changes:

- Change `daemon.debug` to `daemon.notice`.
 - Change the `debug_level` property to 0.
-

1 Determine whether debugging for the PeopleSoft application server domain is active.

```
# grep daemon /etc/syslog.conf
*.err;kern.debug;daemon.notice;mail.crit      /var/adm/messages
*.alert;kern.err;daemon.err                    operator
#
```

- If debugging is active, `daemon.debug` is set in the file `/etc/syslog.conf`. You do not need to continue this procedure.
- If debugging is inactive, `daemon.notice` is set in the file `/etc/syslog.conf` of the appropriate node. Perform the remaining steps in this procedure to activate debugging.

2 If debugging is inactive, edit the `/etc/syslog.conf` file in the appropriate node to change `daemon.notice` to `daemon.debug`.

3 Confirm that debugging for PeopleSoft application server domain is active.

```
# grep daemon /etc/syslog.conf
*.err;kern.debug;daemon.debug;mail.crit      /var/adm/messages
*.alert;kern.err;daemon.err                    operator
#
```

4 Restart the `syslogd` daemon.

```
# svcadm refresh svc:/system/system-log:default
```

5 Set the property `debug_level` to level 2.

```
# clresource set -p debug_level=2 psft-app-server-resource
```

Installing and Configuring the HA for PeopleSoft Process Scheduler

This chapter gives an overview of the optional HA for PeopleSoft process scheduler and explains how to install and configure it.

This chapter contains the following sections:

- “Overview” on page 45
- “Planning the HA for PeopleSoft Process Scheduler Installation and Configuration” on page 46
- “Installing and Configuring the PeopleSoft Process Scheduler Domain” on page 49
- “Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain” on page 51
- “Registering and Configuring HA for PeopleSoft Process Scheduler” on page 52
- “Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain Resource” on page 53
- “Tuning the HA for PeopleSoft Process Scheduler Fault Monitor” on page 54
- “Debugging the HA for PeopleSoft Process Scheduler Fault Monitor” on page 56

Overview

The HA for PeopleSoft process scheduler data service manages the start, shutdown, and fault monitoring of a specific process scheduler domain.

The HA for PeopleSoft process scheduler performs the following tasks:

- Supports the PeopleSoft application environment – Run batch certain processes (such as batch programs and reports) behind the scenes of the online system. Examples of processes that run offline include running reports, posting journal entries, loading benefit enrollment forms, or calculating payroll deductions.

- Schedules and manages the execution of PeopleSoft batch processes – Schedule recurring processes to run on a specific date or at a specific time interval. You can also create jobs that run several processes and then schedule successive processes based on the status of a previous process.
- Enables load balancing – Set up a Master Scheduler server, which enables workload balancing by automatically routing requests to available Process Scheduler servers. The feature also provides fault tolerance in a batch environment.

The following table lists the tasks for configuring the HA for PeopleSoft process scheduler data service and provides links to detailed instructions for performing these tasks. Perform the tasks in the order that they are listed in the table.

TABLE 3-1 Tasks for Installing and Configuring HA for PeopleSoft Process Scheduler

Task	Instructions
1. Plan the installation	“Planning the HA for PeopleSoft Process Scheduler Installation and Configuration” on page 46
2. Install and configure the PeopleSoft process scheduler domain	“Installing and Configuring the PeopleSoft Process Scheduler Domain” on page 49
3. Verify the PeopleSoft process scheduler domain installation and configuration	“Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain” on page 51
4. Register and configure the HA for PeopleSoft process scheduler resources	“Registering and Configuring HA for PeopleSoft Process Scheduler” on page 52
5. Verify the HA for PeopleSoft process scheduler resource installation and configuration	“Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain Resource” on page 53
6. Tune the HA for PeopleSoft process scheduler fault monitor	“Tuning the HA for PeopleSoft Process Scheduler Fault Monitor” on page 54
7. Debug the HA for PeopleSoft process scheduler	“Debugging the HA for PeopleSoft Process Scheduler Fault Monitor” on page 56

Planning the HA for PeopleSoft Process Scheduler Installation and Configuration

This section contains the information you need to plan your HA for PeopleSoft process scheduler configuration.

The HA for PeopleSoft process scheduler data service uses the `ORCL.PeopleSoft_process_scheduler` resource type and the software is delivered as part of the `ha-cluster/data-service/peoplesoft` package. The resource type uses the `psadmin`

command to start, stop, and fault monitor the specific process scheduler commands. You can use the command to verify the PeopleSoft process scheduler domain status.

Configuration Restrictions for the HA for PeopleSoft Process Scheduler

The configuration restrictions in the subsections that follow apply only to the HA for PeopleSoft process scheduler.

For restrictions that apply to all data services, see the [Oracle Solaris Cluster 4.1 Release Notes](#).



Caution – Your data service configuration might not be supported if you do not observe these restrictions.

- **Multiple process scheduler instances** – If multiple process scheduler instances are configured for the same Oracle Solaris database, you must configure a resource for each of the process scheduler instances.
- **Failover support only** – PeopleSoft process scheduler can be configured only as a failover data service and not as a scalable data service.
- **Multiple process scheduler domains** – The Oracle Solaris Cluster resource of resource type `ORCL.PeopleSoft_process_scheduler` can manage exactly one PeopleSoft process scheduler domain. To manage multiple PeopleSoft process scheduler domains, configure multiple Oracle Solaris Cluster resources of resource type `ORCL.PeopleSoft_process_scheduler`, each resource managing exactly one PeopleSoft process scheduler domain.

Configuration Requirements for the HA for PeopleSoft process scheduler

Use the requirements in this section to plan the configuration of HA for PeopleSoft process scheduler. These requirements apply to HA for PeopleSoft process scheduler only.

Information about how to install PeopleSoft Enterprise PeopleTools version 8.52 is published in the [PeopleSoft PeopleTools 8.52 Install Documentation Library](#).

For requirements that apply to all data services, see [Chapter 1, “Planning for Oracle Solaris Cluster Data Services,” in *Oracle Solaris Cluster Data Services Planning and Administration Guide*](#).

- **UNIX user and group** - The UNIX user and group that are used to install, operate, and manage the PeopleSoft process scheduler domain must exist on all cluster nodes where the corresponding resource for the PeopleSoft process scheduler domain is configured to come online.

- **File systems** - The corresponding file system resource for the domain is configured in the same resource group as the PeopleSoft process scheduler's resource domain. The file systems used to store the required binaries and data for the domain must be configured on highly available local file systems. If you choose to install the binaries on local storage, install and keep them identical on all the cluster nodes. The directory specified for `Psft_Cfg_Home` must reside on a highly available local file system, which needs to be accessible where the corresponding resource for the PeopleSoft process scheduler domain comes online.

If you are setting up HA for PeopleSoft process scheduler in a multi-instance configuration, the PeopleSoft process scheduler installation should be located on network attached storage (NAS) accessible to all the nodes running the server.

- **Environment variables** - In addition to the required environment variables that are explained in the PeopleSoft Enterprise PeopleTools installation guide, you must set up the following variables before you configure the PeopleSoft process scheduler domain:
 - `SC_LHOSTNAME`
 - `LD_PRELOAD_32`
 - `LD_PRELOAD_64`

Set `SC_LHOSTNAME` to the logical hostname under which the PeopleSoft process scheduler domain must be reachable from the web tier. For more details, refer to the [libscho.st.so.1\(1\)](#) man page.

Set these environment variables for the profile of the user that operates the PeopleSoft process scheduler domain. Ensure that the login for the user is noninteractive. If you invoke as user root, you must see these variables displayed in the `psadmin` command output:

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -env"
```

- **Database tier dependency** - If the database tier is deployed on the same global cluster, the resource for the PeopleSoft process scheduler domain must define a strong resource dependency to the resources for the database instance and database listener. This ensures that the PeopleSoft process scheduler domain will only try to start when the corresponding database is already operational. This configuration is required for a successful startup of the PeopleSoft process scheduler domain. If the Oracle database is not managed through Oracle Solaris Cluster, you can also configure the database tier dependency by using the data service delivered as part of the Oracle External Proxy resource. You can specify a resource dependency to the Oracle External Proxy resource.
- **Database client network connection** - The database client used by the PeopleSoft process scheduler domain configuration must be configured to connect to the network address that is managed by the cluster framework for the corresponding database server.

Configuration Options for the HA for PeopleSoft process scheduler

Use the data service configurations in this section to plan the installation and configuration of HA for PeopleSoft process scheduler.

Failover Configurations

When the PeopleSoft software is installed in a traditional file system, a failover deployment requires a configuration where one failover resource group contains the PeopleSoft process scheduler resource, the logical hostname resource, and the failover storage resource. For more information, see the graphics in [“HA for PeopleSoft Application Server Data Service Configurations”](#) on page 18.

Multi-Instance Configurations

Multi-instance configuration is an application deployment topology where multiple instances of the same application provide an aggregation of services. This topology can be achieved independently of using a data service because you can manually start and stop the instances on the cluster nodes. When HA of such instances is required, you can enable a data service for the instances by creating multiple single-node resource groups or a few multi-master resource groups. For more information, see the graphics in [“HA for PeopleSoft Application Server Data Service Configurations”](#) on page 18.

Installing and Configuring the PeopleSoft Process Scheduler Domain

HA for PeopleSoft process scheduler

This section contains the two procedures you need to install and configure a PeopleSoft process scheduler domain as a cluster resource.

Complete the following items before you perform the procedures in this section:

- Install the PeopleSoft application server and PeopleSoft process scheduler data service package during your initial Oracle Solaris Cluster installation. If you did not yet install the package, [“Installing the Data Service Package”](#) on page 12.
- Install and configure all storage management software that you intend to use on all nodes where PeopleSoft process scheduler is to run.
- Create zone clusters where you intend to run PeopleSoft process scheduler.
- Create an entry in a name service database (such as DNS) for the logical hostnames that are to be made available by the resources.

- If you are using IPMP groups, configure the groups on the nodes where the logical hostname resources can be brought online.
- Ensure that any non-global zones that can master the resources are already configured on your cluster nodes.

Note – If you want to configure identical multiple process scheduler instances that are distributed across multiple nodes without failover, you can configure a resource group for each node, where only that node is listed in the nodelist. Each process scheduler instance that runs only on a specific node gets its own resource in the corresponding resource group.

In the steps below, it is assumed the UNIX user `psft` was used to install the PeopleSoft process scheduler software, that `HR91` is the process scheduler domain name, that `psft-sched-rg` is the resource group name, and that `pse-sched-rs` is the resource name. Change the resource group name, resource name, user name, and domain name to match your configuration.

▼ How to Enable the PeopleSoft Process Scheduler Domain to Run in a Cluster

Perform this procedure on one node of the cluster to configure storage and logical host resource groups.

Before You Begin Ensure that the `/etc/netmasks` file has IP-address subnet and netmask entries for all logical hostnames. If necessary, edit the `/etc/netmasks` file to add any missing entries.

1 On a cluster node that will host the PeopleSoft process scheduler domain, assume the root role that provides `solaris.cluster.modify` and `solaris.cluster.admin` RBAC authorization.

2 Register the `SUNW.HASStoragePlus` resource type.

```
# clresourcetype register SUNW.HASStoragePlus
```

3 Create a failover resource group.

```
# clresourcegroup create psft-sched-rg
```

4 Create a resource for the PeopleSoft process scheduler domain file systems on shared storage.

```
# clresource create -g psft-sched-rg -t SUNW.HASStoragePlus \
-p FilesystemMountPoints=psft-mount-points psft-hasp-resource
```

5 Create a resource for the logical hostname that will be used by the web tier to connect to the PeopleSoft process scheduler domain.

```
# clreslogicalhostname create -g psft-sched-rg \
-h logical-hostname logicalhost-resource
```

- 6 Enable the failover resource group that now includes the PeopleSoft process scheduler domain disk storage and logical host resources.

```
# clresourcegroup online -eM -n current-node psft-sched-rg
```

▼ How to Install PeopleSoft Process Scheduler Software

- 1 On the cluster member where the *psft-sched-rg* resource group is online, assume the root role.
- 2 Follow the instructions in the appropriate PeopleSoft documentation for your version of the product. Documentation for installing PeopleSoft Enterprise PeopleTools version 8.52 is published in the [PeopleSoft PeopleTools 8.52 Install Documentation Library](#).

Use the file system specified within the HASToragePlus resource and the IP address within the logical hostname. When following these instructions, ensure that you observe the information in “[Configuration Requirements for the HA for PeopleSoft process scheduler](#)” on page 47.

Next Steps See “[Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain](#)” on page 51.

Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain

This section contains the procedure to verify successful installation and configuration of the PeopleSoft process scheduler domain.

▼ How to Verify the PeopleSoft Process Scheduler Domain Installation and Configuration

- 1 Assume the root role and log in to the node that currently hosts the resource group that contains the PeopleSoft process scheduler guest domain resource.

- 2 Start the PeopleSoft process scheduler.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -p start -d Psft_Domain"
```

- 3 Verify the status of the PeopleSoft process scheduler.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -p sstatus -d Psft_Domain"
```

- 4 Stop the PeopleSoft process scheduler.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -p stop -d Psft_Domain"
```

- 5 Switch the PeopleSoft process scheduler resource group to another cluster member.

```
# clresourcegroup switch -n node psft-sched-rg
```
- 6 Repeat all steps until you have tested all the potential nodes on which the PeopleSoft Process Scheduler can run.

Next Steps See “Registering and Configuring HA for PeopleSoft Process Scheduler” on page 52.

Registering and Configuring HA for PeopleSoft Process Scheduler

This section contains the procedures to configure or unconfigure the HA for PeopleSoft process scheduler.

- “How to Register and Configure HA for PeopleSoft Process Scheduler for Failover” on page 52
- “How to Remove a PeopleSoft Process Scheduler Domain From a Failover Resource Group” on page 53

▼ How to Register and Configure HA for PeopleSoft Process Scheduler for Failover

Before You Begin Install the data service package during your initial Oracle Solaris Cluster installation.

If you did not install the HA for PeopleSoft Process Scheduler package as part of your initial Oracle Solaris Cluster installation, go to “Installing the Data Service Package” on page 12.

- 1 On the cluster node that hosts the PeopleSoft process scheduler domain, assume the root role that provides `solaris.cluster.modify` and `solaris.cluster.admin` RBAC authorization.

- 2 Create a PeopleSoft process scheduler domain resource in the failover resource group.

```
# clresource create -g psft-sched-rg -d \  
-t ORCL.PeopleSoft_process_scheduler \  
-p Psft_User=Psft-username -p Psft_Domain=Psft-domainname \  
-p Psft_Home=Psft-home-directory -p Psft_Cfg_Home=Psft-config-home-directory \  
-p resource_dependencies=logicalhostname-resource \  
-p resource_dependencies_offline_restart=hasp-resource psft-sched-rs
```

- 3 If the database tier is deployed on the same global cluster, configure a strong dependency to the resources for the database instance and database listener.

Do this even if the database tier is deployed in a different zone cluster of the same global cluster.

```
# clresource set -p resource_dependencies+=db-instance-resource,db-listener-resource \  
psft-sched-rs
```

4 Enable the PeopleSoft process scheduler domain resource.

Repeat this step for each PeopleSoft process scheduler domain instance, if multiple instances were created.

```
# clresource status
# clresource enable psft-sched-rs
```

▼ How to Remove a PeopleSoft Process Scheduler Domain From a Failover Resource Group

- 1 Assume the root role that provides `solaris.cluster.modify` and `solaris.cluster.admin` RBAC authorizations.
- 2 Disable and remove the resource that is used by the HA for PeopleSoft process scheduler data service.

```
# clresource disable psft-sched-rsresource
# clresource delete psft-sched-rs
```

Verifying Installation and Configuration of the PeopleSoft Process Scheduler Domain Resource

This section contains the procedure to verify successful installation and configuration of the PeopleSoft process scheduler domain resource.

▼ How to Verify PeopleSoft Process Scheduler Domain Resource Installation and Configuration

- 1 Assume the root role and log in to the node that currently hosts the resource group that contains the PeopleSoft process scheduler guest domain resource.
- 2 Switch the PeopleSoft process scheduler domain resource group to another cluster member.

```
# clresourcegroup switch -n node psft-sched-rg
```

- 3 Verify the status of the PeopleSoft process scheduler domain instance.

```
# su - Psft_User -c "/Psft_Home/appserv/psadmin -p sstatus -d Psft_Domain"
```

- 4 Verify the status of the PeopleSoft process scheduler domain resource.

```
# clresource status psft-sched-rs
```

- 5 Repeat all steps until you have tested all the potential nodes on which the PeopleSoft process scheduler domain can run.

Tuning the HA for PeopleSoft Process Scheduler Fault Monitor

This section describes the HA for PeopleSoft process scheduler fault monitor's probing algorithm or functionality, and states the conditions, messages, and recovery actions associated with unsuccessful probing.

- “Resource Properties” on page 54
- “Probing Algorithm and Functionality” on page 54
- “Operations of the PeopleSoft Process Scheduler Probe” on page 55

For conceptual information about fault monitors, see the *Oracle Solaris Cluster Concepts Guide*.

Resource Properties

The HA for PeopleSoft process scheduler fault monitor uses the resource properties that are specified in the resource type `ORCL.PeopleSoft_process_scheduler`. Refer to the `r_properties(5)` man page for a list of general resource properties used. Refer to “`ORCL.PeopleSoft_process_scheduler Extension Properties`” on page 59 for a specific list of resource properties for this resource type.

Probing Algorithm and Functionality

The HA for PeopleSoft process scheduler is controlled by extension properties that control the probing frequency. The default values of these properties determine the preset behavior of the fault monitor and are suitable for most Oracle Solaris Cluster installations. You can modify this preset behavior by modifying the following settings:

- The interval between fault monitor probes (`Thorough_probe_interval`)
- The timeout for fault monitor probes (`Probe_timeout`)
- The number of times the fault monitor attempts to restart the resource (`Retry_count`)

The HA for PeopleSoft process scheduler fault monitor checks the domain status within an infinite loop. During each cycle, the fault monitor checks the domain state and reports either a failure or success.

- If the fault monitor is successful, it returns to its infinite loop and continues the next cycle of probing and sleeping.
- If the fault monitor reports a failure, a request is made to the cluster to restart the resource. If the fault monitor reports another failure, another request is made to the cluster to restart the resource. This behavior continues whenever the fault monitor reports a failure. If successive

restarts exceed the `Retry_count` within the `Thorough_probe_interval`, a request is made to fail over the resource group onto a different node.

Operations of the PeopleSoft Process Scheduler Probe

The following explains the operations of the PeopleSoft process scheduler probe:

- If the `control_process_scheduler` script for the resource is still running with the start option, the probe returns 100. This basically implements “wait for online” during start. Otherwise, the probe continues.
- If the output from `psadmin` for the boot option contains the string `ERROR:`, the probe returns 100 to indicate a failed start. Otherwise, the probe continues.
- If the output for the `psadmin -p sstatus -d ${Psft_Domain}` command contains the string `ERROR:`, the probe checks for the following specific message:

`Can not find DBBL on master and backup nodes.`

- If that string is detected, it assumes the critical BBL service has failed and tries to restart the BBL by sending the `bbc` command, using `tmadmin`. The probe returns 50, which puts the service into degraded mode. If on a subsequent probe the same error is detected, the return code is 50 again, which totals 100, resulting in a failed probe.
- If the specific error message is not matched, the probe immediately returns 100.
- If no error message is found, the probe continues.
- The probe checks whether at least one of each of the services that are defined as critical is running. The following services are regarded as critical:
 - BBL
 - PSMONITORSRV
 - PSPRCSRV
 - PSDSTSRV

If the probe does not detect that all of the critical services are running, the probe returns 100, otherwise it returns 0.

- If the PeopleSoft process scheduler guest-domain resource is repeatedly restarted and subsequently exhausts the `Retry_count` within the `Retry_interval`, and if `Failover_enabled` is set to `TRUE`, a failover to another node is initiated for the resource group.

Debugging the HA for PeopleSoft Process Scheduler Fault Monitor

The HA for PeopleSoft process scheduler has an extension property named `debug_level`. This extension property enables you to activate debugging for PeopleSoft process scheduler guest-domain resources.

▼ How to Activate Debugging for HA for PeopleSoft Process Scheduler

Perform this procedure to activate debugging.

Note – To deactivate debugging, repeat all steps in this procedure with the following changes:

- Change `daemon.debug` to `daemon.notice`.
 - Change the `debug_level` property to 0.
-

1 Determine whether debugging for PeopleSoft process scheduler domain is active.

```
# grep daemon /etc/syslog.conf
*.err;kern.debug;daemon.notice;mail.crit      /var/adm/messages
*.alert;kern.err;daemon.err                  operator
#
```

- If debugging is active, `daemon.debug` is set in the file `/etc/syslog.conf`. You do not need to continue this procedure.
- If debugging is inactive, `daemon.notice` is set in the file `/etc/syslog.conf` of the appropriate node. Perform the remaining steps in this procedure to activate debugging.

2 If debugging is inactive, edit the `/etc/syslog.conf` file in the appropriate node to change `daemon.notice` to `daemon.debug`.

3 Confirm that debugging for PeopleSoft process scheduler domain is active.

```
# grep daemon /etc/syslog.conf
*.err;kern.debug;daemon.debug;mail.crit      /var/adm/messages
*.alert;kern.err;daemon.err                  operator
#
```

4 Restart the `syslogd` daemon.

```
# svcadm refresh svc:/system/system-log:default
```

5 Set the property `debug_level` to level 2.

```
# clresource set -p debug_level=2 psft-sched-rs
```


HA for PeopleSoft Application Server Extension Properties

Extension properties for HA for PeopleSoft application server resource types are described in the following section:

- “[ORCL.PeopleSoft_app_server Extension Properties](#)” on page 57

For details about system-defined properties, see the [r_properties\(5\)](#) and [rg_properties\(5\)](#) man pages.

For details about properties that are inherited from the generic data service, see the [SUNW.gds\(5\)](#) man page.

ORCL.PeopleSoft_app_server Extension Properties

The `ORCL.PeopleSoft_app_server` resource type represents the PeopleSoft application server server in an Oracle Solaris Cluster configuration. The extension properties of this resource type are as follows:

`Psft_user`

Defines the username to use to run the PeopleSoft Enterprise application server domain.

Data Type: String

Default: None

Tunable: When disabled

`Psft_Home`

Defines the installation directory for the PeopleSoft Enterprise application server binaries. Provide exactly the same value as for `PS_HOME` during configuration of the PeopleSoft application server domain. This value must match the definition in the output for `psadmin -env`.

Data Type: String

Default: None

Tunable: When disabled

Psft_Cfg_Home

Defines the directory for the PeopleSoft Enterprise application server domain configuration. If you configure this property, provide exactly the same value as for PS_CFG_HOME during configuration of the PeopleSoft application server domain. The value must match the definition in the output for psadmin -env.

Data Type: String

Default: Empty String

Tunable: When disabled

Psft_Domain

Defines the name of the PeopleSoft Enterprise application server domain.

Data Type: String

Default: None

Tunable: When disabled

Debug_level

Debug level for the control script and its functions.

Data Type: Integer

Default: 0

Tunable: Anytime

HA for PeopleSoft Process Scheduler Extension Properties

Extension properties for HA for PeopleSoft Process Scheduler resource types are described in the following section:

- “[ORCL.PeopleSoft_process_scheduler Extension Properties](#)” on page 59

For details about system-defined properties, see the [r_properties\(5\)](#) and [rg_properties\(5\)](#) man pages.

For details about properties that are inherited from the generic data service, see the [SUNW.gds\(5\)](#) man page.

ORCL.PeopleSoft_process_scheduler Extension Properties

The `ORCL.PeopleSoft_process_scheduler` resource type represents the HA for PeopleSoft Process Scheduler server in an Oracle Solaris Cluster configuration. The extension properties of this resource type are as follows:

`Psft_user`

Defines the username to use to run the PeopleSoft Enterprise application.

Data Type: String

Default: None

Tunable: When disabled

`Psft_Home`

Defines the installation directory for the PeopleSoft Enterprise process scheduler binaries. Provide exactly the same value as for `PS_HOME` during configuration of the HA for PeopleSoft Process Scheduler. This value must match the definition in the output for `psadmin -env`.

Data Type: String

Default: None

Tunable: When disabled

Psft_Cfg_Home

Defines the directory for the PeopleSoft Enterprise process scheduler domain configuration. If you configure this property, provide exactly the same value as for PS_CFG_HOME during configuration of the HA for PeopleSoft Process Scheduler. The value must match the definition in the output for `psadmin -env`.

Data Type: String

Default: Empty String

Tunable: When disabled

Psft_Domain

Defines the name of the PeopleSoft Enterprise process scheduler domain.

Data Type: String

Default: None

Tunable: When disabled

Debug_Level

Debug level for the control script and its functions.

Data Type: Integer

Default: 0

Tunable: Anytime, per node

Index

C

- clsetup utility, 24
- configuration modes, 18–20, 49
 - failover, 18–19, 49
 - multi-instance, 20, 49
- configuration requirements
 - HA for PeopleSoft application server, 17–18
 - HA for PeopleSoft process scheduler, 47–48
- configuration restrictions
 - HA for PeopleSoft application server, 16–17
 - HA for PeopleSoft process scheduler, 47
- configuring
 - HA for PeopleSoft application server, 24–31, 31–38
 - clsetup utility, 31–38
 - HA for PeopleSoft process scheduler, 52–53

D

- Debug_level extension property, 58, 60
- debugging
 - HA for PeopleSoft application server, 44
 - HA for PeopleSoft process scheduler, 56

E

- enabling, HA for PeopleSoft process scheduler domain, 50–51
- extension properties
 - ORCL.PeopleSoft_app_server resource type, 57–58

extension properties (*Continued*)

- ORCL.PeopleSoft_process_scheduler resource type, 59–60

F

- failover configuration, 18–19, 49
 - HA for PeopleSoft application server
 - clsetup utility, 24–31
- functionality, 42, 54–55

H

- HA for PeopleSoft application server
 - configurations, 18–20
 - configuring, 24–41
 - debugging, 44
 - installing, 12–13, 22–23
 - overview, 15–16
 - registering, 24–41
 - registering and configuring, 24–41
 - clsetup utility, 24–31
 - registering and configuring for multi-instance
 - clsetup utility, 31–38
 - software package, installing, 12–13
- HA for PeopleSoft process scheduler
 - configurations, 49
 - configuring, 52–53
 - debugging, 56
 - installing, 12–13
 - overview, 45–46

HA for PeopleSoft process scheduler (*Continued*)

- registering, 52–53
 - registering and configuring, 52–53
 - software package, installing, 12–13
- HA for PeopleSoft process scheduler domain,**
installing, 49–51
- help,** 10

I**installing**

- HA for PeopleSoft application server, 12–13, 21–23
- HA for PeopleSoft process scheduler, 12–13
- HA for PeopleSoft process scheduler domain, 49–51

M

- multi-instance configuration,** 20, 49

O**operations**

- PeopleSoft application server probe, 43
 - PeopleSoft process scheduler probe, 55
- Oracle Solaris Cluster software, publisher, 13
- Oracle Solaris software, publisher, 13
- ORCL.PeopleSoft_app_server, resource type, 57–58
- ORCL.PeopleSoft_process_scheduler
resource type, 47–48, 59–60

overview

- architecture, 11–12, 15–16
- HA for PeopleSoft application server, 15–16
- HA for PeopleSoft process scheduler, 45–46
- installation, 15–16

P**packages,** 12–13**planning the installation**

- HA for PeopleSoft application server, 16–20
- HA for PeopleSoft process scheduler, 46–49

probing algorithm, 42, 54–55

Psft_Cfg_Home extension property, 58, 60

Psft_Domain extension property, 58, 60

Psft_Home extension property, 57, 59

Psft_User extension property, 57, 59

publisher

- Oracle Solaris Cluster software, 13
- Oracle Solaris software, 13

R**registering and configuring**

- HA for PeopleSoft application server, 24–41
- HA for PeopleSoft process scheduler, 52–53
- tools, 24

registering and configuring for failover

- HA for PeopleSoft application server
clsetup utility, 24–31

registering and configuring for multi-instance

- HA for PeopleSoft application server
clsetup utility, 31–38

resource properties, 42, 54

resource types

- ORCL.PeopleSoft_app_server
extension properties, 57–58
- ORCL.PeopleSoft_process_scheduler, 47–48
extension properties, 59–60

resources

- HA for PeopleSoft application server application
debugging, 44
- HA for PeopleSoft process scheduler application
debugging, 56

S**software installation**

- HA for PeopleSoft application server, 13, 22–23
- HA for PeopleSoft process scheduler, 13
- software packages, 12–13

T

- technical support, 10
- tuning fault monitor
 - product, 42–43, 54–55

V

- verifying installation
 - PeopleSoft application server domain, 23
 - PeopleSoft process scheduler domain, 51–52
- verifying installation and configuration
 - PeopleSoft application server domain, 41
 - PeopleSoft process scheduler domain
 - resource, 53–54

